

Quickfire™

User Guide



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies.

© 2008 AT&T Intellectual Property.
All rights reserved.



at&t

TABLE OF CONTENTS

CHAPTER 1. BEFORE USING YOUR AT&T QUICKFIRE

PACKAGE CONTENTS.....	6
HANDSET DESCRIPTION.....	7
THE FUNCTION KEYS	8
DISPLAY INDICATORS.....	9
BATTERY USAGE	12
BATTERY INSTALLATION.....	12
BATTERY REMOVAL.....	12
BATTERY CHARGING.....	13
USING AT&T SIM CARD.....	14
INSERTING THE AT&T SIM CARD	14
REMOVING THE AT&T SIM CARD	14
USING microSD CARD	15
INSERTING THE microSD CARD	15
REMOVING THE microSD CARD	15
USING QWERTY KEYPAD	16
BLOCKING ANTENNA WHILE MAKING A CALL	18
CORRECT/INCORRECT FINGER POSITION	18
BATTERY HANDLING INFORMATION.....	19
IEEE STANDARD FOR RECHARGEABLE BATTERIES FOR CELLULAR TELEPHONES.....	19

CHAPTER 2. BASIC OPERATION

TURNING THE PHONE ON/OFF.....	22
TOUCH SCREEN LOCK MODE.....	22
USING SHORTCUT KEY.....	22
IDLE SCREEN	23
USING THE TOUCHSCREEN	23
MENU SUMMARY	27
12-UP MAIN MENU.....	27
LANDSCAPE MODE MENU	29
BASIC FUNCTIONS	30
MAKING A CALL.....	30
ANSWERING CALLS	31
WAIT/PAUSE FEATURE	31
3-WAY CALLING.....	32
CALLER ID FUNCTION	32
CALL WAITING FUNCTION	32
ADJUSTING VOLUME	33
MAKING AN INTERNATIONAL CALL.....	33
DURING A CALL	34

TABLE OF CONTENTS

MUTE (UNMUTE)	34
SPEAKERPHONE	34
RECENT CALLS	34
FIND NAME	34
MESSAGING	35
BLUETOOTH	35
MAKING AN EMERGENCY CALL	36
911 IN LOCK MODE	36
911 USING ANY AVAILABLE SYSTEM	36

CHAPTER 3. MEMORY FUNCTION

STORING A PHONE NUMBER	38
ENTERING LETTERS, NUMBERS & SYMBOLS	40
USING QWERTY KEYBOARD	41
STANDARD INPUT MODE	42
NUMERIC MODE	42
SYMBOL MODE	43
EMOTICON MODE	43
MAKING A CALL THROUGH THE CONTACT LIST	44
ONE-TOUCH DIALING	44

CHAPTER 4. QUICKFIRE TIPS & TRICKS

QUICKFIRE TIPS & TRICKS	46
NAVIGATING & TOUCH SCREEN TIPS	46
MESSAGING TIPS	46
BROWSING TIPS	47
MUSIC TIPS	47
CAMERA TIPS	48
GENERAL TIPS	49

CHAPTER 5. MENU FUNCTION

AT&T MUSIC	52
MUSIC PLAYER	52
SHOP MUSIC	53
MUSIC ID	54
XM RADIO	54
MUSIC VIDEOS	55
THE BUZZ	55
COMMUNITY	56
MUSIC APPS	56

TABLE OF CONTENTS

MESSAGING.....	57
CREATE NEW MESSAGE.....	57
INBOX	58
OUTBOX	59
SENT	59
DRAFTS	60
IM	61
EMAIL	63
VOICE MAIL	64
YELLOWPAGES	65
FIND. MAP. SAVE. GO.....	65
MEDIA NET	66
MEDIA NET HOME	66
FAVORITES	66
ENTER URL	67
HISTORY	67
SETTINGS	68
MEDIA MALL.....	69
SHOP RINGTONES.....	69
SHOP GAMES.....	69
SHOP GRAPHICS	69
SHOP MULTIMEDIA.....	69
SHOP APPLICATIONS.....	70
SHOP VIDEOS.....	70
MEDIA NET HOME	70
CELLULAR VIDEO	71
CELLULAR VIDEO OPTIONS	71
MY STUFF	72
RINGTONES & AUDIO.....	72
IMAGES.....	73
VIDEOS.....	74
ADDRESS BOOK	75
FIND NAME.....	75
ADD NEW.....	81
GAMES & APPS	83
GAMES.....	83
APPS	83
AT&T GPS.....	87
AT&T NAVIGATOR.....	87
ORGANIZER & TOOLS.....	88

TABLE OF CONTENTS

CAMERA	88
CALENDAR	90
ALARM	91
CALCULATOR	92
TIP CALCULATOR	92
TO DO	93
WORLD TIME	93
NOTEPAD	94
UNIT CONVERTER	95
VOICE MEMO	95
STOPWATCH	96
SETTINGS	97
PROFILE	97
DISPLAY	98
BLUETOOTH	100
DATE & TIME	102
PHONE	103
CALL	106
SECURITY	109
APPLICATIONS	112
SOFTWARE UPDATE	115
VOICE COMMANDS	116

CHAPTER 6. PC CONNECTIVITY

PC CONNECTIVITY	118
SET UP BLUETOOTH MODE FOR THE QUICKFIRE	118
PAIRING THE QUICKFIRE WITH A PC	119
MAKING DIAL-UP NETWORKING	122
PAIRING A BLUETOOTH HEADSET TO THE QUICKFIRE	127
MAKING DIAL-UP NETWORKING VIA USB	128
MUSIC SYNC	130
MASS STORAGE DEVICE	131

CHAPTER 7. SAFETY INFORMATION

SAFETY	134
WARRANTY	160

CHAPTER 1 BEFORE USING YOUR AT&T QUICKFIRE



CHAPTER 1. BEFORE USING YOUR AT&T QUICKFIRE

This chapter provides important information about your AT&T Quickfire handset including:

- Package Contents
- Handset Description
- Battery Usage
- Using AT&T SIM Card
- Using microSD Card
- Using QWERTY Keypad
- Blocking Antenna while Making a Call
- Battery Handling Information

PACKAGE CONTENTS

This package should include all items pictured below.
If any are missing or different, immediately contact the retailer where you purchased the phone.



Handset



Standard Battery




Manual







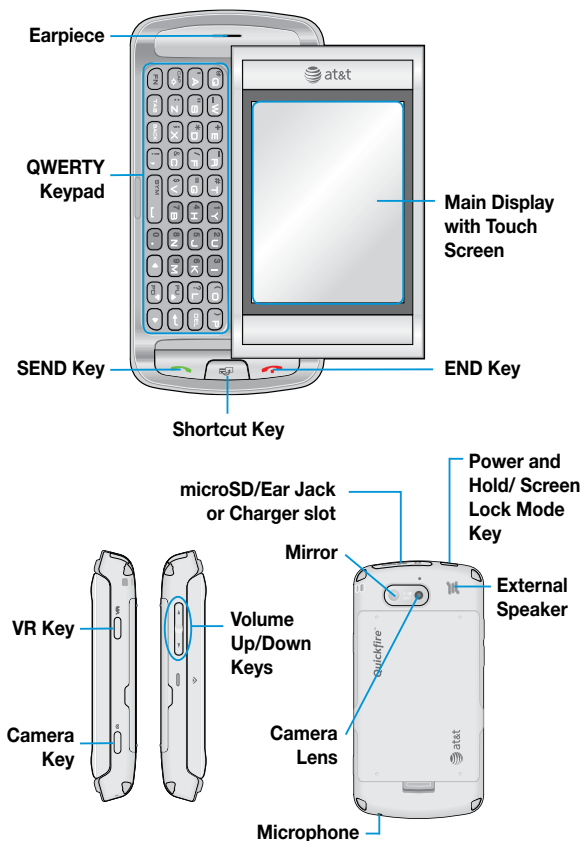


AC Charger

HANDSET DESCRIPTION



HANDSET DESCRIPTION


THE FUNCTION KEYS

KEY	Descriptions
	Power/Screen Lock Mode Key Press and hold to turn the phone on/off. Short press to screen lock mode the phone.
	Send Key Press to make or receive a call or in idle mode, press to access the All calls list.
	End Key Press to terminate a call or to return to idle mode.
	Shortcut Key Press to launch the Quick List such as Main Menu, Call, Messaging, Browser, Music Player.
	Voice Command Key Press to activate Voice Command.
	Camera Key Press and Hold to launch the camera application in Idle or main menu screen.
	Side Volume Key Allows you to adjust the ringer volume in standby mode or adjust the voice volume during a call. The volume key can also be used to scroll up or down to navigate through the different menu options. Press to mute the incoming call ringer.

HANDSET DESCRIPTION

DISPLAY INDICATORS

The idle mode display appears when you are not on a call or using the menu. You must be in idle mode to dial a phone number.



Display Indicators

Displays various icons.

Text & Graphic Area



Signal Strength

Current signal strength: the more lines, the stronger the signal.



GPRS Signal Strength

GPRS service is available.



EDGE Signal Strength

Edge service is available.



3G Signal Strength

3G service is available.



Airplane mode



No service













Indicates the phone cannot receive a signal from the system.










Roaming

Phone is out of home area.

HANDSET DESCRIPTION

	Call forward Appears when your incoming phone calls are being forwarded to another number.
	Battery Battery charging level — the more blocks, the stronger the charge.
	Battery charging Indicates the battery is charging.
	Missed call
	Data call
	Voice call
	TTY Indicates your Quickfire is active in TTY mode.
	Alarm on Appears when an alarm is set.
	Scheduler on Appears when a Scheduler event is set.
	Profile Icon Status Indicates Meeting, Headset or Outdoor mode is active.
	Silent All Phone is set to Silent - no sound will be made to notify you of incoming calls or messages.
	Vibrate All Phone will vibrate to notify you of an incoming call.


HANDSET DESCRIPTION

	Bluetooth on Indicates Bluetooth mode is active.
	Bluetooth connected Indicates Bluetooth Connected.
	External memory Indicates a microSD card is inserted.
	Music player Indicates Music player is active.
	Secure WAP Indicates Secure WAP connection.
	Message Icon Status Icons indicate Text message, MMS message, Voice mail, WAP push, OTA, text message + voice mail, MMS message + voice mail, WAP push + voice mail. You're also notified by a visual and audible alert.
	IM Icons indicate AIM Online, MSN Online, MSN Busy, Yahoo Busy, AIM away, MSN Away, AIM Invisible, Yahoo Invisible, AIM Message, MSN New Message, Yahoo Message, MSN Appear Offline, Yahoo Available

BATTERY USAGE

BATTERY INSTALLATION

1. Place the battery (label side up) on the back of the phone so the metal contacts match up on the battery and in the battery cavity.
2. Slide the battery down into the battery cavity until it locks into place.

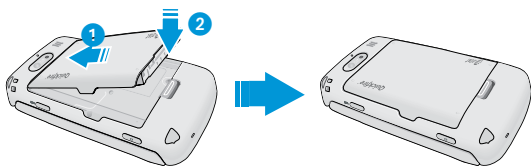


BATTERY REMOVAL

1. Push up the release latch button, then slide the battery off the phone.
2. Lift the battery up and out of the battery cavity from the top of the battery.

Note

If the battery is not correctly placed in the compartment, the handset will not turn on and/or the battery may detach during use.

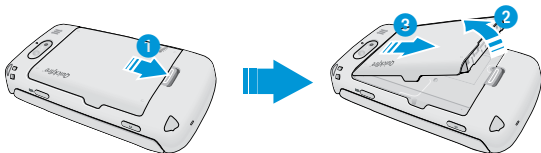


BATTERY CHARGING

POWER CONNECTION

1. Plug the AC Charger into a standard outlet.
2. To access the charging port located on the upper side of your Quickfire, as seen on page 7, open the flap and plug the other end of the AC Charger into the charging port. The battery must be installed onto the phone to work properly.
3. The clearly marked, embossed arrow on the AC Charger adapter should always be face-up on the same side as the display screen when it is inserted into the Quickfire phone. See the diagram below for proper positioning and insertion of the AC Charger adapter into the phone. You should never force the AC Charger adapter into the phone.

Note

- When you charge the battery with the phone powered off, you will see a charging status screen. You cannot operate the phone until it is powered on.
- The battery is not charged at the time of purchase.
- Fully charge the battery before use.
- It is more efficient to charge the battery with the handset powered off.
- The battery must be connected to the phone in order to charge it.
- Battery operating time gradually decreases over time.
- If the battery fails to perform normally, you may need to replace the battery. Please refer to the Manufacturer's Warranty on page 160 for further information.

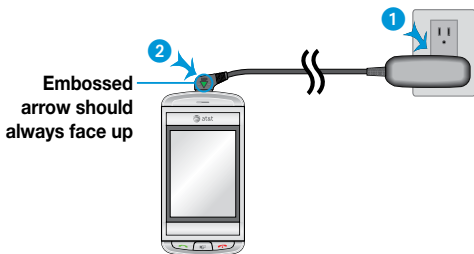


USING AT&T SIM CARD

INSERTING THE AT&T SIM CARD


You'll always need an AT&T SIM card to use your mobile phone. This contains important information about your mobile phone and network. The message "Insert SIM" appears when the AT&T SIM card is not installed. Please take care of your AT&T SIM card and don't keep it near magnetic and electronic devices as this can interfere with data storage and network operations.

1. Lift the battery out of the device.
2. Slide the SIM card in under the metal grooves in the SIM card slot. Make sure the SIM card's metal contacts are facing down and the cut corner is at the upper left.

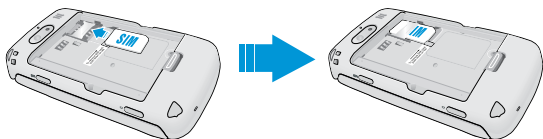

REMOVING THE AT&T SIM CARD

1. Lift the battery out of the device.
2. To remove the SIM card, push down on tab ①. Slide it away from socket ②.

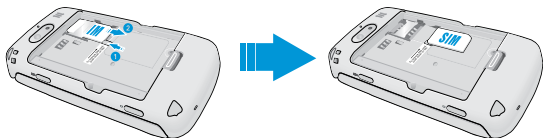

USING microSD CARD

INSERTING THE microSD CARD

The microSD card stores sounds, images, photos and videos, music, and other files. To install your microSD card:

1. With the microSD card slot opened and the gold contacts facing down, insert the microSD card into the slot.
2. Push the card in until it clicks into place. Close the microSD card slot.



REMOVING THE microSD CARD

To remove the microSD card:

1. Open the microSD card slot. Use your thumb to press and release the microSD card. It will pop-out to allow you to remove the card.
2. Remove the card and close the microSD card slot.



Note

Memory cards with over 32 GB of storage capacity will not work with this phone.

USING QWERTY KEYPAD

Your Quickfire features a specifically designed QWERTY keyboard that provides a superior typing experience for easy and comfortable text writing for SMS or e-mail messages, notes and other functions. You can use all of the phone functions with the keyboard either closed or open. When you open the keyboard you have the extra benefit of a full messaging keyboard.



Caps/Shift Key

To type upper-case letters, hold down the Caps/Shift key and then press one or more letter keys. To type upper-case letters continuously, use the CAPS-LOCK mode. To change to the CAPS-LOCK mode, press the FN Key then the Caps/Shift Key. Once the CAPS-LOCK mode is set, you can type upper-case letters only. To deactivate, press the FN Key then the Caps/Shift Key. To type an upper-case letter for the first letter of a word only, simply press the Caps/Shift key once. Then, the first letter you type will be upper case while the rest will be lower-case.



Enter Key

Press the Enter key to insert a line break.



USING QWERTY KEYPAD



FN Key

To type the special character or numbers that appear in orange on the keys, press the applicable key while holding down the FN key. To type special characters or numbers consecutively, use the FN-LOCK mode. To change to the FN-LOCK mode, double-tap the FN key. You can type special characters or numbers only in this mode. To deactivate, double-tap the FN key again. To type a special character or number for the first letter of a word only, simply press the FN key once. Then, the first letter you type will be a special character or number while the rest will be normal letters. To access other special characters that do not appear on the keyboard, press FN + Space.



DEL Key

Press the Delete Key to delete a character to the left of the text cursor. Press and hold to delete the entire entry.



TAB Key

Press the TAB Key to easily navigate between multiple windows.



Back Key

Press to return to the previous page.




Sym/Space Key

Press the Space Key to type a blank space.
Press the FN Key + Space Key, to open the Symbol Pad.



Arrow Key

Press the arrow keys for directional movement.



Numeric Key


Press the FN Key + Corresponding Key to enter the number.

BLOCKING ANTENNA WHILE MAKING A CALL

CORRECT/INCORRECT FINGER POSITION



CORRECT FINGER POSITION



INCORRECT FINGER POSITION

Note

Your Quickfire is equipped with an antenna. For optimal call quality, hold the phone by the gripped edges on the side and avoid touching the top and bottom of the phone.

BATTERY HANDLING INFORMATION

IEEE STANDARD FOR RECHARGEABLE BATTERIES FOR CELLULAR TELEPHONES

- Do not disassemble or open, crush, bend or deform, puncture, or shred.
- Do not modify or remanufacture, attempt to insert foreign objects into the battery, immerse or expose to water or other liquids, or expose to fire, explosion, or other hazard.
- Only use the battery for the system for which it was specified.
- Only use the battery with a charging system that has been qualified with the system per this standard. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazard.
- Do not short circuit a battery or allow metallic or conductive objects to contact the battery terminals.
- Replace the battery only with another battery that has been qualified with the system per this standard. Use of an unqualified battery may present a risk of fire, explosion, leakage, or other hazard.
- Promptly dispose of used batteries in accordance with local regulations.
- Battery usage by children should be supervised.
- Provide an explanation of security implementation, per 10.2.1.
- Avoid dropping the phone or battery. If the phone or battery is dropped, especially on a hard surface, and the user suspects damage, take it to a service center for inspection.
- Improper battery use may result in a fire, explosion, or other hazard.

MEMO

CHAPTER 2

BASIC OPERATION



CHAPTER 2. BASIC OPERATION

This chapter addresses and explains the basic features of your Quickfire including:

Turning the Phone On/Off

Touch Screen Lock Mode

Using Shortcut Key

Idle Screen

Using the Touchscreen

Menu Summary



Basic Functions

During a Call

Making an Emergency Call


BASIC OPERATION

TURNING THE PHONE ON/OFF


1. To turn on the phone, press and hold the POWER button  for a few seconds until the AT&T animation appears and the melody begins to play at same time.
2. To turn off the power, press and hold the POWER button  for a few seconds.
3. Power off AT&T animation appears and the melody begins to play at same time.



TOUCH SCREEN LOCK MODE


Quickly pressing the Power button  temporarily turns off the display and locks your device. You will still be able to receive messages and calls while your device is in Lock Mode. To wake up your device, press the Lock Icon on the screen then touch the Falling Key. Or, simply open the QWERTY keyboard.

Note





Your device automatically goes into lock mode when you leave it idle after 1 minute. To change this time go to [Menu](#)  > [Settings](#) > [Display](#) > [Auto Lock](#), select the time you prefer and press Save on your touch screen.






USING SHORTCUT KEY

The Shortcut Key allows you to quickly access frequently used programs and functions including the Main Menu, Call, Messaging, Browser and Music Player.



IDLE SCREEN

From the Idle screen, you can access Main Menu  , Call  , AT&T Music  and Address Book  .

From the Landscape mode screen, you can access Messaging  , E-mail  , IM  , Address Book  and More  .



USING THE TOUCHSCREEN

CAUTIONS FOR TOUCH KEYS


- Make sure your hands are clean and dry.
- You do not need to press hard on the touch keys to make them work. Do not subject the product to severe impact, as this may damage the touch key sensors.
- Use the tip of your finger to press exactly on the touch key you want, being careful not to touch the keys for other functions.
- Touch keys may not work normally if a mobile phone case or plastic cover is covering them. Also, touch keys may not work if you are wearing gloves.

BASIC OPERATION

- Keep metal and other conductive materials away from the surface of the touch keys, as contact with them may result in an error.


TO OPEN A SCREEN MENU ITEM:

1. Tap any application or sub menu item.

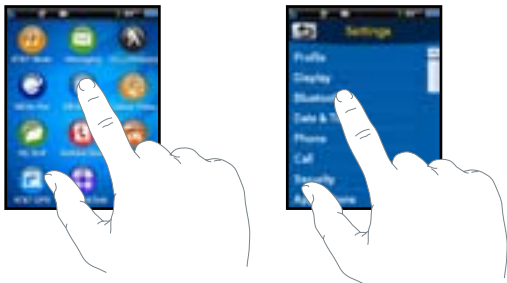


TO USE THE SCROLL BAR:

1. Tap and hold the scroll bar and drag up or down. On some screens such as webpages, you can also scroll side to side.



TOUCH SCREEN SCROLLING

1. You may touch and drag text on the screen up or down in the direction you want to move it, or use your finger to quickly flick the text in the direction you want it to move.



TO RETURN TO THE PREVIOUS SCREEN:

1. Tap the return button.




BASIC OPERATION

MAKING A CALL WITH THE SCREEN DIAL BUTTON

1. Simply touch the screen dial button with your finger to enter the phone number then tap **Call** or press the SEND Key .



TO RETURN TO THE IDLE SCREEN:

1. Press the END Key  multiple times to close all the running application to return to IDLE screen.



12-UP MAIN MENU

1. AT&T Music

- 1.1. Music Player
 - 1.1.1. Now Playing
 - 1.1.2. All Music
 - 1.1.3. Albums
 - 1.1.4. Artists
 - 1.1.5. Playlists
 - 1.1.6. Genres
 - 1.1.7. Settings
- 1.2. Shop Music
- 1.3. Music ID
- 1.4. XM Radio
- 1.5. Music Videos
- 1.6. The Buzz
- 1.7. Community
- 1.8. Music Apps

2. Messaging

- 2.1. Create New Message
- 2.2. Inbox
- 2.3. Outbox
- 2.4. Sent
- 2.5. Drafts
- IM
- Email
- Voice Mail

3. YELLOWPAGES

4. MEdia Net

- 4.1. MEdia Net Home
- 4.2. Favorites
- 4.3. Enter URL
- 4.4. History

- 4.5. Settings

5. MEdia Mall

- 5.1. Shop Ringtones
- 5.2. Shop Games
- 5.3. Shop Graphics
- 5.4. Shop Multimedia
- 5.5. Shop Applications
- 5.6. Shop Video
- 5.7. MEdia Net Home

6. Cellular Video

7. My Stuff

- 7.1. Ringtones & Audio
- 7.2. Images
- 7.3. Videos

8. Address Book

9. Games & Apps

- 9.1. Games
- 9.2. Apps

10. AT&T GPS

- 10.1. AT&T Navigator

11. Organizer & Tools

- 11.1. Camera
- 11.2. Calendar
- 11.3. Alarm
- 11.4. Calculator
- 11.5. Tip Calculator
- 11.6. To Do
- 11.7. World Time
- 11.8. Notepad
- 11.9. Unit Converter
- 11.10. Voice Memo
- 11.11. Stopwatch

MENU SUMMARY

12. Settings

12.1. Profile

- 12.1.1. General
- 12.1.2. Outdoor
- 12.1.3. Meeting
- 12.1.4. Headset
- 12.1.5. Flight

12.2. Display

- 12.2.1. Wallpaper
- 12.2.2. Style
- 12.2.3. Greeting Banner
- 12.2.4. Backlight
- 12.2.5. Theme
- 12.2.6. Auto Lock

12.3. Bluetooth

- 12.3.1. Bluetooth
- 12.3.2. Search Device
- 12.3.3. Paired Device List
- 12.3.4. My Phone's Visibility
- 12.3.5. My Phone's Name
- 12.3.6. Supported Services

12.4. Date & Time

- 12.4.1. Time Zone Update
- 12.4.2. Date Format
- 12.4.3. Time Format

12.5. Phone

- 12.5.1. Language
- 12.5.2. Network Selecting
- 12.5.3. Network Profile
- 12.5.4. Headset Type
- 12.5.5. USB Connection Mode
- 12.5.6. Memory Meter
- 12.5.7. Phone Information

12.6. Call

- 12.6.1. Answer Mode
- 12.6.2. Auto Redial
- 12.6.3. Minute Minder
- 12.6.4. Call Forwarding
- 12.6.5. Call Waiting
- 12.6.6. Caller ID
- 12.6.7. Call Barring
- 12.6.8. TTY

12.7. Security

- 12.7.1. Phone Lock
- 12.7.2. PIN Code Request
- 12.7.3. Change Phone Password
- 12.7.4. Change PIN Code
- 12.7.5. FDN
- 12.7.6. Master Reset
- 12.7.7. Master Clear

12.8. Applications

- 12.8.1. Messaging Settings
- 12.8.2. Browser Settings
- 12.8.3. Address Book Settings
- 12.8.4. Camera Settings

12.9. Software Update

- 12.9.1. Continue Update
- 12.9.2. Check for Update

LANDSCAPE MODE MENU

1. Messaging

- 1.1. Create New Message
- 1.2. Inbox
- 1.3. Outbox
- 1.4. Sent
- 1.5. Drafts

2. E-mail

3. IM

4. Address Book



5. More

- 5.1. Call
- 5.2. AT&T Music
- 5.3. Recent Calls
- 5.4. YELLOWPAGES.COM
- 5.5. MEdia Net
- 5.6. MEdia Mall
- 5.7. Cellular Video
- 5.8. My Stuff
- 5.9. Games & Apps
- 5.10. AT&T GPS
- 5.11. Organizer & Tools
- 5.12. Settings



BASIC FUNCTIONS

MAKING A CALL



MAKE A CALL FROM DIALPAD

1. In Idle mode, tap the Call icon .
2. On the Phone keypad, simply touch the number key with your finger to enter the phone number. If you tap a wrong number, tap **Clear** to erase a number. To erase the entire number, press and hold **Clear**.
3. Tap **Call** on your device to place the call or press the SEND Key .


MAKE A CALL FROM PHONE BOOK

1. In Idle mode, tap the Address Book icon . Your Phone Book list appears.
2. Tap and hold scroll bar and drag up or down with your finger.
3. Tap the desired contact in the Phone Book list, then tap the phone number that you want to call.
4. To place the call, tap **Call** or press the SEND Key .

MAKE A CALL FROM CALL HISTORY

1. In Idle mode, press the SEND Key .
2. You can select to view different types of calls including: All Calls, Received Calls, Dialed Calls and Missed Calls.
3. Select the desired contact or phone number, then tap **Call** or press the SEND Key .



ANSWERING CALLS

1. When your Quickfire rings or vibrates, tap **Answer** or press the SEND Key  to answer the incoming call. (Depending on your phone's settings, you may also answer incoming calls by opening the phone or by pressing any digit key.)

To ignore incoming calls, tap **Ignore** or press the END Key .

WAIT/PAUSE FEATURE

Pauses are used for automated systems (i.e., Voicemail, calling cards). Insert a pause after a phone number then enter another group of numbers. The second set of numbers is dialed automatically after the pause. This feature is useful for dialing into systems that require a code.

1. To insert a wait/pause, enter a phone number then press and hold the * button  until "T" appears, or press and hold the # button  until "P" appears.


- **Type "P":** When you call automated systems (like banking services), you are often required to enter a password or account number. Instead of manually entering the numbers each time.
- **Type "T":** A two second pause stops the calling sequence for two seconds and then automatically sends the remaining digits.

2. Tap **Call** to dial.

BASIC FUNCTIONS

3-WAY CALLING

With 3-Way Calling, you can talk to two people at the same time. When using this feature, the normal airtime rates will be applied for each of the two calls.

1. Enter the number you wish to call then tap *Call*.
2. Once you have established the connection, enter the second number you wish to call then tap *Call*.
3. When you're connected to the second party, tap *3-Way call icon*  again to begin your 3-Way call.

CALLER ID FUNCTION



Identifies caller by displaying their phone number. If the caller's name and number are already stored in your phone book, their name will appear.

Note

This is a system dependent feature. Please contact your service provider for details.

CALL WAITING FUNCTION

Notifies you of an incoming call when you are already on a call by sounding a beep tone and displaying the caller's phone number.


1. To answer another call while on the phone, press the SEND Key . This places the first call on hold. To switch back to the first caller, press the SEND Key  again.

Note

Call Waiting is a system dependent feature. Please contact your service provider for details.

ADJUSTING VOLUME



Adjusts the volume of the ringer, key beep and earpiece.

1. In idle mode, press the Side Volume Key  up or down. Choose from "General", "Outdoor", "Meeting", "Vibrate", "Silent", "OFF" or "Level 1 ~ Level 7".

Note

- To adjust the conversation phone volume, you must do it during a call. Adjusting the volume at another time will affect the ring, notification, and Music sound levels.
- When you activate Vibrate mode, sound will automatically be muted and your device will vibrate when an incoming call is received.

MAKING AN INTERNATIONAL CALL

1. Press and hold  on the Phone keypad until the "+" sign appears. The "+" replaces the international prefix of the country that you are calling.
2. Enter the full phone number you want to dial, then tap [Call](#) or press the SEND Key .

DURING A CALL

MUTE (UNMUTE)

If you press Mute during a call, the person you are speaking with cannot hear you or any sounds from your side of the conversation. However, you can still hear them. To activate Mute during a call, tap *Mute*.

- To deactivate, tap *Unmute*.
- The phone will automatically unmute in "Emergency Call" or "Callback Mode".

SPEAKERPHONE

To activate speakerphone during a call:

1. To activate the speakerphone while in answering or calling modes, tap *SPK On* (Speakerphone On/Off).

RECENT CALLS

To view your Recent Call List during a call:

1. Tap *Options*, then tap *Recent Calls*.

FIND NAME

To select a phone number in your internal Contact List:

1. Tap *Options*, then tap *Find Name*.

MESSAGING

To send a text message during a call:

1. Tap *Options*, then tap *Messaging*.

BLUETOOTH

To connect to a Bluetooth-enabled device, such as a wireless headset (sold separately):

1. Tap *Options*, then tap *Bluetooth*.

MAKING AN EMERGENCY CALL

The 911 feature puts the phone in the Emergency Call Mode when you dial the preprogrammed emergency number 911. It also operates in Lock Mode and outside the service area.

911 IN LOCK MODE

The 911 call service is available even in Lock Mode.

1. Enter "911", then tap *Call*.
2. The call connects.
3. When the call ends, the phone returns to Lock Mode.

911 USING ANY AVAILABLE SYSTEM

1. Enter "911", then tap *Call*.
2. The call connects.
3. The phone maintains Emergency Mode and the phone can receive an incoming call from any available system.
However, it can't make a call.

Note

The 911 call does not appear in the Emergency call list.

CHAPTER 3

MEMORY FUNCTION



CHAPTER 3. MEMORY FUNCTION

This chapter addresses memory functions including:


Storing a Phone Number

Entering Letters, Numbers & Symbols

Making a Call Through the Contact List

STORING A PHONE NUMBER

The phone book stores up to 500 entries.

1. In Idle mode, tap the Call icon .
2. From the Phone Screen, enter the phone number, then tap *Options* > *Save Contact*.
3. Tap "Phone ("New Entry" or "Existing Entry")" or "SIM ("New Entry" or "Existing Entry")".
4. If "Existing Entry" is selected, your contact list is displayed. Choose the entry to add the number, then tap *Done*. Select the type of number you are adding from the icon list. Tap *Save*. Tap primary phone number, then tap *Done* to save contact.
5. If "New Entry" is selected, the New entry icon list appears. Tap to choose the type of number you are adding. Enter a name by tapping the "First Name" and "Last Name" fields. To change the input mode, tap *Options*. Tap to enter information in other fields for the contact, including "Mobile", "No Group" and "Ringtone".

- **Phone number:** To insert another phone number for the contact, enter the phone number. Tap to select type (Mobile, Home, Office, Pager, Home FAX, Office FAX, Etc Number) of phone number.
- **Group:** To set a group for the contact, highlight the Group Name. Tap to select "No Group", "Business", "Family" or "Friends".
- **Ringtone:** To set a ringtone for the contact, highlight a Ringtone. Tap to select "AT&T Ringtone", "Basic Ringtone 1 ~ Basic Ringtone 3", "Sky lounge", "Rainforest", "Fighters", "Love", "Funny guy" or "Happiness".

STORING A PHONE NUMBER

Tap *Options* the *Add Optional Field* to access the following options:


- Mobile
- Home
- Office
- Pager
- Etc Number
- Home FAX
- Office FAX
- E-mail
- URL
- Instant Message
- Picture
- Birthday
- Company
- Job Title
- Address
- Memo

6. To store the entry in your contact list, tap *Save*.

ENTERING LETTERS, NUMBERS & SYMBOLS

The input mode will automatically be activated when it is necessary to enter letters and numbers. There are 4 available modes: Alphabet mode (Abc/ABC), Numeric mode (123), Symbol mode (Symbols) and Emoticon mode (Emoticon). The input mode indicator appears on the lower portion of the display when letters and numbers are entered.

Using the touch screen keypad:





Tap <i>Options</i>	To change the entry mode - [Abc] [123] [Symbols] [Emoticon]
Tap <i>Del</i>	Tap to delete a character. Tap and hold to delete the entire entry.
Tap <i>abc icon</i>	Tap to select a letter case of the standard text input. [Abc], [ABC] and [abc] indicate the standard text input. Tap to change mode.
Tap  <i>icon</i>	Tap to accept a word and add a space.

ENTERING LETTERS, NUMBERS & SYMBOLS

USING QWERTY KEYBOARD

Your device has a specifically designed QWERTY keyboard that provides a superior typing experience on a small handheld for easy and comfortable input. You can use all of the handset functions with the keyboard either closed or open. When you open the keyboard you have the extra benefit of a full messaging keyboard.

The handheld includes a fully-functional QWERTY keyboard you can use to compose text for email messages, notes, and so on.

Using the QWERTY Keypad:	
Tap <i>Options</i>	To change the entry mode - [Symbols] [Emoticon]
Press <i>Del Key</i> 	Press to delete a character. Press and hold to delete the entire entry.
Press <i>SYM Key</i> 	Press the Space key to type a blank space.
Press <i>CAP Key</i> 	To type upper-case letters, hold down the CAP key and then press one or more letter keys. To return to typing lower-case letters, press and release the CAP key and then press a letter key.
Press <i>FN Key</i> 	To type the number or symbol printed in orange at the top of a key, hold down the orange-colored FN key and then press one or more letter keys. To return to typing letters, press and release the FN key and then press a letter key. To write in number or symbol printed in orange at the top of a key only, press the FN key twice.




ENTERING LETTERS, NUMBERS & SYMBOLS

Note

For best performance in low-light environments, your handset includes a backlight feature that can illuminate both the display and the keyboard so you can keep reading and typing.



STANDARD INPUT MODE

Use the QWERTY keyboard to enter letters, numbers and characters.

1. Enter letters using the keypad. To change the input mode, tap *Options*.
2. To enter a space, press *SYM Key* . The cursor will automatically move to the next column.
3. Repeat until letters are entered.
4. To delete one letter, press *Del Key* . To delete the entire entry, press and hold *Del Key* .

NUMERIC MODE

To enter numbers:

1. Press the *FN Key* .
2. To enter a number, press its corresponding digit key. To enter numbers consecutively, double-press the *FN Key* .

ENTERING LETTERS, NUMBERS & SYMBOLS

SYMBOL MODE

To enter symbols:

1. Tap *Options* > *Symbols*.
2. Tap the ◀▶ keys to locate the symbol you want to enter then press *Done*.

EMOTICON MODE

To enter Emoticons:

1. Tap *Options* > *Emoticon*.
2. Tap the ◀▶ keys to locate the Emoticon you want to enter then press *Done*.

MAKING A CALL THROUGH THE CONTACT LIST

ONE-TOUCH DIALING

Ideal for frequently dialed numbers, this feature allows entries in your contact list to be dialed via the keypad with only one key press.

ONE-TOUCH DIALING

2-9: Press and hold the corresponding memory number for more than 1 second.

Note

- If no phone number is stored in the location entered, "Empty Speed Dial Assign Now?" will appear on the screen.
- Location 1 is reserved for voicemail. Location 2-9 are unassigned. To assign a speed dial location, please see page 78.

CHAPTER 4

QUICKFIRE TIPS & TRICKS





CHAPTER 4. QUICKFIRE TIPS & TRICKS



Quickfire Tips & Tricks

QUICKFIRE TIPS & TRICKS

NAVIGATING & TOUCH SCREEN TIPS




- For optimal touch screen performance, use the tip of your finger to touch the center of a touch key. A light tap will do. (Do not use a foreign object or your fingernail on the screen.)
- Press and drag your finger up or down to scroll. A beep will sound when you've reached the top or bottom of a menu. To return to the previous screen tap the *Back icon* . You may also press the BACK button  on your keyboard.
- When scrolling on the text screen, touch and drag the text on the screen up or down in the direction you want to move it, or use your finger to quickly flick the text in the direction you want it to move. You can also navigate through text and applications using the up and down arrows on your QWERTY keyboard.
- You may also scroll thru the text screen by pressing the Volume Up/Down key on the side of your Quickfire. This allows for a page scroll.

MESSAGING TIPS



- To send a text message, slide open the QWERTY keyboard. Tap the *Messaging*  and select *Create New Message*. Input your message, then Tap To, input the phone number then tap Send. You may also switch back and forth by pressing the TAB key  on your keyboard.
- To add media to your message, press Add Media, and select from an image, video or audio.

QUICKFIRE TIPS & TRICKS

BROWSING TIPS













- To access the mobile web from idle mode, tap the *Menu icon* , select *MEdia Net* , then choose Media Net Home.
- To personalize your Media Net home page, from the MEdia Net home page, tap EDIT (next to "My Links"). Tap the content you would like added, moved, or deleted from your MEdia Net home page.
- To increase or decrease the size of the onscreen text, press  and select your viewing size.

MUSIC TIPS

- To listen to music on your device, insert your microSD™ card (gold contacts facing up towards the screen) with music saved on it into the slot at the top of the phone. From idle mode, tap *AT&T Music* , select Music Player from the list, then choose your song.
- To adjust the volume, press the Volume Up/Down Keys located on the upper left side of your Quickfire.
- To purchase music from your device, tap *AT&T Music*  from idle mode, then select Shop Music.










QUICKFIRE TIPS & TRICKS

CAMERA TIPS


- To take a picture, press and hold the Side Camera Key  or, in Idle mode, tap the *Menu icon*  and select *Organizer & Tools*  > *Camera* > *Camera*. Rotate the phone horizontally. Press the Camera Key  to take the picture.
- To record video, press and hold the Side Camera Key  or, in Idle mode, tap the *Menu icon*  and select *Organizer & Tools*  > *Camera* > *Camcorder*. Rotate the phone horizontally. Press the Side Camera Key  to start/stop recording.
- For quick access to camcorder from camera screen (or vice versa) tap the top right icon  – or – .
- To adjust the brightness, use the controls on the lower right bottom of the display.
- To zoom in or out of a photo, tap the *T icon*  or the *W icon*  that appears in the lower left corner of the display. The zoom function will only work on the camera if the resolution is set to 640 X 480 or 320 X 240, and on the camcorder if the resolution is set to 176 X 144.
- To send a picture or video via message after taking it, tap the Envelope icon that appears in the middle of the bottom of the display

QUICKFIRE TIPS & TRICKS

GENERAL TIPS

- To turn your Quickfire on/off, press the Power Key  .
- Quickly pressing the Power button temporarily turns off the display and locks your device. Unlock the device by pressing the Lock Icon on the screen then touch the Falling Key. Or, simply open the QWERTY keyboard.
- To personalize your Quickfire, in idle mode, tap the *Menu icon*  and select *MEdia Mall*  . From here, you can shop for and download ringtones, games, graphics, multimedia files, applications and videos.
- To access turn-by-turn voice and onscreen driving directions, in idle mode, tap the *Menu icon*  and then tap *AT&T GPS*  . Tap AT&T Navigator then follow the on-screen directions.
- To stay organized and on schedule with time-saving tools including a calendar, alarm clock and calculator, tap the *Menu icon*  then select *Organizer & Tools*  .
- To watch news, sports, weather and entertainment clips on the go, tap the *Menu icon*  then tap *Cellular Video*  . You are then taken to your default Cellular Video homepage.

MEMO



CHAPTER 5

MENU FUNCTION



CHAPTER 5. MENU FUNCTION

This chapter addresses accessing the menu and using its functions and features to customize your Quickfire.

AT&T Music
Messaging
YELLOWPAGES
MEdia Net
MEdia Mall
Cellular Video
My Stuff
Address Book
Games & Apps
AT&T GPS

Organizer & Tools
Settings
Voice Commands

MUSIC PLAYER

The built in Music Player is an application that can play music files. The music player supports files with extensions AAC, AAC+, eAAC+, MP3, WMA, 3GP, MP4(Audio only), and M4A. Launching the Music Player allows you to navigate within your Music Player folders and select playback material.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Music Player*. Menu options include:

- **Now Playing:** Opens the current play list.
- **All Music:** View all the music stored on your Quickfire and/or memory card.
- **Albums:** View all your music by album.
- **Artists:** View all your music by artist.
- **Playlists:** Create your own playlists by choosing songs from the All Songs menu list.
- **Genres:** View all your music by genres.
- **Settings**
 - **Play Via:** Tap "Phone" or "Bluetooth".
 - **Shuffle:** Tap "On" or "Off".
 - **Repeat:** Tap "All", "Off" or "One".
 - **Equalizer:** Tap "Normal", "Rock", "Pop", "Classical", "Jazz" or "Bass".

Note

Copyrights of music files may be protected by copyright and intellectual property laws. Therefore, it may be required to obtain necessary permissions or licenses before you can reproduce or copy the materials. In some countries, national law prohibits copying of copyrighted materials for personal archive as well. Prior to downloading or copying the files, please ensure that you adhere to the applicable laws and laws of corresponding countries or regions regarding the Terms of Use of materials.

SHOP MUSIC

Selecting Shop Music from the AT&T Music sub menu launches the browser to a music landing page from which you can purchase music from 3rd party stores and personalization content from AT&T. Some sites are data intensive (i.e. previews via streaming) so the user should have an unlimited MEdia bundle like the MEdia Max 200.

Note


Additional charges may apply. Please contact your service provider for further information regarding your plan.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Shop Music*. Tap *Options* to access:

- **History:** Displays the list of sites visited.
- **Display:** Select "Page Map" or "Page Layout".
- **Search:** Enter the text then press *Search*.
- **Tool**
 - **Send URL:** Send a URL via text message.
 - **Page Info:** Display site information.
 - **Save Item:** Save an item to "Phone" or "SD Card".
- **Settings**
 - **Help:** Displays help information.
 - **Certificates:** Displays Certificate information.
 - **Preferences:** Tap to select user preferences including Font Size, Encoding, Title Region and Secure Prompt.
 - **Clear Cache:** Tap "Yes" or "No".
 - **Clear Cookies:** Tap "Yes" or "No".
 - **Clear History:** Tap "Yes" or "No".
 - **Clear Auto-complete:** Tap "Yes" or "No".

MUSIC ID

MusicID is an application which uses the onboard microphone to analyze a song sample and then compare it to a remote database of songs. Once the application completes the analysis of the song sample, it then provides you with the name of the song, artist and album art as well as opportunities to buy related content.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Music ID*.
2. Follow the on-screen prompts. Menu options include:

- **ID song!:** Allows you to find out information of unknown music by sending the sound of the unknown music to the web. If the web identifies the song, it returns with relevant information of the song.
- **manage IDs:** Once a song has been identified through the MusicID, you can see the list of songs in this folder.
- **help me out:** Information for how to use this java application.
- **exit:** Ends the application and exits.

XM RADIO

Selecting XM Radio from the Games & Apps sub menu launches a preinstalled java application. The application allows the user to listen to dozens of channels of digital radio on your mobile phone. Get unlimited access to commercial-free music, the latest Hip Hop, R&B, Rock, Jazz, Country anywhere you go.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > XM Radio*.

Warning This product will use a large amount of data. Please contact your service provider to determine which plan best fits your device, additional charges may apply.

MUSIC VIDEOS

Selecting Music Videos from the AT&T Music sub menu launches a browser which takes you directly into the Music Video section of Cellular Video. From this menu, you will have access to music videos from the latest artist as well as programming from AT&T, MTV, VHI, and CMT among others. Simply click on a video and begin watching!

Note Additional charges may incur when downloading music video contents. Contact your service provider for further information.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Music Videos*.

THE BUZZ

Selecting The Buzz from the AT&T Music sub menu launches a preinstalled java application (e.g. Billboard). The application allows the user to obtain relevant music industry news and information including charts, news, and concert locations.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > The Buzz*.

COMMUNITY

Selecting Community from the AT&T Music sub menu launches the browser to either one or more of the hot user communities. The application allows the user to interact with their friends and the community as well as review artist fan sites.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Community*.


MUSIC APPS

Music Apps is a group of internet-based music applications, including MySpace, Billboard Mobile Channel, Hip Hoptionary, Hip Hop Official by GoTV, and a search option for other features. All of these applications are by subscription only, and require a large amount of data streaming. AT&T strongly recommends that if you subscribe to one of these subscription services that you also subscribe to an appropriate unlimited Data rate plan for your handset.

1. In Idle mode, tap the *Menu icon*  and select *AT&T Music > Music Apps*.

CREATE NEW MESSAGE

To send a new message:

1. Slide open the QWERTY keyboard. Tap the *Messaging icon*  and select *Create New Message*.
2. Input your message.

From the *Message* screen, tap *Options* to choose from:

- **Symbols:** Allows you to enter symbols.
- **Emoticon:** Allows you to enter emoticons.
- **Add Contacts:** Allows you to insert contact information into the message.
- **Sending Settings:**
 - **Priority:** Select "High", "Normal" or "Low".
 - **Validity Period:** Select "1 Hour", "2 Hours", "1 Day", "1 Week" or "Maximum".
 - **Delivery Report:** Select "On" or "Off".
 - **Read Report:** Select "On" or "Off".
- **Add Format:** Allows you to access the Text Templates, Subject, vCard and vCalendar.
- **Slide Duration:** Enter the slide duration time. (1~30sec)
- **Save as Drafts:** To save a message to "Drafts" folder.
- **Add Slide:** Allows you to add a slide to your message.
- **Preview:** To preview a created MMS message.

The "Priority" and "Validity Period" menus only appear when you create MMS message.

From the *Message* screen, tap *Add Media* to add an Image, Video or Audio file to your message:

3. Tap *To*, input the phone number.

From the *To* screen, tap *Options* to choose from:

- **Recent Message:** Look up a number from your recent message list.

MESSAGING

- **Recent Calls:** Look up a number from your recent call list.
- **Change to To:** Tap to access the "To" field.
- **Change to CC:** Tap to access the "CC" field.
- **Change to BCC:** Tap to access the "BCC" field.


You may also add a number from your address book by tapping Contacts and looking up a phone number from your Contact List.

The "Sending Settings" and "Preview" menus only appear when you create messages.

4. To send message, tap *Send*.

INBOX

The Inbox manages received messages.

1. Slide open the QWERTY keyboard. Tap the *Messaging icon*  and select *Inbox*.

From the *Inbox* screen, tap *Options* to choose from:

- **Delete Read messages**
- **Select&delete:** "Delete Selected message?" > *Yes* or *No*.
- **Delete all:** "Delete all Messages?" will appear. Tap *Yes* or *No*.

2. Tap a message. The message is displayed. To reply to the message, tap Reply, to delete it, tap Delete.


From the *Inbox* screen, tap *Options* to choose from:

- **Reply:** Replies to the message.
- **Forward:** Send the message to another person.
- **Save contact:** Save the phone number in contacts.
- **Extract data:** Extract phone number, e-mail, URL included in the message.
- **Save item:** Select to save a graphic, sound or other object included in MMS.
- **Information:** To show received message information.

The "Reply", "Save item", and "Information" menus only appear when you receive MMS message.

OUTBOX

To manage Outbox messages:

1. Slide open the QWERTY keyboard. Tap the *Messaging icon*  and select *Outbox*.
2. To delete a message, tap *Options*. Tap *Select & Delete* or *Delete All* > *Yes* or *No*.
3. Tap a message. The message is displayed.

From the *Outbox* screen, tap *Options* to choose from:


- **Play:** To play Outbox MMS message.
- **Edit:** Change the recipient's number or a message.
- **Information:** To show Outbox message information.
- **Error Status:** To show send Error message information.

The "Play", "Error Status" and "Information" menus only appear when you receive MMS message.

4. To resend message, tap *Resend*.

SENT

To manage Sent messages:

1. Slide open the QWERTY keyboard. Tap the *Messaging icon*  and select *Sent*.
2. To delete a message, tap *Options*. Tap *Select & Delete* or *Delete All* > *Yes* or *No*.
3. Tap a message. The message is displayed. To forward the message to another recipient, tap Forward. To delete the message, tap Delete.


MESSAGING

From the *Sent* screen, tap *Options* to choose from:

- **Information:** To show sent message information.
- **Forward:** Send the message to another person.

DRAFTS

To manage Drafts messages:

1. Slide open the QWERTY keyboard. Tap the *Messaging icon*  and select *Drafts*.
2. To delete a message, tap *Options*. Tap *Select & Delete* or *Delete All* > *Yes* or *No*.
3. Tap a message. The message is displayed.

From the *Drafts* screen, tap *Options* to choose from:

- **Symbols:** Allows you to enter symbols.
- **Emoticon:** Allows you to enter emoticons.
- **Add Contacts:** Allows you to insert contact information into the message.
- **Sending Settings:**
 - **Delivery Report:** Select "On" or "Off".
 - **Read Report:** Select "On" or "Off".
- **Add Format:** Allows you to access the Text Templates, Subject, vCard and vCalendar.
- **Save as Drafts:** To save a message to "Drafts" folder.
- **Add Slide:** Allows you to add a slide to your message.


From the *Drafts* screen, tap *Add Media* to allows you to insert images, videos and/or audio to your message.

4. To send message, tap *Send*.

IM

IM allows you to use your AIM, Windows Live and Yahoo! Messenger on your Quickfire. You can exchange messages with your friends and check their online status while you're away from the computer.

SET UP IM

1. Slide open the QWERTY keyboard. Tap the *IM icon* .
2. Tap the IM community service you want to use.

SIGN IN

1. Tap and type your existing ID.
2. Tap the password field and type your password.
3. Tap *Sign In*.
4. A list of contacts appear on the screen.
5. Tap *Options* to change your status or add a contact. You can sign in multiple communities.
6. To sign into another community, tap *Home* and tap the other IM community service you want to use.
7. Tap and type your existing ID.
8. Tap the password field and type your password.

MESSAGING

SEND IM

1. Select a contact who you want to send IM.
2. Tap *Options* > *Send IM*.
3. Type your message in the input field, then tap *Send*.
4. Tap *Options* to insert emoticon or quick text.

RECEIVE IM

1. Select a conversation that you want to join.
2. Tap *Options* > *Open*.

Once you're signed in, you can receive an IM even if you are not in the IM menu.


SIGN OUT

1. Tap the IM community service you want to sign out of.
2. Tap *Options* > *Sign Out*.

EMAIL

Email allows you to access your Yahoo! Mail, AOL Mail, AIM Mail, Windows Live Hotmail, AT&T Yahoo!, BellSouth and Other provider's accounts on your Quickfire.

SET UP EMAIL

1. Slide open the QWERTY keyboard. Tap the *Email icon* .
2. Tap the email provider you want to use.

SIGN IN

1. Tap and type your existing email ID.
2. Tap the password field and type your password.
3. Tap *Sign In*.
4. You can choose *Inbox*, *Drafts*, *Sent* and *Trash*.
5. Tap *Options* to select Read, Delete or Compose New.

OPENING AN EMAIL

1. Tap *Read* after highlighting the email subject line you want to open by scrolling the bar.
2. Once the email opens, tap *Options* to Reply, Forward, Delete.






DELETING AN EMAIL

1. Tap the email you want to delete by scrolling the bar.
2. Tap *Options* > *Delete*

MESSAGING

VOICE MAIL

Voicemail allows callers to leave voice messages in your voice mailbox, and lets you review, play, and delete your voice messages any time you are in your Carrier's network coverage area.

1. In Idle mode, push *Shortcut Key*  and select *Messaging icon*  > select *Voice Mail* or tap the *Main Menu icon*  > select *Messaging icon*  > select *Voice Mail*. Or, from the phone screen, tap and hold the *(1) icon* .

FIND. MAP. SAVE. GO.

Selecting YELLOWPAGES.COM Mobile from the Games & Apps sub menu launches a preinstalled java application.

It maps a business and gets step-by-step directions to or from saved locations, including home or from recent searches. Then save favorites and access them on the go from wherever you happen to be.

1. In Idle mode, tap the *Menu icon*  and select *YELLOWPAGES icon* .



MEDIA NET HOME

MEdia Net is one of the services provided by AT&T and it gives you access to all the cool things you can do with your wireless phone. Once connected, the homepage is displayed. The content depends on the service provider.

With MEdia Net you can access your local weather, news & entertainment, sports scores, tones, games, apps, and so much more.

FAVORITES

While navigating through either the Internet or the MEdia Net pages, you can bookmark a site to quickly and easily access it at a future time. The URL addresses of the bookmarked sites are stored in the Favorites folder, wherein you can either use the 6-preset URL addresses or store your own favorite URL addresses.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Net icon* 
> *Favorites*.
2. Tap a bookmark item on the Favorite list. The preset URLs consist of:

- My Account
- Chat
- News
- Sports
- Weather
- Cellular Video

Tap *Options* to access the following options:



- **Add Folder:** Allows you to add a new folder to your Favorites List.
- **Add Favorite:** Allows you to add a new URL address to your Favorites List.
- **Delete All:** "All Items will be deleted. Delete all?" will be display > *Yes* or *No*.

3. Tap *Go* to launch the website.

Tap *Options* to access the following options:

- **Send:** Send the URL address via text message.

ENTER URL



1. In Idle mode, tap the *Menu icon*  and select *MEdia Net icon*  > *Enter URL*.
2. Enter the URL address using the keypad. To change the input mode, tap *Options*. The following modes are available:

- **T9Word:** Allows you to enter characters by pressing one key per letter. In this mode, tap "T9" to display alternative words.
- **Abc:** Allows you to enter alphabet characters.
- **123:** Allows you to enter numbers.
- **Symbols:** Allows you to enter symbols.

3. Tap *Go* to go there directly.

HISTORY

The History list provides you with a list of the most recently visited web sites. These entries can be used to return to previously unmarked web pages.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Net icon*  > *History*.
2. Tap a website on the History list.
3. To clear the History, tap *Delete All*. All Items will be deleted. Delete all?" will appear. Tap *Yes* or *No*.

SETTINGS

1. In Idle mode, tap the *Menu icon*  and select *MEdia Net icon*  > *Settings*. Select from the following options:

- **Help:** Displays the browser version and copyright information about the browser.
- **Certificates:** Accesses certificate information from your Quickfire.
- **Preferences:** Changes the settings for the web browser to suit your preference.
- **Clear Cache:** Clear the cache.
- **Clear Cookies:** Clears saved cookies.
- **Clear History:** Clear the list of recently visited URLs.
- **Clear Auto-complete:** Clear automatically fills in character for browser recognized words.

The Media Mall topics covered in this section are shopping for Ringtones, Games, Graphics, Multimedia, Applications, Themes, Videos and MEdia Net Home the MEdia Home site.

SHOP RINGTONES

This menu option connects to AT&T's ringtone download site.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Ringtones*.

SHOP GAMES

This menu option connects to AT&T's game download site. This allows users to download the various games by connecting to the Internet. Downloaded games appear in your Games folder.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Games*.

SHOP GRAPHICS

This menu option connects to AT&T's graphic download site, where you can shop for graphic images. Downloaded graphics appear in your Graphics folder.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Graphics*.

SHOP MULTIMEDIA

This allows you to connect to AT&T's multimedia download site where you can shop for multimedia (video) files. Downloaded files appear in your Videos folder.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Multimedia*.

SHOP APPLICATIONS

This allows you to connect to AT&T's application download site where you can shop for applications. Downloaded files appear in your Applications folder.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Applications*.

SHOP VIDEOS

This allows you to connect to AT&T's video download site where you can shop for videos. Downloaded videos appear in your My Stuff folder.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *Shop Videos*.

MEDIA NET HOME

The MEdia Net Home menu option allows you to quickly access your MEdia Net homepage using the built-in browser. This page gives you quick access to information such as local weather, sports scores, horoscope information and quick links to the previously mentioned shopping sites.

1. In Idle mode, tap the *Menu icon*  and select *MEdia Mall icon*  > *MEdia Net Home*.

Your Quickfire is equipped with a browser which allows you to access the Internet and upload media files directly to your phone. These media files display using the built-in Media Player. Accessing the browser is data intensive and additional charges may apply.

CV brings you quick, on-demand access to news, sports, weather and entertainment video clips. Catch up on TV's hottest shows, funniest comedians, biggest headlines and latest sports scores. You can even personalize your homepage for quick access to your favorites. In addition, the CV service automatically streams localized weather information to your personalized "News & Weather" page each and every day.

1. In Idle mode, tap the *Menu icon*  then tap *Cellular Video icon* .

You are then taken to your default Cellular Video homepage.

2. Highlight the desired media clip or select from one of the available categories and tap the screen.

CELLULAR VIDEO OPTIONS

1. In Idle mode, tap the *Menu icon*  then tap *Cellular Video icon*  and tap the screen.

RINGTONES & AUDIO

1. In Idle mode, tap the *Menu icon*  and select *My Stuff icon*  > *Ringtones & Audio*.

2. Tap *Phone* or *SD Card*.

Tap *Options* to access the following options:

- **Copy to SD Card:** To copy the selected ringtone or audio.
- **Move to SD Card:** To move the selected ringtone or audio.
- **Delete Multimedia:** To delete a selected ringtone or audio.

Note

When accessing ringtones or audio files from your SD card, the file must be placed in the Audio folder under Media on your card.

3. Tap *AT&T Ringtone*, *Basic Ringtone 1~3*, *Sky lounge*, *Rainforest*, *Fighters*, *Love*, *Funny guy* and *Happiness*.

Tap *Options* to access the following options:

- **Send Message:** To send a message.
- **Assign:** Select "Incoming Call" or "Alarm Tone".
- **Rename:** To rename a selected ringtone or audio.

4. To play, tap *Play*.

5. To delete a ringtone or audio file, tap *Delete*, "Delete item?" will appear. Tap *Yes* or *No*. Only ringtones you have downloaded can be deleted.

IMAGES

1. In Idle mode, tap the *Menu icon*  and select *My Stuff icon*  > *Images*.

2. Tap *Phone* or *SD Card*.

Tap *Options* to access the following options:

- **Copy to SD Card:** To copy the selected image.
- **Move to SD Card:** To move the selected image.
- **Delete Multimedia:** To delete a selected image.

3. Tap *AT&T Globe*, *Cloud*, *Water Button*, *Spring*, *Waterdrops on The Window*, *Silk*, *White Rose*, *Skyline*, *Bridge* or *Sandy Beach*.



4. To preview an image, tap *Preview*.

Tap *Options* to access the following options:

- **Send Message:** To send a message.
- **Send to Snapfish:** To send a message to HP's online Snapfish® service.
- **Assign to Wallpaper:** To set wallpaper image.
- **Rename:** To rename a selected image.

5. To delete an image, tap *Delete*. "Delete item?" will appear. Tap *Yes* or *No*. Only images you have downloaded can be deleted.

VIDEOS

1. In Idle mode, tap the *Menu icon*  and select *My Stuff icon*  > *Videos*.
2. Tap *Phone* or *SD Card*.

Tap *Options* to access the following options:

 - **Copy to SD Card:** To copy the selected video clip.
 - **Move to SD Card:** To move the selected video clip.
 - **Delete Multimedia:** To delete a selected video clip.
3. Tap the video you want to view.
4. Tap *Play*, to play a video.


Tap *Options* to access the following options:


 - **Send Message:** To send a video message.
 - **Rename:** To rename a selected video clip.
5. To delete a video, tap *Delete*. "Delete item?" will appear. Tap *Yes* or *No*.

Stores up to 500 entries, each of which can be assigned to a group. Entries can be retrieved by name or group.

1. In Idle mode, tap the *Menu icon*  and select *Address Book icon* .

FIND NAME

Retrieves an entry by name and calls the primary number by simply pressing the SEND Key . You can review all the entries stored in your contacts list or quickly find an entry by entering a name or its character string.

1. The list of names in your contacts is displayed alphabetically.
2. Enter a name or scroll through the list. If more than one contact is listed, highlight the contact you want.
3. Tap the contact. The contact information is displayed.
4. To edit the contact information, tap *Edit*. The Edit Contact screen will appear with the selected contact information shown.
See page 38 for "Storing a Phone Number".
5. To save the entry, tap *Save*. To return to the previous page, tap the *BACK icon*  at the top of the page.
6. Tap *Options* to access the following options:
 - Group List
 - Speed Dial List
 - Copy to
 - Delete Contact

- Service Dial Number
- My Number
- Address Settings

GROUP LIST

This menu allows you to manage group information. By default, there are 4 existing groups: "No Group," "Business," "Family" and "Friends." You can also configure a ring tone for a group so that the group ring tone sounds when a call from a specific contact address within that group arrives and there is no ring tone configured for the specific contact address. A maximum of 20 groups is allowed.

1. In Idle mode, tap the *Menu icon*  and select *Address Book icon*  > *Options* > *Group List*.

Add new group

1. Tap *Add New* to add a new group name. Tap *Phone* or *SIM*.
2. Input a new group name.
3. To save a new group, tap *Save*.

Setting a ring type for a group

1. Select an existing group name.
2. Tap *Options* > *Set Group Ringtone*.
3. Tap "AT&T Ringtone", Basic Ringtone 1 ~ Basic Ringtone 3", "Sky lounge", "Rainforest", "Fighters", "Love", "Funny guy" or "Happiness".
4. Tap *Save*.

Change group name

1. Select the group you want to rename. Only new groups you added can be changed.
2. Tap *Options* > *Rename Group*.
3. Input a new group name.
4. To change the name, tap *Save*.

Select & Delete

1. Select an existing group name. (Except No Group)
2. Tap *Options* > *Select & Delete*.
3. Tap the contact you want to delete, tap check or uncheck. Or, tap *All*.
3. Tap *Done*, then "Delete?" will appear. Tap *Yes* or *No*.

Delete group

1. Select an existing group name. Only new groups you added can be changed.
2. Tap *Options* > *Delete Group*.
3. "Delete Group" will appear. Tap *Yes* or *No*.

SPEED DIAL LIST

This menu allows you to configure the speed dial numbers. You can select a number from 2 to 9 as a speed dial. You can configure speed dial numbers for any of the 8 numbers for a specific contact address so that a contact address may have multiple speed dial numbers.

1. In Idle mode, tap the *Menu icon*  and select *Address Book icon*  > *Options* > *Speed Dial List*.

2. To assign a phone number to a location, select the location.

Note "Empty" appears if the location is available.

3. Tap a name from your contact list. If the contact has more than 1 number saved, tap the correct number for the Speed Dial location is shown.

4. You will see the contact name next to the Speed Dial location number in the Speed Dial lists.

5. To reset the speed dial locations, tap *Reset All*. "Reset all speed dial?" will appear. Tap *Yes* or *No*.

6. Tap the speed dial # location.

To call the contact, tap *Call*.

To change the speed dial location, tap *Switch*, then tap the new speed dial location.

To reset a specific speed dial location, tap *Reset*.

COPY TO

This menu allows you to copy all of the information from your SIM card to your handset and vice versa. If a name is duplicated during the copying operation, the information is also duplicated. Options include:

- **SIM to Phone:** You can copy the entry from the SIM card to the phone memory.
- **Phone to SIM:** You can copy the entry from the handset memory to the SIM card (not all the data will be copied).

1. Tap *Options* > *Copy to*.
2. Tap "Phone -> SIM" or "SIM -> Phone".
3. Tap the contact you want to copy, tap check or uncheck.
Or, tap *All*.
4. To copy all phone number, tap *Done*.
5. "Copy selected contacts?" will appear. Tap *Yes* or *No*.

DELETE CONTACT

To delete an entry:

1. Tap *Options* > *Delete Contact*.
2. Tap the contact you want to delete, tap check or uncheck.
Or, tap *All*.
3. To delete all phone numbers, tap *Done*.
4. "Delete selected contacts?" will appear. Tap *Yes* or *No*.

ADDRESS BOOK


SERVICE DIAL NUMBER

You can view the list of Service Dialing Numbers (SDN) assigned by your network provider. Such numbers could include the emergency, directory assistance and voice mail numbers.

1. Tap *Options* > *Service Dial Number*.

MY NUMBER

Displays and edit your phone number.

1. Tap *Options* > *My Number*. Your phone number will appear next to 1.
2. Tap *2 (empty)*, *3 (empty)* or *4 (empty)*. Enter the additional information, then tap *Save*.
3. To return to the previous page, tap the *BACK icon*  at the top of the page. The Name or Data you enter now will appear instead of *2 (empty)*, *3 (empty)* or *4 (empty)*.

ADDRESS SETTINGS

To select your address settings:

1. Tap *Options* > *Address Settings*.

Tap *Options* to access the following options:

- **Save Location:** Tap "Always Ask", "Phone" or "SIM" then tap *Save*.
- **View:** Tap "All", "Phone" or "SIM" then tap *Save*.
- **Memory Status:** Displays the current status of the phone memory and the SIM card.
- **SIM Number Type:** Tap *Add*. Input the new number then tap *Save*.

- **Change Hidden Key:** Input the new hidden key. (This is used to Lock your SIM Card address book. The default hidden key code is "00000000". Please contact AT&T Customer Service for your Hidden Key code.)

ADD NEW

Adds a new entry.

1. Tap *Add New*, then tap *Phone* or *SIM*.
2. When adding a new contact to your address book you may choose to save the information in either the Phone or SIM memory. Saving a contact in the Phone location allows you to add additional fields such as number type (mobile, home, office, etc.), email, picture, etc. Please note, some of these options may not be available when storing on the SIM, such as adding a picture or ringtone.
3. Fill in the fields as they are selected.

Phone Book fields(SIM):

- **Name:** Enter name > *Done*.
- **Phone Number:** Input the number > *OK*.
- **No Group:** Tap "No Group".

Tap *Add New*. > To save location, tap *Phone* or *SIM*. Input the new group name > *SAVE*.

Tap *Options* to access the following options:

Add Optional Field, Delete Optional Field, Save as Hidden Entry


Phone Book fields(Phone):

- **First Name:** Enter first name > *Done*.
- **Last Name:** Enter last name > *Done*.
- **Number Type:** Tap "Mobile", "Home", "Office", "Pager", "Home FAX", "Office FAX" or "Etc Number". Input the number > *OK*.

ADDRESS BOOK


- **No Group:** Tap "No Group", "Business", "Family" or "Friends" > Input the new group name > [SAVE](#).
- **Ringtone:** Tap "AT&T Ringtone", Basic Ringtone 1 ~ Basic Ringtone 3", "Sky lounge", "Rainforest", "Fighters", "Love", "Funny guy" or "Happiness" > [Save](#).

Tap [Options](#) to access the following options:
Add Optional Field, Delete Optional Field


4. To save the entry, tap [Save](#). To return to the previous page, tap the [BACK icon](#)  at the top of the screen.

Note See page 38 for more detailed information about storing a number.

GAMES

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Games*.
2. Tap the game you want to play then follow the on-screen directions.

APPS

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps*.
2. Tap the application you want to access then follow the on-screen directions.


BILLBOARD

The application allows the user to obtain relevant music industry news and information including charts, news, and concert locations.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Billboard*.


MOBITV

MobiTV brings your Quickfire to life. Watch news, sports, weather, and entertainment clips via AT&T's high-speed data network while on the go.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > MobiTV*.
2. Tap *MobiTV*.
3. Tap the show you wish to view.

MOBILE BANKING

Mobile Banking is an application that allows you to quickly and easily access your financial accounts. You can check account balances, view and pay bills and review your transactions.

1. Access your bank's Online Banking site and enroll in Mobile Banking.
2. Download the Mobile Banking application to phone. You will receive a text message shortly to complete the download.
3. Tap the link in the message to download.
4. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Mobile Banking*.
5. Enter the Initiation Code, provided during your bank enrollment, into the required field.
6. Establish a six-digit PIN to unlock the application. This is your personal code providing you future access to the Mobile Banking application.

PEOPLE

People provides up-to-the-minute celebrity news, photos and more directly on phone. PEOPLE Mobile is the easiest way to stay updated on your favorite celebs.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > People*.

AT&T NAVIGATOR

AT&T Navigator, with GPS enabled directions, is the fastest way to get where you are going - whether across town or across the country. You can always find your way with turn-by-turn voice and on-screen directions. Find whatever you need on the road, including restaurants, and business listings.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > AT&T Navigator*.

MUSIC ID

MusicID is an application which uses the onboard microphone to analyze a song sample and then compare it to a remote database of songs.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Music ID*.

XM RADIO

The application allows the user to listen to dozens of channels of digital radio on your mobile phone. Get unlimited access to commercial-free music, the latest Hip Hop, R&B, Rock, Jazz, Country anywhere you go.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > XM Radio*.

GAMES & APPS


MOBILE EMAIL

Allows you to access your Yahoo! Mail, AOL Mail, AIM Mail, Windows Live Hotmail, AT&T Yahoo!, BellSouth and Other provider's accounts on your Quickfire.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Mobile Email*.

INSTANT MESSAGING

Allows you to use your AIM, Windows Live and Yahoo! Messenger on your Quickfire. You can exchange messages with your friends and check their online status while you're away from the computer.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Instant Messaging*.


YELLOWPAGES.COM

The Yellowpages.com application provides quick and ready access maps a business and gets step-by-step directions to or from saved locations, including home or from recent searches. Then save favorites and access them on the go from wherever you happen to be.

1. In Idle mode, tap the *Menu icon*  and select *Games & Apps > Apps > Yellowpages.com*.

AT&T NAVIGATOR

AT&T Navigator, with GPS enabled directions, is the fastest way to get where you are going - whether across town or across the country. You can always find your way with turn-by-turn voice and on-screen directions. Find whatever you need on the road, including restaurants, and business listings. Get where you're going faster! Save your favorite locations, get traffic updates, and one-click re-routing.

1. In Idle mode, tap the *Menu icon*  and then tap *AT&T GPS*.
2. Tap *AT&T Navigator*.
3. Select the Drive To option.
4. Select the address option and choose the Type it option.
5. Enter the address for your desired destination and select Done. AT&T GPS Navigator™ will validate the address and generate your route.

GPS works on a separate satellite signal than your wireless carrier. For best results when using GPS services:



- Be outdoors and have a clear view of the sky. Hold the phone without blocking the antenna.
- Start *AT&T GPS* and select a *Drive To* route before driving to acquire the initial GPS signal.
- Keep the device turned on to optimize subsequent uses of GPS.
- In some cases, acquiring the initial position may take up to 2-3 minutes.

ORGANIZER & TOOLS

CAMERA


TAKE A PICTURE

Taking pictures with your Quickfire's built-in camera is as simple as choosing a subject, pointing the lens and pressing a button.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Camera* > *Camera* or press and hold Camera Key  .
2. Point the camera lens at your subject. You can check the picture framing through the display screen.

Tap *Options* to choose from:

- **View Photos:** The list of the photos in the currently selected memory appears.
- **Self Timer:** To select self timer "Off", "5secs" or "10secs".
- **White Balance:** Allows you to select the white balance mode to adjust the color balance of photos. Adjust by tapping the ◀/▶ and selecting from "Fluorescent", "Daylight", "Cloudy", "Automatic" or "Incandescent".
- **Image Effect:** Tap ◀/▶ to select from "Gray", "Negative", "Sepia" or "No Effect".
- **Fun Frame:** Highlight a fun frame from the list.
- **Resolution:** To select resolution "1280x960", "640x480", "320x240".
- **Quality:** To select Quality "Economy", "Normal" or "Fine".
- **Save to:** To select save to "Phone Memory", "SD Card".

3. Press the Camera Key  to take the picture.
4. After taking the picture it will be displayed.
To save the picture, press the Camera icon at the bottom left of the screen.
To take another picture without saving the picture you just took, press the Trash Can icon at the bottom right of the screen.

To send the picture to someone, press the Envelope icon in the middle of the bottom of the screen.



TAKING A VIDEO

Taking video with your Quickfire's built-in camera is as simple as choosing a subject, pointing the lens and pressing a button.

1. In Idle mode, tap the **Menu icon**  and select **Organizer & Tools** > **Camera** > **Camcorder**.

Tap **Options** to choose from:

- **View Videos:** The list of the videos in the currently selected memory appears.
- **Image Effect:** Tap ◀ / ▶ to select from "Gray", "Negative", "Sepia" or "No Effect".
- **Resolution:** To select resolution "320x240" or "176x144".
- **Quality:** To select Quality "Economy", "Normal" or "Fine".
- **Save to:** To select save to "Phone Memory" or "SD Card".

2. Press the Side Camera Key  to take the camcorder.
3. To stop recording, press the Side Camera Key  .
To Pause/Resume recording, tap **Pause/Resume**.
4. After taking the camcorder it will be displayed.
To save the video, tap Video icon at the bottom left of the screen.
To take another video without saving the video you just took, tap the Trash Can icon at the bottom right of the screen.
To send the video to someone, tap the Envelope icon in the middle of the bottom of the screen.

ORGANIZER & TOOLS

CALENDAR

Sets an event and reminds you of that event.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Calendar*.

ADD NEW EVENT

1. Tap to choose a date in the Scheduler. Tap *Add* to add an event to the Scheduler.

- **Title:** Enter the event title > *Save*.
- **Start:** Enter the start date > *Done*.
- **Time:** Enter the time. Tap *AM/PM* > *Done*.
- **End:** Enter the end date > *Done*.
- **Time:** Enter the time. Tap *AM/PM* > *Done*.
- **Summary:** Enter the Summary > *Save*.
- **Location:** Enter the location > *Save*.
- **Alarm:** Tap "Off", "On Time", "15 Min Before.", "1 Hour Before.", "1 Day Before.", "2 Days Before.", "1 Week Before." > *Save*.
- **Repeat:** Tap "Once", "Daily", "Mon to Fri", "Mon to Sat", "Weekly", "Monthly", "Annually" > *Save*.

2. Tap *Save*.
3. The date of the event will be marked on your Calendar.

VIEW ADDED SCHEDULER

1. Tap ◀ / ▶ to select a date in the Calendar, then tap to view the event for that day.
2. Tap *Add* to add an event to the Scheduler.

Tap *Options* to access the following options:

- **Select & Delete:** "Delete Selected Items?" will appear. Tap *Yes* or *No*.
- **Delete All:** "Delete all Items?" will appear. Tap *Yes* or *No*.

3. Tap event to see the details for the event.
4. Tap *Edit* to edit the event, then tap *Save* to save the event.
5. Tap *Delete* to delete event in the Scheduler. "Delete Schedule?" will appear. Tap *Yes* or *No*.


TODAY SCHEDULER

To view the Today Scheduler:

1. Tap *Today*.

ALARM

The alarm function allows you to set up multiple separate alarms. You can also set the time, repetition interval and alarm sound.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Alarm*.
2. Tap *Add* to set a new alarm.

- **Set:** Tap "On" or "Off" > *Done*.
- **Time:** Enter the time. Tap *AM/PM* > *Done*.
- **Repeat:** Tap "Once", "Mon to Fri", "Mon to Sat", "Sat to Sun" or "Daily" > *Done*.
- **Snooze:** Tap "5 min", "10 min", "15 min" or "20 min" > *Done*.
- **Ringtone:** Tap a ringtone for the alarm sound.


3. Tap *Save*.

ORGANIZER & TOOLS

4. To delete all the alarms, tap *Delete All*. "Delete all Items?" will appear. Tap *Yes* or *No*.


CALCULATOR

The calculator allows you to perform general mathematical functions, such as addition, subtraction, multiplication, and division.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Calculator*.
2. Enter the numbers to get the value you want. To cancel a calculation, tap *C*. To clear the display, tap (0).


TIP CALCULATOR

This feature allows you to quickly and easily calculate the tip amount based on the total bill as well as the split of the total bill based on the number of people.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Tip Calculator*.
2. Tap *Bill*, enter the amount of the bill then tap *Done*.
3. Tap *Tips*, enter the percentage of the tip, then tap *Done*.
4. Tap *Persons*, enter the number of people splitting the bill, then tap *Done*.
5. The amount that each person pays appears in the *Each Pays* field.

TO DO

This feature allows you to save and manage a to do list.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *To Do*.
2. Tap *Add* to set a new To Do item. Enter the following fields:

- **Title:** Enter the title > *Save*.
- **Due Date:** Tap to choose a date in the Scheduler.
- **Summary:** Enter the summary > *Save*.
- **Priority:** Tap "High", "Normal", "Low" > *Save*.
- **Status:** Tap "In Progress", "Completed" > *Save*.


3. Tap *Save*.

Tap *Options* to access the following options:

- **Select & Delete:** "Delete Selected Items?" > *Yes* or *No*.
- **Delete All:** "Delete all ToDo?" will appear. Tap *Yes* or *No*.

WORLD TIME

The World Time function provides time information on major cities worldwide.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *World Time*.
2. Tap *Set*, then tap ◀ / ▶ to choose a city.
Tap Country & City, to view city list.

- **DST:** Specifies whether the current time of the selected place is adjusted to Daylight Savings Time.

ORGANIZER & TOOLS

3. Tap *Done*.
4. Tap *Delete All* to delete world time. "Delete all Items?" will appear. Tap *Yes* or *No*.

NOTEPAD

To access the notepad:

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Notepad*.

ADD MEMO

1. Tap *Add* to add a new memo.
2. Input the memo then tap *Save*.
3. Tap *Delete All* to delete the memos. "Delete All?" will appear. Tap *Yes* or *No*.

VIEW MEMO

1. The list of all memos, in saved order is displayed.
2. Tap a memo.

EDIT MEMO

1. The list of all memos, in saved order is displayed.
2. Tap a memo.
3. Tap *Edit* to edit the memo > *Save*.

DELETE MEMO

1. The list of all memos, in saved order is displayed.
2. Tap a memo.
3. Tap *Delete*. "Delete this memo?" will appear. Tap *Yes* or *No*.

UNIT CONVERTER

This function converts any measurement into a unit you want. There are 5 types of units that can be converted: Distance, Area, Volume, mass and Temperature.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Unit Converter*.

- **Unit:** Tap "Distance", "Area", "Volume", "Mass" or "Temperature" > *Done*.
- **Input:** Tap "mm", "cm", "m", "km", "in", "ft", "yd" or "mi" > *Done*.
- **Output:** Tap "mm", "cm", "m", "km", "in", "ft", "yd" or "mi" > *Done*.

2. Tap *Reset*.


VOICE MEMO

Voice Memo allows you to record a reminder message that can be up to 4 minutes. To record a memo:

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Voice Memo*.
2. To record a voice memo, tap *Start*.
To pause/resume a voice memo, tap *Pause/Resume*.

ORGANIZER & TOOLS

3. To stop recording a voice memo, tap *Stop*.

- **Save:** The saved memo appears in the My Stuff folder.
(*Menu icon*  > *My Stuff* > *Ringtones & Audio*)
- **Save & Send Msg:** To save and send the memo in a message.
- **Cancel:** To cancel voice memo.

STOPWATCH

You can simultaneously time up to 10 different events.

1. In Idle mode, tap the *Menu icon*  and select *Organizer & Tools* > *Stopwatch*.

2. To measure a time period:

- To start, tap *Start*.
- To stop the timing, tap *Stop*.
To continue timing, tap *Continue*.
- Tap *Lap* to save the time at one instance. You can show up to 10 times.
- To stop the stopwatch, tap *Stop*.
- To review the results, scroll through the list.
- To reset it, tap *Reset*.

Customizes your Quickfire and optimizes performance through a variety of settings.

PROFILE

1. In Idle mode, tap the **Menu icon**  and select **Settings** > **Profile**.
2. Tap **General**, **Outdoor**, **Meeting** or **Headset**.

- **Call Alert Type:** Tap Ring, Vibrate, Ring & Vibrate, Ring After Vibrate or Silence > **Save**.
- **Ring Tone:** Tap Phone or SD Card.
Tap AT&T Ringtone, Basic Ringtone 1 ~ Basic Ringtone 3, Sky lounge, Rainforest, Fighters, Love, Funny guy, Happiness > **Save**.
- **Ring Volume:** Tap Off or Volume 1 ~ Volume 7 > **Save**.
- **Message Alert Type:** Tap Ring Once, Ring Periodically, Ring & Vibrate or Silent > **Save**.
- **Message Tone:** Tap Tone 1, Tone 2, Others or Off > **Save**.
- **Keypad & Touch Volume:** Tap Off or Volume 1 ~ Volume 7 > **Save**.
- **Multimedia Volume:** Tap Off or Volume 1 ~ Volume 7 > **Save**.

3. Tap **Flight**. This allows you to use only the phone's features that do not require the use of the wireless network when you are in an airplane or in places where the wireless network is prevented. If you set the flight mode on, the icon will be displayed on the screen instead of the network signal icon.

- **On:** You cannot make (or receive) any calls, including emergency calls, or use other features that require network coverage.
- **Off:** You can deactivate the flight mode and restart your handset to access the network.


Tap On or Off > **Save**.

SETTINGS

DISPLAY


WALLPAPER

Allows you to choose the kind of background to be displayed on the phone.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Wallpaper*.
2. Tap "AT&T Globe ~ Sandy Beach". If you have taken any pictures and saved them to your device, they will appear here as well.
3. Tap *Save*.


STYLE

Allows you to choose how the Idle screen will appear.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Style*.
2. Scroll through the styles by tapping < / >.
3. Tap *OK*.

GREETING BANNER

The greeting is your personal label for your Quickfire. It appears on the main screen along the top of the display.


1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Greeting Banner*.
2. Tap "On" or "Off".

3. If you select "On", the current greeting text is displayed.
Tap *Del* to delete the greeting, then enter your new greeting.
Tap *Options* to change the input mode.
4. Tap *Save*.


BACKLIGHT

Turn on the backlight on the display and keypad for easy viewing in dark places.

DISPLAY


1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Backlight* > *Display*.
2. Tap "5 secs", "10 secs", "20 secs", "1 min" or "3mins".
3. Tap *Save*.

KEYPAD


1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Backlight* > *Keypad*.
2. Tap "5 secs", "10 secs", "20 secs" or "Always off".
3. Tap *Save*.

SETTINGS

THEME

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Theme*.
2. Tap "Gray" or "Blue".
3. Tap *Save*.

AUTO LOCK

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Display* > *Auto Lock*.
2. Tap "Off", "1 min", "2 mins" or "5 mins".
3. Tap *Save*.

BLUETOOTH

Your Quickfire has built-in Bluetooth wireless technology, which makes it possible for you to connect your Quickfire wirelessly to a hands free device, PC or PDA. Only one of the devices registered in your Quickfire can be connected at a time. (To make a connection to the same type of device or change Bluetooth preferences, disconnect the existing device first.)

You can have a conversation via a cordless Bluetooth hands-free phone or browse the Internet, wirelessly connected via a mobile phone. MobiTV or XMRadio is supported through Only Stereo Bluetooth, A2DP Music Playing is available.


We recommend that your Quickfire and the Bluetooth device you are communicating with be no more than 10 meters apart. The connection

may be improved if there are no solid objects in between your Quickfire and the other Bluetooth device.

Note

File transfer of ringtones, images, etc. from device to device is not permitted.

BLUETOOTH

1. In Idle mode, tap the *Menu icon*  and select *Settings > Bluetooth > Bluetooth*.
2. Tap "On" or "Off".

SEARCH DEVICE

Searches for Bluetooth devices in possible range.

1. In Idle mode, tap the *Menu icon*  and select *Settings > Bluetooth > Search Device*.

PAIRED DEVICE LIST

This function allows you to view the list of all devices that are paired with your Quickfire at once.

1. In Idle mode, tap the *Menu icon*  and select *Settings > Bluetooth > Paired Device List*.

MY PHONE'S VISIBILITY

Selecting "On" exposes your Quickfire to other Bluetooth devices. Selecting Hide shows your Quickfire only to already paired devices.


1. In Idle mode, tap the *Menu icon*  and select *Settings > Bluetooth > My Phone's Visibility*.

SETTINGS

2. Tap "On" or "Off".


MY PHONE'S NAME

Allows you to change the handset's name that can be seen by other Bluetooth devices.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Bluetooth* > *My Phone's Name*.
2. Input your device name.
3. Tap *Save*.

SUPPORTED SERVICES

Shows you all services that your device supports.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Bluetooth* > *Supported Services*.
2. Tap "Headset", "Stereo Headset", "Handsfree", "Dial up Networking", "A/V Remote Control" or "Serial Port".

DATE & TIME

Allows you to change the date and time settings.

TIME ZONE UPDATE

Select Auto Update to set the phone to automatically update the time and date according to the current local time zone. Select Manually to update the information yourself.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Date & Time* > *Time Zone Update*.

2. Tap "Auto Update" or "Manually".

3. Tap *Save*.

DATE FORMAT

To select a date format:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Date & Time* > *Date Format*.

2. Tap "Fri Feb 22", "Feb 22 Fri", "Fri Feb.22.1980" or "1980.Feb.22 Fri".

3. Tap *Save*.

TIME FORMAT

To select a time format:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Date & Time* > *Time Format*.

2. Tap "12 Hour" or "24 Hour".

3. Tap *Save*.

PHONE

LANGUAGE


Selects the language in which letters are displayed on the screen.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *Language*.

SETTINGS


2. Tap "English" or "Spanish".
3. Tap *Save*.

NETWORK SELECTING


1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *Network Selecting*.
2. Tap "Automatic" or "Manually".
3. Tap *Save*.

NETWORK PROFILE

To set the network profile.


1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *Network Profile*.
2. Tap *Add* to add a new network profile.
3. Tap *Save*.

HEADSET TYPE

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *Headset Type*.
2. Tap "Mono" or "Stereo".
3. Tap *Save*.


USB CONNECTION MODE

To set the USB connection mode:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *USB Connection Mode*.
2. Tap "Music Sync", "Mass Storage" or "Data Service".
3. Tap *Save*.

MEMORY METER

To view your Quickfire's memory meter:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Phone* > *Memory Meter*.
2. Tap "Phone" or "SD Card".
3. Your Quickfire's Games & Apps, Music & Ringtones, Graphics & Videos and MMS information are displayed.
4. If you are sure you want to format the microSD Card, tap *Format*. "Formatting will erase all data. Format now?" will be display. Tap *Yes* or *No*.


Note

The formatting procedure erases all the data on the microSD card, after which the files CANNOT be retrieved. To prevent the loss of important data, please check the contents before you format the card.

PHONE INFORMATION

Displays your Quickfire's information:


SETTINGS

1. In Idle mode, tap the *Menu icon*  and select *Settings > Phone > Phone Information*.
2. Your Quickfire's My Mobile Number, IMEI, S/W Ver, H/W Ver, Config Version, Network band, Manufacturer, Model and JAVA Information are displayed.

CALL

ANSWER MODE

This feature allows you to select the answer mode.


1. In Idle mode, tap the *Menu icon*  and select *Settings > Call > Answer Mode*.
2. Tap "Any Key" or "Talk Key".

- **Any Key:** Press any key to answer an incoming call.
- **Talk Key:** Press talk key to answer a call.

3. Tap *Save*.


AUTO REDIAL

Automatically redials a phone number after a set time interval.

1. In Idle mode, tap the *Menu icon*  and select *Settings > Call > Auto Redial*.
2. Tap "On" or "Off".
3. Tap *Save*.


MINUTE MINDER

This option allows you to specify whether the phone will beep every minute during an outgoing call to keep you informed of the length of the call.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *Minute Minder*.
2. Tap "On" or "Off".
3. Tap *Save*.

CALL FORWARDING

When this network service is activated, you can direct your incoming calls to another number, for example, to your voice mailbox number. For details, contact your service provider. Select one of the divert options, for example, select Busy to divert voice calls when your number is busy or when you reject incoming calls.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *Call Forwarding*.
2. Tap *Unconditional*, *Busy*, *No Reply* or *Not Reachable*.


- **Activate:** To activate Call Forwarding and enter a forwarding number.
- **Deactivate:** To deactivate Call Forwarding.
- **Check Status:** To check if the function is active or not.

3. Tap *Deactivate All* to cancel all active Call Forwarding options.

CALL WAITING

Call Waiting will notify you of a new incoming call while you have a call in progress.


SETTINGS

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *Call Waiting*.
2. Tap *All Call*, *Voice Call* or *Data Call*.

- **Activate:** To activate call waiting.
- **Deactivate:** To deactivate call waiting.
- **Check Status:** To check if the function is active or not.

CALLER ID


To select if your phone number will appear when making a call:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *Caller ID*.
2. Tap *Show My Number*, *Hide My Number*, *Network* or *Check Status*.

- **Show My Number:** Caller ID appears.
- **Hide My Number:** Caller ID does not appear.
- **Network:** Caller ID is dependent on Network Setting.
- **Check Status:** To check the Network Setting Status.

CALL BARRING

To block select types of calls:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *Call Barring*.
2. Tap *All Outgoing*, *Outgoing Int'l*, *Except Home*, *All Incoming*, *Incoming Roaming*.

- **Activate:** To activate call barring.
- **Deactivate:** To deactivate call barring.
- **Check Status:** To check if the function is active or not.

Tap *Deactivate All* to cancel all active Call Barring options or *Change Password* to change your password.

TTY

Allows you to attach a TTY device enabling you to communicate with parties also using a TTY device. A phone with TTY support is able to translate typed characters to voice. Voice can also be translated into characters and then displayed on the TTY.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Call* > *TTY*.
2. Tap *TTY Full*, *TTY + Talk*, *TTY + Hear* or *TTY Off*:

- **TTY Full:** Users who cannot talk and hear send and receive a text message through TTY equipment.
- **TTY + Talk:** Users who can talk but cannot hear receive a text message and send voice messages through TTY equipment.
- **TTY + Hear:** Users who can hear but cannot talk send a text message and receive voice messages through TTY equipment.
- **TTY Off:** Normal users send and receive without TTY equipment.

3. Tap *Save*.

SECURITY

Prevents others from using the phone without permission and allows access to security features only after inputting a password.

PHONE LOCK

Turn on the lock to prevent the phone from being used without entering the password first.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Security*


SETTINGS

> [Phone Lock](#).

2. Tap "On" or "Off".
3. Tap [Save](#).
4. When locking the device for the first time, enter "0000" to lock.
See the following page for instructions on how to change your password.

PIN CODE REQUEST FOR YOUR SIM CARD


When the PIN code request feature is set to 'On', you must enter your PIN each time you switch the phone on. Consequently, any person who does not have your PIN cannot use your Quickfire without your approval.

1. In Idle mode, tap the [Menu icon](#)  and select [Settings](#) > [Security](#) > [PIN Code Request](#).
2. Tap "On" or "Off".
3. Tap [Save](#).
4. See the following page for instructions on how to change your PIN password.

Please contact AT&T Customer Service for your SIM PIN code.


CHANGE PHONE PASSWORD

To change your password:

1. In Idle mode, tap the [Menu icon](#)  and select [Settings](#) > [Security](#) > [Change Phone Password](#).
2. Enter your New Password > [Done](#), then enter your Verify Password > [Done](#). Enter your Current Password > [Done](#).

CHANGE PIN CODE FOR YOUR SIM CARD


To change your PIN code:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Security* > *Change PIN Code*.
2. Tap *PIN1* or *PIN2*.

FDN

This allows you to restrict your outgoing calls to selected phone numbers, if this function is supported by your SIM card. The PIN2 code is required.

- **FDN On:** You can only call phone numbers stored in the FDN List. You must enter your PIN2.
- **FDN Off:** You can call any number.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Security* > *FDN*.
2. Tap *FDN* or *FDN List*.

- **FDN:** Tap "On" or "Off" > *Save*.
- **FDN List:** Tap *Add New*. Enter a "Name" and "Phone number" > *Save*. Tap *Options* to access the following options: Add Contacts, Recent Calls

MASTER RESET

Performing a Master Reset restores the settings (e.g.: Audio, Display, Language, Date & Time, Bluetooth Settings) stored in the handset memory to default values.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Security* > *Master Reset*.


SETTINGS

2. "Initialize all settings to default value. Proceed?" will appear.
Tap *Yes* or *No*.

MASTER CLEAR

Performing a Master Clear deletes downloaded/user created contents (e.g.: images, videos) from your device and the External Memory card.

- **Handset**
 - Deletes all downloaded/user created Images, Videos & Sounds from the Handset Memory.
 - Restores Personal Information stored in the handset memory (e.g.: address book, messages, tasks, alarm, Scheduler) to default values.
 - Restores the settings stored in the handset memory to default values.
- **Memory Card:** Deletes all contents from the External Memory Card.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Security* > *Master Clear*.
2. "Master Clear deletes all data and contents. Proceed?" will appear.
Tap *Yes* or *No*.

Note

All data will be lost when using this function.

APPLICATIONS

MESSAGING SETTINGS

To select your message settings:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Applications* > *Messaging Settings*.

- **Text Message**


- **Message Center Number:** If you want to send a text message, you can get the address of the SMS center by using this menu.
- **Email Gateway:** You can send the text message to an Email Address via this gateway.
- **Text Templates:** View and edit the template messages or create new messages.

- **Multimedia Message**

- **Default Slide Duration:** Tap "2 sec.", "5 sec." or "10 sec." > [Save](#).
- **Priority:** Tap "High", "Normal" or "Low" > [Save](#).
- **Validity Period:** Tap "1 Hour", "2 Hours", "1 Day", "1 Week" or "Maximum" > [Save](#).
- **Automatic Download:** Tap "On" or "Off" > [Save](#).
- **Send Delivery Receipt:** Tap "On" or "Off" > [Save](#).
- **Send Read Receipt:** Tap "On" or "Off" > [Save](#).
- **Message Center:** Tap "Name", "MMSC URL", "MMSC PROXY", "MMSC PORT" or "Network Profile". Enter text > [Save](#).
- **Voicemail:** To change user voice mail number.
- **Auto Erase:** Tap "On" or "Off" > [Save](#).

BROWSER SETTINGS

To view and/or edit your Browser settings:

1. In Idle mode, tap the [Menu icon](#)  and select [Settings](#) > [Applications](#) > [Browser Settings](#).
2. Tap [MEdia Net](#) > [Activate](#). Selects a connection profile to be used when connecting to the Internet.
3. To create a new connection, tap [Add](#).

SETTINGS

- **Account Name:** Enter a account name.
- **Homepage:** Enter the URL address of the page to be used as your homepage.
- **Proxy Address:** Set the proxy server address.
- **Port Number:** Set the proxy server port.
- **Network Profile:** Select a network profile to be used when connecting to the internet.
- **Save:** Save edited connection profile.
- **Activate:** Activate currently connection profile.
- **Delete:** Delete connection profile.

ADDRESS BOOK SETTINGS

To select your Address Book settings:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Applications* > *Address Book Settings*.

- **Save Location:** Tap "Always Ask", "Phone" or "SIM" > *Save*.
- **View:** Tap "All", "Phone" or "SIM" > *Save*.
- **Memory Status:** Check the current status of the external memory card in this menu.
- **SIM Number Type:** Tap *Add*. Input the new number then tap *Save*.
- **Change Hidden Key:** Input the new hidden key. (The default hidden key code is "00000000". Please contact AT&T Customer Service for your Hidden Key code.).

CAMERA SETTINGS

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Applications* > *Camera Settings*.

- **Camera**

- **Resolution:** Tap "1280 x 960", "640 x 480" or "320 x 240" > *Save*.
- **Quality:** Tap "Economy", "Normal" or "Fine" > *Save*.
- **Save to:** Tap "Phone Memory" or "SD Card" > *Save*.

- **Camcorder**

- **Resolution:** Tap "320 x 240" or "176 x 144" > *Save*.
- **Quality:** Tap "Economy", "Normal" or "Fine" > *Save*.
- **Save to:** Tap "Phone Memory" or "SD Card" > *Save*.

SOFTWARE UPDATE

This menu is used to resume a postponed software update. If new software exists, the AT&T server notifies devices using a WAP push message. Before updating new software after downloading it from the AT&T server, you can decide whether you would like to postpone the operation. Reminder times can be set to 30 minutes, 1 hour, and 4 hours. When the time is up, you will be prompted again or you can resume the postponed operation using this menu at any time.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Software Update*.

- **Continue Update:** This menu is used to resume a postponed software update.
- **Check for Update:** "Check the AT&T server for a new software update? The software update process will not delete any personal data on your Quickfire." will appear. Tap *OK* or *No*.

VOICE COMMANDS

Your Quickfire is equipped with an AVR (Advanced Voice Recognition) feature. This feature allows you to make calls or use the phone's functions by simply using your voice. All you have to do is talk into the phone, and the phone will recognize your voice and complete tasks by itself.

1. In Idle mode, press Side VR Key(Advanced Voice Recognition)




2. When prompted, say one of the following commands:

- Call
- Digit Dial
- Voicemail
- My Phone Number
- Status
- Help

3. To setup the voice command, tap [Set](#).

- **VR Results:** Tap "One" or "Three Best".
- **Voice Calibration:** Tap "Words Calibration" or "Digits Calibration". Follow the on-screen prompts.
- **Prompts:** Tap "Mode" or "Timeout". For "Mode" tap [Prompts](#) or [Tones Only](#). For "Timeout" select [5 sec.](#) or [10 sec.](#)
- **Number Format:** Tap "Accept Any" or "North America".

4. To return to the previous page, tap the [BACK icon](#)  at the top of the page.

CHAPTER 6

PC CONNECTIVITY



CHAPTER 6. PC CONNECTIVITY

PC Connectivity

SET UP BLUETOOTH MODE FOR THE QUICKFIRE



TURNING ON BLUETOOTH

To enable Bluetooth:

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Bluetooth* > *Bluetooth* > Select Bluetooth On/Off.
2. Select *On*.




You can see the Bluetooth icon at the top of the screen.



MAKING THE QUICKFIRE VISIBLE TO A PC

This step enables your PC to find the Quickfire when searching for Bluetooth devices.

1. In Idle mode, tap the *Menu icon*  and select *Settings* > *Bluetooth*.
2. Select "My Phone's Visibility On/Off".
3. Select *On*.



PAIRING THE QUICKFIRE WITH A PC

To pair your device with a PC:

1. If your PC supports Bluetooth, you can find the Bluetooth icon in the tray icons.
2. Click the right button of your mouse on the Bluetooth icon.
3. Select "Bluetooth Settings".
4. On the "Bluetooth Settings" window, click "New Connection" to start "Add New Connection Wizard".


PC CONNECTIVITY



5. Click the "Next" button on the "Add New Connection Wizard" window to search for the Bluetooth device.
6. After searching, "Quickfire (GTX75)" or the name you assigned to your device will appear.
7. Select "Quickfire (GTX75)" and click the "Next" button.




8. Enter the PIN number then click "OK" button.



9. Click the "Yes" button.

10. Enter the same PIN number you entered in step 8.



11. Click the "Next" button, if you do not need to set additional modem settings.

12. Pairing is complete and the New modem will be installed.


13. "Add New Connection Wizard" will use Dial Up Networking to automatically configure the Quickfire. Enter the Dial Up name and the connection number *99#.




MAKING DIAL-UP NETWORKING

First, connect Quickfire to PC using Data service mode.





1. On your PC, select Start > All Programs > Accessories > Communications > Network connections



2. In network connection window, right click on New Connection Wizard.






3. Follow the instructions in the dialog boxes.




Select UTStarcom USB modem. To view the option, your device should be connected to the PC. If device is not connected correctly, the above option will be skipped to the following screen. In case this option is skipped, you can change this option in the start up screen using the properties button described in step #6.

PC CONNECTIVITY



- 4.** The new icon for ATT dial-up connection will appear.



- 5.** Double click the ATT icon to the start dial-up connection. A user name and password is not required.



PC CONNECTIVITY

6. Click the properties button to select the current configuration. The UTStarcom modem should be selected.



7. Dial Up Networking set-up is complete.
8. The DUN icon is located on the "Bluetooth Settings" window or the properties of "My Network Places".
9. To access Data service(DUN), click the DUN icon.




PAIRING A BLUETOOTH HEADSET TO THE QUICKFIRE

1. Turn on Bluetooth on your Quickfire.
2. Change your Bluetooth headset to connection mode. This will vary by manufacturer.
3. Once connected, select 'Search Device' on the Bluetooth menu.




4. After searching, a list of Bluetooth devices will appear.
5. Select your headset.
6. Enter "Pass Code" for the headset, which may be found in the user manual for the headset.



MAKING DIAL-UP NETWORKING VIA USB

Your device can be used as a network device for Internet sharing. You can share files with a computer or use an Internet connection, etc.

1. Before you connect the device, set your device to Data Service Mode.
To do this, tap the *Menu icon*  and select *Settings > Phone > USB Connection Mode > Data Service > Save*.
2. Connect your Quickfire to your PC with a USB cable.
3. Execute the Dial up application you created.
4. Click "Properties" for modem setting.



5. "UTStarcom USB Modem" will appear. Check it as modem.
6. Enter *99#.
7. Click "OK".



- 8.** Click "Dial" to connect. "User name" and "Password" are not used for a UMTS connection.




MUSIC SYNC

The phone communicates with a computer via ActiveSync.

Note


To transfer music to your device, you will need:

- Microsoft® ActiveSync® installed on your PC.
- Windows Media® Player 10 (or higher) installed on your PC. You can download this at: <http://www.microsoft.com/mediaplayer>.
- You will need a microSD card to use Music Sync. If you attempt to connect to Music Sync without a card, "SD not found, cannot access to Music Sync" will appear.

- 1.** Before you connect the device, set your device to Music Sync Mode. To do this tap the *Menu icon*  and select *Settings > Phone > USB Connection Mode > Music Sync > Save*.
- 2.** Connect the Quickfire to your PC with a USB cable.
- 3.** Close ActiveSync® (it will automatically open when you connect your device).
- 4.** Open Windows Media® Player on your PC.
- 5.** Click "Media Library", then highlight the music you want to copy.
- 6.** Right-click on it, then click "Add to Playlist".
- 7.** Click "Sync List" (The songs will appear in the "Sync List" pane on the right).
- 8.** Click "Start Sync".

MASS STORAGE DEVICE


Your device can be used as an external memory device.

1. Before you connect the device, set your device to Mass Storage Mode. To do this, tap the *Menu icon*  and select *Settings* > *Phone* > *USB Connection Mode* > *Mass Storage* > *Save*.

Note

You will need a microSD card to use Mass Storage. If you attempt to connect to Mass Storage via USB without a card, "SD not found, cannot access to Mass Storage" will appear.

2. Connect the Quickfire to your PC with a USB cable.
3. It is ready when "Found New Hardware USB Modem" appears on the screen.
4. Select "My Computer" on the PC.
5. The phone's memory card will be listed under "Devices with Removable Storage" in the same location as an optical drive.
6. File explorer will open in a new window.
7. Drag and drop the desired files content from the PC window to the "Storage Card" window.
8. Disconnect the device from the cable.



CHAPTER 7

SAFETY INFORMATION



CHAPTER 7. SAFETY INFORMATION

Read this information before using your handheld portable Cellular Telephone.

Safety
Warranty

SAFETY INFORMATION FOR WIRELESS HANDHELD PHONES

Read This Information Before Using Your Handheld Portable Cellular Telephone

DRIVING SAFETY

Talking on the phone while driving is extremely dangerous and is illegal in some states. Remember, safety comes first. Check the laws and regulations on the use of phones in the areas where you drive. Always obey them. If you must use your Quickfire while driving, please:

- Give full attention to driving. Driving safely is your first responsibility.
- Use hands-free operation and/or one-touch, speed dialing, and auto answer modes.
- Pull off the road and park before making or answering a call.

An air bag inflates with great force. DO NOT place objects, including either installed or portable wireless equipment, in the area over the air bag or in the air bag deployment area. If in-vehicle wireless equipment is improperly installed and the air bag inflates, serious injury could result.

WARNING! Failure to follow these instructions could lead to serious personal injury and possible property damage.

ELECTRONIC DEVICES

Your wireless handheld portable telephone is a low power radio transmitter and receiver. When it is ON, it receives and also sends out radio frequency (RF) signals.

Most modern electronic equipment is shielded from RF energy. However, certain electronic equipment may not be shielded against the RF signals from your wireless phone. Therefore, use of your Quickfire must be restricted in certain situations.

PACEMAKERS

The Health Industry Manufacturers Association recommends that a minimum separation of six (6") inches be maintained between a handheld wireless phone and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with the independent research by and recommendations of Wireless Technology Research.

Never come closer than six (6) inches to a person with a heart pacemaker implant when using your Quickfire. Doing so could result in interference with the function of the pacemaker.

Persons with pacemakers:

- ALWAYS keep the phone more than six inches from your pacemaker when the phone is turned on.
- Do not carry the phone in a breast pocket.
- Use the ear opposite the pacemaker to minimize the potential for interference.
- If you have any reason to suspect that interference is taking place, turn your Quickfire OFF immediately.

HEARING AIDS

Some digital wireless phones may interfere with some hearing aids. In the event of such interference, you may want to consult your service provider (or call the customer service line to discuss alternatives).

OTHER MEDICAL DEVICES

If you use any other personal medical device, consult the manufacturer of your device to determine if they are adequately shielded from external RF energy. Your physician may be able to assist you in obtaining this information.

HOSPITALS AND HEALTH CARE FACILITIES

Turn your Quickfire OFF in health care facilities when any regulations posted in these areas instruct you to do so. Hospitals or healthcare facilities may be using equipment that could be sensitive to external RF energy.

VEHICLES

RF signals may affect improperly installed or inadequately shielded electronic systems in motor vehicles. Check with the manufacturer or its representative regarding your vehicle. You should also consult the manufacturer of any equipment that has been added to your vehicle.

POSTED FACILITIES

Turn your Quickfire OFF where posted notices so require.

AIRCRAFT

FCC regulations prohibit using your Quickfire while in the air. Turn your phone OFF before boarding an aircraft. Always request and obtain prior consent and approval of an authorized airline representative before using your phone aboard an aircraft. Always follow the instructions of the airline representative whenever using your phone aboard an aircraft, to prevent any possible interference with airborne electronic equipment.

BLASTING AREAS

To avoid interfering with blasting operations, turn your Quickfire OFF when in a "blasting area" or in areas posted "Turn off two-way radio". Obey all signs and instructions.

POTENTIALLY EXPLOSIVE ATMOSPHERES

Turn your Quickfire OFF when in any area with a potentially explosive atmosphere and obey all signs and instructions. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death.

Areas with a potentially explosive atmosphere are often, but not always, clearly marked. They include fueling areas such as gas stations: below deck on boats: fuel or chemical transfer or storage facilities: vehicles using liquefied petroleum gas (such as propane or butane): areas where the air contains chemicals or particles, such as grain, dust, or metal powders: and any other area where you would normally be advised to turn off your vehicle's engine.

SAFETY INFORMATION FOR FCC RF EXPOSURE

Warning! Read this information before using your Quickfire.

In August 1996 the Federal Communications Commission (FCC) of the United States with its action in Report and Order FCC 96-326 adopted an updated safety standard for human exposure to radio frequency electromagnetic energy emitted by FCC regulated transmitters. Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies. The design of this phone complies with the FCC guidelines and these international standards.

BODY-WORN OPERATION

This device was tested for typical body-worn operations with the back of the phone kept 2.0 cm from the body. To maintain compliance with FCC RF exposure requirements, use only belt-clips, holsters or similar accessories that maintain a 2.0 cm separation distance between the user's body and the back of the phone, including the antenna. The use of belt-clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

For more information about RF exposure, please visit the FCC website at www.fcc.gov.

SAR INFORMATION

THIS MODEL PHONE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES.

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. * Tests for SAR are conducted with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure.

SAFETY

The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value (WCDMA 1900) for this model phone when tested for use at the ear is 1.1W/Kg and when worn on the body, as described in this user guide, is 0.995W/Kg. (Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements). While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement for safe exposure.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on O6Y-GTX75.

Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications & Internet Association (CTIA) website at <http://www.phonefacts.net>.

* In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.

	Head	Body
GSM 850	0.445 W/kg	1.06 W/kg
DCS 1900	0.357 W/kg	0.75 W/kg
WCDMA 850	0.563 W/kg	0.993 W/kg
WCDMA 1900	1.1 W/kg	0.995 W/kg

FDA CONSUMER UPDATE



U.S. Food and Drug Administration Cell Phone Facts Consumer Information on Wireless Phones

1. What kinds of phones are the subject of this update?

The term "wireless phone" refers here to handheld wireless phones with built-in antennas, often called "cell," "mobile," or "PCS" phones. These types of wireless phones can expose the user to measurable radiofrequency energy (RF) because of the short distance between the phone and the user's head. These RF exposures are limited by Federal Communications Commission safety guidelines that were developed with the advice of FDA and other federal health and safety agencies. When the phone is located at greater distances from the user, the exposure to RF is drastically lower because a person's RF exposure decreases rapidly with increasing distance from the source. The so-called "cordless phones," which have a base unit connected to the telephone wiring in a house, typically operate at far lower power levels, and thus produce RF exposures well within the FCC's compliance limits.

2. Do wireless phones pose a health hazard?

The available scientific evidence does not show that any health problems are associated with using wireless phones. There is no proof, however, that wireless phones are absolutely safe. Wireless phones emit low levels of radiofrequency energy (RF) in the microwave range while being used. They also emit very low levels of RF when in the standby mode. Whereas high levels of RF can produce health effects (by heating tissue), exposure to low level RF that does not produce heating effects causes no known adverse health effects.

Many studies of low level RF exposures have not found any biological effects. Some studies have suggested that some biological effects may occur, but such findings have not been confirmed by additional research. In some cases, other researchers have had difficulty in reproducing those studies, or in determining the reasons for inconsistent results.

3 . What is FDA's role concerning the safety of wireless phones?

Under the law, FDA does not review the safety of radiation-emitting consumer products such as wireless phones before they can be sold, as it does with new drugs or medical devices. However, the agency has authority to take action if wireless phones are shown to emit radiofrequency energy (RF) at a level that is hazardous to the user. In such a case, FDA could require the manufacturers of wireless phones to notify users of the health hazard and to repair, replace or recall the phones so that the hazard no longer exists.

Although the existing scientific data do not justify FDA regulatory actions, FDA has urged the wireless phone industry to take a number of steps, including the following:

- Support needed research into possible biological effects of RF of the type emitted by wireless phones:
- Design wireless phones in a way that minimizes any RF exposure to the user that is not necessary for device function: and
- Cooperate in providing users of wireless phones with the best possible information on possible effects of wireless phone use on human health

FDA belongs to an interagency working group of the federal agencies that have responsibility for different aspects of RF safety to ensure coordinated efforts at the federal level. The following agencies belong to this working group:

- National Institute for Occupational Safety and Health
- Environmental Protection Agency
- Federal Communications Commission
- Occupational Safety and Health Administration
- National Telecommunications and Information Administration

The National Institutes of Health participates in some interagency working group activities, as well.

FDA shares regulatory responsibilities for wireless phones with the Federal Communications Commission (FCC). All phones that are sold in the United States must comply with FCC safety guidelines that limit RF exposure. FCC relies on FDA and other health agencies for safety questions about wireless phones.

FCC also regulates the base stations that the wireless phone networks rely upon. While these base stations operate at higher power than do the wireless phones themselves, the RF exposures that people get from these base stations are typically thousands of times lower than those they can get from wireless phones. Base stations are thus not the primary subject of the safety questions discussed in this document.

4. What are the results of the research done already?

The research done thus far has produced conflicting results, and many studies have suffered from flaws in their research methods. Animal experiments investigating the effects of radiofrequency energy (RF) exposures characteristic of wireless phones have yielded conflicting results that often cannot be repeated in other laboratories. A few animal studies, however, have suggested that low levels of RF could accelerate the development of cancer in laboratory animals.

However, many of the studies that showed increased tumor development used animals that had been genetically engineered or treated with cancer-causing chemicals so as to be pre-disposed to develop cancer in the absence of RF exposure. Other studies exposed the animals to RF for up to 22 hours per day. These conditions are not similar to the conditions under which people use wireless phones, so we don't know with certainty what the results of such studies mean for human health. Three large epidemiology studies have been published since December 2000. Between them, the studies investigated any possible association between the use of wireless phones and primary brain cancer, glioma, meningioma, or acoustic neuroma, tumors of the brain or salivary gland, leukemia, or other cancers. None of the studies demonstrated the existence of any harmful health effects from wireless phone RF exposures. However, none of the studies can answer questions about long-term exposures, since the average period of phone use in these studies was around three years.

5. What research is needed to decide whether RF exposure from wireless phones poses a health risk?

A combination of laboratory studies and epidemiological studies of people actually using wireless phones would provide some of the data that are needed. Lifetime animal exposure studies could be completed in a few years. However, very large numbers of animals would be needed to provide reliable proof of a cancer promoting effect if one exists. Epidemiological studies can provide data that is directly applicable to human populations, but 10 or more years' follow-up may be needed to provide answers about some health effects, such as cancer. This is because the interval between the time of exposure to a cancer-causing agent and the time tumors develop - if they do - may be many, many years.

The interpretation of epidemiological studies is hampered by difficulties in measuring actual RF exposure during day-to-day use of wireless phones. Many factors affect this measurement, such as the angle at which the phone is held, or which model of phone is used.

6. What is FDA doing to find out more about the possible health effects of wireless phone RF?

FDA is working with the U.S. National Toxicology Program and with groups of investigators around the world to ensure that high priority animal studies are conducted to address important questions about the effects of exposure to radiofrequency energy (RF).

FDA has been a leading participant in the World Health Organization International Electromagnetic Fields (EMF) Project since its inception in 1996. An influential result of this work has been the development of a detailed agenda of research needs that has driven the establishment of new research programs around the world. The Project has also helped develop a series of public information documents on EMF issues.

FDA and the Cellular Telecommunications & Internet Association (CTIA) have a formal Cooperative Research and Development Agreement (CRADA) to do research on wireless phone safety. FDA provides the scientific oversight, obtaining input from experts in government, industry, and academic organizations. CTIA-funded research is conducted through contracts to independent investigators. The initial research will include both laboratory studies and studies of wireless phone users. The CRADA will also include a broad assessment of additional research needs in the context of the latest research developments around the world.

7. What steps can I take to reduce my exposure to radiofrequency energy from my wireless phone?

If there is a risk from these products--and at this point we do not know that there is--it is probably very small. But if you are concerned about avoiding even potential risks, you can take a few simple steps to minimize your exposure to radiofrequency energy (RF). Since time is a key factor in how much exposure a person receives, reducing the amount of time spent using a wireless phone will reduce RF exposure.

- If you must conduct extended conversations by wireless phone every day, you could place more distance between your body and the source of the RF, since the exposure level drops off dramatically with distance. For example, you could use a headset and carry the wireless phone away from your body or use a wireless phone connected to a remote antenna

Again, the scientific data do not demonstrate that wireless phones are harmful. But if you are concerned about the RF exposure from these products, you can use measures like those described above to reduce your RF exposure from wireless phone use.

8. What about children using wireless phones?

The scientific evidence does not show a danger to users of wireless phones, including children and teenagers. If you want to take steps to lower exposure to radiofrequency energy (RF), the measures described above would apply to children and teenagers using wireless phones. Reducing the time of wireless phone use and increasing the distance between the user and the RF source will reduce RF exposure. Some groups sponsored by other national governments have advised that children be discouraged from using wireless phones at all.

For example, the government in the United Kingdom distributed leaflets containing such a recommendation in December 2000. They noted that no evidence exists that using a wireless phone causes brain tumors or other ill effects. Their recommendation to limit wireless phone use by children was strictly precautionary: it was not based on scientific evidence that any health hazard exists.

9. Do hands-free kits for wireless phones reduce risks from exposure to RF emissions?

Since there are no known risks from exposure to RF emissions from wireless phones, there is no reason to believe that hands-free kits reduce risks. Hands-free kits can be used with wireless phones for convenience and comfort. These systems reduce the absorption of RF energy in the head because the phone, which is the source of the RF emissions, will not be placed against the head. On the other hand, if the phone is mounted against the waist or other part of the body during use, then that part of the body will absorb more RF energy. Wireless phones marketed in the U.S. are required to meet safety requirements regardless of whether they are used against the head or against the body. Either configuration should result in compliance with the safety limit.

10. Do wireless phone accessories that claim to shield the head from RF radiation work?

Since there are no known risks from exposure to RF emissions from wireless phones, there is no reason to believe that accessories that claim to shield the head from those emissions reduce risks. Some products that claim to shield the user from RF absorption use special phone cases, while others involve nothing more than a metallic accessory attached to the phone.

Studies have shown that these products generally do not work as advertised. Unlike "hand-free" kits, these so-called "shields" may interfere with proper operation of the phone. The phone may be forced to boost its power to compensate, leading to an increase in RF absorption. In February 2002, the Federal Trade Commission (FTC) charged two companies that sold devices that claimed to protect wireless phone users from radiation with making false and unsubstantiated claims. According to FTC, these defendants lacked a reasonable basis to substantiate their claim.

11. What about wireless phone interference with medical equipment?

Radiofrequency energy (RF) from wireless phones can interact with some electronic devices. For this reason, FDA helped develop a detailed test method to measure electromagnetic interference (EMI) of implanted cardiac pacemakers and defibrillators from wireless telephones. This test method is now part of a standard sponsored by the Association for the Advancement of Medical Instrumentation (AAMI). The final draft, a joint effort by FDA, medical device manufacturers, and many other groups, was completed in late 2000. This standard will allow manufacturers to ensure that cardiac pacemakers and defibrillators are safe from wireless phone EMI.

FDA has tested hearing aids for interference from handheld wireless phones and helped develop a voluntary standard sponsored by the Institute of Electrical and Electronic Engineers (IEEE). This standard specifies test methods and performance requirements for hearing aids and wireless phones so that no interference occurs when a person uses a "compatible" phone and a "compatible" hearing aid at the same time. This standard was approved by the IEEE in 2000.

FDA continues to monitor the use of wireless phones for possible interactions with other medical devices. Should harmful interference be found to occur, FDA will conduct testing to assess the interference and work to resolve the problem.

Updated July 29, 2003

For more information, please visit the FDA website at <http://www.fda.gov/cellphones>.

EMERGENCY CALLS

Never rely solely upon your wireless phone for essential communications (e.g., medical emergencies), if it can be avoided, since a wireless phone requires a complex combination of radio signals, relay stations and landline networks for its operation. Consequently, emergency calls may not always be possible under all conditions on all wireless phone systems. Your wireless phone, however, may sometimes be the only available means of communication at the scene of an accident. When making an emergency call, always give the recipient all necessary information as accurately as possible. Never terminate an emergency call until you have received clearance to do so.

FCC ENHANCED 911 (E911) RULES

Background

The Federal Communications Commission (FCC) requires wireless carriers to transmit specific latitude and longitude location (Automatic Location Identification = ALI) information as well as "911" calls to Public Safety Answering Points (PSAPs) to identify the location of the caller in case of emergency.


Generally, the rules require that carriers identify an E911 caller's location within 50 meters of the actual location for 67 percent of calls and within 150 meters of the actual location for 95 percent of calls. Quickfire's ALI Capability

The Quickfire is an ALI-capable phone equipped with a GPS (Global Positioning System) receiver supporting a satellite-based GPS ALI-capable network to comply with the FCC's ALI requirements.



The network compliance with the above FCC requirements is dependent on: (a) the use of digital technology by the wireless network: (b) GPS satellite signals being able to reach the handset (such transmissions do not always work indoors, for example) : and (c) handset signals reaching wireless "base stations" (atmospheric and environmental conditions may cause variations in handset receiving signal strength).

Also the transmission of the ALI information is subject, in part, to system constraints within the wireless network to which the E911 signal is transmitted and over which UT Starcom has no control.

Finally, customers are advised that the Quickfire's ALI capability is to be used for E911 purposes only.

This feature allows you to place an emergency call even if your phone is in "Phone Lock" or "Restrict" mode when you dial the preprogrammed emergency number, 911, #911, or *911. It also operates in out-of-service areas. The phone maintains the emergency mode until you press the END Key  after disconnecting an emergency call. In emergency call mode, the phone can receive an incoming call from any available system.

To call "911" in "Phone Lock" or "Restrict" mode.

1. In Idle mode, tap **Call icon**  , tap "9 Key", "1 Key", "1 Key".
2. Tap **Call** or the SEND Key  . "911" and "Emergency" will appear on the screen.

COMPLIANCE WITH OTHER FCC REGULATIONS

OPERATING PROCEDURES

Never violate any of the following Rules and Regulations of the FCC when using your Cellular Phone. Such violations are punishable by fine, imprisonment or both.

- Never use obscene, indecent, or profane language.
- Never use your Cellular Phone to send false distress calls.
- Never wiretap or otherwise intercept a phone call, unless you have first obtained the consent of the parties participating in the call.
- Never make any anonymous calls to annoy, harass, or molest other people.
- Never charge another account without authorization, to avoid payment for service.
- Never willfully or maliciously interfere with any other radio communications.
- Never refuse to yield the line when informed that it is needed for an Emergency Call. Also, never take over a line by stating falsely that it is needed for an emergency.

GENERAL SAFETY

PRECAUTIONS

Your Handheld Portable Telephone is a high quality piece of equipment. Before operating, read all instructions and cautionary markings on the product, battery and adapter/charger.

Failure to follow the directions below could result in serious bodily injury and/or property damage due to battery liquid leakage, fire or rupture.

- DO NOT use or store this equipment in a place where it will be exposed to high temperatures, such as near an open flame or heat-emitting equipment.
- DO NOT drop your device or subject it to severe shock. When not using, lay down the unit to avoid possible damage due to instability.
- DO NOT expose this equipment to rain or spilled beverages.
- DO NOT use unauthorized accessories.
- DO NOT disassemble the phone or its accessories. If service or repair is required, return unit to an authorized Personal Communications Devices cellular service center. If unit is disassembled, the risk of electric shock or fire may result.

ANTENNA

ANTENNA SAFETY

Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications, or attachments could impair call quality, damage the phone, or result in violation of FCC regulations. Please contact your local dealer for replacement antenna.

Do not use the phone with a damaged antenna. If a damaged antenna comes into contact with the skin, a minor burn may result. Please contact your local dealer for replacement antenna.

BATTERY

BATTERY SAFETY

Your device uses a removable and rechargeable lithium ion battery. Please contact customer service for assistance should you need a replacement battery.

DO's

- Only use the battery and charger approved by the manufacturer.
- Only use the battery for its original purpose.
- Try to keep batteries in a temperature between 41°F (5°C) and 95°F (35°C).
- If the battery is stored in temperatures above or below the recommended range, give it time to warm up or cool down before using.

SAFETY

- Completely drain the battery before recharging. It may take one to four days to completely drain.
- Store the discharged battery in a cool, dark, and dry place.
- Purchase a new battery when its operating time gradually decreases after fully charging.
- Properly dispose of the battery according to local regulations.

DON'Ts

- Don't attempt to disassemble the battery – it is a sealed unit with no serviceable parts.
- Don't expose the battery terminals to any other metal object (e.g., by carrying it in your pocket or purse with other metallic objects such as coins, clips and pens). This can short circuit and critically damage the battery.
- Don't leave the battery in hot or cold temps. Otherwise, it could significantly reduce the capacity and lifetime of the battery.
- Don't dispose of the battery into a fire.

Lithium ion batteries are recyclable. When you replace your built-in battery, please request the repair center to recycle the battery in accordance with RBRC standards. When disposing of the battery by yourself, please call RBRC at (800) 822-8837 for proper disposal tips.

Never touch any fluid that might leak from the built-in battery. Such liquid when in contact with the eyes or skin, could cause injury to the skin or eyes. Should the liquid come into contact with the eyes, irrigate the eyes thoroughly with clean water and immediately seek medical attention. In the event the liquid comes into contact with the skin or clothing, wash it away immediately with clean water.

ADAPTER/CHARGER

CHARGER

The charger designed by Personal Communications Devices for this unit requires the use of a standard 120 V AC power source for its operation.

- Never attempt to disassemble or repair a charger.
- Never use a charger if it has a damaged or worn power cord or plug. Always contact a Personal Communications Devices authorized service center, if repair or replacement is required.
- Never alter the AC cord or plug on your charger. If the plug will not fit into the available outlet, have a proper outlet installed by a qualified electrician.
- Never allow any liquids or water to spill on the charger when it is connected to an AC power source. Always use the authorized Personal Communications Devices charger to avoid any risk of bodily injury or damage to your cellular phone or battery.
- Never attempt to connect or disconnect the charger with wet hands. Always unplug the charger from the power source before attempting any cleaning. Always use a soft cloth dampened with water to clean the equipment, after it has been unplugged.

Handling the cord on this product or cords associated with accessories sold with this product, will expose you to lead, a chemical known to the State of California to cause birth defects or other reproductive harm. Wash hands after handling. Always disconnect the charger from the power source when it is not in use.

GAMES

SEIZURES/BLACKOUTS

Warning

A very small percentage of individuals may experience epileptic seizures when exposed to certain light patterns or flashing lights. Exposure to certain patterns or backgrounds on a computer screen, or while playing video games, may induce an epileptic seizure in these individuals. Certain conditions may induce previously undetected epileptic symptoms even in persons who have no history of prior seizures or epilepsy.

If you, or anyone in your family, have an epileptic condition, consult your physician prior to playing. If you experience any of the following symptoms while playing a video or computer game -- dizziness, altered vision, eye or muscle twitches, loss of awareness, disorientation, any involuntary movement, or convulsions -- IMMEDIATELY discontinue use and consult your physician before resuming play.

Repetitive Motion Injuries

When you play games on your phone, you may experience occasional discomfort in your hands, arms, shoulders, neck, or other parts of your body. Follow these instructions to avoid problems such as tendonitis, carpal tunnel syndrome, or other musculoskeletal disorders:

- Take a minimum 15-minute break every hour of game playing.
- If your hands, wrists, or arms become tired or sore while playing, stop and rest for several hours before playing again.
- If you continue to have sore hands, wrists, or arms during or after play, stop playing and see a doctor.

RECYCLE YOUR CELL PHONE!

Carriers marketing this cell phone have an in-store phone take-back program. Consumers can drop off their used wireless devices to specified carrier retail outlets for recycling purposes. For a list of carrier members and collection sites, visit the cellular industry's recycling website www.recyclewirelessphones.com.

To mail in your old wireless device to Personal Communications Devices for recycling purposes, simply package your old wireless device and any accessories (including discharged batteries) in appropriate shipping materials and mail to: For Recycling Personal Communications Devices LLC 555 Wireless Blvd. Hauppauge, NY 11788

Wireless phones also can be donated to the Wireless Foundation's DONATE A PHONE® CALL TO PROTECT® campaign. This charitable cause collects wireless phones to benefit victims of domestic violence. All donated phones are tax deductible. You may mail the phone to: CALL TO PROTECT, 2555 Bishop Circle, West Dexter, MI 48130.

-OR-

Drop the phone off at a local collection center. For a list of collection centers, visit www.wirelessfoundation.org/CalltoProtect/dropoff.cfm

Before returning any wireless device for recycling purposes, please remember to terminate your service on the device, clear the device of any stored information and remove the device's SIM card, if it has one (please contact your wireless provider to find out if your device contains a SIM card and for assistance on how to remove it).

FCC COMPLIANCE INFORMATION

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.

INFORMATION TO USER

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ tv technician for help.

CAUTION: The user who makes changes or modifications to the unit without the express approval by the manufacturer will void user authority to operate the equipment.

MANUFACTURER'S WARRANTY

12 MONTH LIMITED WARRANTY

Personal Communications Devices, LLC. (the Company) warrants to the original retail purchaser of this handheld portable cellular telephone, that should this product or any part thereof during normal consumer usage and conditions, be proven defective in material or workmanship that results in product failure within the first twelve (12) month period from the date of purchase, such defect(s) will be repaired or replaced (with new or rebuilt parts) at the Company's option, without charge for parts or labor directly related to the defect(s).

The antenna, keypad, display, rechargeable battery and battery charger, if included, are similarly warranted for twelve (12) months from date of purchase.

This Warranty extends only to consumers who purchase the product in the United States or Canada and it is not transferable or assignable.

This Warranty does not apply to:

- (a) Product subjected to abnormal use or conditions, accident, mishandling, neglect, unauthorized alteration, misuse, improper installation or repair or improper storage;
- (b) Product whose mechanical serial number or electronic serial number has been removed, altered or defaced.
- (c) Damage from exposure to moisture, humidity, excessive temperatures or extreme environmental conditions;
- (d) Damage resulting from connection to, or use of any accessory or other product not approved or authorized by the Company;
- (e) Defects in appearance, cosmetic, decorative or structural items such as framing and non-operative parts;

- (f) Product damaged from external causes such as fire, flooding, dirt, sand, weather conditions, battery leakage, blown fuse, theft or improper usage of any electrical source.

The Company disclaims liability for removal or reinstallation of the product, for geographic coverage, for inadequate signal reception by the antenna or for communications range or operation of the cellular system as a whole.

When sending your wireless device to Personal Communications Devices for repair or service, please note that any personal data or software stored on the device may be inadvertently erased or altered. Therefore, we strongly recommend you make a back up copy of all data and software contained on your device before submitting it for repair or service. This includes all contact lists, downloads (i.e. third-party software applications, ringtones, games and graphics) and any other data added to your device. In addition, if your wireless device utilizes a SIM or Multimedia card, please remove the card before submitting the device and store for later use when your device is returned, Personal Communications Devices is not responsible for and does not guarantee restoration of any third-party software, personal information or memory data contained in, stored on, or integrated with any wireless device, whether under warranty or not, returned to Personal Communications Devices for repair or service.

WARRANTY

To obtain repairs or replacement within the terms of this Warranty, the product should be delivered with proof of Warranty coverage (e.g. dated bill of sale), the consumer's return address, daytime phone number and/or fax number and complete description of the problem, transportation prepaid, to the Company at the address shown below or to the place of purchase for repair or replacement processing. In addition, for reference to an authorized Warranty station in your area, you may telephone in the United States (800) 229-1235, and in Canada (800) 465-9672 (in Ontario call 416-695-3060).

THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY MUST BE BROUGHT WITHIN A PERIOD OF 18 MONTHS FROM DATE OF ORIGINAL PURCHASE.

IN NO CASE SHALL THE COMPANY BE LIABLE FOR AN SPECIAL CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, WHATSOEVER. THE COMPANY SHALL NOT BE LIABLE FOR THE DELAY IN RENDERING SERVICE UNDER THIS WARRANTY OR LOSS OF USE DURING THE TIME THE PRODUCT IS BEING REPAIRED OR REPLACED.

No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.

Some states or provinces do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage so the above limitation or exclusions may not apply to you. This Warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

IN USA: Personal Communications Devices, LLC.

555 Wireless Blvd.

Hauppauge, NY 11788


(800) 229-1235


IN CANADA: PCD Communications Canada Ltd.

5535 Eglinton Avenue West Suite #234


Toronto, ON M9C 5K5


(800) 465-9672






MEMO







MEMO

