






DVR4-Alert Business & 2 Camera Easy Setup Guide

Front of DVR

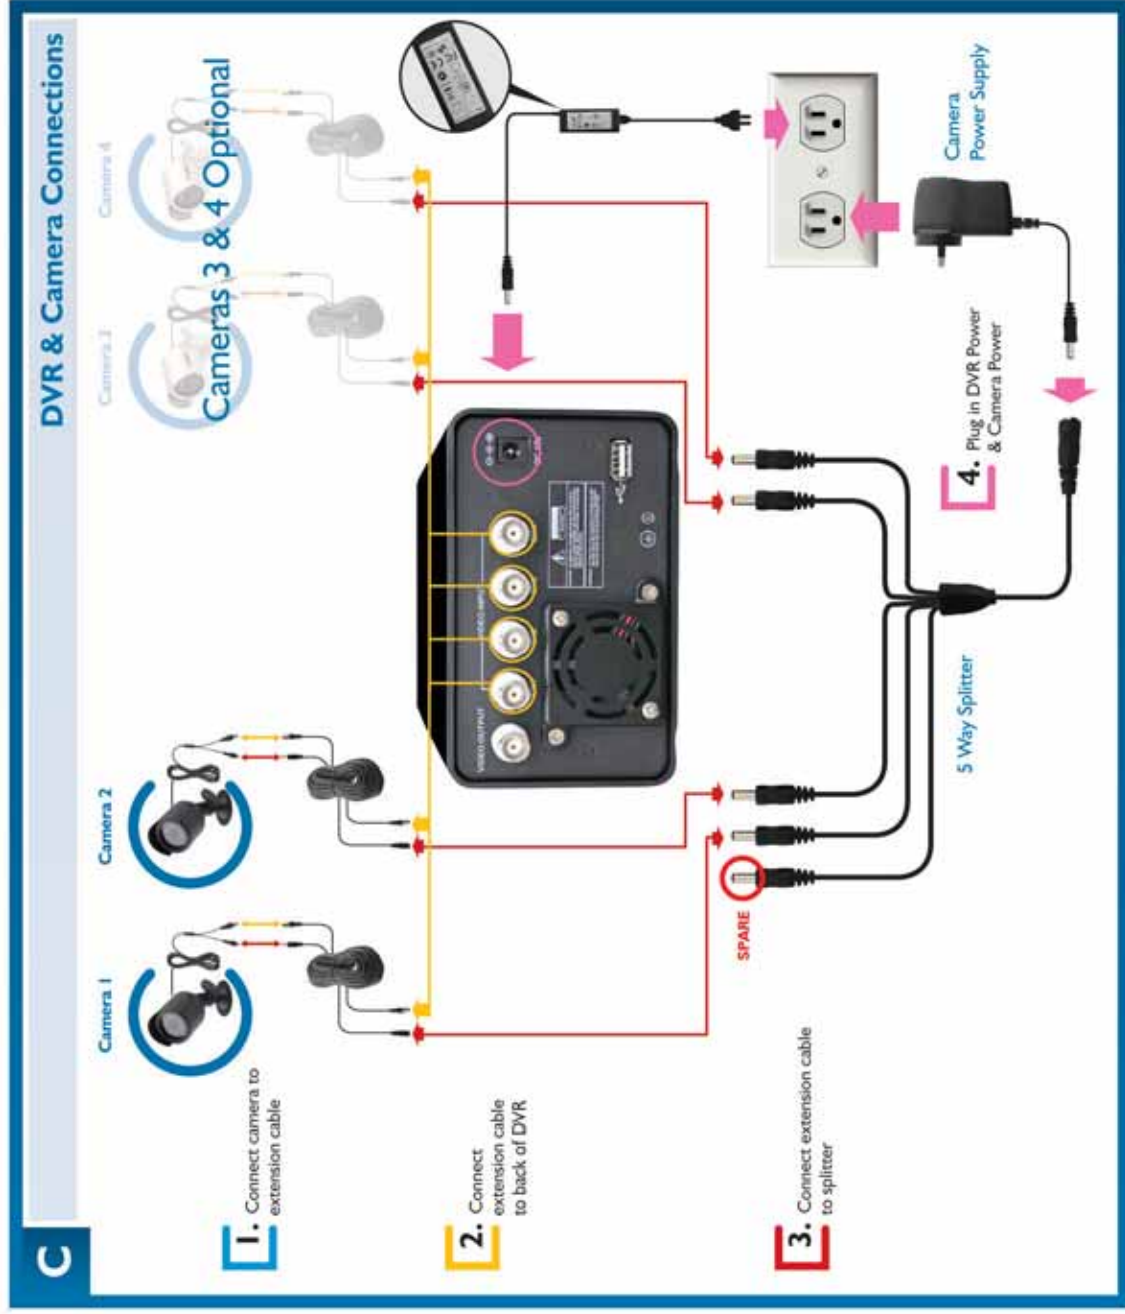

T = Normal Record
A = Motion Record
- = No Record



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT

1. Move the cursor using the **UP & DOWN** arrow
Press the **SEL** button to change the record mode

Note: Schedule based on 24 hour clock

Setting the Record Schedule



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT

1. Push the **MENU** button to bring up the menu
2. Move the cursor to 'Record Schedule' using the **DOWN** arrow and press **SEL**

Camera & Record Selection



Ensure 'Camera Select' and 'Record Select' show 1234 to record all 4 cameras

Push the **MENU** and using the arrows move the cursor to 'Sub Menu' and press **SEL**



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT



Move the cursor to 'Time Setup' and press the **SEL** button

- A. Use the **UP** and **DOWN** arrows to move the cursor
- B. Press the **SEL** button to increase the chosen value by 1
- C. Push **MENU** to exit the setup



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT

Setting the Date & Time



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT



Move the cursor to 'Time Setup' and press the **SEL** button

- A. Use the **UP** and **DOWN** arrows to move the cursor
- B. Press the **SEL** button to increase the chosen value by 1
- C. Push **MENU** to exit the setup



PRESS (UP, DOWN), THEN (SELECT)
PRESS (MENU) TO EXIT