Be Safe with Swann

12 month Warranty

Quality Assured

DVR4-SecuraNet™

4 Channel Digital Video Recorder with Networking

Perfect for business, retail, large homes, law enforcement, schools & more
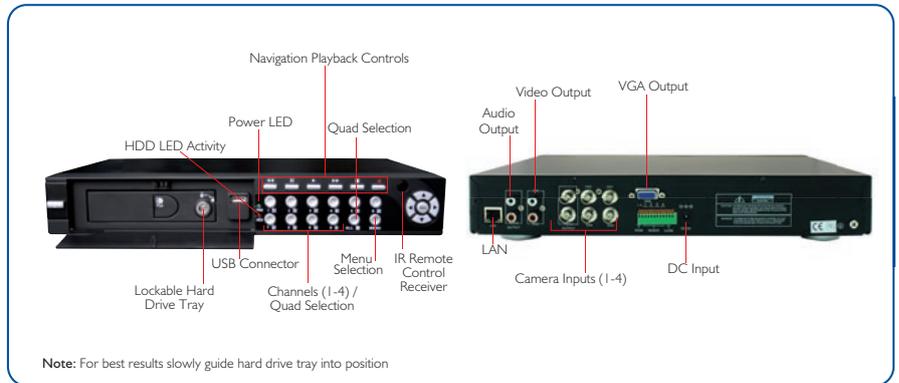
Easy to connect

to PC via USB

- Monitor & record up to 4 cameras simultaneously 24/7

- High compression MPEG4 – high resolution & less hard drive space needed with faster streaming than MJPEG models

- Motion detection records activity to pre-installed 160GB hard drive

- Protect your loved ones, home & business

DIY
Do-It-Yourself

160GB
Hard Drive
Records Longer

USB
Compatible

Plugs into your TV

High Compression
MPEG 4
Video

www
Remote viewing over the web or network

Swann MONITORING

DVR4-SecuraNet™
4 Channel Digital Video Recorder with Networking
Perfect for business, retail, large homes, law enforcement, schools & more

Navigation Playback Controls

Power LED

Quad Selection

HDD LED Activity

Video Output VGA Output

Audio Output

USB Connector

Menu Selection

IR Remote Control Receiver

LAN

Lockable Hard Drive Tray

Channels (1-4) / Quad Selection

Camera Inputs (1-4)

DC Input

Note: For best results slowly guide hard drive tray into position

DVR Specifications

- Compression: MPEG4
- Video I/O: BNC 4-channel inputs / 1-channel output
- Audio I/O: RCA 1-channel input / 1-channel output
- Display Resolution: NTSC: 720x480 PAL: 720x576
- Display Frame Rate: NTSC: 100fps PAL: 100fps
- Record Resolution: NTSC: 720x240 PAL: 720x288
- Record Frame Rate: NTSC: 60fps PAL: 50fps
- HDD Interface: PATA or SATA
- Record Modes: Continuous, Motion Detection, Sensor Triggered, Time Schedule
- Record Picture Quality: Low, Normal, High, Highest
- Network Interface: RJ45, TCP/IP
- USB Interface: USB2.0
- VGA Output: YES
- Remote Control: IR remote control
- Power Supply: DC 12V (adapter included)
- Dimensions (DxWxH):   13.6" x 9.45" x 2.17" (345mm x 240mm x 55mm)

DVR Features:

- MPEG4 compression
- SOC single chip, high stability
- Linux operating system
- Full-D1 live monitoring, each or quad display
- Multiple record modes: continuous, motion detection, sensor triggered, time schedule
- Motion detection: settable window & sensitivity
- Variable record frame rate & quality level
- Support hiding & switching channels
- System self-recovery after power reconnected
- Video loss alarm function
- IR Remote control
- Audio I/O
- VGA output
- USB2.0
- Network monitoring: Web browser

Package Contents

- DVR4-SecuraNet™
- 160GB Hard Drive
- Power Adapter & Cable
- Remote Control
- BNC to RCA Video Cable 3ft (1m)
- BNC to RCA Adapters x 9
- Manual and Installation CD
- Ethernet Cable
- Theft Deterrent Stickers x 4

DIY
Do-It-Yourself

Swann™
www.swannsecurity.com

Please note that the information contained within this document is subject to change without notification.