

OfficePower™ 1500AVR-H0 Automatic Voltage Regulator



40 - 100
Minutes of
system runtime

CyberPower gives you lightning protection plus battery back-up in a compact space-saving design.

Includes software that saves open files and shuts off the computer automatically when power is interrupted.

AVR
AUTOMATIC VOLTAGE REGULATOR

USB & Serial
Interface Compatibility
ALL CABLES INCLUDED

PRODUCT FEATURES:

- Automatic Voltage Regulator ensures clean, consistent and computer-safe voltage levels.
- Battery Run-times up to 100 minutes
- Dual 9AH batteries for longer run-time
- All outlets are surge-protected at 1500 joules
- PowerPanelPlus Software included
- Internet / Network-Ready with Phone / Fax / Modem / DSL & Broadband Network Protection
- \$400,000 Connected Equipment Warranty
- Includes USB and serial cable for maximum connectivity



Microsoft®
Windows® XP,
2000, ME, 98,
Windows NT®

Includes
PowerPanelPlus™
Automatic Shutdown Software
(Windows NT, 98, ME & 2000 compatible)



- Saves open files, closes applications and shuts down your computer when a power outage occurs.
- Monitors input voltage, output voltage, battery capacity, load and unit temperature.
- Allows for user-defined scheduled shutdown and startup of computer system.

OfficePower™ 1500AVR-HO

Automatic Voltage Regulator



High Performance Power Protection with Automatic Voltage Regulation

CyberPower Systems' 1500AVR-HO is an ideal unit for high-end computer systems or users who need extended run-times. The dual 9AH batteries provide ample run-time for today's power-hungry processors.

The AVR feature ensures that your sensitive electronic equipment receives only clean, consistent, regulated power, reducing system "lock-ups". CyberPower backs this unit with an impressive \$400,000 connected equipment guarantee. The 1500AVR-HO sets the standard for quality, reliability and performance at a realistic price.

What is AVR?

Automatic Voltage Regulators increase low or decrease high voltage to a computer safe 110/120 volts. The 1500AVR-HO automatically provides battery backup power if the line voltage drops below 90 volts or exceeds 145 volts.

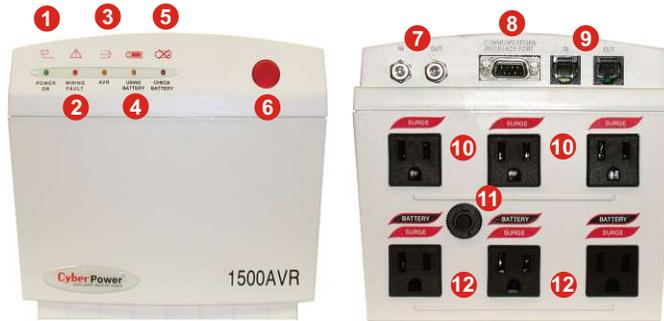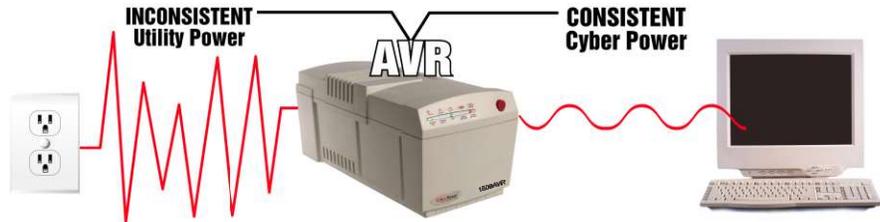

- 1 - Power On Indicator
- 2 - Electrical Wiring Fault Indicator
- 3 - Automatic Voltage Regulator
- 4 - Using Battery Indicator
- 5 - Check Battery Indicator
- 6 - Power Switch
- 7 - Coaxial cable protection
- 8 - Serial Port to PC
- 9 - Phone/Network Protection (RJ-11/RJ-45)
- 10 - Full-time Surge Protection Outlets
- 11 - Re-settable Circuit Breaker
- 12 - Battery Power Supplied Outlets

TECHNICAL SPECIFICATIONS

Model	CPS1500AVR-HO
VA Rating	1500VA
Watts	900W
Input Voltage on Utility	85V to 150V
Frequency on Utility	57Hz to 63 Hz
Output Voltage on Battery	120V +/- 5%
Frequency on Battery	60Hz
Surge Energy Capacity	1500 Joules
Maximum Surge Current	72,000 Amps
Overload Protection	Internal circuitry limiting. On-line circuit breaker
Battery Run-time	Up to 100 mins.
Typical Battery Recharge Time	8 hours
Total number of receptacles	3 battery / surge, 3 full-time surge-only
Visual Indicators	Power On/Off, Automatic Voltage Regulator, Using Battery, Site Wiring Fault
Audible Indicators	Battery on, Low battery, UPS overload
Warranty	Three Year Limited Warranty on UPS unit and battery
Conformance Approvals	UL 1778, cUL 107.1, FCC Doc Class B
Included Software	PowerPanelPlus™ Power Management Software
Connected Equip. Guarantee	\$400,000

ORDERING INFORMATION

Part Number	CPS1500AVR-HO
Sell Unit Dims. (L" x W" x H")	15.87" x 9.25" x 9.12"
Sell Unit Net Weight	30 LBS.
Master Carton Quantity	2 UNITS
Master Dims. (L" x W" x H")	18.33" x 16.18" x 9.37"
Master Weight	62 LBS.
UPC Number	6 49532 20015 3

CyberPower™

5555 12th Ave. East, Suite 110, Shakopee, MN 55379
 Phone: 877.297.6937 Fax: 952.403.0009

For more information, visit CyberPower's Web Site at www.cyberpowersystems.com or call 1-877-CY-POWER