Model Nos. 110-120-306, 110-121-306, 110-141-306

10 CENTS

ROTARY MOWER

WARRANTY

For one year from date of purchase, MTD Products, Inc., will replace for the original purchaser, free of charge, F.O.B. factory or authorized service firm, any part or parts found to be defective in material or workmanship. All transportation charges on parts submitted for replacement under this warranty must be paid by the purchaser. This warranty does not include replacement of parts which become inoperative through misuse, excessive use, accident, neglect, improper maintenance or alterations by unauthorized persons. This warranty does not include the engine, motor, battery, battery charger or any component parts thereof. For service on these units refer to the applicable manufacturer's warranty.

The above warranty will apply only to the original owner and will be effective only if the warranty card has been properly processed. It will not apply where the unit has been used commercially.


Warranty service is available through your local authorized service dealer or distributor. UNDER NO CIRCUM-STANCES WILL THE RETURN OF A COMPLETE UNIT BE ACCEPTED BY THE FACTORY UNLESS PRIOR WRITTEN PERMISSION HAS BEEN EXTENDED.

SAFETY RULES

Your rotary mower is a precision piece of power equipment, not a plaything. Therefore exercise extreme caution at all times.

- Remove all sticks, stones, wire and other hazardous items from lawn before mowing. Such items are dangerous to both the mower and individuals in the vicinity of the mower.
- Always disconnect spark plug cable during repairs or refueling operations.
- 3. Always start engine from side opposite discharge chute.
- 4. NEVER place hands or feet under mower or near discharge chute while engine is running.
- Do not tilt mower at extreme angle while engine is running. Cut grass on hills and banks sideways, not up and down.
- 6. Always stop engine when not cutting grass.
- 7. Do not fill gas tank while engine is running. Do not spill gasoline on hot engine.
- Keep children and pets away from area at all times during mowing operation. Never allow mower to discharge grass toward any person.
- Do not attempt to start engine while mower is resting in high grass.
- Check all nuts and bolts, particularly the blade bolts, for tightness. This is especially important during the initial operation period. Make this same check periodically thereafter.
- While operating the mower, if any foreign object is struck, stop the mower and inspect for damage. Do not restart or operate the mower until all damage has been repaired.

WARNING: Should excessive vibration develop, check your blade and crankshaft immediately. Do not operate mower with an unbalanced blade, a damaged blade or a damaged crankshaft.

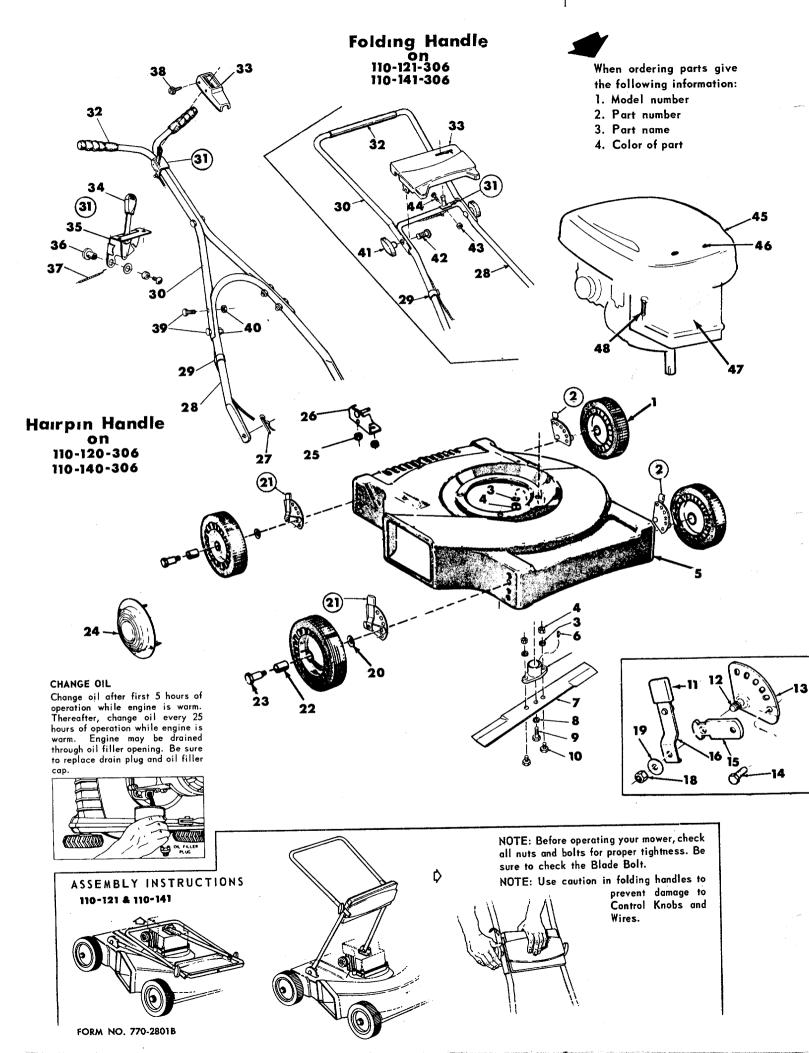

Part No. Mobility of the part No. Part No. Mobility of the part No. Mobility	.120-306	20-306 110-121-306 110-140-306 110-141-306	110-140-306	110-141-306	DESCRIPTION
10.00	Part No.	Part No.	Part No.	Part No.	
116-9691 NONE 310-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9691 116-9692 11	504 - 9392	504-9392	505.9392	505-9392	Wheel Assembly
41 778-119 778-119 778-119 778-119 41 778-119 778-119 778-119 778-119 2 312-7882 312-781 351-10208 778-110 3 776-169 776-169 778-169 778-169 7 710-113 710-113 710-113 710-113 7 710-117 710-117 710-113 710-113 7 710-117 710-113 710-113 710-113 7 710-117 710-117 710-117 710-117 7 710-117 710-117 710-117 710-117 7 710-282 NONE 310-9682 NONE 310-9682 8 710-209 NONE 710-105 710-106 710-106 8 710-209 NONE 710-106 310-9682 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 310-8838 31	NONE	310-9691	NONE	310-9691	Height Adjustment L.H.—Complete
712-123 712-123 712-123 712-123 712-123 712-123 712-123 712-124-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 710-137 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-117 710-209 71	736-119	736-119	736-119	736-119	Spring Lockwasher 5/16 Screw*
261-10641 351-10208 351-10208 714-365 714-365 714-365 712-7582 716-18 716-18 710-113 710-113 710-113 710-117 710-113 710-113 710-117 710-117 710-117 710-262 NONE 310-9682 810-9683 NONE 710-309 810-9683 NONE 710-117 810-9683 NONE 710-209 810-9683 NONE 710-209 810-7492 NONE 710-209 810-7492 NONE 710-209 810-8313 NONE 736-105 778-105 786-105 736-105 810-9692 NONE 736-105 810-838 310-838 310-389 810-806 778-107 778-102 788-105 788-105 778-102 806-9871 712-107 712-107 810-838 310-838 310-838 810-10024 310-983 310-10024	112-123	712-123	712-123	712-123	Hex Nut 5/16-24 Thd.*
2 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 714-365 716-169 736-169 736-169 736-169 736-169 736-169 710-113 710-113 710-117 710-106 310-368 310-368 310-368 310-368 310-368 310-368 310-368 310-369 310-369 310-369 310-369 310-369 310-369 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 310-10024 <td< td=""><td>351-10541</td><td>351-10541</td><td>351-10208</td><td>351-10208</td><td>Deck Assembly</td></td<>	351-10541	351-10541	351-10208	351-10208	Deck Assembly
2 312-7682 312-7681 312-7681 736-169 736-169 736-169 736-169 736-169 736-169 736-169 736-169 710-113 710-113 710-113 710-113 710-122 710-132 710-133 710-113 710-262 NONE 310-9682 300-9682 810-7492 NONE 310-9683 NONE 310-9683 710-209 NONE 310-9683 NONE 310-9683 710-209 NONE 710-116 710-109 712-116 NONE 710-109 710-106 810-7492 NONE 736-106 736-106 736-105 736-106 736-106 736-106 738-102 NONE 712-107 712-107 738-102 NONE 712-107 712-107 746-128 746-128 746-128 746-128 746-128 746-128 746-128 714-104 714-104 718-138 710-936	714-365	714-365	714-365	714-365	Key Hi-Pro #505*
736-169 736-169 736-169 736-169 710-113 710-113 710-113 710-113 710-117 710-117 710-117 710-117 310-9682 NONE 310-9682 100-9683 310-9683 NONE 310-9682 100-9683 310-9683 NONE 310-9683 100-9683 310-9683 NONE 310-9683 100-9683 310-7492 NONE 310-9683 100-9683 310-8313 NONE 310-7492 100-1098 310-8213 NONE 310-7492 100-7492 310-9692 NONE 310-7492 100-7492 310-9692 NONE 310-9692 310-7492 310-9692 NONE 310-8388 310-8388 310-8388 310-8388 310-8388 310-8388 310-8389 310-8388 310-8388 310-10024 310-10024 310-9366 310-10024 310-10024 310-10033 310-10039 310-10033 310-10034 <td>312 - 7582</td> <td>312-7582</td> <td>312-7581</td> <td>312-7581</td> <td>Blade</td>	312 - 7582	312-7582	312-7581	312-7581	Blade
710-113 710-113 710-113 710-117 710-117 710-113 710-117 710-117 710-117 710-362 NONE 310-9682 710-362 NONE 310-9682 710-209 NONE 310-9682 710-209 NONE 310-9683 712-116 NONE 712-106 736-105 736-105 736-105 736-105 736-105 736-105 736-105 736-105 736-105 736-202 736-105 736-105 736-203 736-105 736-105 738-305 305-7006 310-838 810-8389 310-8388 310-8389 810-8389 310-8388 310-8389 810-10024 310-9366 310-10024 810-1003 310-9366 310-	736-169	736-169	736-169	736-169	Lockwasher % Screw.*
710-117 710-117 710-117 710-1282 NONE 710-202 710-862 NONE 305-7520 710-862 NONE 310-9682 810-9683 NONE 310-9682 810-9683 NONE 310-9682 810-9683 NONE 310-9682 810-8133 NONE 310-9683 810-8106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 736-106 310-3682 310-838 810-838 310-838 310-838 810-838 310-838 310-838 810-10024 712-107 712-107 746-128 746-128 746-128 746-128 746-128 746-1	710-113	710.113	710-113	710.113	Hex Head Cap Screw %-24 x 1%" Lg. (Heat Treated)
305-7520 NONE 305-7520 710-862 NONE 310-9682 310-9683 NONE 310-9683 310-9683 NONE 310-9683 710-209 NONE 310-9683 710-209 NONE 310-9683 710-209 NONE 710-209 310-7492 NONE 712-116 736-105 NONE 712-116 736-105 736-105 736-105 310-9692 NONE 736-105 310-9692 NONE 736-105 310-9692 NONE 736-105 310-9871 NONE 712-105 738-102 738-213 738-105 310-8389 310-8389 310-8389 310-8389 310-8389 310-8389 310-10024 714-104 714-104 746-128 746-128 746-128 746-128 746-145 746-128 310-10023 310-10029 310-1003 310-10033 718-104 718-138 </td <td>710-117</td> <td>710-117</td> <td>710-117</td> <td>710-117</td> <td>Hex Head Cap Screw 5/16-24 x 1" Lg. (Heat Treated)</td>	710-117	710-117	710-117	710-117	Hex Head Cap Screw 5/16-24 x 1" Lg. (Heat Treated)
10-362 NONE NONE 10-362 Index Plate L.H. (Not Shown)	NONE	305-7520	NONE	305-7520	Knob Height Adiusteri
10.9882 NONE 10.9882 Index Plate R.H.†	NONE	710 969	MONE	710.969	How Rol+ Snoois
310-3662 NONE 310-3682 Index Plate L.H. (Not Shown) 710-209 310-3683 NONE 710-209 Sems Hex Head Cap Screw %-16 x % 310-3683 NONE 712-116 NONE 712-116 Spring Lever† Spring Lever† 712-116 NONE 728-105 Spring Lever† Spring Lever† 712-116 NONE 728-105 Spring Lever† Spring Lever† Spring Lever† 728-105 Spring Lever† Spring Lever	NOME	700-011	EINON	200-011	Teda: Dieta DII 4
310-9883 NONE 310-9883 Index Plate L.H. (Not Shown) 310-983 NONE 310-9883 Sems Hex Head Cap Screw %-16 x %-	NONE	310-9682	NONE	310-9682	Index Flate K.H.T
710-209 NONE 710-209 Sems Hex Head Cap Screw %-16 x % 310-7492 NONE 310-7492 Spring Levert 712-116 NONE 712-116 Spring Levert 712-116 NONE 736-105 Spring Levert 736-105 736-105 Spring Levert 712-107 738-213 738-105 738-105 Spring Levert 712-107 738-213 738-105 738-105 Spring Levert 738-105 738-105 738-105 Spring Levert 738-105 738-105 Spring Levert 738-107 738-105 Spring Levert 738-107	NONE	310-9683	NONE	310-9683	Index Plate L.H. (Not Shown)
310-7492 NONE 310-7492 Spring Levert	NONE	710-209	NONE	710-209	Sems Hex Head Cap Screw %-16 x % Lg.*
310-8313 NONE 310-8313 712-116 NONE 712-116 736-105 736-105 736-105 736-105 736-105 738-105 310-9692 305-7006 310-9692 305-7006 305-7006 305-7006 306-871 738-102 305-9071 738-102 738-102 305-9071 8 310-838 310-838 310-838 9 310-8389 310-8389 310-8389 1 744-104 714-104 714-104 2 310-10024 310-9306 310-10024 3 310-10024 310-9306 310-10024 3 310-9998 310-10029 310-10033 3 310-9949 310-10029 310-10033 3 310-9949 310-10029 310-10033 3 310-9949 310-10039 310-10033 3 310-9949 310-10029 310-10033 3 310-9949 310-10029 310-10033 3 310-9949 310-10029 310-10033 3 310-9949 310-10029 310-1003 4 310-1001 310-10029 310-10024	NONE	310-7492	NONE	310-7492	Pivot Bar I
732-116 NONE 772-116 736-105 736-105 736-105 736-105 736-105 736-105 736-105 736-105 736-105 310-9692 805-7006 305-7006 306-9871 NONE 310-9692 106-9871 NONE 305-9871 112-107 712-107 712-107 110-838 310-8388 310-8388 310-8388 310-8388 310-8388 310-8389 310-8389 310-8388 310-8389 310-8389 310-8388 310-8389 310-8389 310-8388 310-8389 310-8389 310-10024 746-128 746-128 746-128 746-128 746-128 746-128 310-9389 310-9364 310-10033 310-93849 310-9364 310-10033 310-9849 310-7627 301-7627 713-139 700-7627 301-7627 710-405 NONE NONE 710-106	NON	310-8313	NONE	310-8313	Spring Lever't
7.36-105 NONE 736-105 7.36-105 736-105 736-105 7.36-105 736-105 736-105 7.36-105 736-105 736-105 3.10-9692 305-7006 305-7006 7.38-102 738-102 738-102 7.38-102 738-213 738-102 8 310-8389 310-8389 9 7.12-107 712-107 7.12-107 712-107 712-107 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.14-104 7.11-104 7.18-138 7.18-138 7.18-138 7.18-138 7.10-106 310-9996 801-7627 901-7627 901-7627 901-7627 901-7627 901-7627 70-405	TION	710 410	NONE	719 116	Floreto Otomotic
736-105 NONE 736-105 736-105 736-105 736-105 310-9692 NONE 736-105 310-9692 305-7006 305-7006 310-9692 305-7006 305-7006 738-102 738-13 738-102 305-9871 NONE 305-9871 712-107 712-107 712-107 310-8389 310-8389 310-8389 9 310-8389 310-8389 10-10024 310-8389 310-8389 10-10024 310-936 310-10024 746-128 746-128 310-10024 310-10024 310-936 310-10033 310-10033 310-10029 310-10033 310-949 310-9364 310-10033 310-9849 305-9973 351-998 310-9849 301-7627 732-139 772-132 710-148 NONE NONE 710-146 NONE 710-1405 NONE 710-106 710-16 NONE	NONE	011-71/	NONE	011-711	Dallaril vital vital
136-106 736-106 736-105 310-9692 NONE 310-9692 310-9692 305-7006 310-9692 305-7006 305-7006 310-9692 738-102 738-103 738-102 310-8383 310-8383 310-8388 310-8384 310-8388 310-8388 310-8389 310-8389 310-8389 714-104 714-104 714-104 310-10024 714-104 714-104 4 310-10024 746-138 310-10024 746-138 310-10024 746-128 746-146 746-138 310-10011 310-9364 310-10024 310-10023 310-10029 310-10033 310-949 310-9364 310-10013 310-949 310-9364 310-10033 310-949 310-9369 310-9369 710-106 710-106 NONE 710-106 NONE 710-106 710-106 NONE 710-106 710-835 <t< td=""><td>NONE</td><td>736-105</td><td>NONE</td><td>736-105</td><td>Believille Washer % 1.D.</td></t<>	NONE	736-105	NONE	736-105	Believille Washer % 1.D.
310-9692 NONE 310-9692 305-7006 305-7006 305-7006 305-9871 738-102 738-102 305-9871 NONE 305-9871 712-107 712-107 712-107 310-8388 310-8388 310-8388 310-8389 310-8389 310-8389 310-10024 714-104 714-104 746-128 746-146 746-128 746-128 746-146 746-128 718-138 310-9306 310-10033 29 310-10033 310-10024 310-9449 310-9306 310-10033 3 305-7470 305-7470 305-7470 6 310-949 310-9996 310-9849 7 732-139 710-148 NONE 8 94-9966 NONE 710-106 8 710-405 NONE 710-405 8 31-8998 NONE 710-106 8 31-8998 710-158 710-158	736 - 105	736-105	736-105	736-105	Belleville Washer % I.D.
305-7006 305-7006 738-102 738-213 738-102 305-9871 NONE 305-9871 712-107 712-107 712-107 310-8388 310-8388 310-8388 310-8389 310-8389 310-8389 310-10024 310-8389 310-8389 4 310-10024 714-104 714-104 746-128 746-145 746-128 746-128 746-145 746-128 310-10024 310-9364 310-10024 310-10033 718-7072 746-128 310-10033 718-7072 718-138 351-9998 310-9966 310-9849 700-7470 310-9849 310-9849 700-7627 732-139 700NE 700-7627 732-139 700NE 700-7627 732-139 700-106 804-9666 NONE 710-405 710-106 NONE 710-405 710-106 NONE 710-405 710-835 710-168 </td <td>NONE</td> <td>310-9692</td> <td>NONE</td> <td>310-9692</td> <td>- 1</td>	NONE	310-9692	NONE	310-9692	- 1
738-102 738-213 738-102 738-102 738-113 738-102 305-9871 712-107 712-107 712-107 712-107 712-107 310-8388 310-8388 310-8388 310-8389 310-8389 310-8389 714-104 714-104 714-104 310-10024 746-128 310-10024 746-128 310-306 310-10024 746-128 310-10024 746-128 310-10011 310-9364 310-10024 29 718-138 718-138 3 305-7470 310-9996 310-9996 4 310-9849 301-7627 7 301-7627 732-139 710-148 NONE 710-148 NONE NONE 710-106 710-106 10-405 NONE 710-106 10-106 351-8998 710-106 10-106 351-8998 710-106 10-108 710-106 351-8998 10-108 710-106 351-8998 10-108 710-106 351-8998 10-158 710-158 710-158	305,7006	305-7006	305-7006	305-7006	
305-9871 NONE 705-102 712-107 712-107 712-107 712-107 712-107 712-107 8 310-8388 310-8388 310-8388 9 310-8389 310-8389 310-8389 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 716-128 310-9306 310-10024 718-138 310-10029 310-10033 718-138 305-7470 310-9949 710-944 710-106 310-9949 710-944 710-106 310-9949 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 351-8998 710-108 710-158 710-158 710-158 710-158 710-158	790 019	2001-000	790 919	738 100	A VIO BOOL
305-9871 NONE 305-9871 712-107 712-107 712-107 8 310-8388 310-8388 9 310-8389 310-8389 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 746-128 716-128 710-10024 746-128 718-138 718-138 718-138 718-138 718-138 718-138 718-138 310-9949 710-106 310-9849 310-9949 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-106 710-835 710-168 710-168 710-158 710-158 710-158	738-213	Z0T-881.	017-00)	138-102	Axie Doll
8 310-838 310-8388 9 310-8389 310-8389 9 310-8389 310-8389 9 310-8389 310-8389 14-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 714-104 310-10024 310-9306 310-10024 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 746-128 716-1002 7 310-9949 310-10029 3 305-7470 305-7470 3 305-7470 310-9849 6 310-9849 701-7627 7 732-139 700-166 NONE 710-106 7 710-405 NONE 7 710-405 NONE 7 710-406 NONE 7 710-406 NONE <t< td=""><td>NONE</td><td>305-98/1</td><td>NONE</td><td>305-9871</td><td>THUD Caps</td></t<>	NONE	305-98/1	NONE	305-9871	THUD Caps
8 310-8388 310-8388 310-8388 9 310-8389 310-8389 310-8389 9 310-8389 310-8389 310-8389 714-104 714-104 714-104 714-104 310-10024 310-306 310-10024 310-10024 4 310-10011 310-9364 310-10011 29 310-10033 718-138 718-138 3 351-9998 310-10033 3 351-9998 310-996 3 305-7470 305-7470 6 310-9849 310-996 7 301-7627 718-138 8 351-9998 310-9849 9 301-7627 301-7627 732-139 700-1627 901-7627 NONE 710-148 NONE 710-405 NONE 710-405 712-107 NONE 710-405 710-106 351-8998 710-106 831-8998 710-168 710-168 710-835	712-107	712-107	712-107	. 712-107	Hex Center Locknut 4-20 Thd.*
9 310-8389 310-8389 310-8389 6 310-10024 714-104 714-104 714-104 310-10024 310-10024 310-10024 310-306 310-10024 4 310-10011 310-9364 310-10011 29 310-10023 310-10023 310-10013 3 351-9998 365-973 351-9998 3 305-7470 310-9849 310-9849 6 310-9849 310-996 310-9849 7 301-7627 301-7627 301-7627 732-139 710-148 NONE NONE NONE 710-148 NONE 710-405 NONE 710-405 NONE 710-405 712-107 NONE 710-405 710-106 NONE 710-106 831-8998 NONE 710-106 831-8998 710-158 710-158	310-8388	310-8388	310-8388	310-8388	Handle Bracket Ass'y.—R.H.
6 310-1004 714-104 714-104 310-10024 310-9306 310-10024 746-128 746-128 746-128 4 310-10011 310-9364 310-10013 29 310-10033 310-10029 310-10033 3 361-9998 365-9973 351-9998 3 305-7470 305-9973 351-9998 3 305-7470 310-9849 310-9849 6 310-9849 310-9996 310-9849 7 732-139 710-148 NONE NONE 710-148 NONE NONE NONE 710-106 NONE 710-405 7 712-107 NONE 710-405 7 710-106 710-106 710-106 8 710-106 710-106 710-106 8 710-106 710-106 710-106 8 710-835 710-158 710-158	310 - 8389	310-8389	310-8389	310-8389	Handle Bracket Ass'y.—L.H. (Not Shown)
310-10024 310-9306 310-10024 746-128 746-128 746-128 310-10011 310-9364 310-10011 310-10033 310-10029 310-10033 718-138 718-138 718-138 351-9998 305-7470 305-7470 310-9849 305-7470 305-7470 310-9849 301-7627 301-7627 901-7627 301-7627 301-7627 732-139 732-141 732-139 NONE 710-148 NONE NONE 710-148 NONE 710-405 NONE 710-405 710-106 NONE 710-106 351-8998 710-106 351-8998 710-835 710-158 710-158	714-104	714-104	714-104	714-104	Hairpin Cotter*
746-128 310-10011 310-10029 310-10033 718-138 3110-10033 718-138 3110-10033 718-138 3110-10033 718-138 3110-10033 718-138 3110-10033 718-138 3110-1003	310-9306	310-10094	310-9306	310-10024	
4 310-1061 310-1061 29 310-1001 310-9364 310-10033 29 310-10033 310-10033 310-10033 20 718-138 310-10033 310-10033 3 361-9998 305-9973 351-9998 3 305-7470 305-7470 305-7470 3 310-9849 310-996 310-9849 4 310-9849 310-996 310-9849 7 732-139 732-141 732-139 7 732-139 710-148 NONE 8 732-141 700NE NONE 8 732-141 710-106 710-405 7 710-406 NONE 710-405 7 710-106 710-106 710-106 8 351-8998 710-108 710-158 7 710-158 710-158 710-158	746-145	746 198	746-145	746-198	Cable Clin
310-10011 310-10033 310-10033 310-10029 310-10033 310-10033 310-10033 310-10033 310-10033 310-10033 310-10033 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-10098 310-1008 3	910 0564	910 10011	310-0364	910 10011	Handlo—Ilmer
310-10033 310-10033 718-138 718-7072 718-138 361-9998 305-9973 351-9998 310-9849 305-7470 310-9849 310-9849 310-9996 310-9849 901-7627 732-141 732-139 NONE 710-148 NONE NONE 710-106 NONE 710-405 NONE 710-405 710-106 NONE 710-106 351-8998 NONE 710-106 351-8998 NONE 710-106 310-835 710-158 710-158	910-200 4	11001-010	910 10000	11001-016	
718-138 310-9998 310-9998 310-9849 310-148	310-10029	310-10033	510-10029	310-10033	t
351-9998 305-9973 351-9998 305-7470 305-7470 305-7470 310-9849 310-9996 310-9849 901-7627 310-9996 310-9849 901-7627 310-9849 310-9849 901-7627 310-9849 310-9849 NONE 710-148 NONE NONE 712-107 NONE 710-405 NONE 710-405 710-106 NONE 710-106 351-8998 NONE 710-106 710-835 NONE 710-835 710-158 710-158	718-7072	718-138	718-7072	718-138	Grip—Handle
305-7470 305-7470 305-7470 310-9849 310-9996 310-9849 310-9849 310-9949 310-9849 901-7627 901-7627 901-7627 732-139 732-141 732-139 NONE 710-148 NONE NONE 712-107 NONE 394-9966 NONE 710-405 710-405 NONE 710-406 710-106 NONE 710-106 351-8998 NONE 351-8998 710-835 NONE 710-835 710-158 710-158	305-9973	351-9998	305-9973	351-9998	Control Cover or Handle Panel
310-9849 310-9849 901-7627 901-7627 901-7627 901-7627 732-139 70-148 NONE 710-148 NONE 710-106 NONE 712-107 394-9966 NONE 710-405 NONE 710-405 NONE 710-106 NONE 351-8998 710-106 351-8998 710-835 710-158 710-158	305-7470	305-7470	305-7470	305-7470	Knob-Throttle Control†
901-7627 901-7627 901-7627 732-139 732-139 700NE 710-148 NONE NONE NONE NONE 394-9966 710-405 NONE 710-405 NONE 710-106 NONE 710-106 NONE 710-106 NONE 710-106 NONE 710-106 351-8998 710-835 710-158	310-9996	310-9849	310-9996	310-9849	Throttle Control Bracket†
732-139 732-139 NONE NONE NONE 10-106 NONE 394-9966 710-405 710-405 710-106 710-106 351-8998 710-835 NONE 710-106 NONE 710-106 NONE 710-106 351-8998 710-158 710-158	901-7627	901-7627	901-7627	901-7627	Ferrule Ass'y,
NONE 710-148 NONE NONE 710-106 NONE NONE 712-107 NONE 394-9966 NONE 394-9966 710-405 NONE 710-405 710-106 NONE 710-106 351-8998 NONE 710-106 710-835 NONE 710-158 710-158 710-158	732-141	739.139	732-141	732.139	Conduit and Wiret
NONE 710-106 NONE NONE 712-107 NONE 394-9966 NONE 394-9966 710-405 NONE 710-405 712-107 NONE 712-107 710-106 NONE 351-8998 710-835 NONE 710-835 710-158 710-158	710-148	NON	710-148	NONE	Self-Tap Screw No. 8-32 x %" Lg.*
NOME 712-107 NONE 394-9966 NONE 394-9966 710-405 NONE 710-405 712-107 NONE 712-107 710-106 NONE 710-106 351-8998 NONE 351-8998 710-835 NONE 710-835 710-158 710-158	710-106	NONE	710-106	NONE	Hex Hd, Cap Scw. 1/4.20 x 11/4" 1.9.*
394-9966 NONE 394-9966 710-405 NONE 710-405 712-107 NONE 712-107 710-106 S51-8998 710-835 NONE 710-835 710-158 710-158	719.107	NONE	719-107	NONE	Hex Center Locknut 1, 20 Thd *
394-9966 NONE 394-9960 710-405 NONE 710-405 712-107 NONE 710-106 351-8998 NONE 351-8998 710-835 NONE 710-158	TOTAL	NOINE 904 9099	TONON	Sou soo	Knob Handle Polding
710-405 NONE 710-405 712-107 NONE 712-107 710-106 NONE 710-106 351-8998 710-835 NONE 351-8998 710-835 710-158	NONE	394-9966	NONE	394-9966	Commendation of the second of
712-107 NONE 712-107 710-106 NONE 710-106 351-8998 NONE 351-8998 710-835 NONE 710-835 710-158	NONE	710-405	NONE	710-405	Curved Hd. Scw. 5/16-18 x 1/8" Lg.
710-106 NONE 710-106 351-8998 NONE 351-8998 710-835 NONE 710-835 710-158 710-158	NONE	712.107	NONE	712-107	Hex Center Locknut 1/4 - 20 Thd.*
351-8998 NONE 351-8998 710-835 NONE 710-835 710-158 710-158	NONE	710-106	NONE	710-106	Hex Hd. Cap Scw. 14-20 Thd.*
710-835 NONE 710-835 710-158 710-158	NONE	351-8998	NONE	351-8998	Engine Shroud
710-158 710-158	NONE	710-835	NONE	710-835	Self-Tap Scw. Type "A" $\#6 \times 5/16$ " Lg.*
710-158 710-158 710-158					Engine
	710-158	710-158	710-158	710-158	Engine Bolt 5/16-24 x 11/4" Lg.*

PARTS Ref.

shown on the Parts List. For faster service

†Part of throttle control complete. 310-10029 on (110-120-306 and 110-140-306) Part of throttle control complete. 310-10033 on (110-121-306 and 110-141-306) Part of wheel adjustment assembly, 310-9691 L.H. (Complete) and 310-9692 R.H.

44

46 47 48

ASSEMBLY FOR MODELS 110-120 AND 110-140.

Your new mower is shipped completely assembled with the exception of the handle.

- Remove lawn mower and all parts from carton. Make certain that all loose parts and literature are removed from carton before carton is discarded.
- Extend throttle control assembly, which is attached to rear of mower and place on floor. CAUTION: Do not bend or kink control wire.
- A. Snap lower handle into position on two lugs which extend from either side on the rear of the deck.
 - B. Assemble the two upper handle parts with cap screws and locknuts provided in parts bag. The yellow cap screw should be used to attach throttle control assembly to upper handle as shown in diagram. Do not tighten nuts.
 - C. Attach upper handle assembly to lower handle with cap screws and locknuts. Tighten all nuts.
 - D. Secure control wire to lower handle with cable clips.
 - E. Place the plastic control cover over the throttle control and secure with two self-tapping screws.
- 4. Check blade bolts for proper tightness.

OPERATION

NOTE: For shipping purposes your mower is set with the wheels in a low cutting height position. For best results raise the cutting position until it is determined which height is best for your lawn. See adjustments.

- Service engine with gas and oil. See Engine Manual packed with lawn mower for complete instructions for the care and maintenance of engine. Read Directions Carefully.
- 2. When ready to start engine, place throttle control lever, on handle, in "START" position and start engine in accordance with instructions in Engine Manual. After engine starts, move throttle control lever, on handle, to desired engine speed. The engine is stopped by placing control lever on handle in the "STOP" position.
- Be sure that lawn is clear of stones, sticks, wire or other objects which could damage lawn mower or engine. For best results and to insure more even grass distribution, do not mow when lawn is excessively wet.

ADJUSTMENTS

CAUTION: Do not at any time make any adjustment to lawn mower without first stopping engine and disconnecting spark plug wire.

EASY CUTTING HEIGHT—FOR MODELS 110-121 and 141—An adjusting plate and thumb lever at each wheel position provides cutting height adjustment. Each adjusting plate has five holes. Height of cut will be changed when the thumb lever is moved from one hole to another. Simply depress thumb lever towards wheel and move wheel and lever assembly to desired position. Cutting height will be raised as lever is moved toward front and lowered as lever is moved toward rear. All wheels must be positioned in relative height of cut positions.

standard cutting height—for Models 110-120 and 110-140—Adjustment may be made by removing and moving wheel studs to desired position. Cutting heights will be raised as wheel studs are moved to a lower hole and lowered as wheel studs are moved to a higher hole in the deck. All wheel studs must be mounted in a relative position to the deck.

THROTTLE - If adjustment becomes necessary, the throttle control wire assembly can be reset as follows:

 Loosen, but do not remove, screw securing throttle control wire assembly at engine.

- 2. Move throttle control lever on handle to "FAST" position.
- 3. Move lever, to which control wire is fastened at engine, to full open position and retighten screw to secure throttle control wire assembly.

LUBRICATION

IMPORTANT: Always stop engine and disconnect spark plug wire before cleaning, lubricating or doing any kind of work on lawn mower.

WHEELS - Wheel bearings are of lifetime Fortiflex. They require no lubrication.

THROTTLE - Periodically lubricate throttle control lever and throttle wire assembly with a few drops of light oil (S.A.E. No. 10 or 20) for ease of operation.

CUTTING BLADE - The blade may easily be removed for grinding or replacement as follows:

grinding or replacement as follows:

1. Remove bolt and lock washer holding blade and hub

- assembly to engine crankshaft.

 2. Remove blade and hub assembly from engine crankshaft.
- Remove two bolts, lock washers and nuts holding blade to blade hub.

When sharpening blade, follow the original angle of grind as a guide. It is extremely important that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. An unbalanced blade will cause excessive vibration when rotating at high speeds and may cause damage to the mower.

Upon reassembly, make certain all parts are assembled properly and tightened securely.

DECK - The underside of mower deck should be cleaned after each period of use as grass clippings, leaves, dirt and other matter will accumulate. This accumulation of grass clippings, etc., is undesirable as it will invite rust and corrosion and may cause an uneven discharge of grass clippings at the next cutting.

The deck may be cleaned by tilting the mower forward or on its left side and scraping clean with a suitable tool or by washing with a stream of water from a garden hose. **CAUTION:** Do not direct the stream of water at a hotengine as damage to the engine may result.

STORAGE - The following steps should be taken to prepare lawn mower for storage.

- Clean and lubricate mower thoroughly as described in the preceding instructions.
- 2. Refer to Engine Manual for correct engine storage instructions.
- Coat mower's cutting blade with chassis grease to prevent rusting.
- 4. Place blocks under deck to raise tires clear of floor.
- 5. Store mower in a dry clean area.

USING YOUR ROTARY MOWER

For best results do not cut wet grass because it tends to stick to underside of the mower thus preventing proper discharge of grass clippings. If wet grass must be cut reduce engine speed and walking speed to help distribute the clippings more effectively

New grass should be treated as wet grass, otherwise a normal walking speed is about the right pace for efficient mowing.

The best mowing pattern is one that allows the clippings to discharge towards the uncut part of the lawn. This permits recutting of the clippings to further pulverize them. When cutting high weeds, discharge towards cut portion then recut at right angles to first direction.

Lawn should be cut in the fall as long as there is growth.