

# InPressive

Administration Manual  
Version 2.7

December 8, 2008

InPress  
Systems 

## Contents

<b>1</b>	<b>What is the InPressive Style?</b>	<b>4</b>
<b>2</b>	<b>Installation</b>	<b>5</b>
2.1	Where do I get the software.	5
2.2	Prerequisites	5
2.3	Installing the software	5
2.4	Configure WebNative and license	6
<b>3</b>	<b>Configure InPressive.</b>	<b>7</b>
3.1	User settings	7
3.1.1	Creating links.	9
3.1.2	Setup agreement text on login	10
3.2	Themes	11
3.2.1	Create/Edit a Theme	11
3.2.2	Theme Base settings.	13
3.2.3	Theme Logo settings	14
3.2.4	Theme Header settings.	15
3.2.5	Theme Menu settings.	16
3.2.6	Theme Home settings	18
3.2.7	Theme Browse settings.	18
3.2.8	Theme Trailer setting	19
3.2.9	Theme Advanced settings.	20
3.3	Upload logos	22
3.5	ICC-profiles	24
3.6	Changing the name of the basket plugins	25
3.7	Filters	26
3.8	Sort volumes in Toplevel	28
3.9	Customized Header, Trailer, Main html files and CSS files	28
3.9.1	Header, trailer, main or CSS file as a user setting	28
3.9.2	Header, trailer, main or CSS file on a theme.	28
3.9.3	Header, trailer, main or CSS file on a baselayout	29
3.10	Bookmark/Home	30
3.11	Navigation.	31
3.12	Print contact sheet of basket contents	31
3.13	Display files.	32
3.14	InPressive and Dialogue.	33
<b>4</b>	<b>InPressive 2.7 news.</b>	<b>33</b>
4.1	Supported browsers	33
4.2	Global value for number of files	34
4.3	Loading panel	34
4.4	Dynamic Fields	35
<b>5</b>	<b>Advanced customization.</b>	<b>36</b>
5.1	user.js	36
5.2	InPressive Stylesheet guide.	36
5.2.1	Common Classes	36
5.2.2	CSS Faq	37
5.3	Advanced features	38
5.3.1	Advanced search in navigation area.	38
5.3.2	Split keywords into tabs in Imageinfo.	38
5.3.3	Changing "Max. files per page" popup values and default value	38
5.3.4	Open Imageinfo in a popup window	38
5.3.5	Filter keywords per path.	39
5.3.6	Fileinfo in shortdisplay.	39

**Appendix A, InPress Systems Software License . . . . . 40**

- 1. Grant of License . . . . . 40**
- 2. Proprietary Rights . . . . . 40**
- 4. No Other Rights . . . . . 40**
- 5. Term . . . . . 40**
- 6. LIMITED WARRANTY . . . . . 40**
  - a. LIMIT OF LIABILITY . . . . . 41
  - b. Integration. . . . . 41
  - 7. Governing Law . . . . . 41
- 8. Arbitration . . . . . 41**

# InPress Systems InPressive™, WebNative Style Administration Manual

## 1 What is the InPressive Style?

The InPressive Style is a style for Xinet WebNative (and WebNative Venture) that enables a new look and feel as a complement to the shipping variations in the standard product. The InPressive Style also adds a number of new features to the product and make some already built in capabilities of WebNative easier to access.

Some features and “twists” to WebNative are;




1. Toplevel Navigation to browse volumes and folders (Finder and Windows tree).

2. Imageorder is based on WebNative house style.

3. Quarkview/InDesign view based on WebNative house style.

4. Filemanagement based on WebNative house style.

5. Admin tool for setting up the look and feel of WebNative styles.

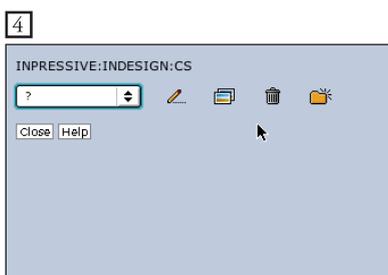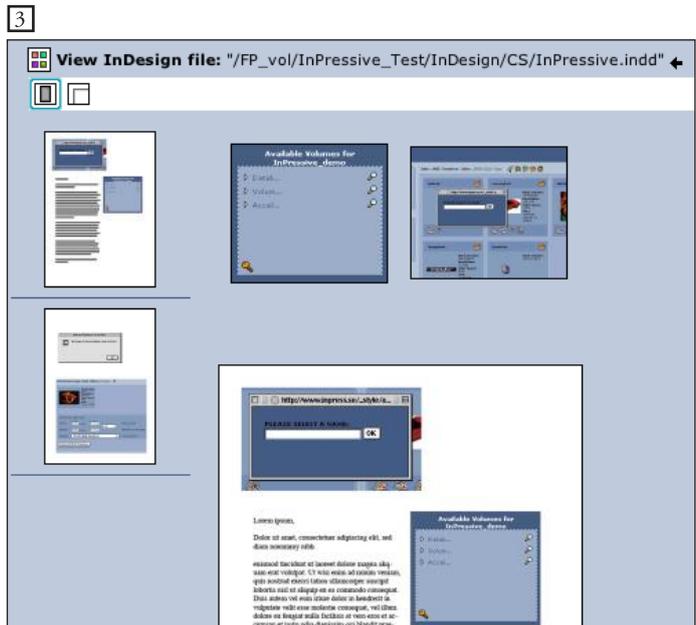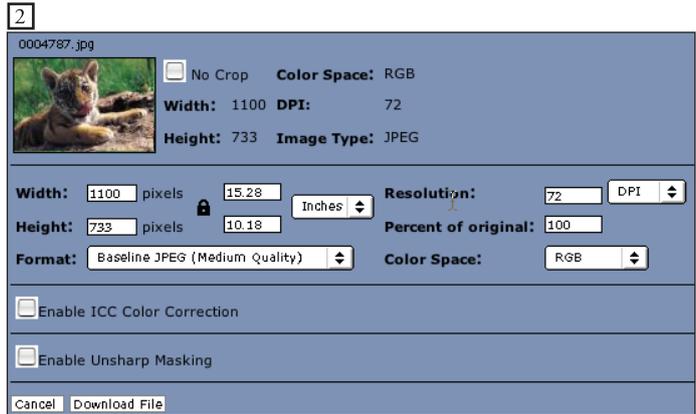

## 2 Installation

### 2.1 Where do I get the software

To get the latest InPressive software, login using your user and password at [www.inpress.se](http://www.inpress.se), select InPressive at the top and download the distribution for the right platform. As an alternative, it can be provided to you from your InPress Systems reseller.

The installation package is a compressed unix tar file named “inpr” followed by the version and platform and ending in “tar.Z”, for example `inpr.2.5.macosx.tar.Z`.

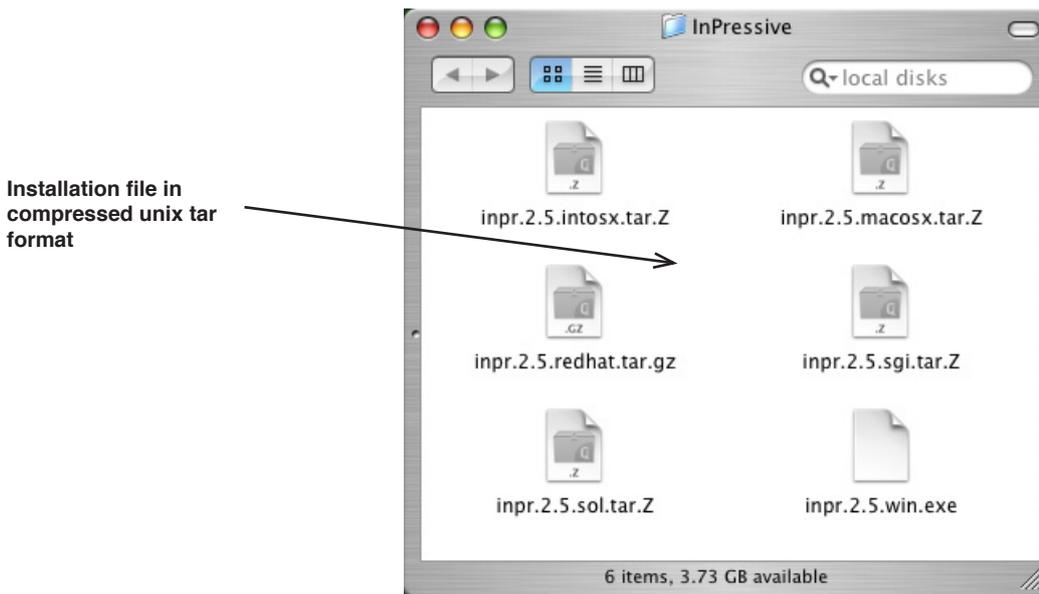


fig 1. InPressive installation files

### 2.2 Prerequisites

- WebNative or WebNative Venture 5.0

The installation procedures below assumes the Xinet software above is installed.

InPressive is available for MacOSX (v 10.3 and 10.4, client or server), MacOSX Intel, Irix (6.5.X), Linux RedHat (ES 3 or 4), Windows 2000 - 2003 and Solaris (7+).

### 2.3 Installing the software

For UNIX and MacOSX: Login as root, place the software in an appropriate installation directory. Uncompress and unpack the package from commandline. You should now have an installation script, `installstyle`, and a directory structure, `inprinst`. The install is made using the installation script and is started by typing `./installstyle` from command line.

On Windows 2000, you just run the exe file and you will be presented with an installation shield.



**IMPORTANT!**

The CSS option must be set to impressive, otherwise it will cause problems with InPressive colours.

Action	Styles
basket	impressive
browse	impressive
css	impressive
icons	impressive
imageinfo	impressive
language	default (classic)
order	impressive
quarkview	impressive
search	impressive
toplevel	impressive
upload	impressive

fig 3. WebNative admin styles tab

### 3 Configure InPressive

To enable InPressive for a WebNative user is to choose the InPressive styles for the user in the WebNative administration gui -> “Styles” tab. In version 2, this can be done with a click in the Styles tab “Use InPressive”, and all the needed styles will be chosen for the user.


The “InPressive Admin” button will redirect you to the InPressive Admin tool. The admin tool can also be found by typing the address; <http://your.address/webnative/plugins/inpradmin>

#### 3.1 User settings

There are two ways getting to the user settings in InPressive. Clicking “InPressive Admin” will take you to the current user that is selected in the user dropdown.

Clicking the “Use InPressive” link will take you to the “Home” area of InPressive admin. To get to the user this way, you have to click the USERS tab and then choose the user you wish to setup.

When clicking modify, you will be taken to a screen to either choose a user setting to copy and apply on the new user, or just start with the default settings. Click the “Configure” button to confirm your choice.

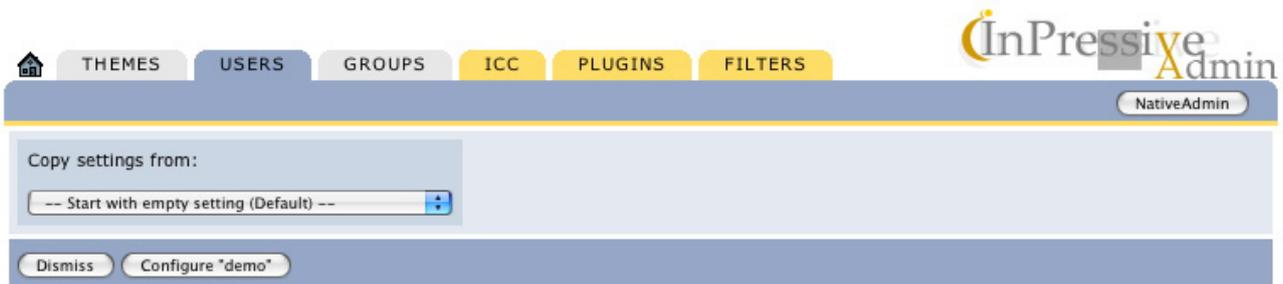

Base settings for the chosen user/group.



Name	Explanation
Theme	Tells you which Theme that is chosen for the user. Click Edit to edit the chosen theme, or click “Add New Theme...” in the dropdown to add a new theme that will apply to current user.
Quicksearch headline text	Definition of the text above the Quicksearch area. Default is “Search All Venture Volumes”, if value is empty. Set value to “none” to remove the headline completely.
Volume headline text	Definition of the text above the volumes. Default is “Available Volumes for [user]”, if value is empty. Set value to “none” to remove the headline completely.
Bookmark headline text	Definition of the text above the bookmarks. Default is “Bookmarks for [user]”, if value is empty. Set value to “none” to remove the headline completely.
Basket headline text	Definition of the text above the basket. Default is “Basket for [user]”, if value is empty. Set value to “none” to remove the headline completely.
Header File URL	Tells you which Header file the user will use. Can be baselayout, theme, user or group setting.
Trailer File URL	Tells you which Trailer file the user will use. Can be baselayout, theme, user or group setting.
Main File URL	Tells you which Main file the user will use. Can be baselayout, theme, user or group setting.
Stylesheet File	Tells you which stylesheet file the user will use. Can be baselayout, theme, user or group setting.

### 3.1.1 Creating links

Create custom links that appear below the volumes in the navigation area. Two different kind of links can be created.

- Link to internal or external webpage.
- Smart link that performs a search on selected criteria.

Links settings for the chosen user/group.

#### Volumes

- ▶ Images (10) 
- ▶ Projects (30) 
- ▣ Canon Camera Files
- ▣ Approved
- ▣ InPress Systems AB

#### Modifying User "demo"

##### Add new Link

Title	Help
URL	/webnativedoc/images/help_page.html
Target	_blank
Text	Click here to see the help pages for this site.
Features	toolbar=no,resizable=no,scrollbars=yes,width=540,height=380

Dismiss

Add new Link

Name	Explanation
Title	Name of the link that will be displayed in the navigate frame
URL	HTML file / Page to be displayed. Explanation how to create "Smart Links" see below.
Target	Where to display the HTML file / Page. _blank will open a popup window. main will display the page in the main area of InPressive.
Text	Tooltip text when doing "mouseover" the link
Features	Features if using popup window. Eg. "toolbar=no,resizable=yes,scrollbars=yes,width=540,height=380".

Creating a "smart" link.

A smart link is basically a way to show a special collection of files when clicking the link. Which files should be visible is decided by the SQL query you specify in the URL field. Here is a couple of examples:

Showing files based on filename pattern. Will show files starting with "\_MG\_".

URL

Showing files based on keyword value.

URL

URL

Press "Add new Link" to add it to the list.

### 3.1.2 Setup agreement text on login

Legal settings for the choosen user/group.

1. Base 2. Links **3. Legal** 4. Override Theme

**Modifying User "demo"**

License agreement Title

License agreement Text

Disagree button Text

Disagree button URL

Agree button Text

Show Agreement at login

Name	Explanation
License agreement Title	Title of Agreement
License agreement Text	Text to be used as Legal text
Disagree button Text	Text on button to Disagree login
Disagree button URL	URL that you will be redirected to if clicking Disagree button
Agree button Text	Text on Agree button
Show Agreement at Login	Controls if Legal text should be used at all

View when logging in the first time after enabling a Legal Text.

**Legal notice**

---

Access to and use of this Web site is subject to the following conditions. Please do not use this Web site unless you agree with these conditions. Images on this site is protected by.....

Override Theme settings for the chosen user/group.

1. Base 2. Links 3. Legal 4. **Override Theme**

**Modifying User "demo"**



**Image Width:** 210px  
**Image Height:** 49px  
theme default setting is used.

Disable header logotype



**Image Width:** 75px  
**Image Height:** 115px  
theme default setting is used.

Disable main logotype

Title

Name	Explanation
Header logo	Changing this logo will affect the user/group you are editing. The logo can also be disabled by clicking the "Disable header logotype" checkbox.
Main logo	Changing this logo will affect the user/group you are editing. The logo can also be disabled by clicking the "Disable main logotype" checkbox.
Title	Will change the "title" of the site to whatever you enter.

## 3.2 Themes

Themes can be used for multiple users or groups. Themes can be created based on existing Themes. For each Theme you will choose a base layout. The differences in the base layouts are basically the frameset, and how files are displayed. For version 2.5, InPressive contains 6 different base layouts. The different base layouts will be described later on. (see chapter xx)

Almost everything is customizable from the THEME tab in InPressive admin.

Colours for fonts and backgrounds, upload new logos, choose height/width for frames, create welcome and download messages, and choose icc, plugin and filter lists for the Theme.

### 3.2.1 Create/Edit a Theme

To add a theme, click the "Add theme" link on the THEMES tab, or click the "Add New Theme..." in the Theme dropdown on the Users base settings page. See figures below.

Add theme from Themes tab.



Add theme from the Users tab.



Supply a name for the Theme you are creating, and choose to copy a existing theme if you want. A default setting will be used if you choose to not copy a existing theme. Click "Add Theme" to create the theme with the name you supplied.

Add a new theme based on defaults or choose a Theme in the "Copy Theme" dropdown.



### 3.2.2 Theme Base settings


The first tab you will be taken to after clicking Modify or creating a new Theme, is the “1. Base” tab. This tab controls the Title of the page, and the base layout of the page. As mentioned in step 3.2, 6 different base layouts comes with InPressive 2.5. Below is a summary of the 6.

Name	Explanation
accelerator	Customized to work as a “storefront” style for Accelerator aBiz. Fully integrated with the Accelerator “ecommerce” style. This base layout have options that enables “Buy” and “Download file” buttons on files . If setting the volume options inside WebNative admin to allow “Download All Files”, a download button will appear on all image files (not Accelerator templates). If turning on “Custom Image Order”, a “Buy” button will appear on all image files. Accelerator templates will get the “Buy” button automatically.
browse	Classic frameset with the navigate function shipped with InPressive 2.0.
browse_morespace	Identical to “browse” except from that in this one the header appears above the navigate frame(small header), the trailer is removed to save some space.
classic	Original InPressive v1.3 look and feel.
classic_morespace	Identical to “browse_morespace” except from that this one uses the v1.3 volumes, bookmarks and basket.
stockphoto	Designed for image ordering. Dropdown menus displaying the volumes and folders.

#### Edit the Base settings

1. **Base** 2. Logos 3. Header 4. Menu 5. Home 6. Browse 7. Advanced

**Modifying Theme "demo\_theme"**

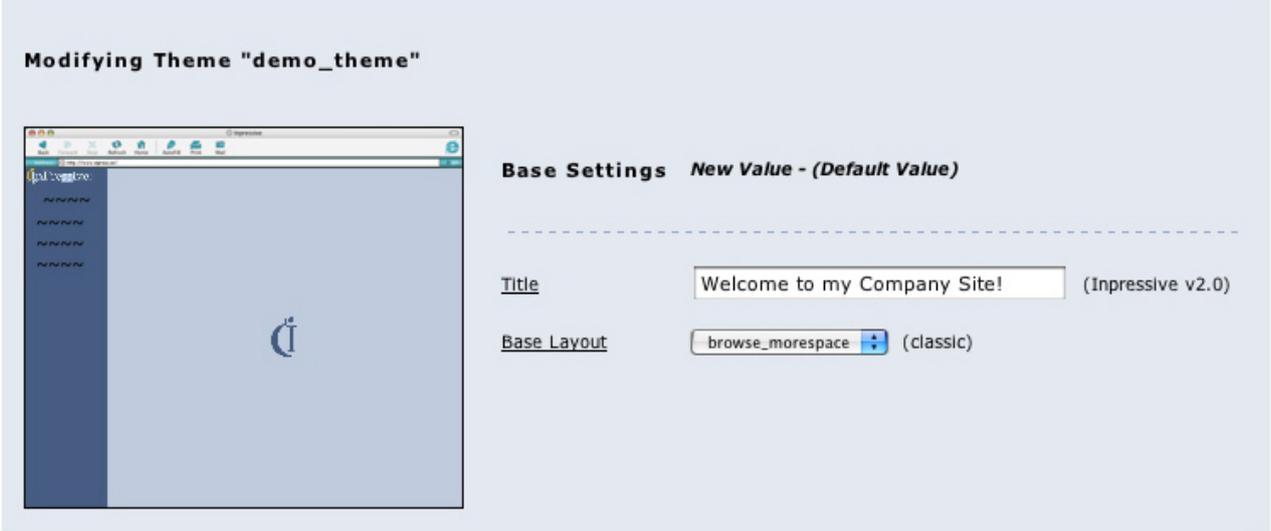

Base Settings	New Value - (Default Value)
<u>Title</u>	Welcome to my Company Site! (Inpressive v2.0)
<u>Base Layout</u>	browse_morespace (classic)

Dismiss Save changes Save and Proceed >>

Name	Explanation
Title	Site title. In most browsers this appears in the top of the browser window. This setting can be overridden by the user/group setting
Base Layout	The basic layout of the site. See descriptions above.

### 3.2.3 Theme Logo settings

Currently chosen logos for the Theme. Upload your own logos, see section “Upload logos”.

**Logos Settings**

---



**Image Width:** 210px  
**Image Height:** 49px  
theme default setting is used.

Disable header logotype



**Image Width:** 75px  
**Image Height:** 115px  
theme default setting is used.

Disable main logotype

Name	Explanation
Header logo Main logo	These are the current logos for this Theme. You can see if it is the default setting or if it is logos that are uploaded for this Theme. Image Width and Image Height shows the dimensions of the logo. Checking the “Disable checkbox” will hide the logos from displaying. See section “Upload logos” on how to upload your own logos and which formats that are supported.

### 3.2.4 Theme Header settings

Edit the header settings

<b>Header Settings</b>	<b>New Value - (Default Value)</b>
Height	<input type="text"/> (70) px <i>Logotype Height: 40px</i>
Header(and Trailer) color	<input type="text"/> (#F4F4F4)
Trailer color	<input type="text"/>


Name	Explanation
Height	Set the Header height in pixels. Use value "0" to remove it completely. Logotype Height shows the height of the current logo that is chosen in the "Logos" settings.
Header(and Trailer) color	Header and Trailer background color. Color codes as "#FFFF00", color names as "green" can be used.
Trailer color	If set, this will be used for Trailer color instead of "Header(and Trailer) color".

### 3.2.5 Theme Menu settings

The menu settings may differ between base layouts. Below is a listing on the different menu options for the base layouts.

1. Base 2. Logos 3. Header **4. Menu** 5. Home 6. Browse 7. Advanced

**Modifying Theme "demo\_theme"**

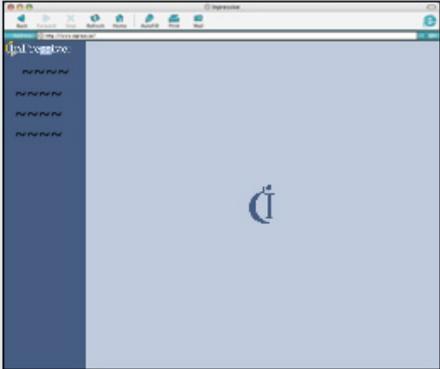

**Menu Settings** **New Value - (Default Value)**

---

Width  (240) px  
*Logotype Width: 210px + 10px margin*

Color  (#455C81)

Font Color  (black)

**Advanced Settings**

---

Headline Font Color

*Defaults to "Font Color"*

List Color

*Defaults to "Color"*

Mouse Over Color

*Defaults to "List Color"*

---

Enable Classic Volumes

Enable Quicksearch

Hide Bookmarks

Hide Search Icon

Dismiss Save changes Save and Proceed >>

Following settings are available in the "browse" and "browse\_morespace" base layouts.

Name	Explanation
Width	Set the Menu width in pixels. Use value "0" to remove it completely.
Color	Set menu background color.
Font Color	Font color in menu. Available in all base layouts.
Headline Font Color	Font color for headlines, If this is not set, it will inherit the "Font Color" value.
List Color	Background color for volumes, bookmarks and basket files. If this is not set, it will inherit the "Color" value.
Mouse Over Color	Row background in volumes, bookmarks, basket files when moving the mouse over the name.
Enable Classic Volumes	Will turn off the "tree-navigation". Available in all base layouts.

Name	Explanation
Enable Quicksearch	Adds a search field in the left frame. Will search all database fields, filenames and the comment field.
Hide Bookmarks	Hides the bookmark feature in the left frame, and it will also hide the "home" icon in the browse style.
Hide Search Icon	Hides the search icon behind the volume and folder names.

Following settings are available in the "classic" and "classic\_morespace" base layouts.

Name	Explanation
Width	Set the Menu width in pixels. Use value "0" to remove it completely.
Volume Height	Set the Volume height in pixels. Use value "0" to remove it completely.
Bookmark Height	Set the Bookmark height in pixels. Use value "0" to remove it completely.
Basket Height	Set the Basket height in pixels. Use value "0" to remove it completely.
Color	Set menu background color.
Font Color	Font color in menu. Available in all base layouts.
Headline Font Color	Font color for headlines, If this is not set, it will inherit the "Font Color" value.
List Color	Background color for volumes, bookmarks and basket files. If this is not set, it will inherit the "Color" value.
Mouse Over Color	Row background in volumes, bookmarks, basket files when moving the mouse over the name.
Enable Classic Volumes	Will turn off the "tree-navigation". Available in all base layouts.
Enable Quicksearch	Adds a search field in the left frame. Will search all database fields, filenames and the comment field.
Hide Bookmarks	Hides the bookmark feature in the left frame, and it will also hide the "home" icon in the browse style.
Hide Search Icon	Hides the search icon behind the volume and folder names.

Following settings are available in the "accelerator" base layout.

Name	Explanation
Width	Set the Menu width in pixels. Use value "0" to remove it completely.
Color	Set menu background color.
Font Color	Font color in menu. Available in all base layouts.
Headline Font Color	Font color for headlines, If this is not set, it will inherit the "Font Color" value.
Navigate headline background	
Navigate links background	
Navigate sublinks background	
Navigate selected links background	


Following settings are available in the "stockphoto" base layout.

Name	Explanation
Height	Set the Menu Height in pixels.
Color	Set menu background color.
Enable Quicksearch	Adds a search field in the left frame. Will search all database fields, filenames and the comment field.

### 3.2.6 Theme Home settings

1. Base 2. Logos 3. Header 4. Menu **5. Home** 6. Browse 7. Advanced

**Modifying Theme "demo\_theme"**

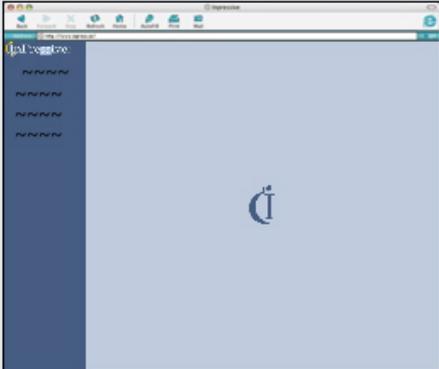


Home Settings	New Value - (Default Value)
Color	<input type="text" value="#BFCBDD"/> (#BFCBDD)
Message Headline	<input type="text"/>
Message Text	<input type="text"/>

Name	Explanation
Color	Desktop background color.
Message Headline	Headline text for message appearing in the default home page.
Message Text	Message appearing in the default home page.

### 3.2.7 Theme Browse settings

1. Base 2. Logos 3. Header 4. Menu 5. Home **6. Browse** 7. Advanced

**Modifying Theme "demo\_theme"**

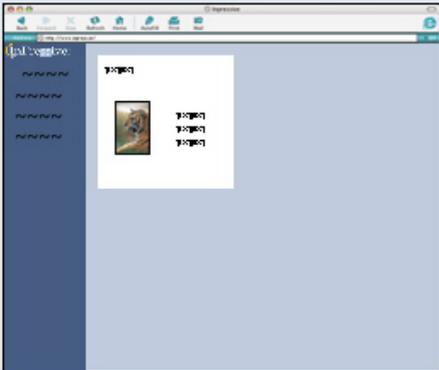

Browse Settings	New Value - (Default Value)
Color	<input type="text" value="#BFCBDD"/> (#BFCBDD)
Font Color	<input type="text" value="black"/> (black)
File Color	<input type="text" value="white"/> (white)


Advanced Settings	New Value - (Default Value)
Desktop Color	<input type="text"/> Defaults to "Color"
File Stripe Color	<input type="text"/> Defaults to "File Color"

Name	Explanation
Color	Desktop background color.
Font Color	Desktop font color.
File Color	Background color of the box that surrounding file, fileinfo etc.
Desktop Color	Background color of the table surrounding files, folders etc.
File Stripe Color	Filename, icons background color.

### 3.2.8 Theme Trailer setting

1. Base 2. Logos 3. Header 4. Menu 5. Home 6. Browse **7. Trailer** 8. Advanced

**Modifying Theme "demo\_theme"**

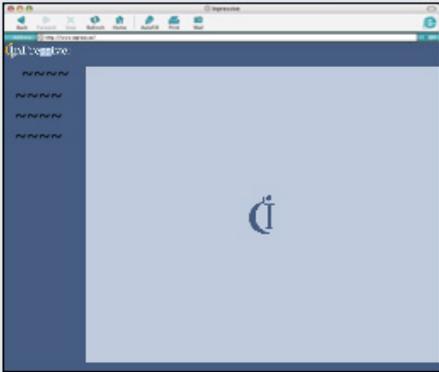

**Trailer Settings**      *New Value - (Default Value)*

---

Height  (25) px


Header and Trailer color  (#455C81)

Name	Explanation
Height	Set the Trailer height in pixels. Use value "0" to remove it completely.
Header and Trailer Color	Header and Trailer background color. Color codes as "#FFFF00", color names as "green" can be used.


### 3.2.9 Theme Advanced settings

Max number of chars in directory names	<input type="text" value=""/>	(50)
Filename database ID	<input type="text" value="127"/>	
<u>Max number of chars in Plugin names</u>	<input type="text" value=""/>	(30)
<u>Volumes, bookmarks, basket Max chars</u>	<input type="text" value=""/>	(20)
Login alert message	<input type="text"/>	
Login popup window (URL)	<input type="text"/>	
<u>Login popup window (features)</u>	<input type="text"/>	
Confirm Download Highres Text	<input type="text"/>	
Confirm Download FPO Text	<input type="text"/>	
Confirm Order text	<input type="text" value="Testar diç ½tta!"/>	
Confirm Add to Basket Text	<input type="text"/>	
<hr/>		
ICC Profile list	<input type="text" value="-"/>	[Edit]
Plugin list	<input type="text" value="-"/>	[Edit]
Filter list	<input type="text" value="-"/>	[Edit]
<hr/>		
Enable Realtime Image	<input checked="" type="checkbox"/>	
<hr/>		
<u>Dialogue connection</u>	<input type="text"/>	
<u>Dialogue Base path</u>	<input type="text"/>	
<u>Dialogue window features</u>	<input type="text"/>	
<u>Second Dialogue connection</u>	<input type="text"/>	
<hr/>		
<u>Hide Color Palette</u>	<input checked="" type="checkbox"/>	
<hr/>		
Let user add popup values to DB in Imageinfo	<input checked="" type="checkbox"/>	
<hr/>		
<u>Thumbnail Size</u>	<input type="text" value=""/>	px


Name	Explanation
Max number of chars in filenames	If a filename is longer than this value, it will be cut of. “...” will be added at the end.
Max number of chars in directory names	If a directory name is longer than this value, it will be cut of. “...” will be added at the end.

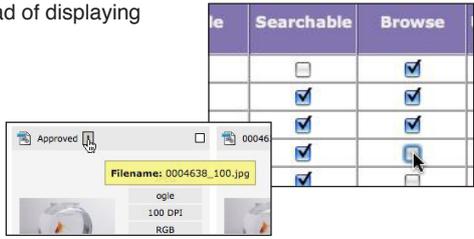Name	Explanation
Filename database ID	<p>ID of Venture database field that you want to use instead of displaying the filename.</p> <p>NB! You need to check the "Browse" checkbox in users permset(Webnative Admin) if this should work.</p> <p>The original filename will be visible if hover the icon beside the filename.</p> 
Max number of chars in Plugin names	If a plugin name is longer than this value, it will be cut of. "..." will be added at the end.
Volumes, bookmarks, basket Max chars	If names in Volumes, Bookmark and Basket are longer than this value, it will be cut of. "..." will be added at the end.
Login alert message	This message appears when a user has logged in and InPressive is loading.
Login popup window (URL)	A URL to a website e.g. "http://www.inpress.se", or a local adress as "/webnatedoc/user/MyPage.html"
Login popup window (features)	Features for this window. Use this as a template: "toolbar=no,resizable=yes,scrollbars=yes,width=540,height=380".
Confirm Download High-res Text	Text in confirm dialog when downloading highres.
Confirm Order text	Text in confirm dialog when downloading file from imageorder.
ICC Profile list	Select ICC Profile list to use for selected theme.
Plugin list	Select Plugin list to use for selected theme.
Filter list	Select Filter list to use for selected theme.
Enable Realtime Image	Enable Realtime Image for selected Theme.
Dialogue connection	Connection string to Dialogue. See section 3.14 for details. This is an example: http://server.com:8080/Dialog/jsp/externView.jsp?login=john&password=mypass
Dialogue Base path	Base path depending on Dialogue "Document Root Folder" setup. See section 3.14 for details.
Dialogue window features	Features for this window. See section 3.14 for details. Use this as a template: width=640,height=480,menubar=no,toolbar=no,location=no,scrolling=no,status=no,resizable=yes
Hide Color Palette	Hide Color Palette when viewing image preview.
Let user add popup values to DB in Imageinfo	A user that have access to database fields that are POPUP fields, and the Venture permset for the user is NOT locked, a user can add values to a existing popup.
Thumbnail Size	Size of the largest side on the thumbnail in Browse, Search etc. Only documents with a large preview will be affected.


### 3.3 Upload logos

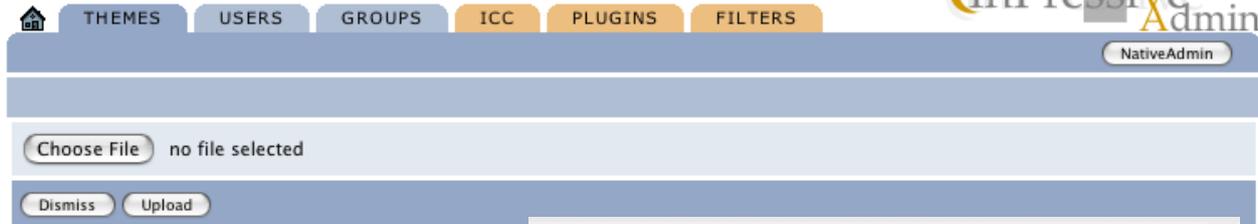


In Themes, Users and Groups, it's possible to upload your own logos. Make sure they are either jpeg or gif formatted. Click "Choose File"...  
...choose a logo from your computer...

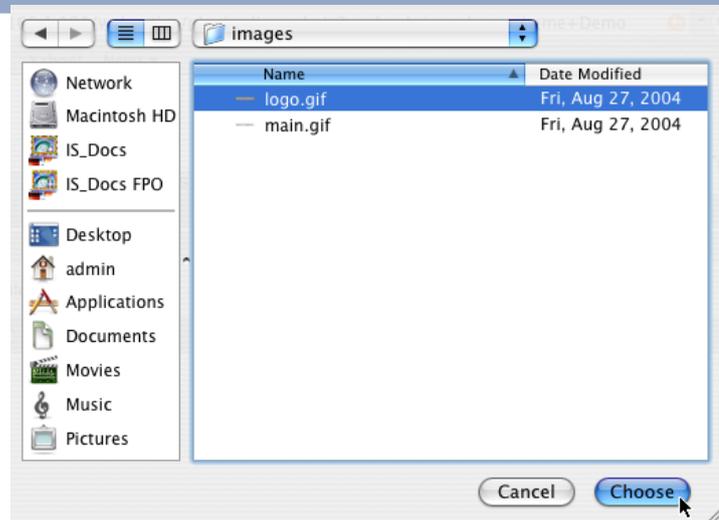


And then click “Upload”...

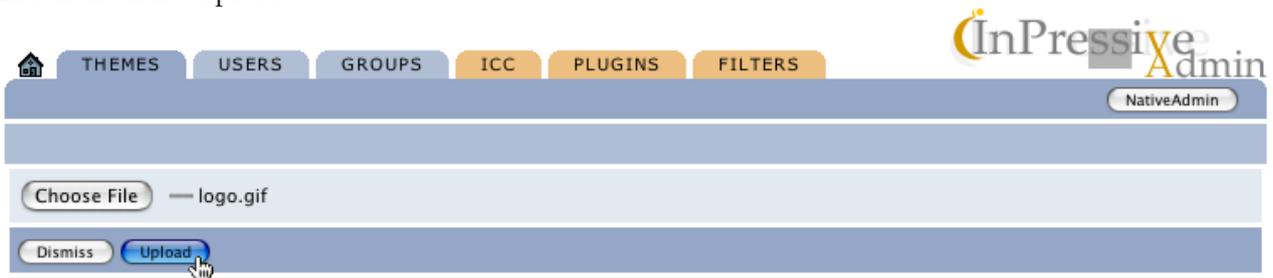

...to choose the file, click “Use this image”.

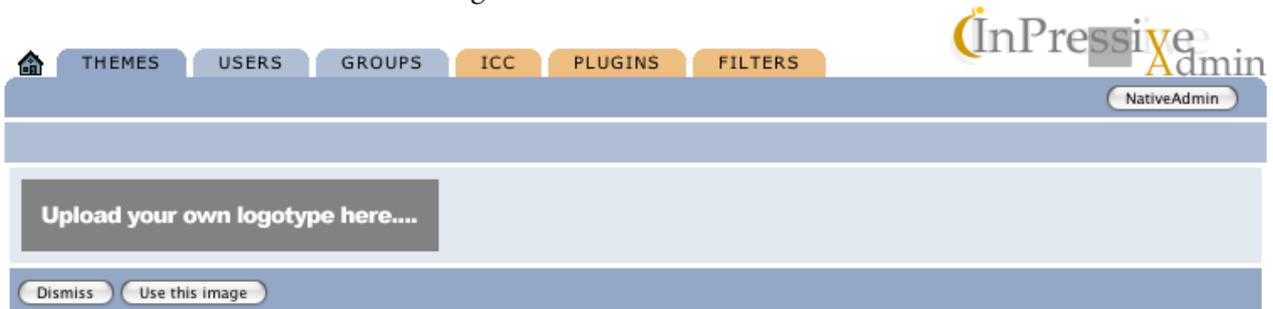

And now you will see your logo in the Logos page.

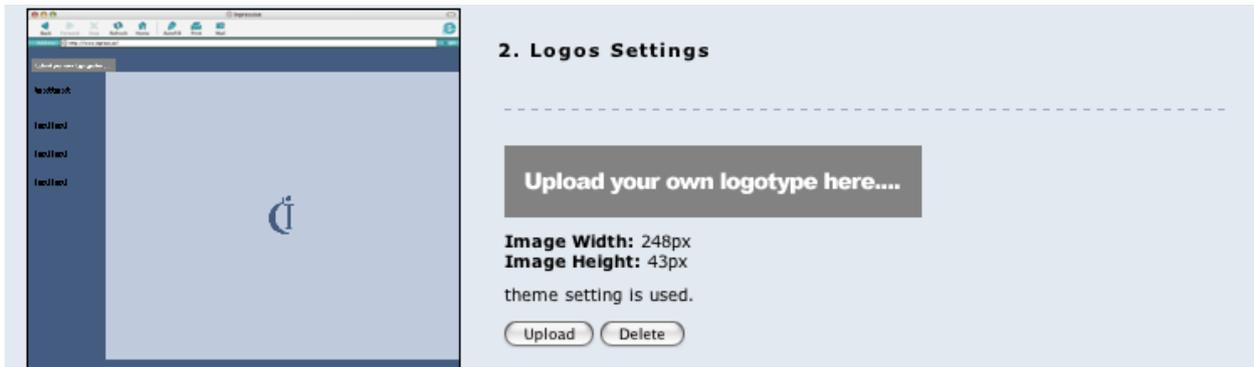


### 3.5 ICC-profiles


InPressive allows you to set up use of ICC-profiles when ordering images through the image order utility. To do so you have to define which profiles to use, what the selections should be displayed as and what color spaces the output will be when the profiles are used.

The first thing you need to do is to define a list with ICC Profiles, then apply this list to Themes that should use this ICC Profiles. This is how you do it.


Click “Add ICC Profile list”

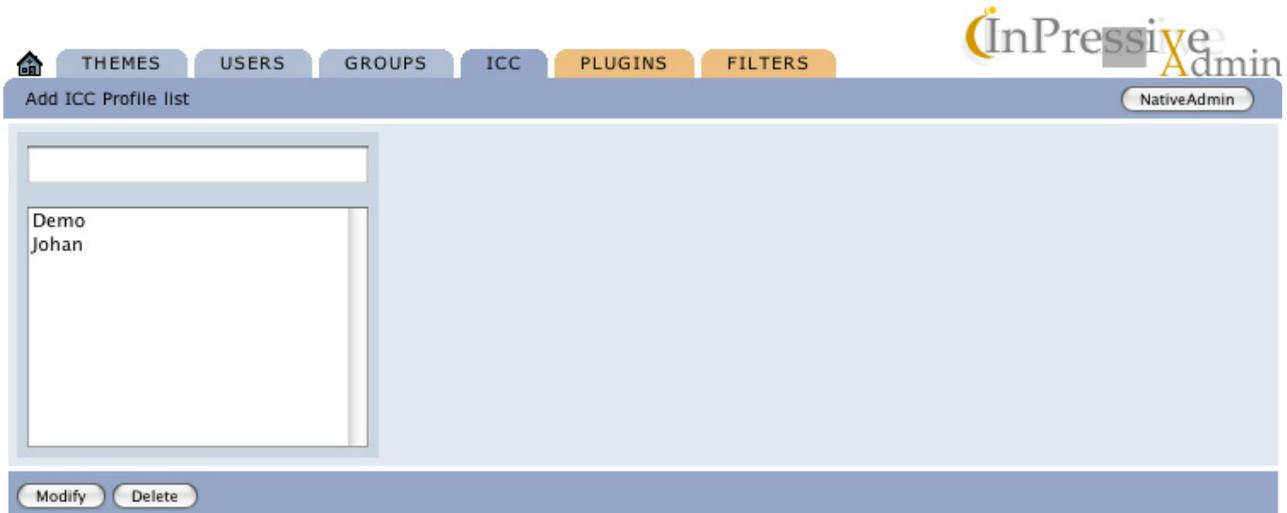

Choose a name for the profile list, or copy a existing list if you want.

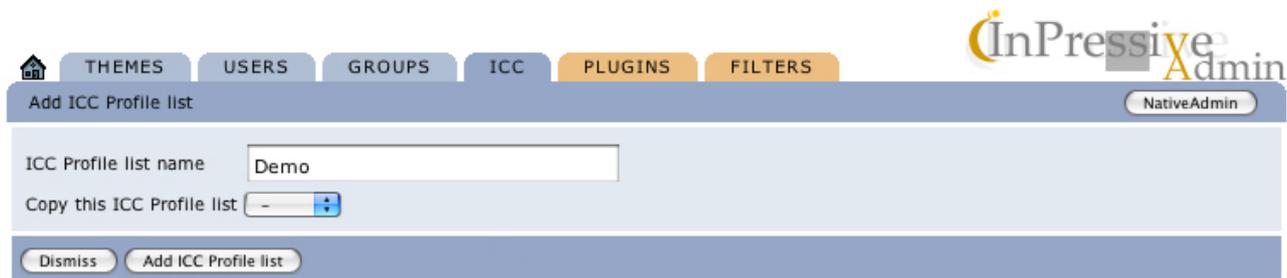


Choose a profile to add to the list, and rename it. Click “Save changes” to save the profile to the list.

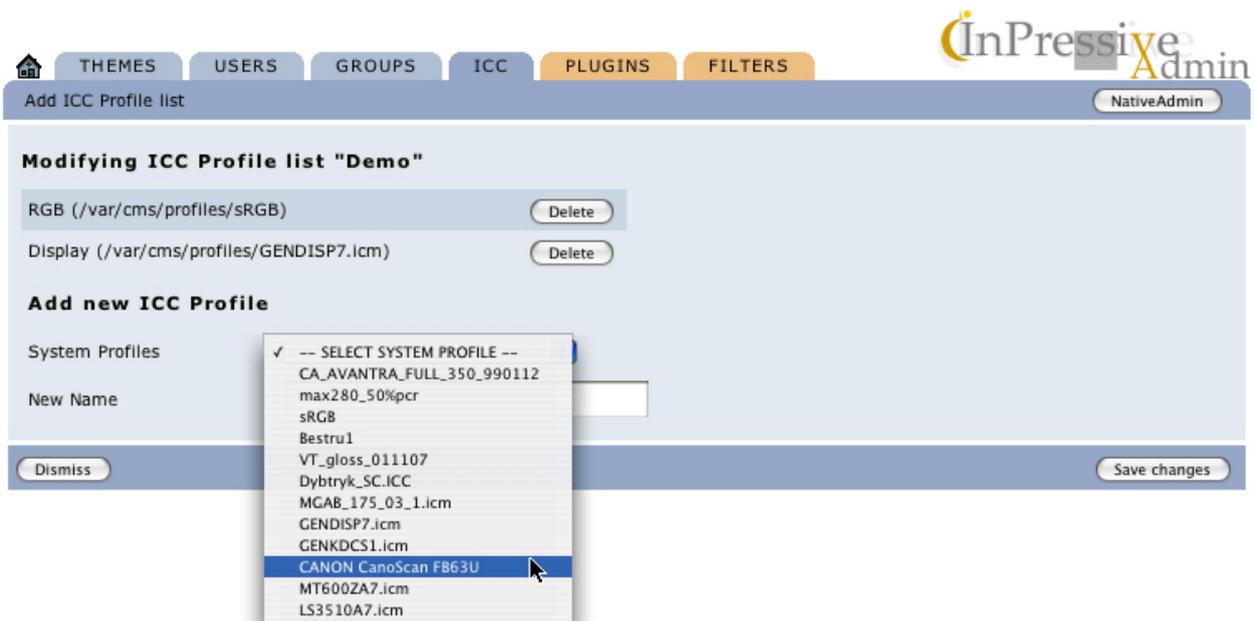


### 3.6 Changing the name of the basket plugins


Click “Add Plugin List” to add a new list. Click “Modify” to edit a existing list.

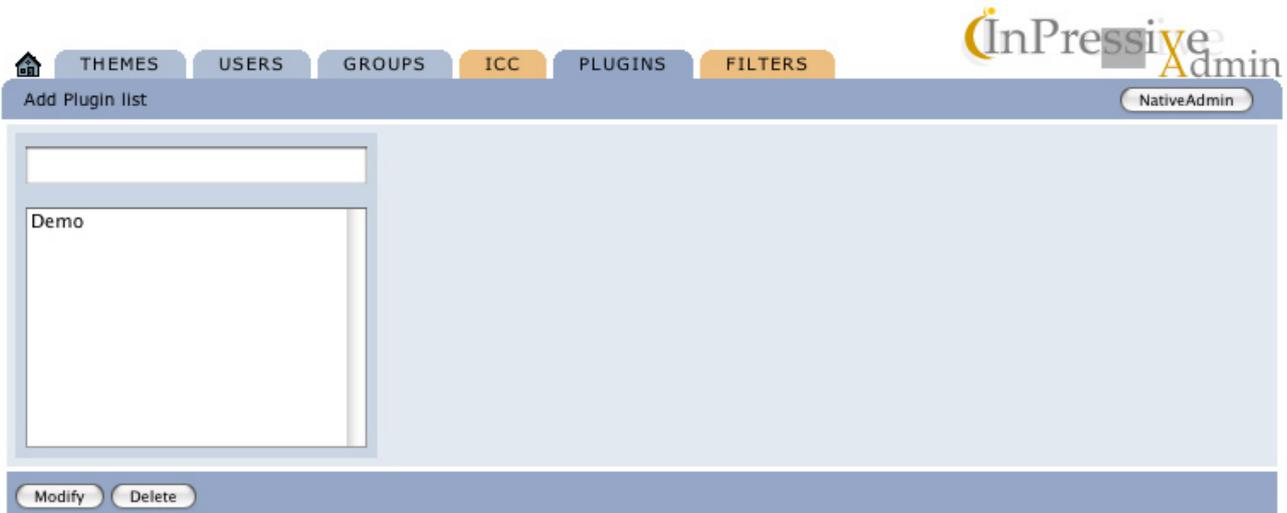

Choose a name for the Plugin list, and click “Add Plugins List”.

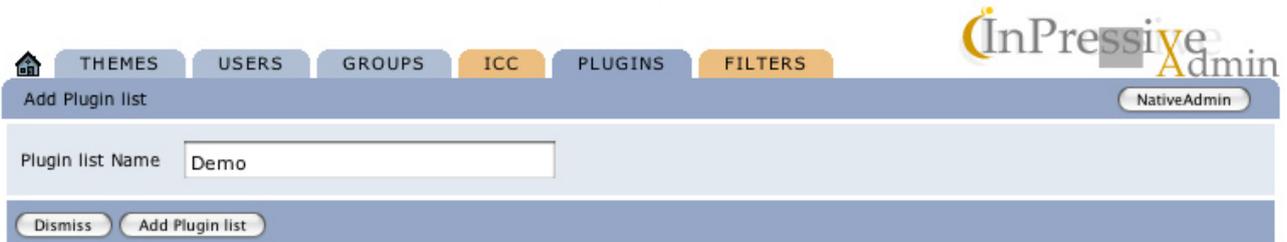

Choose a plugin to rename...

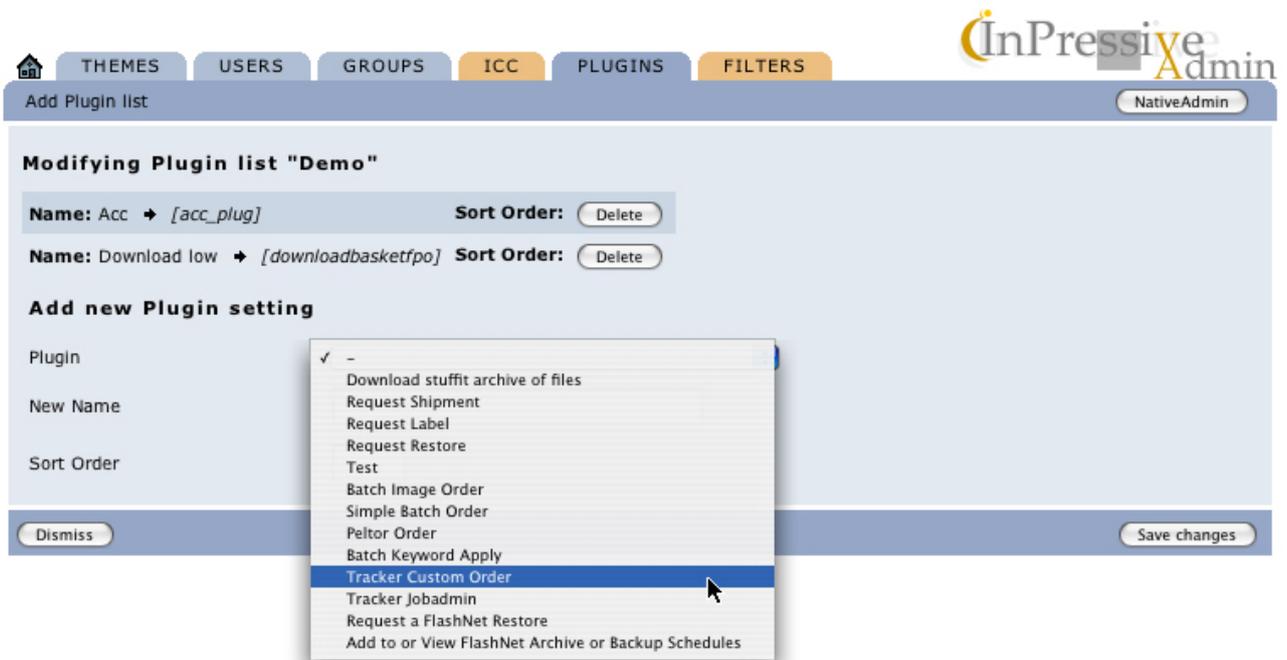


...rename it and click “Save changes” to add the Plugin to the Plugin list.




### 3.7 Filters


Click “Add Filter list” to create a new list, or click “Modify” to edit a existing list.

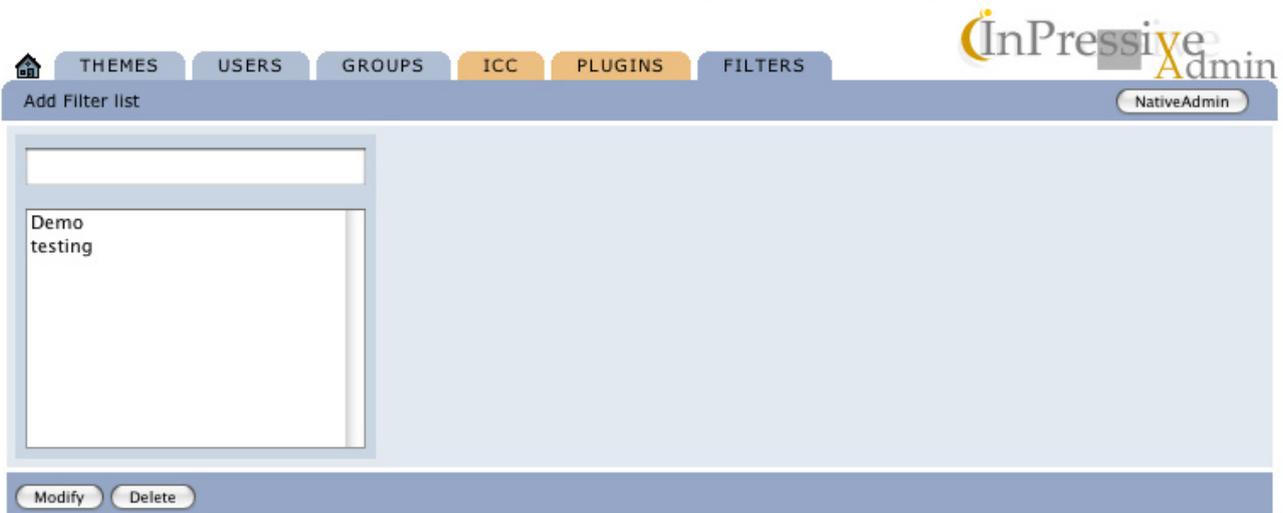


Choose a name for the Filter list, or copy a existing if you want. Click “Add Filter List” to create it.

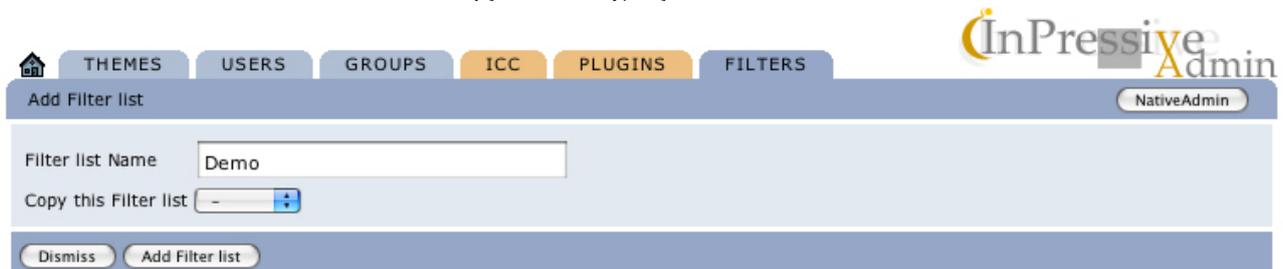


Enter a pattern e.g. “•”. All files and folders that have a “•” in the filename will be hidden.

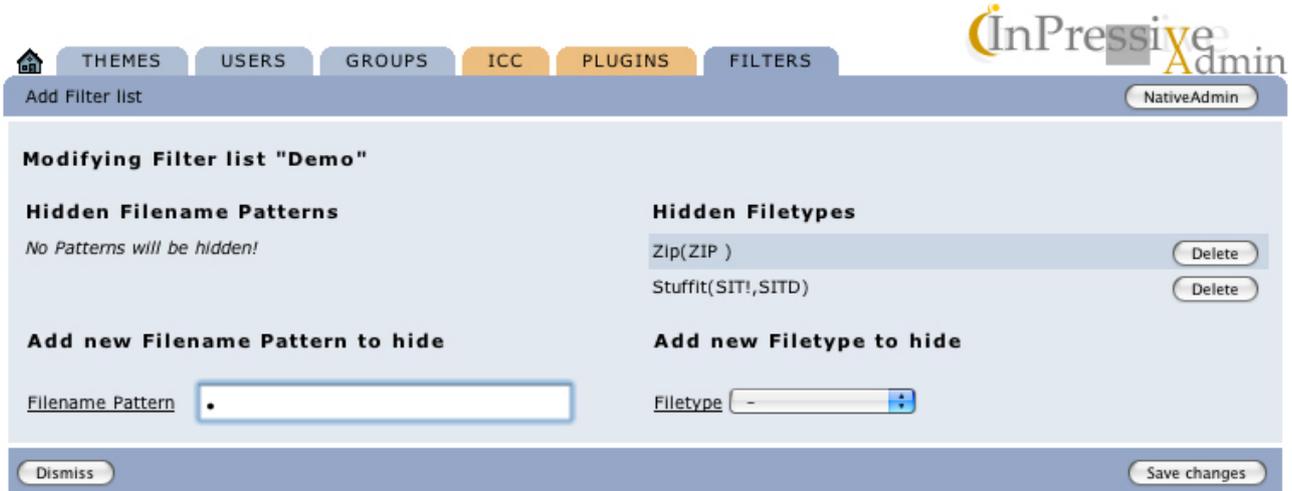


...click “Save changes” to save the pattern to your Filter list.

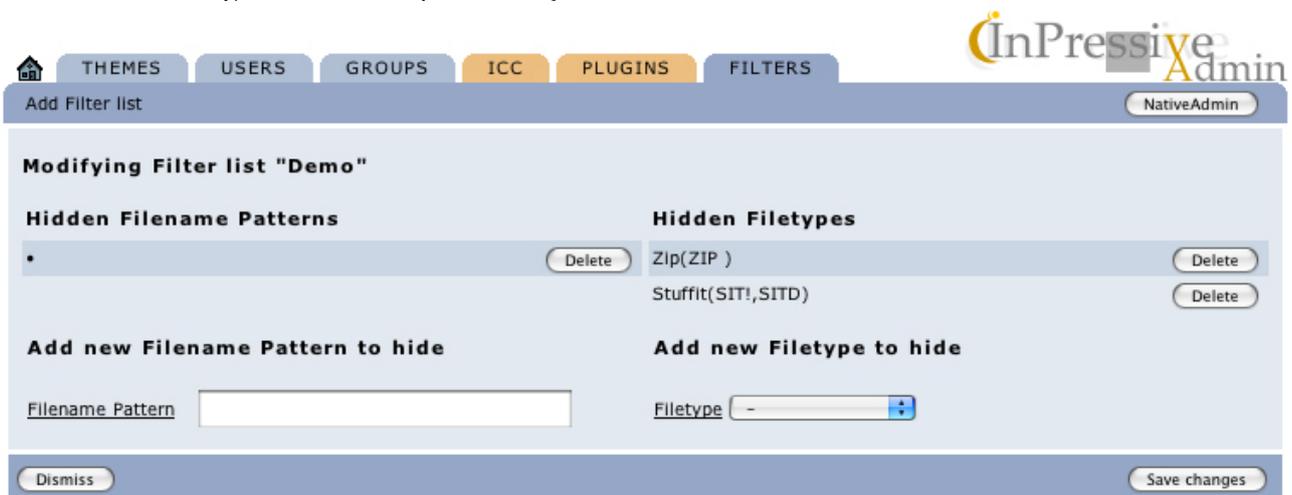

Choose a filetype to hide...

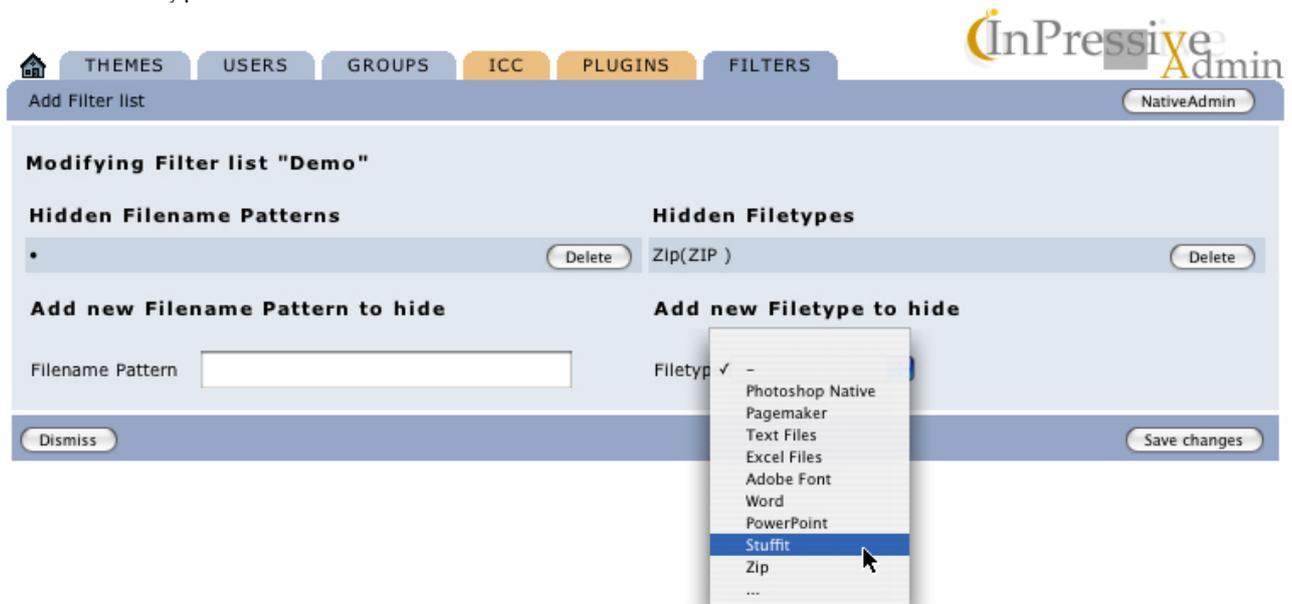


...click "Save changes" to add it to your Filter list.

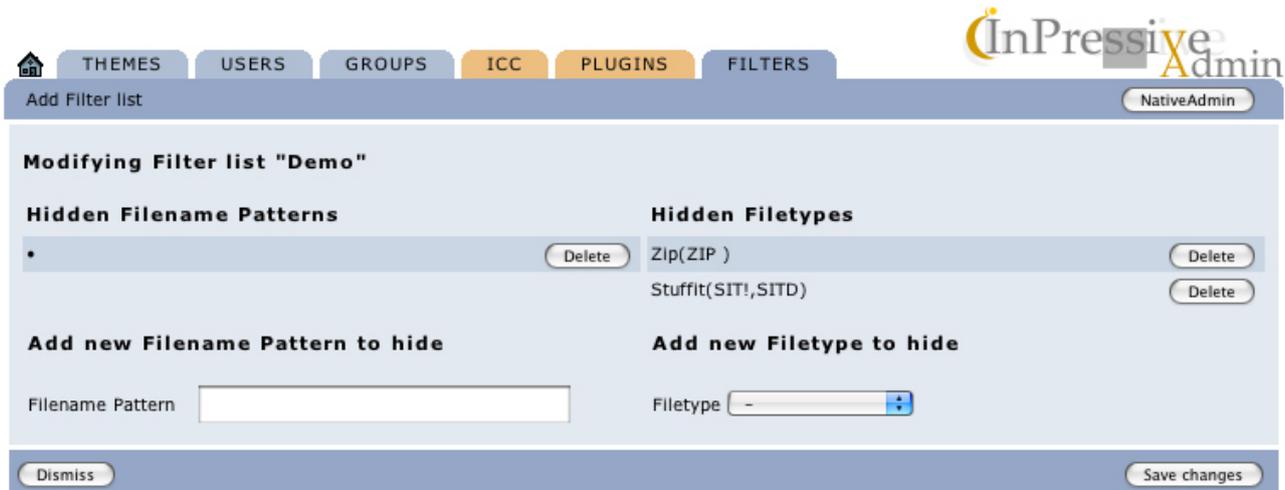

ATTENTION! The way IPS filters the files is not a totally safe solution. Someone with knowledge of html and javascript could by looking at the javascript source figure out how to get to the filtered files.

### 3.8 Sort volumes in Toplevel

Volumes named with a number will create a sorted volume list. If a volume is created without a number, it will be hidden if the others are numbered. The number will be filtered away when displaying it in the list.

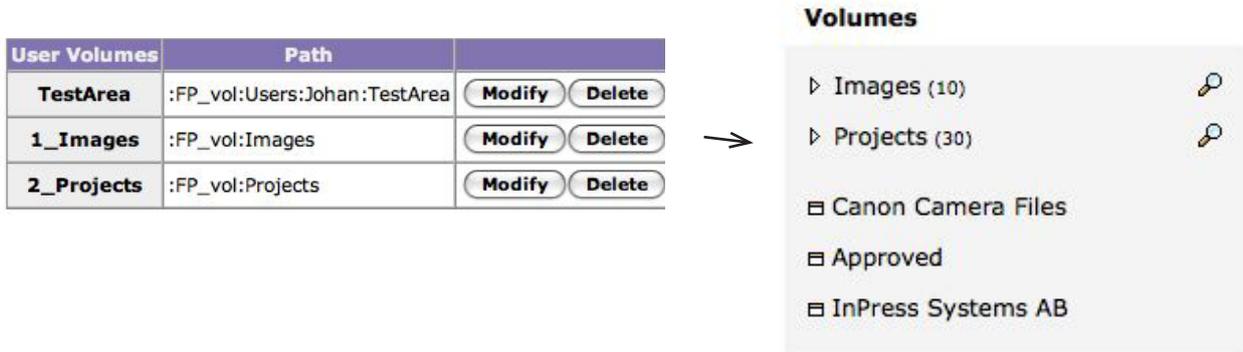

### 3.9 Customized Header, Trailer, Main html files and CSS files

To make customized Header, Trailer and Main html files, you need to name them correct, and put them at the correct place on the server. This customization can be done on the User, Theme or the Baselay-out.

#### 3.9.1 Header, trailer, main or CSS file as a user setting

The header file must be called "inpr\_header.html" and lives in the users WebNative folder on the server. The trailer file must be called "inpr\_trailer.html" and lives in the users WebNative folder on the server. The main file must be called "inpr\_main.html" and lives in the users WebNative folder on the server. The CSS file must be called "inpr\_styles.css" and lives in the users WebNative folder on the server.

User directories on your server:

SGI, Solaris, Linux and MacOSX: /var/adm/webnative/USERNAME

NT/Win2000 C:/Program Files/Xinet/WebNative/Admin/USERNAME

#### 3.9.2 Header, trailer, main or CSS file on a theme

The header file must be called “inpr\_header.html” and be added to directory below.  
 The trailer file must be called “inpr\_trailer.html” and be added to directory below.  
 The main file must be called “inpr\_main.html” and be added to directory below.  
 The CSS file must be called “inpr\_styles.css” and be added to the directory below.

SGI, Solaris, Linux and MacOSX: /var/adm/webnative/inprstyle/themes/THEMENAME  
 NT/Win2000 C:/Program Files/Xinet/WebNative/Admin/inprstyle/themes/THEMENAME

### 3.9.3 Header, trailer, main or CSS file on a baselayout

The header file must be called “inpr\_header.html” and be added to directory below.  
 The trailer file must be called “inpr\_trailer.html” and be added to directory below.  
 The main file must be called “inpr\_main.html” and be added to directory below.  
 The CSS file must be called “inpr\_styles.css” and be added to the directory below.

SGI, Solaris, Linux and MacOSX: /var/adm/webnative/inprstyle/base/BASELAYOUTNAME  
 NT/Win2000 C:/Program Files/Xinet/WebNative/Admin/inprstyle/base/BASELAYOUTNAME




Name	Explanation
Header File URL	Indicates that the user have a header file in the base layout folder.
Trailer File URL	Indicates that the user have a trailer file in the theme folder.
Main File URL	Indicates that the user have a customized main file in the home directory of WebNative.
Stylesheet File	Indicates that the theme CSS file will be used.

### 3.10 Bookmark/Home

#### Bookmark

You can set bookmarks to folders for easy access with one click.

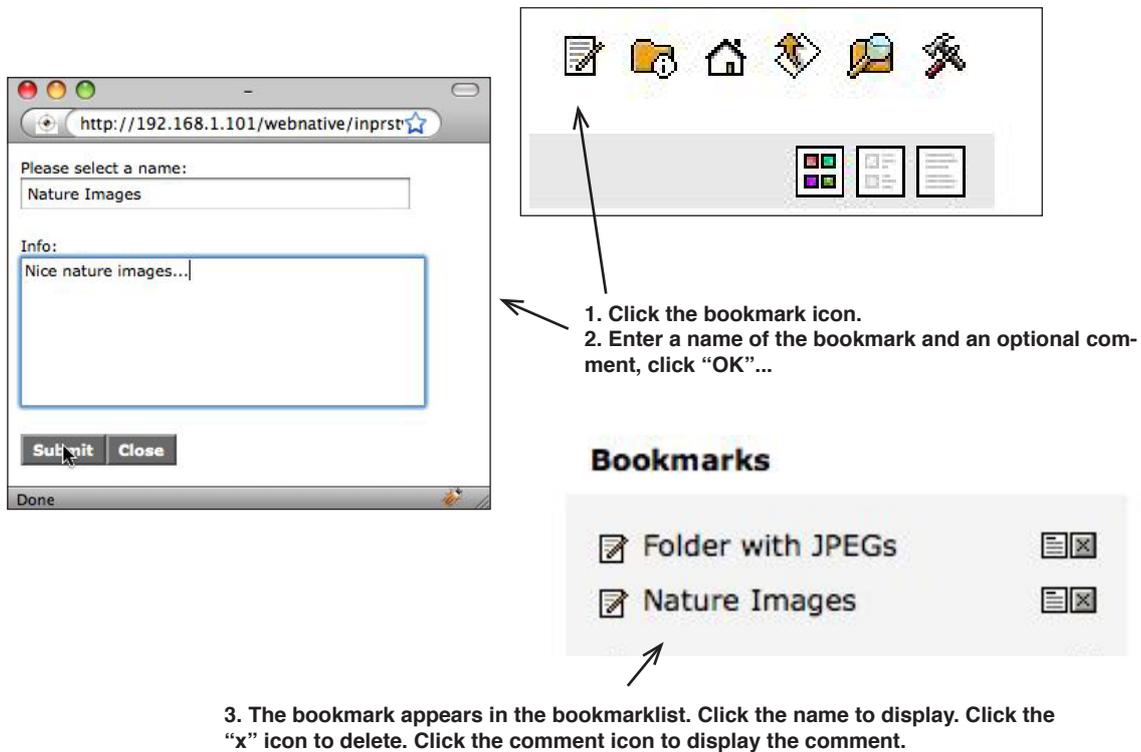

The image shows a browser window with a bookmark creation dialog. The dialog has a text input field with "Nature Images" and a larger text area with "Nice nature images...". Below are "Submit" and "Close" buttons. To the right, a toolbar contains icons for a document, folder, home, folder with magnifying glass, folder with padlock, and folder with key. Below the toolbar are three document icons. An arrow points from the document icon to the dialog. Below the dialog, a "Bookmarks" list shows "Folder with JPEGs" and "Nature Images", each with a comment icon and a delete icon. An arrow points from the "Nature Images" entry to the dialog. Below the list, text explains the actions for each icon.

1. Click the bookmark icon.  
2. Enter a name of the bookmark and an optional comment, click "OK"...


**Bookmarks**

- Folder with JPEGs
- Nature Images

3. The bookmark appears in the bookmarklist. Click the name to display. Click the "x" icon to delete. Click the comment icon to display the comment.

#### Home

You can setup a home folder that will load when the user accesses the account. Click the Home icon to autoload the current folder upon next login.

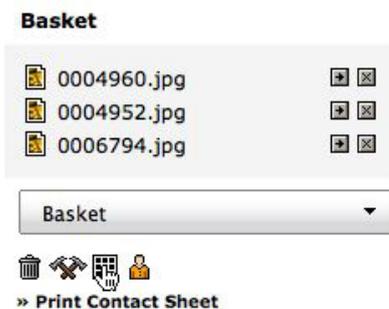


The image shows a "Basket" section with a list of files: "0004960.jpg", "0004952.jpg", and "0006794.jpg". Each file has a download icon and a delete icon. Below the list is a dropdown menu labeled "Basket". At the bottom, there are icons for a trash can, a folder with magnifying glass, a folder with padlock, and a folder with key, followed by a link: "» Print Contact Sheet".

### 3.11 Navigation

New for version 2.0 was the Navigation tool. The base layouts “browse” and “browse\_morespace” contain a Navigation frame which lets you navigate through Volumes and folders as you can do in Finder and Windows Explorer.

This is how it works;


Click the volume/foldername to browse it, or, click the arrow to the left of the volume/foldername to...

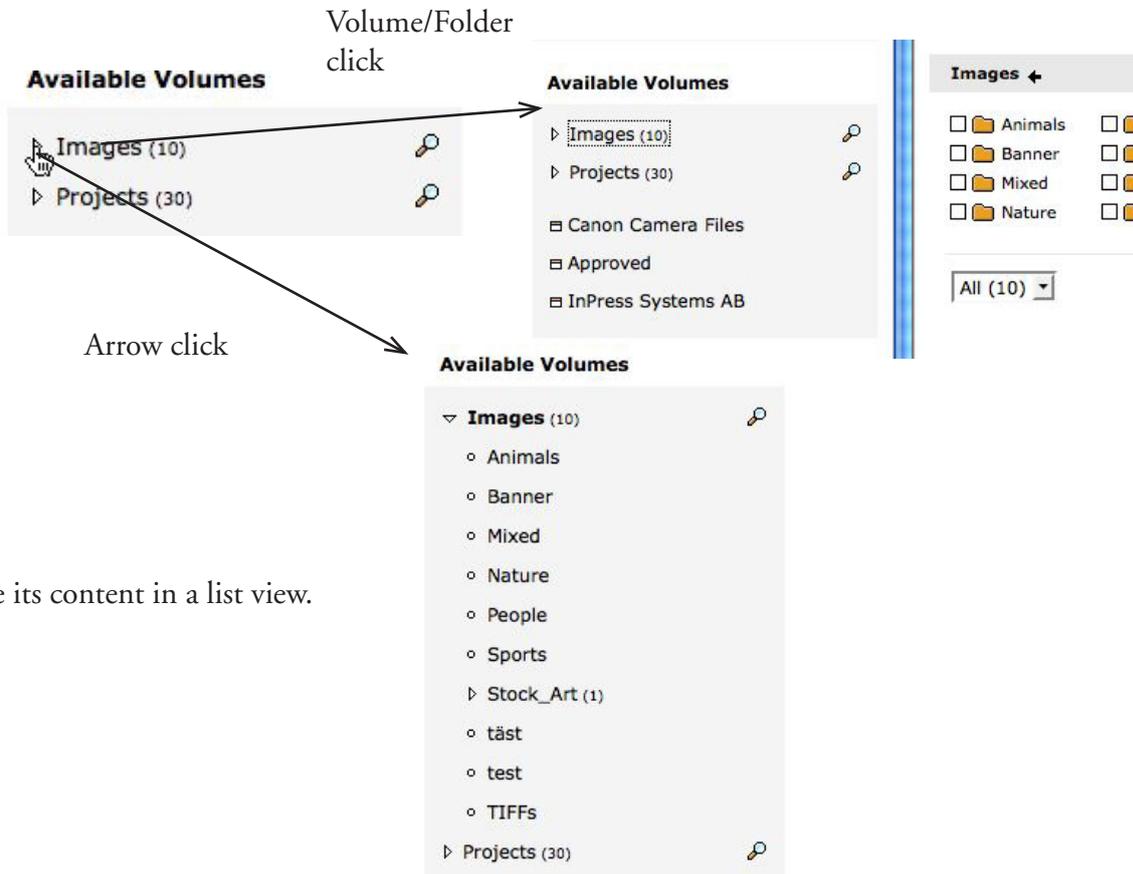

...see its content in a list view.

### 3.12 Print contact sheet of basket contents

New for version 2.01 is the Contact sheet option. It will put the contents from the basket into a A4. Useable for quick preview of the basket contents, or use it for print.

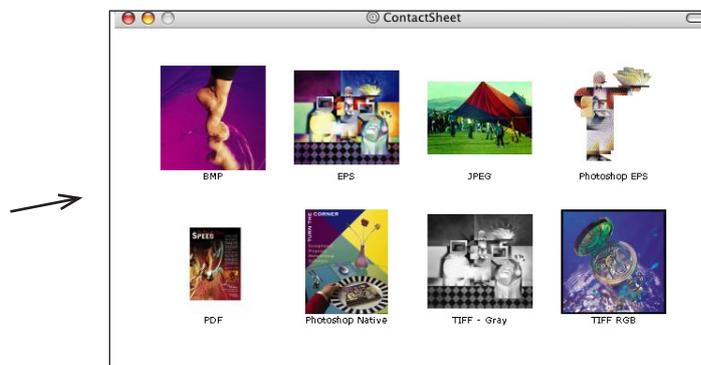


### 3.13 Display files


Additional to WebNative, InPressive have one extra way to display files when browsing through folders(it's replacing the icon view). It's called Textview, and the files will be displayed without a preview. This option is connected to the icon view in WebNative admin. If disabling icon view, the Textview will be hidden.

These are the 3 current ways to display files in WebNative;


ShortView

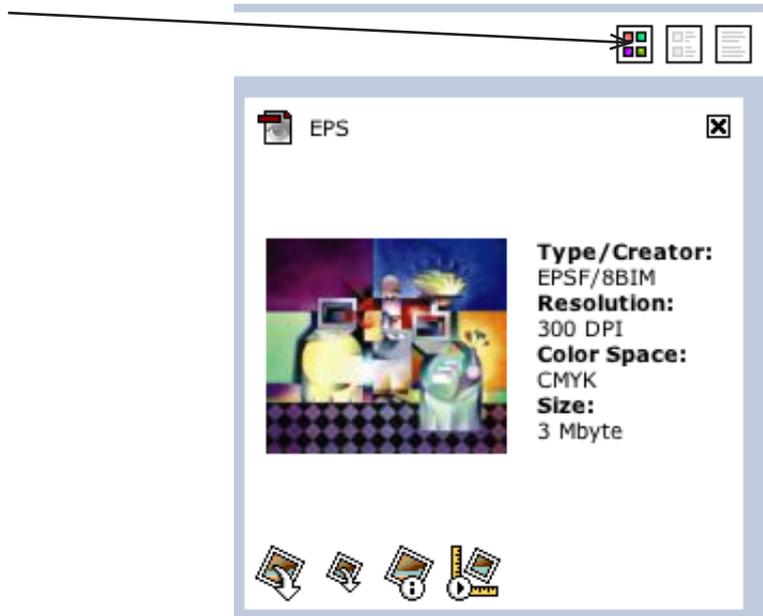

LongView

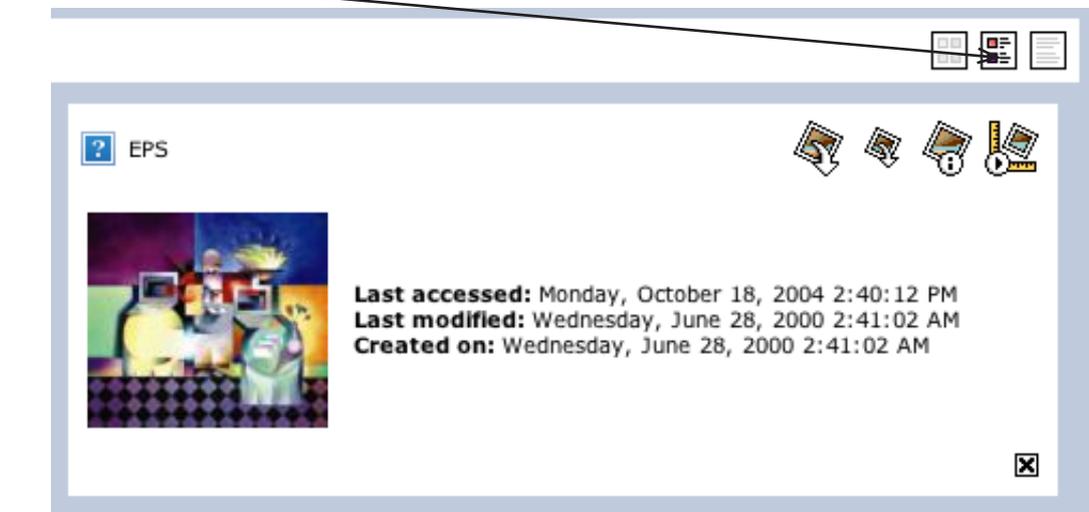

TextView

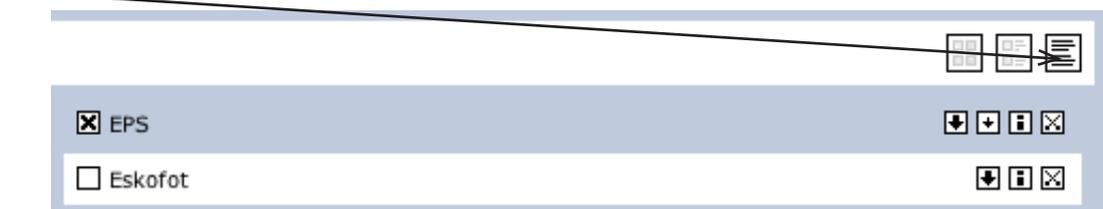

### 3.14 InPressive and Dialogue

Dialogue setup

When setting up Dialogue after installation, a “base path” can be defined.

/docs/

When creating a Dialogue User sub directories can be created for this user.

/john/ (relative)

Absolute/Real path at this point is /docs/john/

InPressive and Dialogue

A working path to a Dialogue server could look like this:

If NO base is defined:

http://server.com:8080/Dialog/jsp/externView.jsp?login=sandra&password=screen&doc=/docs/john/IMAGES/4156AR4\_FPO.jpg

If base path IS defined:

http://server.com:8080/Dialog/jsp/externView.jsp?login=sandra&password=screen&doc=/IMAGES/4156AR4\_FPO.jpg

“/docs/john” needs to be removed from the document path.

Administrator needs to define which Base paths all USERS have. An example of this could be:

```
function dialogueUser(u,b) {  
    this.user = u;  
    this.base = b;  
}  
  
var Users = new Array();  
    Users[0] = new dialogueUser(“john”,”/docs/johan”)  
    Users[1] = new dialogueUser(“andy”,”/docs/andy”)  
    Users[2] = new dialogueUser(“bob”,”/docs/bob”)
```

When login as “andy”, “/docs/andy” will be removed from the files[N].path when building the path to Dialogue.

This can be defined in local.js or in display.js for current Baselayout. Important is that this will be defined for all InPressive user that should use Dialogue links.

## 4 InPressive 2.7 news



### 4.1 Supported browsers

When using not supported Firefox 2 based browsers(Firefox 1-2, Camino) you will get a message that this browser is not supported. This text can be changed by adding following to user.js, display.js etc.

```
var browserNotSupportedTxt = “This browser does not work...”;
```

## 4.2 Global value for number of files

When installing InPressive 2.7 you will notice that the popups where to change how many files to show per page are gone. This setting is now global and will be found under the “Preferences” window.

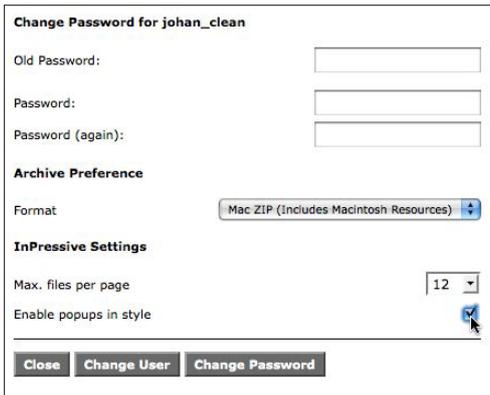

If check “Enable popups in style“ the popups will immediately be visible. They will also be visible next time you login. Changing the “Max. files per page“ or “Enable popups in style“ will update automatically. Additional reload will not be needed.

For more info how to change “Max. files per page“ values and default value. See chapter 5.3.3.

## 4.3 Loading panel

Loading panel will be visible in Browse, Search. Some tweaking can be done to it.

Changing text “Loading N items, please wait...“. Number of files will be inserted where the “[N]” is.

```
var loadingPanelText = “Loading [N] files... Hold on...”;
```

Changing animation image.


```
var loadingPanelAnim = “/my/url/to/animation.gif”;
```

Change width of loading panel.

```
var loadingPanelWidth = 400;
```

Control when the loading panel should be visible. Number that tells how many files should be written before showing the panel. 5 means that if it's 5 or more files the panel will be visible. -1 means never.


```
var loadingPanelControl = 5; // If its less than 5 files the panel will NOT be visible.
```

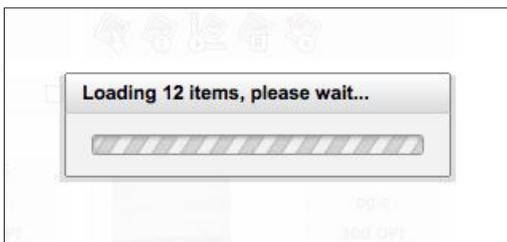

## 4.4 Dynamic Fields

Dynamic Fields is a layer that lies on top of database fields in InPressive.

It's purpose is to show values depending in previous choice. Dynamic Fields will work in Imageinfo and Search. It will also apply on "NavSearch" form in Navigate(Chapter 4.2.4).

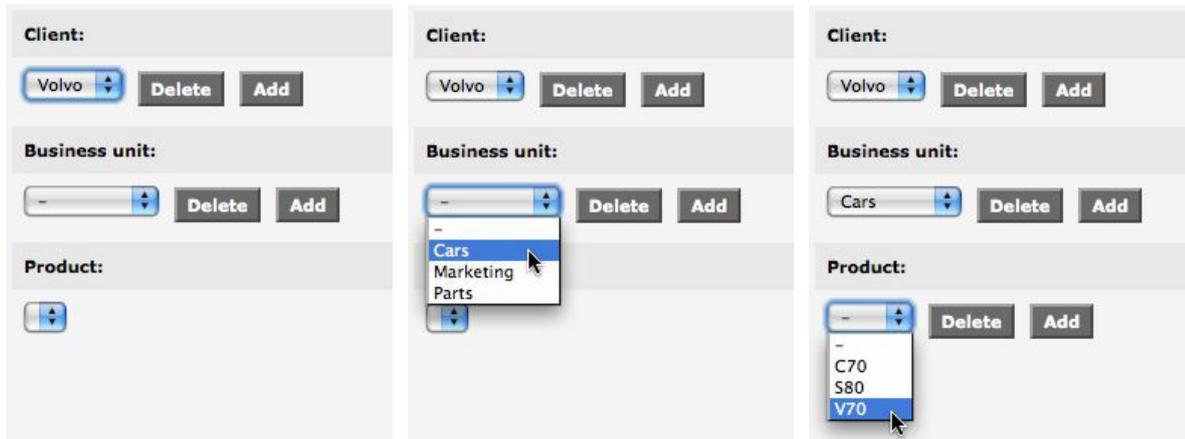

Setup should be made in user.js for the user. See chapter 5.1. for details about the user.js file.

Sample code for Dynamic Fields - Setting up 3 popups that relies to the content of the previous popups.

```
var dynamicFields = new Array();

dynamicFields[0] = new Object();
dynamicFields[0].name = "keyword153";
dynamicFields[0].getmode = "popups_hier";
dynamicFields[0].dispmode = "popup";
dynamicFields[0].defaultVal = new addArgument("", "");
dynamicFields[0].locked = false;
dynamicFields[0].debug = false;
dynamicFields[0].edit = true;
dynamicFields[0].currentVal = "";
dynamicFields[0].isWritten = false;
dynamicFields[0].staticArguments = new Array();
dynamicFields[0].staticArguments[0] = new addArgument("hierType", "sqlite");
dynamicFields[0].staticArguments[1] = new addArgument("DB", "company");
dynamicFields[0].dynamicArguments = new Array();

dynamicFields[1] = new Object();
dynamicFields[1].name = "keyword154";
dynamicFields[1].getmode = "popups_hier";
dynamicFields[1].dispmode = "popup";
dynamicFields[1].defaultVal = new addArgument("", "");
dynamicFields[1].locked = false;
dynamicFields[1].debug = false;
dynamicFields[1].edit = true;
dynamicFields[1].currentVal = "";
dynamicFields[1].isWritten = false;
dynamicFields[1].staticArguments = new Array();
dynamicFields[1].staticArguments[0] = new addArgument("hierType", "sqlite");
dynamicFields[1].staticArguments[1] = new addArgument("DB", "company");
dynamicFields[1].dynamicArguments = new Array();
dynamicFields[1].dynamicArguments[0] = new addArgument("level0", "keyword153");

dynamicFields[2] = new Object();
dynamicFields[2].name = "keyword155";
dynamicFields[2].getmode = "popups_hier";
dynamicFields[2].dispmode = "popup";
dynamicFields[2].defaultVal = new addArgument("", "");
dynamicFields[2].locked = false;
dynamicFields[2].debug = false;
dynamicFields[2].edit = true;
dynamicFields[2].currentVal = "";
dynamicFields[2].isWritten = false;
dynamicFields[2].staticArguments = new Array();
```

```
dynamicFields[2].staticArguments[0] = new addArgument("hierType","sqlite");
dynamicFields[2].staticArguments[1] = new addArgument("DB","company");
dynamicFields[2].dynamicArguments = new Array();
dynamicFields[2].dynamicArguments[0] = new addArgument("level0","keyword153");
dynamicFields[2].dynamicArguments[1] = new addArgument("level1","keyword154");
```

For details about this setup see user.js.sample file.  
 /var/adm/webnative/inprstyle/userjs\_samples/user.js.sample

## 5 Advanced customization

### 5.1 user.js

There is a lot of functions and possibilities with InPressive that are not described in this manual. In v2.7 we added a sample library that contains sample functions for all the functions that are not documented here. The content of this file could be copied to your own user.js.

Sample files lives here: "/var/adm/webnative/inprstyle/userjs\_samples"

"user.js" is a file used for setting up advanced features in InPressive. It should live under the user folder /var/adm/webnative/USER/. If you do not find it there, create it!

NB! This file has to start and end with SCRIPT tags.

```
<SCRIPT LANGUAGE="JavaScript">

    // Code goes here...

</SCRIPT>
```

### 5.2 InPressive Stylesheet guide

NB! Be aware of that changing colors etc. with stylesheet will override the settings in InPressive Admin.

#### 5.2.1 Common Classes

In the body classes you can change the background color of the document or even add an background image. Also change margins, padding.

Class name	Explanation
headerBody	Class set in <BODY> of "inpr_header.html"
navigateBody	Class set in <BODY> of "navigate.html"
mainBody	Class set in <BODY> of main frame content. Browse, Search, Imageinfo etc.
trailerBody	Class set in <BODY> of "inpr_trailer.html"
*toplevelBody	Class set in <BODY> of Classic Toplevel frame
*bookmarkBody	Class set in <BODY> of Classic Bookmark frame
*basketBody	Class set in <BODY> of Classic Basket frame

bookmarkcommentBody	Class set in <BODY> of popup window for Bookmark comments
slideshowBody	Class set in <BODY> of slideshow window(Image preview)

*\*Used only in Classic baselayout*

Change colors, border, font etc. on common form elements.

Class name	Explanation
formButton	Form buttons used in InPressive.
formButton_plug	When using one single plugin. This Class is used for that button.
formJump	Class used for popup menus.
textField	Class for regular textfield.
textField#quicksearch	Specific for the Quicksearch input field.
textArea	Class for multirow textareas.

Change font on common text elements.

Class name	Explanation
tableHeadlineFont	Class applied on text above Volumes, Bookmarks, Basket.
listFont	Applied on all listitems in navigate except Volumes. See below.
treeFont	Applied to Volumes and sublevels.
treeInfo	Applied to info beside Volumes and sublevels. "(10)" etc.
fileNameFont	Applied to the filename for each file. In Browse, Search, Imageinfo etc.
fileInfoFont	Applied to fileinfo for each file. Filetype, Creator, DB-Fields etc.
folderNameFont	Applied to the foldernames in Browse, Search.
infoTableHeadlineFont	Applied to the headline in inpr_main.html. Default main file if no Home is set.
infoTableTextFont	Applied to the text in inpr_main.html. Default main file if no Home is set.
mainFont	Default Class for fonts. Use everywhere where no specific Class exist.
dirreffont	Directory reference in Browse, Search.

### 5.2.2 CSS Faq

Q: How do I remove the margin in the header around the logo so it fits to the edge?

A: Use the headerBody Class and set margin to 0.

```
.headerBody { margin: 0px; }
```

Q: Can I use background images instead of colors?

A: Yes. Use body Classes for this purpose.

```
.mainBody { background-image: url(/webnatedoc/USER/mybg.jpg); }
```

Q: How do I change size on file table surrounding each file?

A: Use fileTable to redefine the size of the files container.

```
.fileTable { width: 250px; height: 250px; }
```

### 5.3 Advanced features

#### 5.3.1 Advanced search in navigation area.

If you are not satisfied with the Quicksearch you can make your own searchform in the navigate area. This is done in the user.js file.


```
top.Display.NavSearch = new Object();  
top.Display.NavSearch = { show:true , title: "Advanced Search" , displayMode: 1 }  
top.Display.NavSearch.Keywords = [153,154,155];  
top.Display.NavSearchStatics.selectedvol = { show:false , title: [lang.so,lang.archives]};
```

For details about this setup see DisplayObject file.

```
/var/adm/webnative/inprstyle/userjs_samples/DisplayObject
```

#### 5.3.2 Split keywords into tabs in Imageinfo

Keywords can be divided into tabs in Imageinfo. All keywords that are not defined in the setup will be visible under the default "Keywords" tab.

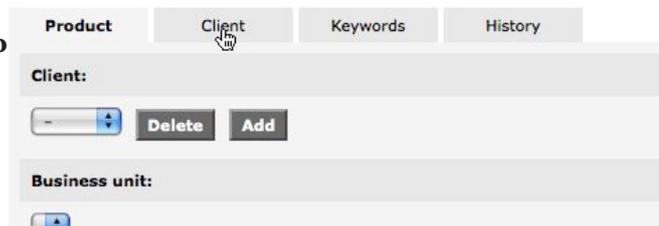

```
Display.Imageinfo.CustomTabs[0] = new addImageinfoCustTab(TRUE,"Txt1","key2",[153,154]);  
Display.Imageinfo.CustomTabs[1] = new addImageinfoCustTab(TRUE,"Txt2","key3",[156]);
```

For details about this setup see DisplayObject file.

```
/var/adm/webnative/inprstyle/userjs_samples/DisplayObject
```

#### 5.3.3 Changing "Max. files per page" popup values and default value

NB! When changing these values a conflict with old cookies can appear. If this happens the clients cookies needs to be removed.

```
var maxmatchesValues = [4,8,12,24,48,96,256,512];
```

It is possible to change the default value. The default value is the number of files will be visible per page of user has not choose a value in the useradmin area. This will have no effect when user has changed the "Max. files per page" value.

```
var maxmatchesDefault = 48;
```



#### 5.3.4 Open Imageinfo in a popup window

This opens Imageinfo in a new window(Javascript window).

```
var imageinfoNewWin = false;
```

To set the window features. Use the following variable.

```
var imageinfoNewWinOpts = "width=820, height=620, resizable=no";
```

### 5.3.5 Filter keywords per path

NB! Keep in mind that “Browse” has to be checked in the users permission set if the keywords should be visible in browse or search.

This is a filter, which means that the keywords will be hidden in the browser, but keyword values could be found in the page source.

```
var accumulate = false;

var keywordFilter = new Array();
keywordFilter[0] = new Object();
keywordFilter[0].path = “/FP_vol/Photobusiness/Cams/Minolta”;
keywordFilter[0].IDs = [143];
keywordFilter[1] = new Object();
keywordFilter[1].path = “/FP_vol/Photobusiness/Cams/Canon”;
keywordFilter[1].IDs = [139,141];
```

For details about this setup see keywordFilter file.

/var/adm/webnative/inprstyle/userjs\_samples/keywordFilter

### 5.3.6 Fileinfo in shortdisplay


A couple of things can be done with the fileinfo in shortdisplay(Browse, Search and Imageinfo).

Such things as removing all or any of the fileinfo labels on each file(Type, Creator, Resolution, Colorspace, Filesize, Dimension, Comment).

It’s also possible to add keyword info to the shortdisplay info.

For details about this setup see DisplayObject file.

/var/adm/webnative/inprstyle/userjs\_samples/DisplayObject

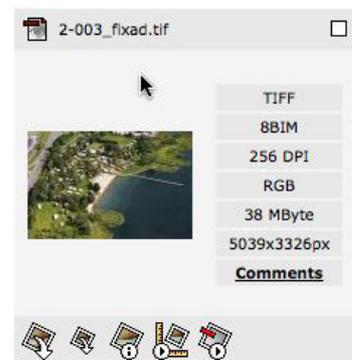

## **Appendix A, InPress Systems Software License**

Our software license is included here so you can read it before using the software. DO NOT install the software from this distribution digitally delivered or by CD media until you have carefully read this Agreement. BY INSTALLING THIS SOFTWARE YOU ACCEPT ALL THE TERMS AND CONDITIONS OF THIS AGREEMENT. If you do not agree with the terms and conditions of this Agreement, return the software package within a reasonable time to your supplier for a full refund.

In return for acquiring a license to use the software and related documentation (“Software”), you agree to the following terms and conditions:

### **1. Grant of License**

InPress Systems grants to you a nonexclusive, nontransferable license to use the Software on one computer system and to make one copy of the software solely for backup purposes. You must place the same copyright and other proprietary rights notices on any copy of the Software as appears on the original. You must not transfer, sell, assign, rent or distribute any copies of the Software to others. InPress Systems reserves all rights not expressly granted to you.

### **2. Proprietary Rights**

As a licensee, you own the media on which the Software is originally recorded. The Software is copyrighted by and proprietary to InPress Systems and its suppliers. InPress Systems and its suppliers retain title and ownership of all copies of the Software. The nonexclusive license set forth in this Agreement is not a sale of the Software or any copy. You agree that you will not assign, sublicense, transfer, pledge, lease or share your rights under this Agreement and agree to take all reasonable steps to prevent unauthorized use. You agree you may not reverse assemble, reverse compile, or otherwise translate the software.

### **3. License Maintenance and Support**

One year of support is included when purchasing InPress Systems products.

The year of support is calculated from the product licensing date or 30 days after the InPress Systems invoice is issued, whichever occurs first. Additional support is purchased at yearly intervals for 15% of the retail price of the software. (Please Note: Product modules that are added to the primary license after the original purchase, will be added to the existing support contract of the primary product license and therefore a full year of support will not be included in such cases).

### **4. No Other Rights**

Except as stated above, this Agreement does not grant you any rights to patents, copyrights, trade secrets, trade names, trademarks (whether registered or unregistered), or any other rights, franchises, or license in respect of the Software. You MAY NOT MODIFY TRANSLATE, DISASSEMBLE, OR DECOMPILE THE SOFTWARE OR ANY COPY, IN WHOLE OR IN PART.

### **5. Term**

The license is effective until terminated. You may terminate the license at any time by destroying the Software (including the related documentation) together with all copies or modifications in any form. InPress Systems will have the right to terminate your license immediately if you fail to comply with any term or condition of the Agreement. Upon any termination you must destroy the Software together with all copies or modifications in any form.

### **6. LIMITED WARRANTY**

InPress Systems warrants to you that the Software will perform substantially in accordance with the user’s manual for a period of thirty (30) days after delivery to you (“Warranty Period”). If the Software fails to comply with this limited warranty, InPress Systems will at its option and at no cost to you, correct errors you discover which

you report during the Warranty Period, or replace the Software, or refund the license fee paid for the Software provided you return the Software. INPRESS SYSTEMS AND ITS SUPPLIERS DO NOT AND CANNOT WARRANT THE PERFORMANCE OR RESULTS YOU MAY OBTAIN BY USING THE SOFTWARE OR DOCUMENTATION. THE FOREGOING STATES THE SOLE AND EXCLUSIVE REMEDIES INPRESS SYSTEMS WILL PROVIDE FOR BREACH OF WARRANTY. YOU UNDERSTAND THAT, EXCEPT FOR THE FOREGOING 30-DAY LIMITED WARRANTY, INPRESS SYSTEMS AND ITS SUPPLIERS MAKE NO WARRANTIES EXPRESS OR IMPLIED, AS TO PERFORMANCE, OR NON-INFRINGEMENT OF THIRD PARTY RIGHTS, MERCHANTABILITY, OR FITNESS FOR ANY PARTICULAR PURPOSE. Some states do not allow the exclusion of implied warranties or limitations on how long an implied warranty may last, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

**a. LIMIT OF LIABILITY**

IN NO EVENT WILL INPRESS SYSTEMS OR ITS SUPPLIER BE LIABLE TO YOU FOR ANY SPECIAL DAMAGES, INCLUDING ANY LOST PROFITS, LOST SAVINGS OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES, EVEN IF INPRESS SYSTEMS OR ANY INPRESS SYSTEMS REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, OR FOR ANY CLAIM BY ANY OTHER PARTY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**b. Integration.**

You acknowledge that you have read this Agreement, understand it, and that by installing the software you agree to be bound by its terms and conditions. You further agree that it is the complete and exclusive statement of the agreement between InPress Systems and you which supersedes any proposal or prior agreement, oral or written, and any other communications between InPress Systems and you relating to the subject matter of this Agreement. No variation of the terms of the Agreement or any different terms will be enforceable against InPress Systems unless InPress Systems gives its express consent, including an express waiver of the terms of this Agreement, in writing signed by an officer of InPress Systems.

**7. Governing Law**

This Agreement shall be governed by and construed in accordance with the laws of Sweden without giving effect to the choice of law principles thereof.

**8. Arbitration**

Any dispute, controversy or claim arising out of or in connection with this Agreement, or the breach, termination or invalidity thereof, shall be settled by arbitration in accordance with Göteborgsklausulerna om skiljeförfarande (simplified rules of arbitration). The arbitral tribunal shall be composed of one arbitrator.