

# **User Manual**

Original instructions

**DR 1500 H** 



Company information: www.vipercleaning.eu info-eu@vipercleaning.com



# **TABLE OF CONTENTS**

INTRODUCTION	4
MANUAL PURPOSE AND CONTENTS	4
TARGET	4
HOW TO KEEP THIS MANUAL	4
DECLARATION OF CONFORMITY	4
IDENTIFICATION DATA	4
OTHER REFERENCE MANUALS	4
SPARE PARTS AND MAINTENANCE	4
CHANGES AND IMPROVEMENTS	4
PURPOSE AND INTENDED USE	4
CONVENTIONS	5
UNPACKING/DELIVERY	5
SAFETY	5
SYMBOLS USED TO MARK INSTRUCTIONS	5
GENERAL INSTRUCTIONS	5
MACHINE DESCRIPTION	
MACHINE DESCRIPTION	
TECHNICAL DATA	
WIRING DIAGRAM	
WIKING DIAGRAW	×
OPERATION	9
BASIC OPERATION	9
MAINTENANCE	9
STORAGE	10
RECYCLING THE CLEANER	10

## INTRODUCTION



NOTE

The numbers in brackets refer to the components shown in Machine Description chapter.

## MANUAL PURPOSE AND CONTENTS

The purpose of this Manual is to provide the operator with all necessary information to use the machine properly, in a safe and autonomous way. It contains information about technical data, safety, operation, storage, maintenance, spare parts and disposal. Before performing any procedure on the machine, the operators and qualified technicians must read this manual carefully. Contact Viper in case of doubts concerning the interpretation of the instructions and for any further information.

## **TARGET**

This manual is intended for operators and technicians qualified to perform the machine maintenance.

The operators must not perform procedures reserved for qualified technicians. Viper will not be answerable for damages coming from the non-observance of this prohibition.

## **HOW TO KEEP THIS MANUAL**

The User Manual must be kept near the machine, inside an adequate case, away from liquids and other substances that can cause damage to it.

## **DECLARATION OF CONFORMITY**

The declaration of conformity, supplied with the machine, certifies the machine conformity with the law in force.



NOTE

Two copies of the original declaration of conformity are provided together with the machine documentation. The CE-declaration is printed in the Quick Start Guide.

## **IDENTIFICATION DATA**

The machine model and serial number are marked on the plate.

This information is useful when requiring machine spare parts. Use the following table to write down the machine identification data.

MACHINE model
MACHINE serial number

#### OTHER REFERENCE MANUALS

- Service Manual (can be consulted at Viper Service Centers)
- Spare Parts List (see www.vipercleaning.eu)

## SPARE PARTS AND MAINTENANCE

All necessary operating, maintenance and repair procedures must be performed out by qualified personnel or by Viper Service Centers. Only original spare parts and accessories must be used. Contact Viper for service or to order spare parts and accessories, specifying the machine model and serial number.

## **CHANGES AND IMPROVEMENTS**

Viper constantly improves its products and reserves the right to make changes and improvements at its discretion without being obliged to apply such benefits to the machines that were previously sold.

Any change and/or addition of accessories must be approved and performed by Viper.

## **PURPOSE AND INTENDED USE**

All single-disc cleaners are designed to clean and care for floor coverings inside buildings only.

This appliance is suitable for commercial use, for example in hotels, schools, hospitals, factories, shops, offices and rental businesses.

Any other use is considered as improper use. The manufacturer accepts no liability for any damage resulting from such use. The risk for such use is borne solely by the user.

Proper use also includes proper operation, servicing and repairs as specified by the manufacturer.

## **CONVENTIONS**

Forward, backward, front, rear, left or right and up are intended with reference to the operator's position, that is to say in working position with the handle.

## UNPACKING/DELIVERY

To unpack the machine, carefully follow the instructions on the packing.

When the machine is delivered, check that the packing and the machine were not damaged during transportation. In case of visible damages, keep the packing and have it checked by the carrier that delivered it. Call the carrier immediately to fill in a damage claim.

## SAFETY

The following symbols indicate potentially dangerous situations. Always read this information carefully and take all necessary precautions to safeguard people and property.

The operator's cooperation is essential in order to prevent injury. No accident prevention program is effective without the total cooperation of the person responsible for the machine operation. Most of the accidents that may occur in a factory, while working or moving around, are caused by failure to comply with the simplest rules for exercising prudence. A careful and prudent operator is the best guarantee against accidents and is essential for successful completion of any prevention program.

## SYMBOLS USED TO MARK INSTRUCTIONS



## DANGER!

Danger that leads directly to serious or irreversible injuries, or even death.



#### WARNING!

Danger that can lead to serious injuries or even death.



#### **CAUTION!**

Danger that can lead to minor injuries and damage.



#### NOTE

Indicates a remark related to important or useful functions.

### **GENERAL INSTRUCTIONS**

Specific warnings and cautions to inform about potential damages to people and machine are shown below.

The appliance must

- only be used by persons, who have been instructed in its correct usage and explicitly commissioned with the task of operating
- only be operated under supervision
- not be used by children

The workplace is behind the cleaner.

Do not use any unsafe work techniques.

Always guide the cleaner with both hands on the handle.

When the cleaner is stationary, switch off the brush unit immediately to prevent damage to the floor covering.

Switch off the appliance and disconnect the mains plug in the following situations:

- Prior to cleaning and servicing
- Prior to replacing components
- Prior to changing over the appliance

Use of the cleaner is subject to current national regulations. Besides the operating instructions and binding accident prevention regulations valid in the country of use, observe recognized regulations for safe and proper work.

## **TRANSPORT**

When transporting the cleaner in elevators

- observe current safety regulations, in particular with regard to carrying capacity.
- place the shaft in an upright position to prevent it from catching on elevator shaft walls.

## **OPERATION**

Take all necessary precautions to prevent hair, jewels and loose clothes from being caught by the machine moving parts.

The machine working temperature must be between 0°C and +40°C.

The humidity must be between 30% and 95%.

Do not use the machine as a means of transport.

In case of fire, use a powder fire extinguisher, not a water one.

Do not tamper with the machine safety guards and follow the ordinary maintenance instructions scrupulously.

Do not allow any object to enter into the openings. Do not use the machine if the openings are clogged. Always keep the openings free from dust, hairs and any other foreign material which could reduce the air flow.

Do not remove or modify the plates affixed to the machine.

If the machine is used according to the instructions, the vibrations are not dangerous. The machine vibration level is less than 2.5 m/s² (98/37/EEC-EN 1033/1995).

This machine must not be used on roads or public streets.

Viper machines can be used in combination with standard detergents which cannot damage any materials of Viper machines (no use of solvents or other aggressive liquid materials). Viper will not pay any claims regarding using aggressive detergents in Viper machines. If you need a special detergent for cleaning purposes, please contact your Viper dealer.

Pay attention during machine transportation when temperature is below freezing point. The water in the tank or in the hoses could freeze and seriously damage the machine.

#### **MAINTENANCE**

To ensure machine proper and safe operation, the scheduled maintenance shown in the relevant chapter of this manual, must be performed by the authorised personnel or by Viper Service Center.

Carefully read all the instructions before performing any maintenance/repair procedure.

Do not wash the machine with direct or pressurised water jets, or with corrosive substances.

#### **GUARANTEE**

Our general conditions of business are applicable with regard to the guarantee.

Unauthorised modifications to the appliance, the use of incorrect brushes and detergents in addition to using the appliance in a way other than for the intended purpose exempt the manufacturer from any liability for the resulting damage.

#### **TESTS AND APPROVALS**

Electrical tests must be performed in accordance with the provisions of safety regulations (BGV A3) and to DIN VDE 0701 Part 1 and Part 3. In accordance with DIN VDE 0702 these tests must be performed at regular intervals and after repairs or modifications.

#### **ELECTRICAL COMPONENTS**



#### **DANGER**

Electric shock due to faulty mains connecting lead.

Touching a faulty mains connecting lead can result in serious or even fatal injuries.

- ▶ Do not damage the mains power lead (e.g. by driving over it, pulling or crushing it).
- Regularly check whether the power cord is damaged or shows signs of ageing.
- Have the faulty mains connecting lead replaced by your Viper service representative or a qualified electrician prior to using the appliance again.



## **CAUTION**

Electrical components.

Damage due to unsuitable mains voltage.

The appliance can be damaged as a result of being connected to an unsuitable mains voltage.

▶ Ensure that the voltage shown on the rating plate corresponds to the voltage of the local mains power supply.



## **CAUTION**

Electrical connection.

- ▶ Connect the appliance via a residual current circuit breaker.
- Arrange the electrical parts (sockets, plugs and couplings) and lay down the extension lead so that the protection class is maintained.
- Connectors and couplings of power supply cords and extension leads must be watertight.

#### STAIRS AND GRADIENTS



## **CAUTION**

Risk of tipping and slipping on stairs and gradients.

When negotiating stairs and gradients, there is a risk of personal injuries and damage to property.

- Do not negotiate steps.
- ▶ Only use the appliance on level surfaces with a maximum gradient of 2 %.

## **FLOOR COVERINGS**



#### **CAUTION**

Damage to sensitive floor coverings.

Particularly sensitive floor coverings can be damaged by cleaning.

- ▶ Before using the cleaner, check whether floor coverings are suitable for this cleaning technique.
- ▶ Beware of area compression in point-elastic floors, e.g. in gym halls.
- ▶ Only use cleaning agents approved by Viper.

## **MATERIALS HAZARDOUS TO HEALTH**



#### WARNING

Materials hazardous to health in floor coverings.

Floor coverings can contain materials that are hazardous to health, which dissolve during cleaning.

▶ Do not clean floor coverings from which dusts or liquids that are hazardous to health can dissolve.

#### **RISK OF EXPLOSION**



#### **WARNING**

Flammable and explosive materials.

Risk of explosion in explosive atmosphere or areas where flammable and explosive materials are stored.

> Do not operate the machine near dangerous, flammable and/or explosive powders, liquids or vapours.

## SPARE PARTS AND ACCESSORIES



## **CAUTION**

Non-genuine components and unsuitable detergents.

The use of non-genuine parts and unsuitable detergents can impair the safety of the appliance and lead to damage.

- ▶ Only use spare parts and accessories from Viper.
- ▶ Only use the accessories and detergents supplied with the appliance or those specified in the operating instructions.

## **MACHINE DESCRIPTION**

# MACHINE STRUCTURE

- (1) Rating plate
- (2) Folding handle
- (3) Handle grip
- (4) Safety lock-out button


- (5) Bumper
- (6) Deck
- (7) Wheel



## **TECHNICAL DATA**

Model		DR 1500 H-EU
Voltage	V	220-240
Power	W	1100
Current	А	6.5
Frequency	Hz	50-60
Brush Speed	rpm	1500
Deck size	in (cm)	20 (51)
Dimension LxWxH	cm	83.8 x 53.3 x 120.6
Weight	kg	39
Length of Power cord	m	15
Sound pressure level	dB(A)	< 85

## **WIRING DIAGRAM**

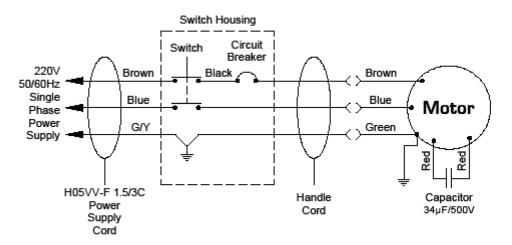

Single Phase Power Supply	insert translation	Brown	insert translation
Power Supply Cord	insert translation	Blue	insert translation
Switch Housing	insert translation	G/Y	insert translation
Switch	insert translation	Black	insert translation
Circuit Breaker	insert translation	Green	insert translation
Handle Cord	insert translation	Red	insert translation
Motor	insert translation		
Capacitor	insert translation		

## **OPERATION**

## **BASIC OPERATION**

- Remove any obstructions or other obstacles in the area which is to be cleaned.
- ▶ Place handle in upright position and tilt machine back until handle rests on the floor.



#### NOTE

Be sure the machine is not plugged into an outlet.

- Remove the pad center gripping device by unscrewing the thumbscrews.
- ▶ Place appropriate burnishing pad on pad driver and re-attach the center gripping device.
- Place machine back into its upright position.
- > Plug power cord into grounded outlet.



#### NOTE

Do not use an extension cord in conjunction with the standard power cord.

- Adjust the handle (switch housing) height to a comfortable operating position.
- To start the machine, push on the Red safety button of the top of upper switch housing and squeeze either of the switch levers.

- ▶ When the machine is in operation, both hands should be placed on the handle (switch housing).
- To stop the machine at any time, simply release the switch lever, and the machine will stop automatically.

## **MAINTENANCE**

To keep the machine performing well for many years, please follow the following maintenance procedures.



#### CAUTION!

Always confirm that the machine is unplugged prior to performing any maintenance or repairs.

- ▶ Unplug machine as soon as you are not using it.
- ▶ Clean the outside of the machine with a mild cleaner.
- ▶ Check power cord for any damage. If damage is detected, replace power cord immediately.
- Lubricate wheels with a water resistant lubricant once a month.
- ▶ Check machine for loose or missing nuts and bolts, and replace as necessary.
- If the machine is used in a dusty environment, you may remove the motor cover and blow the motor, clean with compressed air. This will ensure proper ventilation, and allow the motor to run cooler.

## **STORAGE**

- Switch off the appliance.
- Pull the mains plug out of the socket.
- > Store the appliance in a dry place, protected from frost.
- ▶ The machine storage temperature must be between 0°C and +40°C.

## RECYCLING THE CLEANER

Make the old cleaner unusable immediately:

- Unplug the cleaner.
- ▶ Cut the power cord.
- Do not discard of electrical appliances with household waste.



As specified in European Directive 2002/96/EC on old electrical and electronic appliances, used electrical goods must be collected separately and recycled ecologically. Contact your local authorities or your nearest dealer for further information.

