


The HP OfficeJet G95 is HP's premium performance network-ready color flatbed all-in-one printer/fax/scanner/copier for your entire workgroup.

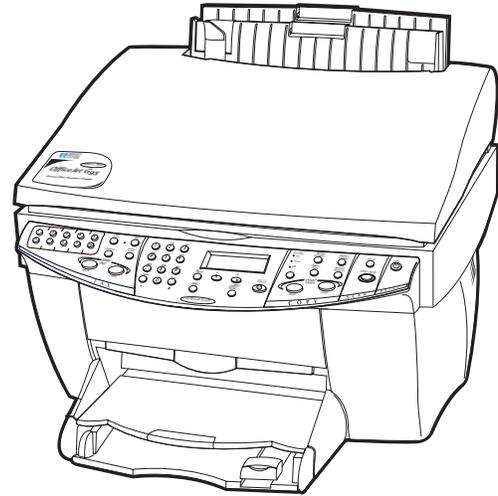

MULTITASKING FUNCTIONALITY

The HP OfficeJet G95 increases productivity by being able to perform several tasks at one time. For example, while printing, the same user or another user can scan, send a PC fax, send a paper fax, or receive a fax to memory, queue up a copy job, or queue up more print jobs. Queued jobs automatically start as soon as it is their turn.

PRINT

- Print over a network
- Up to 2400 x 1200 dpi color¹
- HP's enhanced PhotoREt color layering technology
- Up to 600 x 600 dpi black with Resolution Enhancement technology (REt)
- Two-Sided Printing Accessory included

Method	Drop-on-demand thermal inkjet
Language	HP PCL3/GUI
Duty Cycle	5000 printed pages per month (max.)

Built-in Fonts

Courier, Courier Italic; CG Times, CG Times Italic; Letter Gothic, Letter Gothic Italic; Univers, Univers Italic.

	Resolution (dpi)	Speed (ppm)
Fast		
Black	300 x 600	Up to 12
Color	600 x 300	Up to 10
Normal		
Black	600 x 600	Up to 6.5
Color	600 x 300	Up to 5
Best		
Black	600 x 600	Up to 4.7
Color	2400 x 1200 ¹	Up to 3.1

Print Margins

	Top	Bottom	Left	Right
US Letter/ Legal	.07 in. 1.8 mm	.46 in. 11.7 mm	.25 in. 6.4 mm	.25 in. 6.4 mm
A4	.07 in. 1.8 mm	.46 in. 11.7 mm	.13 in. 3.4 mm	.13 in. 3.4 mm
Envelopes	.125 in. 3.2 mm	.46 in. 11.7 mm	.125 in. 3.2 mm	.125 in. 3.2 mm
Index Cards	.07 in. 1.8 mm	.46 in. 11.7 mm	.125 in. 3.2 mm	.125 in. 3.2 mm

FAX

- Send electronic faxes over a network
- Easy set-up and configuration of fax settings using the PC
- Color fax (does not require a PC)
- 30 page automatic document feeder
- 125 speed dials with 10 one-touch keys
- 20 speed dials in a group speed dial²
- 125 page memory³
- Send/Receive legal, letter and A4 size
- Automatic document reduction (legal to letter)
- Automatic redial, busy redial
- Confirmation and activity reports
- Error Correction Mode (ECM)
- 6 seconds/page³ at 14.4 Kbps
- Distinctive ring detect
- Works with telephone answering machine

FAX (CONT.)

- Delayed send
- Junk fax barrier
- Fax forwarding²
- Color fax compliant with ITU-T.30E
- Automatic/Manual receive modes
- Fax polling to receive
- Log with history of fax sends and receives

Fax Resolution

Standard Black	200 x 100 dpi
Standard Color	200 x 200 dpi, high compression
Fine Black	200 x 200 dpi
Fine Color	200 x 200 dpi, low compression
Photo Black	200 x 200 dpi
Photo Color	200 x 200 dpi, low compression
300 dpi Black	300 x 300 dpi
300 dpi Color	200 x 200 dpi, low compression

SCAN

- Scan over the network
- Flatbed allows scanning of 3-D objects
- 600 x 3600 dpi optical (up to 9600 dpi enhanced)
- 36-bit A/D color; 24-bit external color
- 8-bit grayscale (256 levels of gray)
- TWAIN compliant interface
- Scans up to 8.5" x 11"
- Integrated image editing and OCR software included
- "Scan to" button for scanning directly to any PC on the network

COPY

- Advanced copy features with HP CopySmart II (fit to page, clone, poster, mirror, 2-on-1, and margin shift)
- Walk-up color copy
- Up to 99 copies from one original
- Copies on a range of paper sizes: from 3" x 5" up to 8 1/2" x 11" in color and up to 8 1/2" x 14" in black and white only
- 600 x 2400 dpi scan resolution
- 36-bit color

- 8-bit grayscale (256 levels of gray)
- Digital image processing
- 30 page automatic document feeder
- Reduce/enlarge 25-400%
- Copy Quality button (Best, Normal, Fast)
- Lighter/Darker control (9 levels)

	Resolution (dpi)	Speed (cpm)
Fast		
Black	300 x 600	Up to 12
Color	600 x 300	Up to 9.2
Normal		
Black	600 x 600	Up to 8
Color	600 x 300	Up to 5.1
Best		
Black	600 x 600	Up to 4
Color	1200 x 1200 ¹	Up to 1.2

Copy Margins

	Top	Bottom	Left	Right
US Letter / Legal	.07 in. 1.8 mm	.46 in. 10.9 mm	.24 in. 6.1 mm	.24 in. 6.1 mm
A4	.07 in. 1.8 mm	.46 in. 10.9 mm	.13 in. 3.4 mm	.13 in. 3.4 mm

AUTOMATIC DOCUMENT FEEDER

	Weight	Input Tray ⁴	Output Tray ⁴
Plain paper (letter)	16-24 lb.	30	30
Plain paper (legal)	16-24 lb.	15	15
A4	16-24 lb.	30	30

PAPER TRAY CAPACITY

	Weight	Input Tray	Output Tray
Plain paper	16-24 lb.	150	50
Card stock	max. 110 lb.	45	10
Envelopes	20-24 lb.	22	10
Transparencies		30	

HP OFFICEJET G95 MEDIA

Media Types

Plain paper	60-90 g/m ² (16-24 lb. bond)
Card Stock	Up to 200 g/m ² (110 lb. index maximum) maximum thickness .012"

Media Sizes

US letter	8.5" x 11"
US legal	8.5" x 14"
US Executive	7.25" x 10.5"
ISO A4	210 mm x 297 mm (8.27" x 11.7")
JIS B5	182 mm x 257 mm (7.2" x 10.1")
ISO A5	148 mm x 210 mm (5.8" x 8.3")
Envelopes	US #10 (4.125" x 9.5"), A2 (111 mm x 146 mm) (4.37" x 5.75"), DL (110 mm x 220 mm) (4.33" x 8.66"), C6 (114 mm x 162 mm) (4.49" x 6.38")
Index Cards	3" x 5", 4" x 6", 5" x 8", Hagaki , ISO A6
Labels	HP Inkjet, Avery Inkjet
Custom Sizes	3" x 5" up to 8.5" x 14"

SYSTEM REQUIREMENTS

Minimum	Recommended
Pentium 200 for Windows 95, 98 and NT 4.0 (Windows NT 4.0 requires Service Pack 3 or higher)	Pentium II 333 for Windows 95, 98 and NT 4.0 (Windows NT 4.0 requires Service Pack 3 or higher)
32 MB RAM	64 MB RAM or more
165 MB available hard disk space, plus 50 MB for full-color scanning	210 MB available hard disk space, plus 50 MB for full-color scanning
Available port on Ethernet 10 Base-T network, local connect requires USB or bi-directional parallel port (USB requires Windows 98)	Available port on Ethernet 10 Base-T network, local connect requires USB port with Windows 98 or bi-directional parallel port with ECP enabled for Windows 95 and Windows NT 4.0
CD-ROM drive	Same as minimum
SVGA monitor (256 colors)	SVGA monitor (24-bit color)
	Sound Card
	Internet Access
<p>Network Support: Microsoft Windows 95, Windows 98, and Windows NT 4.0 environments⁵ running TCP/IP or IPX/SPX protocols</p>	
<p>Windows 3.1, DOS, and Macintosh are NOT supported. USB & network cable (RJ-45 10Base-T) NOT included.</p>	

HP OFFICEJET G95 INCLUDES:

- Color print cartridge (1), black print cartridge (1)
- Automatic Document Feeder
- HP JetDirect 170X External Print Server
- Two-Sided Printing Accessory
- Installation software on CD-ROM
- User's Guide and easy set-up instructions
- Fax/Phone connector with phone cord
- Bi-directional parallel IEEE-1284C cable

HP OFFICEJET G95 ALL-IN-ONE SPECIFICATIONS

Interface and Connectivity

Universal Serial Bus (USB)⁶
Bi-directional Parallel (IEEE-1284C compliant)
Network ready (supports printing, fax sending, and scanning)

Memory

4 MB ROM, 8 MB RAM

Physical

Dimensions 19.88 in. H x 18.50 in. W x 19.06 in. D
(506 mm H x 470 mm W x 484 mm D)
Weight 34.21 lb
(15.52 kg)

Power

Source (Input) Voltage 100-240 VAC⁷, grounded
Input Frequencies 50 Hz - 60 Hz
Max. Input Current 1 Amp
Consumption 50 watts max.

Operating Environment

Operating Temperature Ranges 41° to 104° F (5° to 40° C)
Humidity 15-80% RH non-condensing
Non-Operating (Storage) Temperature Ranges -40° to 158° F (-40° to 70° C)

Noise Levels per ISO 9296

Sound power L_{wAd} Econofast printing 6.4 Bels (A)
Fast & Normal mono copying 6.1 Bels (A)
All other modes 5.9 Bels (A) or lower
L_{pAm} pressure Econofast printing 53 dB (A)
All other modes 52 dB (A) or lower

HP OFFICEJET G95 ALL-IN-ONE SPECIFICATIONS (CONT.)

Certifications

Main unit safety: CE, UL, cUL, NOM
 Power supply safety: CE, UL, PSB, NEMKO, CSA, NOM, PCBC, JUN, MITI
 EMC: CE, VCCI, VSMI, FCC, C-Tick

Compliance

Year 2000 compliant

ORDERING INFORMATION

HP OfficeJet G95 C6740A

Inkjet Print Cartridges

HP Large Black cartridge 51645A
 HP Large Color cartridge C6578A
 HP Economy Black cartridge 51645G
 HP Economy Color cartridge C6578D

HP Media

HP Premium Inkjet Paper, 200 sheets 51634Y
 HP Premium Inkjet Paper, A4, 200 sheets 51634Z
 HP Bright White Inkjet Paper, 200 sheets C5976A
 HP Bright White Inkjet Paper, 500 sheets C1824A
 HP Bright White Inkjet Paper, A4, 500 sheets C1825A
 HP Premium Inkjet Transparency Film,
 20 sheets C3828A
 50 sheets C3834A
 A4, 50 sheets C3832A
 HP Premium Inkjet Rapid Dry
 Transparency Film, 50 sheets C6051A
 HP Photo Paper, 20 sheets C1846A
 HP Premium Photo Paper, 15 sheets C6039A
 HP Premium Plus Photo Paper,
 glossy, 20 sheets C6831A
 matte, 20 sheets C6950A
 HP Greeting Cards and Envelopes, 20 each C1812A
 HP Glossy Greeting Cards and
 Envelopes, 10 each C6044A
 HP Textured Greeting Card Paper, 20 sheets C6828A
 HP Iron-On T-Shirt Transfers, 10 sheets C6049A
 HP Banner paper, 100 sheets C1820A
 HP Professional Brochure & Flyer Paper,
 glossy C6817A
 matte C6955A
 HP Restickables, round, 10 sheets C6822A
 HP Restickables, square, 10 sheets C6823A

5968-9535EUS

HP Inkjet Labels
 Avery Inkjet Labels

Extended Warranty

1-Year Express Exchange H3658E
 2-Year Express Exchange H3657E
 3-Year Express Exchange H5467E
 3-Year Express Exchange H5467A

HP ON THE WEB

Visit us at <http://www.hp.com/go/all-in-one> for a hands-on product tour, Windows® 2000 availability and system requirements, networking capabilities, software, drivers, Smart Tools, and partner products and services.

Visit www.hp.com/go/jetdirect for additional information on the HP JetDirect External Print Server.

WARRANTY

Backed by HP reliability and award-winning HP Customer Care including one year warranty. Damage caused by refilled ink cartridges not covered by warranty.

Notes

1. Using photo paper
2. Mono only; PC required for color
3. Based on ITU-T Test Image #1 at standard resolution. More complicated pages, color or higher resolution will take longer and use more memory.
4. Legal size media is supported only for monochrome copy and fax
5. See Web for information on Windows 2000 system requirements
6. Requires Windows 98 or Windows 2000. USB only works as local printer.
7. Figures based on using the AC-adaptor that came with your HP OfficeJet (HP part number 0950-2880)



As an ENERGY STAR Partner, Hewlett-Packard Company has determined that this product meets ENERGY STAR® guidelines for energy efficiency.

The technical information in this document is subject to change without notice. HP is not responsible for the accuracy of information related to non-HP products. Any listing of non-HP products does not constitute an endorsement by Hewlett-Packard Company. HP disclaims all warranties, written and oral, express or implied, with respect to products developed by independent vendors, including the warranties of merchantability and fitness for particular use.

All brand and product names are trademarks of their respective companies.

ENERGY STAR is a U.S. registered service mark of the United States Environmental Protection Agency.

Microsoft, Windows, and MS-DOS are U.S. registered trademarks of Microsoft Corporation.

Pentium is a registered trademark of Intel Corporation.

© 2000 Hewlett-Packard Company
 Printed in the USA