Drawing with dpic

Dwight Aplevich *

31 August 2015

Contents

1	Introduction		2	4	SVG, PDF, and Postscript out-		
					put	18	
2	Dpic usage		2		4.1 Bounding boxes	18	
	2.1	Options	3				
	2.2	Lexical error messages	4	5	Pic processor differences	2 0	
					5.1 Command-line options	20	
3	Dpic programming		4		5.2 Output formats	20	
	3.1	Blocks	5		5.3 . lines and program-generated		
		3.1.1 Positioning blocks	5		pic	20	
		3.1.2 Defining scope	5		5.4 \ lines	21	
	3.2	Dpic macros	6		5.5 for-loop and if bodies	21	
		3.2.1 Finding roots	7		5.6 End of line	21	
		3.2.2 Composing statements .	8		5.7 Logic	21	
		3.2.3 Evaluating arguments .	8		5.8 then	22	
		3.2.4 Branching	9		5.9 line, spline, arrow, move	22	
	3.3	Hiding variables	10		5.10 Arc defaults	22	
	3.4	Looping	10		5.11 Strings	22	
	3.5	M4 macros	11		5.12 print arg,	23	
		3.5.1 Branching	11		5.13 command <i>arg</i> ,	23	
		3.5.2 Perpendiculars	12		5.14 Operating system commands .	24	
		3.5.3 Setting directions	12		5.15 copy	24	
	3.6	Subscripts	13		5.16 plot	24	
		3.6.1 Assigning an array of			5.17 fill	24	
		$ootnotesize{numbers} \dots \dots$	14		5.18 Scaling	25	
	3.7	Splines	14		5.19 Arrowheads	25	
		3.7.1 Curve fitting	15		5.20 Compass corners	26	
	3.8	Postprocessor commands and				26	
		color	15		5.22 Subscripted variables and loca-		
		3.8.1 Color	16			27	
		3.8.2 Filling with color	16			27	
		3 8 3 External files	18		5 24 Arithmetic	27	

^{*}Copyright © 2015 J. D. Aplevich, all rights reserved. This document version is made available under the Creative Commons attribution licence version 3.0 (http://creativecommons.org/licenses/by/3.0/); you are free to copy and distribute this document provided proper attribution is given by identifying the author.

5.25	Vector arithmetic	27		5.30 PSTricks anomaly	28
5.26	Positions	27			
5.27	<pre>int()</pre>	28	6	Appendix A: dpic man page	31
5.28	exec	28			
5.29	Functions	28	7	Appendix B: dpic grammar	44

1 Introduction

This document is meant for persons using dpic to produce diagrams for LaTeX documents or web files. You are assumed to have basic knowledge of the pic language as described for the original Documenter's Workbench (ATT) pic [3] or the current GNU pic (gpic) processor [4]. However, a concise dpic language reference is included here in Appendix A, and the context-free dpic input grammar is given in Appendix B.

Dpic accepts gpic input for the most part but there are minor differences. The outputs of gpic and dpic are quite different but both can serve as preprocessors that create diagrams for inclusion in LaTeX documents.

The pic language is particularly suited for easily creating line diagrams such as electric circuits, and many persons use a set of macros called Circuit_macros, which are processed using the m4 macro processor and Dpic. The pic language itself allows macro definitions, and both pic and m4 macros will be described.

Dpic usage will be reviewed, some programming examples that illustrate dpic extensions of the pic language will be given, and then the differences among pic translators will be itemized, particularly the differences between gpic and dpic.

There had better be a disclaimer: The temptation to change the pic language has been resisted most of the time so that valid diagrams can be processed with minimal changes using the original Documenter's Workbench (ATT) pic, with gpic, or dpic. There are exceptions: embedded word-processor commands principally, but also minor differences in defaults for valid pic input, a few gpic constructs that dpic does not implement directly, and some dpic extensions that gpic does not implement. For details, see Section 5.

2 Dpic usage

In the following, items in square brackets [] are optional and items separated by a vertical line | are alternatives. To produce .tex output (for LaTeX, PSTricks, TikZ-PGF, mfpic processing):

```
dpic [options] file.pic > file.tex
or
  cat file.pic | dpic [options] > file.tex

To produce other formats:
  dpic -[d|e|f|g|h|m|p|r|s|t|v|x] [-z] file.pic > file.[tex|eps|pdf|mp|fig|svg]
```

2.1 Options

Dpic accepts the following options:

(none) Latex picture output (very limited font-based drawing commands)

- -d PDF output
- -e pict2e output
- -f Postscript output with psfrag strings
- -g TikZ-PGF output
- -h write out these options and quit
- -m mfpic output
- -p PSTricks output
- -r raw Postscript output
- -s MetaPost output
- -t eepicemu output
- -v SVG output
- -x xfig 3.2 output
- -z safe mode (sh, copy, and print to file disabled)

The -p option produces output for postprocessing by the LaTeX package PSTricks. Similarly, the -g option produces output for the TikZ-PGF packages and makes pdf production via pdflatex a one-step process.

Mfpic and MetaPost output are provided for compatibility.

The -r option produces Postscript eps files, in which font changes or typesetting must be done explicitly. The -f option writes Postscript strings in psfrag format for tex or latex typesetting.

The -d option produces PDF files. This format is most useful for diagrams containing graphics only, since there is no simple way to change or manipulate fonts for labels. The Courier fixed-width font is employed by default. To produce PDF files containing significant text content, use an option such as TikZ with pdflatex.

The -v option produces SVG for inserting figures into web documents or for further processing by the Inkscape graphics editor, for which SVG is the native format. When the SVG output is used directly in a web document, then any required text formatting generally must be included explicitly. The other possibility for SVG output is that an SVG library of elements can be drawn with dpic, and Inkscape used to place and connect copies of the elements. Then Inkscape can export the graphics as eps for processing by IATEX or as pdf for processing by pdflatex. Inkscape will also export a tex file from which labels can be formatted and overlaid on the imported eps or pdf.

In all cases, arbitrary postprocessor commands (that is, arbitrary PSTricks, SVG, Postscript, or other commands) can be inserted into the dpic output directly from the source. This possibility adds considerable power for manipulating diagram elements.

The -z option disables the commands that access external files. These commands can be permanently disabled by the use of a compile-time option.

The file Examples.txt contains a minimal example of each of these options except -z. Consult

the appropriate manual for processing mfpic, PSTricks, MetaPost, pgf, or psfrag output.

Invoking dpic without options produces basic LaTeX drawing commands by default. LaTeX line slopes, for example, are very limited and you must ensure that lines and arrows are drawn only at acceptable slopes. Dpic sets the maximum slope integer to be 6 for LaTeX, 453 for eepic, and 1000 for pict2e. To see the effect of the slope limitations, process the following:

```
.PS
dtor = atan2(0,-1)/180
for d = 0 to 360 by 2 do {
  line from (0,0) to (cos(d*dtor),sin(d*dtor))
  }
line from (-1.2,0) to (1.2,0)
line from (0,-1.2) to (0,1.2)
.PE
```

2.2 Lexical error messages

Lexical error messages are generated automatically, and state the lexical value that was found and what was expected. Some non-obvious lexical values are:

```
corner a compass corner or .c, .start, .end
envvar environmental variable
primitiv box, circle, ellipse, arc, line, arrow, move, spline
```

3 Dpic programming

Pic is a simple language with a good ratio of power to complexity, so surprisingly sophisticated diagrams can be produced in several areas of application. Arbitrary postprocessor commands can be included in the output and several of the postprocessors are powerful drawing languages in their own right, so it can be argued that dpic has all the power of these languages. However, if you find yourself writing extensive postprocessor code then you might ask why you are not programming exclusively in that language.

Pic is very suitable for line diagrams, and recent language extensions allow for basic color. Elaborate fills and cropping are the domain of the postprocessors, but can be included easily with the use of macros.

The following sections are intended to help you become familiar with dpic language features. Some of these details are exclusive to dpic and are not described in the GNU manual but are discussed in Section 5 of this document.

3.1 Blocks

The basic planar objects in pic are box, circle, and ellipse, the placing of which is done according to the current drawing direction or by explicit placement such as

```
box at position
```

which places the object so that its center is at position.

A block (or a composite object) is a group of elements enclosed by square brackets, such as Q: [B: [A: arc]; circle].

3.1.1 Positioning blocks

A block is placed by default as if it were a box, after which the compass points (Q.n, Q.sw, ... in the previous example) are automatically defined as for a box of the same size and position.

A block can also be positioned by specifying the location of one of its defined points. A defined point is one of the following:

```
1. A compass corner .center, .n, .ne, ... of the block, e.g., Q: [B: [A: arc]; circle] with .ne at position
```

- 2. A defined point of a labeled object or position within the block, preceded by a dot, e.g., Q: [B: [A: arc]; circle] with .B.A.ne at position
- 3. A defined point of an enumerated object in the block, preceded by a dot (but make sure there is a space after the dot if it is followed by a number), e.g.,

```
Q: [B: [A: arc]; circle] with . 1st circle at position

Even better, put braces around the ordinal value, which can now be any expression, e.g.,

... with .{10-9}th circle at ...
```

4. A displacement (x,y) from the lower left corner of the block, e.g., Q: [B: [A: arc]; circle] with (0.5,0.2) at position

Reference to a defined point may correspond to drilling down through several block layers, as the second example above shows.

3.1.2 Defining scope

Variables defined within a block are accessible only within the block itself or its sub-blocks. Thus, the statement x=5 creates the variable x and assigns it a value. If the statement is x:=5 then x must already have been defined either in the block or in a scope containing the block. Limiting the scope to a block avoids name conflicts but occasionally results in subtle behavior. The code

```
x = 5
[ x = x + 2; print x ]
print x
```

prints 7 on the first line and 5 on the second because the assignment within brackets creates variable \mathbf{x} with scope within the brackets. However, Dpic allows a second line of the form

```
[x += 2; print x]
```

which changes the previously defined variable x and the value 7 is printed twice.

Locations inside a block are accessible from outside as shown in the previous section, but the values of variables are not; thus, an error results from

```
Q: [ v = 5 ]; y = Q.v
The := assignment operator in
v = 0; Q: [ v := 5 ]; y = v
```

works around this problem, but this method requires the internal name v to be known and defined in advance of the block.

Variable values can be exported by the use of macro arguments as shown later in Section 3.2 or, if you must, by using the following trick:

```
Q: [ v = 5; w = 6
    Origin: (0,0); Export: (v,w) ]
v = Q.Export.x - Q.Origin.x
w = Q.Export.y - Q.Origin.y
```

This method works because all locations (Origin and Export) inside the block will be translated by the same amount no matter where the block is positioned.

3.2 Dpic macros

Macros can be used to turn the basic dpic language into a powerful tool for producing line drawings. A macro serves to

- specialize the pic language in order to draw components from an application area
- abbreviate long sequences of repetitive commands
- substitute particular values in commands by the use of macro arguments
- provide conditional text replacement depending on the value of its arguments
- provide recursive looping

Macro definitions are not local to blocks so care must be taken to avoid conflicts with macro names.

The pic language includes basic macro facilities, but the m4 macro processor [2, 5] makes a good companion to the language, so both will be mentioned. General-purpose macro definitions can be stored in files external to the diagram source and read in automatically. In particular, the author has written a package called Circuit_macros for drawing electric circuits and other diagrams using dpic and m4 [1], from which examples will be taken.

A dpic macro is defined by the statement

```
define name { contents }
```

where *name* may begin with a lowercase or uppercase letter. Then any separate appearance of *name* in the following lines is replaced by the characters between the defining braces, including newlines. If the name is given arguments of the form

```
name(x, y, z, ...)
```

then, in the macro body, n expands to the nth argument, which may be nul, if at least one argument has been defined and n is a positive integer. Otherwise n is not evaluated.

The line

undefine name

deletes the macro definition.

Dpic skips white space immediately preceding macro arguments so that, for example,

```
name( x,
    y, z )
is equivalent to
    name(x,y,z )
```

In a macro invocation, the arguments are separated by commas. An argument may contain commas if they are enclosed within strings or () parentheses. A double quote character within a string must be preceded by a backslash. Thus, for example, the macro invocation

```
name(ABc"\"t,"(,DE,F))
```

has one argument.

In a dpic macro, the value of + is the number of arguments given to the macro on invocation. Thus if x is a macro name, the values of + when the macro is invoked as x, x(), x(8), and x(,,) are respectively 0, 1, 1, 2, 3 and 3.

To check whether an argument is null, put it in a string; for example,

```
if "$3" == "" then { ... }
```

Values internal to a scope can be passed back through macro arguments with the := operator; thus, executing the following

```
define m \{ [v = 5; \$1 := v] \}; y = 0; m(y)
```

gives y the internal value of v. Notice that y must be defined prior to macro expansion.

The use of macros will be illustrated in the following examples.

3.2.1 Finding roots

A root finder is a powerful tool for determining where lines or curves intersect in diagrams, and can be implemented using a macro. Consider the trivial example in which we wish to find the root of $x^2 - 1$ between 0 and 2. First, define a macro called **bisect** by reading in a library file containing definitions using a command such as

```
copy "filename"
```

or by writing a definition such as given below, which employs the method of bisection, a suitably robust (but not particularly fast) algorithm. Define the two-argument macro corresponding to the function of which we want to calculate the root:

```
define parabola { $2 = ($1)^2 - 1 }
```

In general, many statements might be required to calculate the function, but the essential statement is to assign the function value to the name given by the second argument. Then call the bisect macro using a command such as


```
bisect( parabola, 0, 2, 1e-8, x )
```

where the second and third arguments define the search interval, the fourth argument specifies the solution precision, and the fifth argument is the name of the variable to be set to the root. A basic version of bisect is given by

```
define bisect {
   x_m = $2; x_M = $3
   x_c = (x_m+x_M)/2
   if (abs(x_m-x_M) <= $4) then { $5 = x_c } else {
      $1(x_m,f_m)
      $1(x_c,f_c)
      if (sign(f_c)==sign(f_m)) then { bisect($1,x_c,x_M,$4,$5) } \
      else { bisect($1,x_m,x_c,$4,$5) } }
}</pre>
```

This macro repeatedly calls parabola and then itself, halving the search interval until it is smaller than the prescribed precision. The Circuit_macros library version operates essentially as above but avoids name clashes by appending the value of the first argument to the internal names.

A somewhat more sophisticated use of a root finder is shown at the right. Drawing the spiral on the surface of the sphere requires knowing the points of transition of the curve from visible to hidden and back. A root finder provides a method that is both simple and adaptable to other shapes. The source file Spiral.m4 makes use of both m4 macros and pic macros.



AB

3.2.2 Composing statements

Dpic macro arguments can be expanded almost anywhere. Suppose that circles A and B have been defined, with intersections at positions AB and BA found using the macro cintersect from Circuit_macros, for example. Then the boundary of the region within both circles might be drawn using the macro shown, invoked as lozenge(A,B):

```
define lozenge {
  arc from $1$2 to $2$1 with .c at $2
  arc from $2$1 to $1$2 with .c at $1 }

  Shade(0.5,lozenge(A,B))
```

3.2.3 Evaluating arguments

A macro argument is referenced as n, where n must be an integer and may not be an integer expression. Consequently, the following does not work in a dpic macro:

```
for i=1 to $+ do { c[i] = $i }
```

```
Instead, use the dpic statement
   exec string
which executes the contents of string as if it were the current input line. Since
   sprintf("format", expression,...)
behaves like a string, the following works:
   for i=1 to $+ do { exec sprintf("c[i] = $%g",i) }
```

Macro arguments are passed verbatim, as for example, function(x,y+z), inside which \$1 is replaced by x and \$2 is replaced by y+z. To pass arguments by value, use exec sprintf ..., for example, exec sprintf("function(%g,%g)",x,y+z). The recursive calls near the bottom of the sorting algorithm shown are another example:

```
#
                                dpquicksort(a,lo,hi,ix)
#
                                Given array a[lo:hi] and index
                                array ix[lo:hi] = lo,lo+1,lo+2,...hi, sort
                                a[lo:hi] and do identical exchanges on ix
define dpquicksort { [ if $3 > $2 then {
 pivot = $1[($2+($3))/2]
 loop(lo = $2; hi = $3, lo <= hi,
    loop(,\$1[lo] < pivot, lo = lo + 1)
    loop(,\$1[hi] > pivot, hi = hi - 1)
    if lo < hi then {
      tmp = $1[lo]; $1[lo] := $1[hi]; $1[hi] := tmp
      tmp = $4[lo]; $4[lo] := $4[hi]; $4[hi] := tmp }
    if lo <= hi then { lo = lo + 1; hi = hi - 1 } )
  if hi > $2 then { exec sprintf("dpquicksort($1,%g,%g,$4)",$2,hi) }
 if lo < $3 then { exec sprintf("dpquicksort($1,\%g,\%g,$4)",lo,$3) }
 } ] }
```

3.2.4 Branching

Pic has a basic if-statement of the form

```
if expression then { if-true } else { if-false }
```

but lacks a case statement. Multiple branches can be defined by nested if statements but there is another way. The macro

```
define case { exec sprintf("$%g",floor($1+0.5)+1); }
```

adds 1 to its rounded first argument to determine which alternative among the remaining arguments should be executed. The semicolon (or a newline) forces dpic to perform the exec statement before leaving the macro. For example,

```
case(2,
  print "A",
  print "B")
```

executes the second alternative (the third argument) and prints B.

3.3 Hiding variables

As mentioned in Section 3.1.2, locations inside a block are accessible from outside, but the values of variables are not. Therefore, a block can be used to hide variables internal to a macro, as in the following example:

The three assignments in the first line of the example ensure that the variables exist when the := assignments are performed.

This is not the full story, however. Macro arguments are called by name rather than by value; should the fourth argument, for example, be literally x[minc], then the interior variable minc prevails. A block is only a partial solution to the problem of hiding variables, and care must be exercised in chosing the names of arguments. A more robust solution is to call by value using exec; thus,

```
exec sprintf("rgbtohsv(%g, %g, %g, h, s, v)", expr1, expr2, expr3)
```

In this case however, the last three arguments remain vulnerable to name clashes and should be named with care.

When, as in the example, no drawing commands appear in a [] block, then the block has zero size but has position Here so the block can affect the diagram bounding box if Here happens to be outside the bounding box of drawn elements. An alternative to this complication is to omit the [] brackets and rename the local variables to avoid name clashes. For example, r above could be r_rgbtohsv and so on for other variables.

3.4 Looping

The pic language includes a basic for-loop, such as the following:

```
for x = 1 to 10 by 2 do { print x }
```

but there is no explicit language element (except macro recursion) for executing a block of code an indefinite number of times. However, the for variable can be reset within the executable code, as in the following example where the first macro argument is printed and doubled repeatedly until it becomes greater than the second argument:

```
define series { x = $1; for i=1 to 2 do { if x > $2 then { i = 2 } else { print x; x = x*2; i=1 } }
```

If this trick seems like an abuse of language, it can be disguised somewhat by the definition of a C-like loop. For example, suppose we wish to write

```
loop( x=1, x<10, x*=2,
  loop( y=1, y<=4, y+=1,
  print (x,y) ) )
```

Then the following defines a suitable mechanism with a loop depth index to allow nesting:

```
ld__ = 0
define loop {ld__+=1; $1
for lx__[ld__]=0 to 1 do {
  if $2 then { lx__[ld__]=0; $4; $3 } else {lx__[ld__]=1}}
ld__-=1;}
```

However, loop() is a macro, so references to arguments in the body will refer to loop() arguments, which may not be desired. In that case, use a for loop.

3.5 M4 macros

M4 is a simple but powerful macro language originally distributed with Unix systems [2], but free versions are available for other operating systems. The use of this language requires an extra processing step, but the power and flexibility of the macros easily make up for it. The macro definitions are read before the text to be processed, typically by a system command such as

```
m4 library.m4 diagram.m4 | dpic -g > diagram.tex
```

An m4 macro is defined as follows:

```
define('name', 'contents')
```

so that distinct occurrences of *name* will be replaced by *contents* in the following text. This basic description is a vast simplification of the power that results from conditional substitution, recursion, file inclusion, integer arithmetic, shell commands, and multiple input and output streams. The online manual [5] is a good source of details.

A general rule might be that floating point computation is in the domain of dpic macros but text substitution is often better done in m4 macros.

When m4 reads text, it strips off pairs of single quotes: thus, 'text' becomes text. If text is read again, as when it is a macro argument, for example, then the process is repeated. The single quotes serve to delay the evaluation of macros within text, as in macro definitions described above. Therefore, to avoid m4 changing dpic macro definitions or LaTeX, enclose them in single quote pairs.

Some simple applications of m4 macros are illustrated in the subsections that follow.

3.5.1 Branching

As an illustration of m4 macros, suppose that commands that are specific to the postprocessor must be generated. Then the macro

```
ifpgf('pgf-specific commands', 'other commands')
```

for example, should expand to its first argument if pgf is to be the postprocessor, otherwise it should expand to the second argument. To implement this, ifpgf is defined in the statement define('ifpgf', 'ifelse(m4postprocessor,pgf, '\$1', '\$2')')

which tests for equality of the character sequences m4postprocessor and pgf. However, if m4postprocessor is a macro, it is replaced by the macro text before the test is performed, and if the macro text is pgf, then the first argument of ifpgf is evaluated. In the Circuit_macros package, m4 is required to read a postprocessor-specific file before anything else, and that file contains the required definition of m4postprocessor.

The built-in macro ifelse can have multiple branches, as illustrated below:

```
ifelse(m4postprocessor,pstricks, 'PSTricks code',
   m4postprocessor,pgf, 'TikZ PGF code',
   m4postprocessor,mfpic, 'Mfpic code',
   m4postprocessor,mpost, 'MetaPost code',
   m4postprocessor,xfig, 'Xfig code',
   m4postprocessor,postscript, 'Postscript code',
   m4postprocessor,pdf, 'PDF code',
   m4postprocessor,svg, 'SVG code',
   'default code')
```

3.5.2 Perpendiculars

The Circuit_macros vperp macro illustrates how m4 macros can extend the pic language. The purpose is to generate a pair of values representing the unit vector perpendicular to a given line, say.

```
define('vperp',
  'define('m4pdx','('$1'.end.x-'$1'.start.x)')dnl
  define('m4pdy','('$1'.end.y-'$1'.start.y)')dnl
  -m4pdy/vlength(m4pdx,m4pdy),m4pdx/vlength(m4pdx,m4pdy)')
```

The macro can be invoked as vperp(A) where A is the name of a line. Another invocation might be vperp(last line). First, two macros (beginning with m4 to avoid name clashes) are defined as the x-distance dx and y-distance dy of the end of the line from the start. The macro evaluates to the pair $-dy/\sqrt{(dx)^2+(dy)^2}$, $dx/\sqrt{(dx)^2+(dy)^2}$, where the denominators are calculated by the macro vlength.

3.5.3 Setting directions

The pic language defines the concept of the current drawing direction, which is limited to up, down, left, and right. Two-terminal circuit elements, for example, might have to be drawn in any direction, which calls for the ability to define diagrams without knowing their final orientation and to rotate the result at will. This capability can be added to the basic pic language by judicious use of macros.

```
First, instead of specifying positions in the usual way, such as in line from (x1,y1) to (x2,y2)
```

```
for example, let us agree to write
  line from vec_(x1,y1) to vec_(x2,y2)
where vec_(x1,y1) evaluates to
  (a*x1 + b*y1, c*x1 + d*y1)
```

Then if a and d are cos(theta), b is -sin(theta), and c is sin(theta), this transformation corresponds to rotating the argument vector by an angle theta. To produce relative coordinates, the macro rvec_(x,y) evaluates to

```
Here + vec_(x,y),
so writing
line to rvec_(x1,y1)
```

draws a line from the current position Here to a point (x1,y1) defined with respect to rotated coordinates relative to Here.

The Circuit_macros package makes extensive use of versions of the above two macros. The angle and transformation constants are set using macros

```
Point_(degrees) and point_(radians), which have angles as arguments.
```

This usage is illustrated by the macro lbox, which draws a pic-like box oriented in the current direction. It can be defined as

```
define('lbox',
  'define('m4bwd',ifelse('$1',,boxwid,'($1)'))dnl
  define('m4bht',ifelse('$2',,boxht,'($2)'))dnl
  line from rvec_(m4bwd,0) to rvec_(m4bwd,m4bht/2) \
    then to rvec_(0,m4bht/2) \
    then to rvec_(0,-m4bht/2) \
    then to rvec_(m4bwd,-m4bht/2) \
    then to rvec_(m4bwd,-m4bht/2) \
    then to rvec_(m4bwd,0) '$3'')
```

The macro is invoked as lbox(width, height, type); for example,

```
Point_(20); lbox(,,fill 0.9)
```

draws a light gray-filled box of default size at an angle of 20 degrees from the horizontal. In the macro, the width and height of the box are first defined, using default values if the first and second arguments are not given. Then a line is drawn to outline the box, and the fill 0.9 argument is appended to the line command to fill the box. A slightly more elaborate version that encloses the box in [,] brackets is given by the Circuit_macros rotbox macro.

3.6 Subscripts

Dpic allows variables and capitalized labels to have subscripts; thus x and x[4] are distinct variable names, and can be employed in expressions as usual. Similarly, P and P[3] are distinct labels.

3.6.1 Assigning an array of numbers

We can assign an array of numbers to subscripted variables using statements such as

```
x[1] = 47
x[2] = 63
```

and so on, but generating the subscripts is inconvenient, particularly when these statements are obtained by editing a data file. One way of entering the data is to employ the m4 macro definition

```
define('inx', 'define('m4x', ifdef('m4x', 'incr(m4x)', 1))m4x')
Then, writing
  x[inx] = 47
  x[inx] = 63
:
```

and processing with m4 automatically generates the required subscripts. The macro sets m4x to 1 if it is not yet defined, otherwise it increments m4x, and then it evaluates to m4x. On completion of the assignments, m4x has the value of the last subscript.

Another way of assigning variables to a subscripted variable is by the definition

```
define array {
   for i=2 to $+ do { exec sprintf("$1[%g] = $%g",i-1,i); } }
which equates the subscripted first argument to the values in argument 2, 3, ... so that, for example,
```


```
array(x,9,-4,7,4.2,0,0,7.9,0,0,10,11,12,13,14,10) assigns the second to sixteenth arguments to x[1] to x[15] respectively.
```

Dpic does not define vector operations, but it is easy to define macros for them. For example, macros can be used to define 3-dimensional vectors, transform them, and to project them onto a drawing plane.

3.7 Splines

Dpic implements standard pic splines by default, as on the left in the following figure, which shows the result of the command

```
spline up 1.5 then right 2 then down 1.5
```

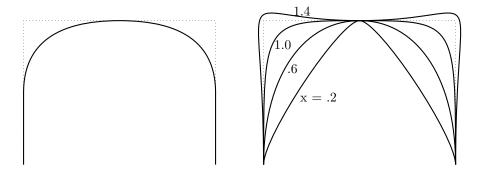

A straight line is drawn along the first half of the first segment and the last half of the last

segment. The curve is tangent to the centres of the segments. The dpic result of including an expression after spline, as in

```
spline x up 1.5 then right 2 then down 1.5
```

is shown on the right of the figure, as the tension parameter x varies from 0.2 to 1.4. The curve begins at the start of the first segment and terminates at the end of the last segment. The tension parameter can be varied to assist in fitting a multisegment spline to a curve. It turns out, for example, that the optimum tension for approximating a circle using four splines is the value 0.551784.

3.7.1 Curve fitting

Splines are drawn with respect to control points, but only pass through the first and last point. Suppose that a sequence of points X[0], X[1], ... X[n] has been given, and a spline is to be found to pass through each point. The control points P[0], P[1], ... P[n] have to be calculated. These points satisfy the following equations:

```
P[0] = X[0]
P[i-1]/8 + P[i]*3/4 + P[i+1]/8 = X[i] for i = 1 to n-1
P[n] = X[n]
```

The Circuit_macros fitcurve macro performs the required calculations and draws the spline to pass through the given points.

3.8 Postprocessor commands and color

Arbitrary postprocessor commands can be interspersed with pic statements to achieve effects such as gradient fills, clipping, and transformations. There are two ways of passing commands into dpic output.

Dpic lines beginning with the backslash \ are passed through to the output without modification. This method works well for TeX statements, LaTeX statements, and commands to postprocessors that rely on the TeX macro processing.

```
The second method is the form

command "text"

or

command sprintf("format", expression,...)

both of which pass the contents of the string into the output stream without the e
```

both of which pass the contents of the string into the output stream without the enclosing quotes. The string need not start with a backslash.

Both of the above methods add considerable power to the pic language, but there are two issues. The first is that if a postprocessor transformation changes the size of a drawn element, the pic processor will not know the new size parameters unless they are explicitly calculated. The second is the challenge of designing a single macro that produces appropriate postprocessor code to have identical effect with different postprocessors.

The Circuit_macros library contains several routines that produce equivalent or nearly equivalent results for several postprocessors. It is probably a good rule to stick with one or two postprocessors such as Tikz-pgf or PSTricks.

Dpic defines a number of internal variables for controlling actions that depend on output format. Internal variables optTeX, opttTeX, optpict2e, optPSTricks, optPDF, optPGF, optMFpic, optPS, optPSfrag, optMpost, optSVG, and optxfig have numerical values 1 to 12 respectively, and variable dpicopt is given the value corresponding to the output format specified on the command line. Therefore, conditional drawing with a case statement as described on page 9, or with if as in the following can be performed:

```
if (dpicopt==optPS) || (dpicopt==optPDF) then {
   drawing commands for postscript or pdf }\
else { drawing commands for latex-related formats }
```

The variable optsafe is set to true if option -z has been specified or if dpic has been compiled to allow only safe mode.

3.8.1 Color

From version 18, gpic allows coloured lines and filled objects as follows, and dpic allows them where the postprocessor supports them:

```
object shaded string
object colored string
where string specifies a colour compatible with the postprocessor. For planar objects, the third case is equivalent to
object outlined string shaded string
For the linear objects line, arrow, spline, dpic treats
colored string
to be the same as
outlined string
but fill can be added by explicitly writing
outlined string shaded string
```

The original pic language did not include the outlined or shaded attributes. Current processors recognize these but know nothing about color except as strings attached to drawing elements. What the string should contain depends on the postprocessor.

3.8.2 Filling with color

Basic pic shapes such as boxes, circles, and ellipses can be colored and filled using, for example, ellipse shaded "color" outlined "color" and, if the two colors are the same, this can be abbreviated as ellipse colored "color" where the color strings are compatible with the postprocessor. For example, the definitions define('gold_', '1,0.84,0') ifelse(m4postprocessor,pstricks,

```
'command "\definecolor{'gold'}{rgb}{gold_}"',
m4postprocessor,pgf,
  'command "\definecolor{'gold'}{rgb}{gold_}"',
m4postprocessor,mpost,
  'define('gold','(gold_)')',
m4postprocessor,postscript,
  'define('gold','1 0.84 0')',
m4postprocessor,pdf,
  'define('gold','1 0.84 0')')
allow the command
  circle shaded "gold"
```

to work for the three different postprocessors specified plus direct postscript or PDF output. Alternatively, the m4 macro rgbstring(fraction,fraction,fraction) evaluates to a string compatible with the postprocessor so that the following produces the same result:

```
circle shaded rgbstring(1,0.84,0).
```

More elaborate options can also be invoked. For example, with PSTricks output the sequence box shaded "lightgray,fillstyle=hlines*,linecolor=blue, hatchwidth=0.5pt,hatchsep=5pt,hatchcolor=red,hatchangle=45" produces a hatched multicoloured fill and is equivalent to command "\pscustom[fillcolor=lightgray,fillstyle=hlines*,linecolor=blue," command "hatchwidth=0.5pt,hatchsep=5pt,hatchcolor=red,hatchangle=45]{%" box command "}%"

One limitation of the pic language is that it lacks the concept of a path composed of different basic curves such as lines, splines, and arcs. Dpic, however, extends the shaded and outlined directives to linear objects such as lines or splines where the output postprocessor allows. Consider, for example, the following macro:

```
define slantbox { [
  w = $1 ; h = $2 ; xs = $3 ; ys = $4
  NE: (w+xs,h+ys)/2 ; SE: (w-xs,-h+ys)/2
  SW: (-w-xs,-h-ys)/2 ; NW: (-w+xs,h-ys)/2
  N: 0.5 between NW and NE ; E: 0.5 between NE and SE
  S: 0.5 between SE and SW ; W: 0.5 between SW and NW
  C: 0.5 between SW and NE
  line $5 from N to NE then to SE then to SW then to NW then to N
  ] }
```

This macro implements a version of the xslanted and yslanted attributes recently introduced for gpic boxes, for example

```
box wid 0.1 ht 0.5 xslanted 0 yslanted 0.1 \
   shaded "Dandelion" outlined "black"
```

The slantbox macro defines the implied compass corners N, S, NE, Its fifth argument can be used to fill or otherwise specify the line. For example, the command

```
slantbox(0.1,0.5,0,0.1,shaded "Dandelion" outlined "black")
```

is equivalent to the gpic example. The above macro can be modified easily to produce arbitrary polygons, for example. The color Dandelion is automatically defined for PSTricks by the LaTeX line

```
\usepackage[dvipsnames]{pstricks}
For TikZ-PGF, try
  \usepackage[usenames,dvipsnames]{xcolor}
  \usepackage{tikz}
```

3.8.3 External files

```
Dpic can send print output to a file (operating system permitting) using the command print arg > "filename" which creates the named file, or print arg >> "filename"
```

which appends output to the named file if it exists and creates the file if not. If the -z option has been invoked or dpic was compiled in safe mode, both of these give warning messages rather than writing to the file.

External files can be used to implement forward referencing. For example, sometimes the final size of a diagram component is required in order to draw a background object that will be overlaid by the component. One solution is to process the diagram twice. In the following code fragment, an assignment to \mathbf{x} is written to an external file so that the required value of \mathbf{x} will be known after the file is read on the second pass.

```
x = <default value>
print "" >> "datafile"  # Make sure the file exists
copy "datafile"  # On second pass, read x = <required value>
... draw objects and calculate required value y ...
print sprintf("x = %g",y) > "datafile" # Write out the assignment
```

4 SVG, PDF, and Postscript output

The -r (raw Postscript), -v (SVG), -d (PDF), and -x (xfig) options of dpic produce output that is not intended to be processed directly by LaTeX or, in some cases, printed on paper. Postscript output can be inserted into a document with the \includegraphics macro. This command will also import pdf for processing by pdflatex.

4.1 Bounding boxes

The bounding box of a diagram is not always known exactly or even defined exactly, since it can depend on the context in which the diagram is to be used. Within a diagram, different line widths, mitred joints, splines, colored output, over-painting, arbitrary text, arbitrary Postscript or SVG, and other complications are allowed; consequently dpic can only provide an estimate of the exact bounding box.

There is apparently no reliable way to know the exact bounding box of arbitrary SVG text, so dpic uses an approximation, and text placement on diagrams may have to be adjusted by hand.

Truncated text: The dpic textht environmental variable often gives dpic a good estimate of the actual height of embedded text, but the width of the text is more difficult to estimate. Consequently, text is often truncated by the figure bounding box at the left or right edge of the figure. Setting the width of strategic strings by hand, e.g. "string" wid 0.75 often serves as a quick cure in specific cases, but is better done automatically as described in the Circuit_macros documentation [1]. Otherwise, strategic move commands can be used to enlarge the bounding box as illustrated at the end of the discussion below.

Dpic uses the constant-width Courier font in pdf files, which allows the width of strings to be calculated from their height, which is specified by textht with default 11 pt, or by the "height number" attribute. The string width is calculated from the height and character count, but can be set explicitly by using width number as the rightmost string attribute.

Psfrag output is another special case. If textht is set to a nonzero value, then its value relative to 11 bp is given as a scale factor to the psfrag \text{tex} command. An alternative way of changing the diagram text height is to set it in the main document; for example, {\small \includegraphics{file.eps}}.

Postscript bounding boxes: For a while, the dpic %%BoundingBox output line simply gave the nominal bounding box determined by line ends and other control points. The use of dpic in server mode has induced a change that correctly defines the bounding box for very basic diagrams. More explicitly, consider

```
.PS box with .sw at 0,0 .PE
```

which draws a box with southwest corner line centres intersecting at Postscript coordinates 0,0 and northeast intersection at 54,36. Dpic -r augments this nominal bounding box by half of the last linethick value (default linethick is 0.8 bp) in the outermost diagram scope to produce the Postscript bounding-box definitions

```
%%BoundingBox: -1 -1 55 37
%%HiResBoundingBox: -0.4 -0.4 54.4 36.4
```

The %BoundingBox line contains integer values that enclose the high-resolution coordinates.

PDF bounding boxes: PDF includes a MediaBox element which serves approximately the same purpose as the postscript BoundingBox, and is calculated the same way. By default, dpic puts the lower left corner of PDF output at coordinates (0,0).

Manual bounding box adjustment: It may be necessary to adjust the bounding box manually. To zero the automatic adjustment, put linethick=0 at the end of the outermost scope. Then arbitrary margins can be added to the nominal box as shown below, where 2, 1, 1, and 0 points are added to the left, bottom, right, and top margins respectively:

```
.PS
Diagram: [
    drawing commands
]
linethick = 0
move from Diagram.sw-(2,1)/72*scale to Diagram.ne+(1,0)/72*scale
.PE
```

5 Pic processor differences

Differences among processors, and between dpic and gpic particularly, are summarized below. Normally, the only changes required to process correct pic or gpic input with dpic are changes to {...} instead of X...X syntax as explained below, together with text formatting if the original code was written for groff. The remaining differences documented below are small syntactical differences or relate to the use of PSTricks or the other dpic output formats. Sometimes, differences in default syntax (such as for arcs) must be considered.

Gpic is being actively maintained so some of the items below apply only to older versions.

5.1 Command-line options

They are completely different, of course. Type dpic -h to see a list of dpic options.

5.2 Output formats

Gpic -t output consists of a sequence of \special statements contained in the TeX box \box\graph. The \special statements are automatically copied into the .dvi file for interpretation by a printer driver such as dvips.

Dpic does not generate tpic specials. See the option list in Section 2 for output formats.

5.3 . lines and program-generated pic

Gpic passes lines beginning with . through to the output, thereby allowing arbitrary Troff macros to be interspersed with pic drawing commands. Some programs that generate pic output automatically insert the Troff line

```
.ps 11
```

on the assumption that the text point size should be 11. Dpic ignores non-continuation lines beginning with . within pictures. Some programs (e.g., pstoedit) add Troff comment lines beginning with .\" outside the .PS, .PE delimiters. These lines must be dealt with separately.

$5.4 \setminus lines$

Both gpic and dpic pass lines beginning with \ to the output but dpic does not automatically append a % at the end as gpic does.

5.5 for-loop and if bodies

```
In gpic, a for loop has the form

for variable = expr1 to expr2 [by [*]expr3] do X body X

where X is any character not occurring in body, but { body } is also allowed. In dpic only
the latter is allowed. Similarly, the required form of an if statement for dpic is
if expr then { if-true } [else { if-false }]
```

The test for termination of the multiplicative form of the for loop is not identical for dpic and gpic but the effects are identical for positive parameters.

Both gpic and recent versions of dpic allow the loop index variable to be changed within the loop, so infinite repetition or control of termination by a test are possible.

5.6 End of line

The line end is significant in the pic grammar. However, dpic ignores line ends following then, $\{$, else, or end of line. Both the CR (octal 015) and NL (octal 012) characters are treated as line ends.

If the last character of a line is \ (but not within a string), then reading is continued on the next line. Dpic allows this to occur within keywords or constants. Strings can contain multiple lines.

The # character begins a comment which ends at the end of the line.

```
The construction

if condition then { if-true }

else { if-false }

produces an error with all pic interpreters. To avoid this error, write

if condition then { if-true } \

else { if-false }
```

5.7 Logic

Dpic and gpic give slightly different default precedences to the logical operators !, &&, ||, ==, !=, >=, <=, <, and >, so judicious use of parentheses may sometimes be in order to guarantee identical behavior. In addition, put string comparisons in parentheses, e.g.

```
("text1" == "text2")
```

The construct x<A,B> is intended to have the same meaning as (x between A and B) but, in some obscure circumstances, all pic interpreters have difficulty determining whether the < character is part of such an expression or is a logical comparison operator. Dpic treats < as a comparison in the expression following if so the form (x between A and B) should be used in such expressions, e.g.

```
if (0.5 \text{ between A and B}).y < 2 \text{ then } { ... }
```

5.8 then

Versions of gpic up to 1.19 ignore the then keyword, so that

line -> then up 0.5

draws one line segment and is the same as

line \rightarrow up 0.5

whereas dpic does not ignore then, and draws two line segments. Newer versions of gpic also draw two segments.

5.9 line, spline, arrow, move

Dpic treats the defaults for linear objects consistently with planar objects with respect to the at modifier. Versions of gpic up to 1.19 treated them differently:

In dpic, line at Here means line with .center at Here. In gpic, line at Here means line with .start at Here.

In dpic, the location corresponding to last line is last line.c.

In gpic, the location corresponding to last line is last line.start.

The compass corners of multisegmented linear objects are not precisely defined and they should be used with care.

5.10 Arc defaults

Gpic and dpic have different algorithms for picking a default radius. The best practice is to specify arcs completely. There is also ambiguity in the pic language. The statement

```
arc cw rad x from A to B
```

does not define a unique arc. There are two arcs, with centres on opposite sides of the line joining A and B, that satisfy this specification, and the interpreter will choose one. Instead, use

arc cw from A to B with .c at C

5.11 Strings

Strings are arbitrary character sequences between double quotes, with double quotes in strings preceded by the backslash character. Equivalently, a string is produced by the C-like sprintf

function

```
sprintf("format" [, expression, ...])
```

The C sprintf function is used for implementing this; therefore, the precision of default formats such as %g may vary by machine and compiler. To produce transportable results, specify the precision completely, e.g. %8.5f. As in C, the pair %% in the format string prints the percent character. Only the f, e, g formatting parameters are valid, since expressions are stored as floating-point numbers, e.g.

```
line sprintf("%g%g0", 2, 0 ) above
is equivalent to
  line "200" above
```

Similarly,

```
command sprintf("\pscircle(%g,%g){%g}",0,0,0.5)
```

places the formatted string into the output. The numerical **sprintf** arguments can be arbitrary expressions rather than the constants shown.

```
Dpic allows strings to be concatenated by the + operator; thus, "abc" + sprintf(" def%g",2) is equivalent to "abc def2".
```

Both dpic and gpic treat $\$ as an escape character prior to the quote character in a string, so "\"" is a length-one string containing the double quote. Otherwise, the backslash is an ordinary string character. For example, the characters $\$ in a string are output as $\$ to produce \ddot{U} when processed by LaTeX.

In a macro, a dollar sign followed by an integer in a string will expand to the corresponding macro argument if it is defined. Separate the dollar sign from the integer to avoid expansion, as in the TeX strings "{\\$}1", "\$\\$ 1\$", or "\${0}\$", for example.

Both dpic and gpic allow logical comparison of strings. Put the comparison in parentheses.

String height and width are unscaled on final output from dpic since these depend on later formatting by LaTeX.

5.12 print arg, \dots

Dpic allows only one argument, which may be an expression, position, or string. To print several quantities at once, use

```
print sprintf(...)
```

to generate a string and, if the string is complicated, remember that $string1 + string2 + \dots$ evaluates to one string.

5.13 command arg, ...

Arbitrary commands are sent to the standard output stream. Dpic allows only one argument, which is a string or sprintf(...).

5.14 Operating system commands

```
With dpic, the required form for a shell (operating system) command is sh "shell command" or sh sprintf("format", expression,...).

The value returned by the operating system can be captured by putting the command in parentheses; for example, if (sh "shell command") == 0 then {...}
```

5.15 copy

```
Dpic supports the command
copy "filename"
but does not directly support the commands
copy [filename] thru X body X [ until word ]
copy [filename] thru macro [ until word ]
```

These functions (and many more) are readily implementable with dpic in any unix-like environment. For example, a basic implementation of copy filename thru macro is given by the following macro:

```
# copythru(macro_name,"filename")
# Implements copy filename thru macro_name
# for data separated by comma, spaces, or tabs
define copythru { sh "sed -e 's/^[ \t]*/$1(/' -e 's/[ \t]*$/)/' \
    -e 's/[, \t][ \t]*/,/g' $2 > copy_tmp__"
copy "copy_tmp__"
sh "rm -f copy_tmp__" }
```

The lines of the *filename* file are changed to calls of the macro_name macro and written into a temporary file, which is then read by dpic. Such usage is not as simple as a built-in function but allows greater flexibility of data by customization of the copythru macro to suit.

5.16 plot

The plot command is deprecated in gpic and not allowed in dpic.

5.17 fill

In gpic, a fill value of 0 means white, 1 means black. Dpic uses 0 as black and 1 as white as do Postscript and the original ATT pic.

The pic language specifies fill only for box, ellipse, and circle, but fill is supported by dpic using the shaded directive. The concept of a path containing several arbitrary linear objects

does not exist in the pic language but can be implemented using postprocessor commands inserted into command string statements. Arbitrary paths can also be constructed using a single spline and the continue statement.

5.18 Scaling

```
Dpic implements a scaled attribute, so that box scaled 1.2 produces a box with dimensions scaled by 1.2, and [box; line scaled 3; circle] scaled 0.5 scales all objects within the block by 0.5. The latter can be used in place of setting the scale environment variable when, for example, different parts of a diagram require different scaling. As always, line thicknesses are not scaled.
```

5.19 Arrowheads

Pic processors provide a limited variety of built-in arrowhead shapes. Dpic draws arrowheads according to the environment variable arrowhead as shown below.

Any other value of arrowhead produces the default filled head shown but also results in an a head shape native to the postprocessor in some cases. The default value of arrowhead is 1 in conformance with other pic processors. Postprocessor parameters can be changed using lines of the form

```
command "postprocessor commands"
```

Changing the line thickness does not affect arrowhead size parameters, which have to be changed explicitly by either of the following methods. The line thickness is specified in points but the arrowhead size parameters are in drawing units:

```
# Method 1 (global change within the current block):
    linethick = 2  # default 0.8 (bp)
    arrowht = 0.18  # default 0.1 (in)
    arrowwid = 0.09  # default 0.05 (in)
    arrowhead = 0  # default 1
    arrow
# Method 2 (change only the currently drawn object):
    arrow thick 2 ht 0.18 wid 0.09 -> 0
```

There is a subtle language problem concerning arrowheads. Let us agree that the following examples should all produce an arrow of length 1 inch and arrowhead width 1 millimetre:

```
arrow right 1 width 1/25.4
.PE
.PS
scale = 25.4
arrow right 25.4 width 1
.PE
.PS 1
arrow right 1/4 width 1/25.4
.PE
```

The original (ATT) pic fails on the second example, insisting that arrowhead dimensions be given in inches. Gpic fails on the third by scaling the arrowhead on final output. Although it might be argued that this is a feature, it causes serious awkwardness when diagrams are to be scaled to exact final dimensions using the .PS x construction, since the effective scale factor is unknown until the .PE line is processed. Dpic generates the same arrow in all three cases, treating arrowhead parameters like line thickness (unscaled) parameters on final output.

5.20 Compass corners

```
Dpic consistently requires a dot before compass corners, so the gpic line x at center of last box should be written for dpic as x at .center of last box
```

5.21 continue

In dpic, the continue command appends a linear drawn object to the previous drawn object as if then had been used in the original command, but calculations can be performed to determine size or placement of the appended part as in, for example,

```
line up right
calculations
continue down
more calculations
continue up left
```

The keyword continue can also be used slightly differently. The line drawn by move to (0,0); line right 1 then to (Here,(2,1))

terminates at (0,1) since Here is the position (0,0), whereas the following terminates at (1,1) since Here is (1,0):

```
move to (0,0); line right 1; continue to (Here,(2,1))
```

Input parsing would be possible if continue were to be replaced by then:

```
move to (0,0); line right 1; then to (Here,(2,1))
```

The keyword **continue** would not have been necessary but it has been retained for historical compatibility.

5.22 Subscripted variables and locations

Dpic allows subscripted variables and positions, as an aid in geometric calculations such as fitting splines to a set of points. Thus Pos[expression] is a valid name for a position. The rounded integer value of the expression is used. Similarly, x[expression] is a valid variable name. There are no array operations, but it is easy to write macros for them.

5.23 Splines

Gpic extends the ATT pic grammar to make line 0.5 legal and mean "a line of length 0.5 in the current direction." All linear objects are treated similarly. Dpic does the same except for splines. In the statement

```
spline x from A to B then to C ...
```

the parameter x is a tension parameter, normally between 0 and 1, to control the spline curvature. If x is not present as in the normal pic grammar, the curve starts with a straight line halfway along the first segment and ends with a straight line along the second half of the last segment. However when x is present, dpic draws the spline from the start of the first segment to the end of the last segment.

5.24 Arithmetic

In an expression, gpic allows terms of the form x*-y, whereas dpic produces an error message. Use x*(-y) or the equivalent.

Dpic allows the assignment operators +=, -=, *=, /=, %=, which do not create a new variable but update the value of the variable already defined. Thus, the assignment x += 1 is equivalent to x := x + 1.

5.25 Vector arithmetic

The dpic grammar permits the following:

```
X: Y + Z
```

where Y and Z are defined positions. Gpic requires

```
X: Y + (Z.x,Z.y)
```

Dpic also allows scalar multiplication:

X: Y*2/3 (but not X: 2/3*Y)

5.26 Positions

If X is a position, then (X) is a valid position for dpic but not old versions of gpic, which gave an error for

```
(a between A and B) + (x,y)
```

Dropping the parentheses to avoid the error gives

```
a between A and B + (x,y)
```

which is not the same resulting position. Use dpic or a recent gpic if you need this construction.

5.27 int()

Gpic int() up to version 1.19 computed the floor of its argument rather than the integer part as specified by ATT pic. Dpic provides both the floor() and int() functions but int() does not compute the same value as these versions of gpic int() for non-integer negative arguments.

5.28 exec

```
In dpic the contents of a string can be executed using exec string or
```

exec sprintf(format string, args)

as if the string were the next line of input. This enables the programmed generation of names and labels, for example:

```
for i=1 to 10 do exec sprintf("A%g: x%g,y%g",i,2*i,3*i) This effect can also be accomplished with a simple macro.
```

5.29 Functions

A few additional mathematical functions are defined in dpic: abs, acos, asin, expe, floor, loge, sign, tan, and pmod.

5.30 PSTricks anomaly

Some time in the mid 2000 to 2010 interval, the behaviour of the low-level PSTricks command \psbezier was changed to match the existing context-dependent behavior of the \pscurve command within the \pscustom environment¹. Dpic does not generate the \pscurve command, but the new behaviour affects dpic-defined filled splines. The "normal" PSTricks spline syntax is

```
\psbezier(x1,y1)(x2,y2)(x3,y3)(x4,y4) ...
```

However, if a correctly defined path containing this spline as its second or later subpath is now enclosed in a \pscustom environment, the path coordinates are incorrect; (x1,y1) must be omitted since, under these conditions, \psbezier takes its first coordinate pair to be the current position. This anomaly would not be a significant problem if it were always known at the time of generating the \psbezier coordinates whether the curve will be enclosed within \pscustom, but such is not the case.

¹The context-dependency of \pscurve was taken to be a feature rather than a bug. An alternative that preserves command orthogonality would have been to define two curve (and spline) commands for the in-pscustom and out of pscustom contexts. Such are the difficulties of software library maintenance.

Dpic always generates four (or more) coordinate-pair arguments as in the normal syntax, sometimes resulting in the addition of an extraneous path segment produced within \pscustom.

For some versions of PSTricks, a workaround for the problem has been to insert a PSTricks patch in your LaTeX code if you are enclosing splines within \pscustom commands. More recent versions of the PSTricks package have changed again but, starting from the August 27, 2010 pstricks.tex distribution file, a parameter noCurrentPoint has been introduced, which prevents \psbezier (and other commands) from taking the current point as the first coordinate pair. The following line inserted into a latex document avoids an error message if the PSTricks version is August 2010 or later:

\psset{noCurrentPoint}

Older versions of PSTricks are handled using the following workaround:

```
command "\makeatletter\@ifundefined{ifPst@noCurrentPoint}%
{\@ifundefined{MPS@Patch}{\gdef\MPS@Patch{}%
  \typeout{ Dpic -p: patching psbezier in pstricks.tex (some versions) }%
  \def\psbezier@ii{\addto@pscode{%
  \ifshowpoints true \else false \fi\tx@OpenBezier%
  \ifshowpoints\tx@BezierShowPoints\fi}\end@OpenObj}}{}%
{\@ifundefined{MPS@PatchMsg}{\gdef\MPS@PatchMsg{}%
  \typeout{ Dpic -p: Setting noCurrentPoint to use all coord pairs }}{}%
  \psset{noCurrentPoint}}\makeatother%"
```

This patch need only be executed once per LaTeX run rather than with every diagram.

If the above fix does not work then, for now, do not insert spline commands into paths within the \pscustom environment, unless the spline is the first path segment. It is probably safe to say that this anomaly does not occur very often, but it can cause considerable difficulty when it does; the cure is to update your PSTricks files.

Legacy diagrams can often be treated in the following way, if pstricks97.tex is available on your machine as in MiKTeX distributions, for example. Replace the line \usepackage{pstricks} with \usepackage[97]{pstricks} or \input{pstricks97.tex}. However, this method precludes using the newer PSTricks facilities.

References

- [1] J. D. Aplevich. M4 macros for electric circuit diagrams in latex documents, 2015. Available with the CTAN Circuit_macros distribution: http://www.ctan.org/tex-archive/graphics/circuit_macros/doc/CMman.pdf.
- [2] B. W. Kernighan and D. M. Richie. The M4 macro processor. Technical report, Bell Laboratories, 1977.
- [3] B. W. Kernighan and D. M. Richie. PIC—A graphics language for typesetting, user manual. Technical Report 116, AT&T Bell Laboratories, 1991.

- [4] E. S. Raymond. Making pictures with GNU PIC, 1995. In GNU groff source distribution; also http://www.kohala.com/start/troff/gpic.raymond.ps.
- [5] R. Seindal et al. GNU m4, 1994. http://www.gnu.org/software/m4/manual/m4.html.

DPIC(1) DPIC(1)

6 Appendix A: dpic man page

NAME

dpic - convert pic-language input to LaTeX-compatible and other formats

SYNOPSIS

```
dpic [ -defghmprstvxz ] [ infile ] [> outfile ]
```

Typically, infile is of the form name [.pic] and outfile is of the form name. [tex|eps|pdf|fig|mp|svg]

OPTIONS

(none) LaTeX drawing output (very limited font-based drawing capability)

- -d PDF output, basic strings
- -e pict2e output
- -f Postscript output, strings in psfrag format
- -g TikZ-pgf output
- -h write help message and quit
- -m mfpic output (see mfpic documentation)
- -p PSTricks output
- -r raw Postscript output, no automatic string formatting
- -s MetaPost output
- -t eepicemu output (slightly less limited than LaTeX drawing output)
- -v svg output
- -x xfig 3.2 output
- -z safe mode (access to external files disabled)

DESCRIPTION

Dpic accepts a tight subset of the pic drawing language accepted by GNU pic (sometimes named gpic) or AT&T pic, and emits lower-level drawing commands for insertion into LaTeX documents, for processing by the xfig or Inkscape drawing tools, or for direct display as encapsulated Postscript, PDF, or SVG. Arbitrary text can be inserted into the output for later formatting, and arbitrary commands for the post-processor (PSTricks, Tikz-pgf, etc.) can be included. Dpic returns EXIT_SUCCESS (normally 0) if messages no more severe than warnings were generated, otherwise EXIT_FAILURE (normally 1).

A few pic-language extensions unique to dpic are implemented for specific purposes.

LANGUAGE SUMMARY

Input consists of a sequence of lines. The first line of a picture is .PS and the last is .PE, with lines between these two converted into low-level drawing commands for the postprocessor chosen by the option. Lines outside of .PSPE pass through dpic unchanged.

Coordinates

Coordinate axes in the pic language point to the right and up. The drawing units are inches by default but the statement

```
scale = 25.4
```

at the beginning of the diagram has the effect of changing the units to millimetres.

Drawn objects

The primitive drawn objects consist of the planar objects box, circle, ellipse; the linear objects line, arrow, move, spline; and arc, which has characteristics of both planar and linear objects. A *block* is a pair of square brackets enclosing other objects: [*anything*] and is a planar object. The complete diagram is contained implicitly in a block.

A *string* is a planar object similar to a box, but the pic language also allows strings to be attached to other objects as overlays, in which case they are part of the object.

The current drawing position Here is always defined. Initially and at the beginning of a block, Here is 0,0. Similarly, the current direction, which can be any of up, down, left, right, is set as right initially.

Each drawn object has an entry point and exit point that depend on the current direction. The entry point is placed by default at the current position. Objects can also be placed explicitly with respect to absolute coordinates or relative to other objects. The exit point becomes the new current position.

Labels

A *label* in pic is an alphameric sequence that starts with an uppercase letter. Dpic allows variables and labels to be subscripted; thus T and T[5] are distinct labels. The value in brackets can be any expression but it is rounded to the nearest integer value. A label gives a symbolic name to a position or drawn object; for example,

```
Post: Here + (1,2)
Bus[23]: line right 4
```

Defined points

Once drawn, a linear object has defined points .start, .center, and .end, which can be referenced as known positions, for example,

```
L: line; line up 0.5 from L.c
```

where .center has been abbreviated as .c

The defined points for a planar object are the compass points on its periphery given by

.n, .s, .e, .w, .nw, .ne, .se, .sw, together with .center, .top, .bottom, .right, .left. For an arc, these points correspond to the circle of which the arc is a part, with the addition of .start and .end.

A block has defined points similar to a box, but can also have others in its interior. For the example

```
A: [ circle; Q: [ line; circle ]; T: Q.n ]
```

the defined points are as follows:

The points of the outer block as if it were a box, for example, A.ne

A position defined in the block, for example, A.T

The defined points of labeled objects inside the block, preceded by a dot, for example, A.Q (the centre of block Q), or A.Q.ne (the northeast corner of Q).

The defined points of enumerated objects inside the block, preceded by a dot (but make sure there is a space after the dot if it is followed by a number rather than an expression in braces), for example, A.Q. 1st circle.n or (better) A.Q.{1}st circle.n

Language elements

The lines defining a picture are separated by newline characters or semicolons. Newlines are significant except after then, ;, :, {, else, or newline.

A line is continued to the next if the rightmost character is a backslash.

Non-continuation lines beginning with a period are ignored, except for .PS and .PE lines.

The pic source may be commented by placing each comment to the right of a # character (unless the # is in a string).

The language elements include the following:

A drawing command with optional label, for example, box or A: box

A position-label definition, for example A: position

An assignment to a variable, for example x = 5

A direction (to change the default), for example, up

Branching is performed by

```
if expr then \{ dotrue \} else \{ dofalse \}.
```

The looping facility is

```
for variable = expr to expr [by [*] incr] do { anything }.
```

The loop variable is incremented by 1 by default, otherwise by incr (which may be

a negative expression) unless it is preceded by the asterisk, in which case the loop variable is multiplied by *incr*. The loop variable may be changed by statements in the loop, thereby controlling the number of loop repetitions.

Braces occur in several contexts. When used independently of other language elements, as

```
{ anything }
```

the left brace saves the current position and direction, and the right brace restores them to the saved values after the enclosed lines have been processed.

Arbitrary postprocessor commands can be generated using

```
command string,
```

which inserts the contents of *string* into the output. The *string* contents must be compatible with the chosen postprocessor. Similarly, any line that begins with a backslash is copied literally to the output.

The line

```
exec string
```

executes the contents of *string* as if it were a normal input line.

To execute operating-system shell commands, use

```
sh string
```

and to read lines from an external file, use

```
copy string
```

These commands are disabled by the dpic option -z or by a compile-time switch.

The command

```
print expr|position|string [ > string | >> string ]
```

prints or appends its argument to the file named in the string on the right, or by default to the standard error. Printing to a file is disabled by the -z option.

Macros

The pic language includes macro definition and expansion, using

```
define name { anything },
```

so that, when *name* appears alone or with arguments as *name* (*arg*, ...) then it is replaced by the contents between the braces in the definition. A comma in an argument list is ignored within a string or parentheses. In this substitution, occurrences of \$1 are replaced literally by the first argument (not by its value, if any), and so on for other arguments.

The value \$\pmu\$+ in a macro is the number of arguments given to the macro. dpic ignores white space (spaces, new lines, and tab characters) that directly precede an argument in a macro invocation. A macro definition can be deleted by

```
undefine name
```

Macro definitions are global, which may require judicious undefinition of macros if there is a risk of name clashes.

Drawing commands

An object is drawn using the following general format:

```
[ Label : ] object [ attributes ] [ placement ] [ strings ]
```

The items following *object* can occur in any order, but the order can make a difference to the drawn result, since lines are read and interpreted from left to right. Defaults are assumed for all drawing parameters as necessary. For example, the sequence

```
circle "Chew"; arrow; box "Swallow"
line; arc cw ->; ellipse "Digest"
```

draws a simple flow diagram using default sizes for all objects, with centered words in the circle, box, and ellipse.

Attributes

An *attribute* is a keyword or keywords followed by expressions as appropriate. Attributes are used to set parameters that control the placement, size, and appearance of objects.

The dimension attributes are the following, showing valid abbreviations:

```
height|ht|width|wid|radius|rad|diameter|diam|scaled expr
```

When appended to linear objects, height and width apply to arrowhead dimensions. The scaled attribute scales the object by *expr*.

The postprocessed size of a string is unknown in advance to the pic processor, but once known, the bounding box dimensions can be specified explicitly as for other drawn objects, as shown:

```
string wid expr ht expr
```

The thickness of lines defining an object are modified using the environmental variable linethick or the attribute

```
thickness|thick expr
```

expressed in points. Line thickness is independent of any scaling.

Solid lines are drawn by default; this can be modified with

```
solid invisible invis
```

or with

the optional expression in the latter setting the length and distance between dashes or dots.

The following attributes are for putting arrowheads at the start, end, or both ends of a linear object:

$$<-|->|<->$$
 [$expr$]

The default for arrow objects is ->. The shape parameter *expr* may be omitted, in which case the value of the environment variable arrowhead is used. The accepted values of expr are currently 0, 1, and 3, with 1 the default.

The drawing direction of an arc is changed by the attribute

with ccw the default.

To fill an object with a shade of gray, use the attribute

```
fill [ expr]
```

where a value of 1 means white, and 0 means black. A linear object defining a path can be filled where the postprocessor allows, currently for MFpic, MPost, PDF, PGF, PS, PSfrag, PSTricks, and SVG output.

Line color can be set using

```
outline outlined string
```

The pic language knows no details about color; the string contents must be compatible with the postprocessor. For example, the predefined colours of LaTeX or Tikz-pdf packages can be specified, or custom colors can be defined using the

```
command string
```

facility so that the postprocessor will know about them.

Filling by color is similar, using the attribute

```
shaded string
```

and, when the object is planar and both the fill and outline colors are the same, the two attributes can be combined as

```
colour|color|colored|coloured string
```

in which all four spellings are equivalent.

Finally, the attribute

same

duplicates the properties of the previously drawn object of the same type, but with the current default placement.

In addition to scale changes effected by the scale variable, the size of the complete picture can be set by appending one or two terms to the .PS line as shown:

```
.PS [x [y]]
```

where x and y evaluate to constant values. On encountering the .PE line, the picture width w and height h are calculated. If x>0 then the picture is scaled so that w=x. If h>y>0 or if x=0 and y>0 then the picture is scaled so that h=y. Horizontal and vertical scaling are not independent. Text size, line thickness, and arrowheads are not scaled. The units are inches, so for example,

```
.PS 100/25.4
```

sets the final picture width to 100 mm. Printed string text may extend beyond the rectangular boundaries defined by w and h unless the text dimensions have been explicitly set.

If the final diagram width exceeds the environment variable maxpswid or the height exceeds maxpsht, both of which can be changed by assignment, then the diagram is scaled as for x and y above.

Placement of drawn objects

An object is placed by default so that its entry is at the current point.

Explicit placement is obtained with

```
object at position
```

which centers the object at position, or

object with defined point at position

for example,

```
arc cw from position to position with .c at position
```

A block can also be positioned by reference to a displacement from its lower left corner, for example,

```
A: [ contents ] with (0.5,0.2) at position.
```

Linear objects are placed by default with the .start point placed at the current drawing postion; otherwise linear objects are defined using a *linespec*, which is of the form

where the second line means that linespecs can be concatenated, and the third that

multisegment linear objects are drawn using multiple linespecs separated by then.

As an example, the following draws a triangle with the leftmost vertex at the current point:

```
line up 2 right 1.5 then down 3 then to Here
```

Exceptionally, the *linespec*

```
to position to position to ...
```

is multiple and does not require the then keyword.

A single *expr* is also an acceptable *linespec* immediately after a linear object and means that the *object* is drawn to length *expr* in the current direction. The exception to this is

```
spline [ expr ] linespec
```

for which the expr is a spline tension parameter. If expr is omitted, a straight line is drawn to the midpoint of the first two spline control points and from the midpoint of the last two to the last point; the spline is tangent to all midpoints between control points. If expr is present, the spline is tangent at the first and last control points and at all other midpoints, and the spline tension can be adjusted. Tension values between 0 and 1 are typical.

In cases where all of the points of a multisegment linear object are not known in advance or inconvenient to calculate, the drawing command

```
continue linespec
```

will append a segment to the previously drawn linear object as if **continue** were **then**, with two differences. Arbitrary calculations may be done between the previous object and the **continue** statement, and the current point is the exit point of the previous object.

The construction

```
line from position to position chop [ expr]
```

truncates the line at each end by the value of *expr* or, if *expr* is omitted, by the current value of environment variable circlerad

Otherwise

```
line from position to position chop expr1 chop expr2
```

truncates the line by the two specified distances at the ends. Truncation values can be negative.

The attribute

by position

is for positioning, for example,

move by
$$(5,6)$$

Variables and expressions

Variable names are alphameric sequences beginning with a lower-case letter, optionally subscripted as for labels, and are defined by assignment. For example, the following line defines the variable x if it does not already exist in the current scope:

$$x = expr$$

The scope of pic variables is the current block in which they are defined, including blocks defined later within the current block. The assignment

```
x := expr
```

or any assignment using an operator in the set

requires x to have been defined previously in the current block or an enclosing block.

Expressions consist of floating-point values combined using the unary operator "!" for logical negation and the usual parentheses and binary operators in decreasing order of precedence:

```
* / %
+ -
== != >= <= < >
&&
||
```

In logical tests, the value 0 is equivalent to false and a nonzero value to true, with resulting true value of 1.

A floating-point value is obtained as an integer, a number with **e** syntax, a function value, a size value of a drawn object, for example,

```
last box.ht,
```

or the horizontal or vertical coordinate of a position, obtained respectively as

```
position .x|.y
```

The single-argument functions are abs, acos, asin, cos, exp, expe, int, log, loge, sign, sin, sqrt, tan, floor. The functions exp and log are base 10. The function rand() delivers a random number between 0 and 1, and rand (expr) initializes the random number generator.

The two-argument functions are atan2, max, min, pmod where pmod is the modulo function delivering a positive value.

DPIC(1)DPIC(1)

Predefined variables

The following variables are predefined on invocation of dpic: optTeX, opttTeX, optPict2e, optPSTricks, optPDF, optPGF, optMFpic, optPS, optPSfrag, optMpost, and optSVG. Variable dpicopt is set according to the output option chosen, so that if one of options -p or -g has been invoked for example, then the test

```
if dpicopt == optPSTricks || dpicopt == optPGF then \{ \ \dots \ \}
```

will selectively execute its body statements. In addition, variable optsafe has value true if the -z option has been selected or dpic has been compiled in safe mode.

Predefined environment variables

A set of environment variables establishes the default values of drawing parameters within the scope of the current block. Their values are inherited from the superior block, but can be changed by assignment. They can be used in expressions like other variables. The variables, their default values, and default uses are given below

arcrad	0.25 arc radius
arrowht	0.1 length of arrowhead
arrowwid	0.05 width of arrowhead
boxht	0.5 box height
boxrad	0 radius of rounded box corners
boxwid	0.75 box width
circlerad	0.25 circle radius
dashwid	0.05 dash length for dashed lines
ellipseht	0.5 ellipse height
ellipsewid	0.75 ellipse width
lineht	0.5 height of vertical lines
linewid	0.5 length of horizontal lines
movewid	0.5 length of horizontal moves
movewid	0.5 length of horizontal moves
textht	0 assumed height of text (11pt for postscript or PDF)
textoffset	2.5/72 text justification gap
textwid	0 assumed width of text

When a value is assigned to the variable scale, all of the above values are multiplied by the new value of scale. The drawing units are thereby changed but the default physical sizes of drawn objects remain unchanged since, on final output, dimensions are divided by the scale value. In addition, the following are unchanged by scale:

1 arrowhead shape
0.5 fill density
0.8 line thickness in points
11.5 maximum allowed diagram height
8.5 maximum allowed diagram width
1 drawing unit scale factor

The variables maxpswid and maxpsht may have to be redefined for large diagrams or landscape figures, for example.

> 40 2015 Jun 1

Positions

A position is equivalent to a coordinate pair defined in current drawing units, and can be expressed in the following forms:

Here The current drawing position.

expr, expr A pair of expressions separated by a comma.

(position) A position in parentheses for grouping.

(position, position) Takes the horizontal value from the first position and the vertical value from the second.

```
position + |-position Vector addition.
```

position *// expr Scalar postmultiplication.

Label The label of a defined position or object. The position is the center of the object.

```
expr [of the way] between position and position
```

The example x between A and B is equal to A*(1-x) + B*x. Any value of expr is allowed.

```
expr < position, position > An abbreviated equivalent of the previous form.
```

The *object* is one of

```
line, move, arrow, arc, box, ellipse, circle, spline, [], "" .
```

The number can be replaced by $\{expr\}$. For example, last "" means the last string, and $\{2^2\}$ nd [] means the fourth block in the current scope. The position is the center of the object.

Parentheses may be required when composite positions or expressions are used in the above forms.

Finally, a position can be given as

```
object. defined point
```

Strings

A *string* is a sequence of characters enclosed in double quotes. To include a double quote in a string, precede it with a backslash. Strings can be concatenated using the + operator. The C-like function

```
sprintf( format string, expr, ... )
```

is equivalent to a string. Expressions are floating-point values, so the only applicable number formats are e, f, and g.

Multiple strings such as "text1" "text2" are stacked and centered vertically.

A string attached to an object overlays the object at the center, and any height or width attributes apply to the object, not the string. However, the justification attributes ljust and rjust can be applied to the individual strings of a stack overlaying an object.

An independent string is placed with its center at the current point by default, or by specifying the position of one of its defined points as for any *object*, for example,

```
"Animal crackers" wid 82.3/72 ht 9.7/72 with .sw at Q
```

The placement qualifiers above, below, ljust, rjust place the string above, below, or justified with respect to the placement point. For example,

```
"Animal crackers" at Q ljust above
```

places the string above and textoffset units to the right of Q.

EXAMPLES

Source file example.pic:

```
\documentclass{article}
\usepackage{tikz}
\begin{document}
.PS
box dashed "Hello" "World"
.PE
\end{document}
```

The command

```
dpic -g example.pic > example.tex; pdflatex example
```

produces example.pdf containing a dashed box with Hello and World stacked inside.

To produce a .tex file containing PSTricks drawing commands for insertion into a LaTeX document using the \input command, delete the first three and last lines in the above source and process using the -p option of dpic.

Similarly, the picture source

```
.PS \definecolor{puce}{rgb}{0.8,0.53,0.6}% box shaded "puce" .PE
```

produces a box filled with a flea-like color when processed with dpic -g or dpic -p and the resulting file is inserted into a latex source file invoking, respectively, the tikz or pstricks package.

SEE ALSO

E. S. Raymond, E. S., *Making Pictures with GNU PIC*, 1995. In GNU groff source distribution; http://www.kohala.com/start/troff/gpic.raymond.ps (A good introduction to the pic language, with elementary illustrations.)

- J. D. Aplevich, *Drawing with dpic*, 2015, http://ece.uwaterloo.ca/~aplevich/dpic/dpicdoc.pdf (Specific discussion of dpic facilities and extensions, with differences between dpic and GNU pic.)
- B. W. Kernighan, B. W. and D. M. Richie, *PIC A Graphics Language for Type-setting, User Manual*, 1991. AT&T Bell Laboratories, Computing Science Technical Report 116. (The original Unix pic.)
- J. D. Aplevich, M4 Macros for Electric Circuit Diagrams in LaTeX Documents, 2015. File CMman.pdf in the graphics/Circuit_macros section of CTAN repositories. (Extension of the pic language using the m4 macro processor for drawing electric circuits and other diagrams.)

AUTHOR

Dwight Aplevich <aplevich at uwaterloo dot ca>

7 Appendix B: dpic grammar

The tokens recognized by the dpic parser are as shown. The tokens in < > pairs are generated internally. Equated tokens (";" = "<NL>") have identical internal value.

```
emptyterm: "<EMPTY>"
terminals:
    "<ERROR>"
     "<" "CW" "CCW"
     "(" ")" "*" "+" "-" "/" "%" ";" = "<NL>"
     "^" "!" "&&" "||"
     "," ":" "[" "]" "{" "}" "." "[]" "'" ";"
     "=" ":=" "+=" "-=" "*=" "/=" "%=" (* the order matters *)
     "<float>" "<name>" "<Label>" "<LaTeX>"
     '"' = "<string>"
     "$" = "<arg>"
     "<START>" "<END>"
     "ht" = "height" "wid" = "width"
     "rad" = "radius" "diam" = "diameter"
     "thick" = "thickness"
     "scaled"
     "from" "to" "at" "with" "by" "then" "continue"
     "chop" "same"
     "of" "the" "way" "between" "and" "Here"
     "st" = "rd" = "nd" = "th" "last"
     "fill" = "filled"
     ".x" ".y"
     "print" "copy" "reset" "exec" "sh" "command"
     "define" "undef" = "undefine"
     "rand"
     "if" "else" "for" "do" "<endfor>"
     "sprintf"
  "<corner>"
     ".ne" ".se" ".nw" ".sw"
     ".t" = ".top" = "top" = ".north" = ".n"
     ".b" = ".bot" = ".bottom" = "bottom" = ".south" = ".s"
     ".right" = ".r" = ".east" = ".e"
     ".left" = ".1" = ".west" = ".w"
     ".start" = "start"
     ".end" = "end"
     ".center" = ".centre" = ".c"
  "<compare>"
     "==" "!=" ">=" "<=" ">"
  "<param>"
```

DPIC(1)DPIC(1)".height" = ".ht" ".width" = ".wid" ".radius" = ".rad" ".diameter" = ".diam" ".thickness" = ".thick" ".length" "<func1>" "abs" "acos" "asin" "cos" "exp" "expe" "int" "log" "loge" "sign" "sin" "sqrt" "tan" "floor" "<func2>" "atan2" "max" "min" "pmod" "<linetype>" "solid" "dotted" "dashed" "invis" = "invisible" "<colrspec>" "color" = "colour" = "colored" = "coloured" "outline" = "outlined" "shade" = "shaded" "<textpos>" "centre" = "center" "ljust" "rjust" "above" "below" "<arrowhd>" "<-" "->" "<->" "<directon>" "up" "down" "right" "left" "<primitiv>" "box" "circle" "ellipse" "arc" "line" "arrow" "move" "spline" "<envvar>" "arcrad" "arrowht" "arrowwid" "boxht" "boxrad" "boxwid" "circlerad" "dashwid" "ellipseht" "ellipsewid" "lineht" "linewid" "moveht" "movewid" "textht" "textoffset" "textwid" = "<lastsc>" (* marker for last scaled env var *) "arrowhead" "fillval" "linethick" "maxpsht" "maxpswid" "scale"

(* marker for last env var *)

The expanded dpic grammar follows:

= "<lastenv>"

```
METAGOAL = input "<EOF>"
1
    input = "<EMPTY>"
2
         | input picture NL
3
    picture = start NL elementlist "<END>"
            | start NL elementlist NL "<END>"
4
    NL = ";"
5
      | "<ERROR>"
6
7
    start = "<START>"
         | "<START>" term
8
```

```
DPIC(1)
                                                                      DPIC(1)
    9
              | "<START>" term term
        elementlist = "<EMPTY>"
   10
   11
                    | element
   12
                    | elementlist NL element
   13
        term = factor
   14
            | term "*" factor
             | term "/" factor
   15
   16
             | term "%" factor
   17
        element = namedobj
   18
               | "<Label>" suffix ":" position
   19
                | assignlist
   20
                | "<directon>"
   21
                | "<LaTeX>"
   22
                command
   23
                | lbrace "{" elementlist optnl "}"
   24
                | ifpart
   25
                | elsehead "{" elementlist optnl "}"
   26
                | for "}"
   27
                | "command" stringexpr
   28
                | "exec" stringexpr
   29
        lbrace = "<EMPTY>"
   30
        namedobj = object
   31
                 | "<Label>" suffix ":" object
        suffix = "<EMPTY>"
   32
   33
               | "[" expression "]"
        position = pair
   34
   35
                 | expression "between" position "and" position
   36
                 | expression "of" "the" "way" "between" position "and" position
   37
                 | expression "<" position "," position "<compare>" shift
   38
        assignlist = assignment
   39
                   | assignlist "," assignment
   40
        command = "print" expression redirect
   41
                | "print" position redirect
   42
                | "print" stringexpr redirect
   43
                | "reset"
                | "reset" resetlist
   44
   45
                | systemcmd
                | "copy" stringexpr
   46
               | defhead optnl "{" "}"
   47
```

```
DPIC(1)
                                                                      DPIC(1)
               | "undefine" "<name>"
   48
   49
               | "undefine" "<Label>"
        optnl = "<EMPTY>"
   50
   51
              | NL
        ifpart = ifhead "{" elementlist optnl "}"
   52
   53
        elsehead = ifpart "else"
   54
        for = forhead "{" elementlist optnl
   55
            | for forincr "<endfor>" elementlist optnl
   56
        stringexpr = string
   57
                   | stringexpr "+" string
        string = "<string>"
   58
   59
               | sprintf ")"
   60
        assignment = "<name>" suffix "=" expression
   61
                   | "<name>" suffix "=" assignment
                   | "<envvar>" "=" expression
   62
   63
                   | "<envvar>" "=" assignment
   64
        expression = term
                   | "+" term
   65
                   | "-" term
   66
   67
                   | expression "+" term
                   | expression "-" term
   68
   69
        ifhead = setlogic "if" logexpr "then"
   70
        setlogic = "<EMPTY>"
   71
        logexpr = logprod
   72
                | logexpr "||" logprod
        forhead = "for" assignlist "to" expression do
   73
   74
        forincr = "<EMPTY>"
        do = "do"
   75
   76
          | by expression "do"
        by = "by"
   77
        | "by" "*"
   78
   79 redirect = "<EMPTY>"
```

```
DPIC(1)
                                                                      DPIC(1)
   80
                 | "<compare>" stringexpr
                 | "<compare>" "<compare>" stringexpr
   81
   82
        resetlist = "<envvar>"
   83
                 | resetlist "," "<envvar>"
   84
        systemcmd = "sh" stringexpr
        defhead = "define" "<name>"
   85
   86
                | "define" "<Label>"
   87
        sprintf = "sprintf" "(" stringexpr
   88
                | "sprintf" "(" stringexpr "," exprlist
   89
        exprlist = expression
                 | expression "," exprlist
   90
   91
        object = block
   92
               | object "height" expression
   93
               | object "width" expression
   94
               | object "radius" expression
   95
               | object "diameter" expression
   96
               | object "thickness" expression
   97
               | object "scaled" expression
               | object "<directon>" optexp
   98
               | object "<linetype>" optexp
   99
               | object "chop" optexp
  100
  101
               | object "filled" optexp
  102
               | object "<arrowhd>" optexp
  103
               | object "then"
  104
               | object "cw"
  105
               | object "ccw"
  106
               | object "same"
  107
               | object stringexpr
  108
               | object "by" position
  109
               | object "from" position
  110
               | object "to" position
  111
               | object "at" position
               | object "<textpos>"
  112
  113
               | object "<colrspec>" stringexpr
               | objectwith "at" position
  114
  115
               | objectwith "<corner>" "at" position
               | objectwith pair "at" position
  116
  117
               | "continue"
  118
        openblock = "<EMPTY>"
        block = "<primitiv>" optexp
  119
```

```
DPIC(1)
                                                                          DPIC(1)
  120
               | stringexpr
  121
               | openblock "[" closeblock "]"
               | openblock "[]"
  122
  123
        optexp = "<EMPTY>"
  124
                | expression
  125
        closeblock = elementlist optnl
  126
        objectwith = object "with"
  127
                    | objectwith "." "<Label>" suffix
  128
                    | objectwith "." nth primobj
  129
        pair = expression "," expression
  130
             | location shift
        nth = ncount "th"
  131
  132
             | ncount "th" "last"
  133
             | "last"
        primobj = "<primitiv>"
  134
                 | "[]"
  135
  136
                 | "<string>"
                 | "[" "]"
  137
        shift = "<EMPTY>"
  138
  139
               | shift "+" location
  140
               | shift "-" location
        location = "(" position ")"
  141
                  | "(" position "," position ")"
  142
  143
                  | place
  144
                  | location "*" factor
  145
                  | location "/" factor
  146
        place = placename
  147
               | placename "<corner>"
  148
               | "<corner>" placename
               | "<corner>" "of" placename
  149
  150
               | "Here"
  151
        factor = primary
  152
                | "!" primary
  153
                | primary "^" factor
  154
        placename = "<Label>" suffix
  155
                   | nth primobj
                   \label{localize} \mbox{ | placename "." "$\label$ " suffix}
  156
```

```
DPIC(1)
                                                                       DPIC(1)
  157
                  | placename "." nth primobj
        ncount = "<float>"
  158
               | "'" expression "'"
  159
  160
               | "{" expression "}"
  161
        logprod = logval
  162
                | logprod "&&" logval
  163
        logval = lcompare
  164
               | stringexpr "<" stringexpr
  165
               | expression "<" expression
  166
        lcompare = expression
  167
                 | stringexpr
  168
                 | lcompare "<compare>" expression
  169
                 | lcompare "<compare>" stringexpr
  170
        primary = "<envvar>"
  171
                | "<name>" suffix
  172
                | "<float>"
  173
                | "(" logexpr ")"
                | location ".x"
  174
                | location ".y"
  175
  176
                | placename "<param>"
                | "rand" "(" ")"
  177
                | "rand" "(" expression ")"
  178
  179
                | "<func1>" "(" expression ")"
                | "<func2>" "(" expression "," expression ")"
  180
                | "(" assignlist ")"
  181
                | "(" systemcmd ")"
  182
```