


**Bulb Heat Lamp**  
 120 Volts, 2.0 amps, 60 hz.

- Grill**  
 White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".
- Heater Housing**  
 23 gauge painted steel housing. Dimensions 8 1/4" x 8" x 5 7/8".
- Lamping Information**  
 1 - 250 watt maximum, type R40 bulb, medium base, 850 Btu.
- Duct Collar**  
 Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.
- Unit Mounting**  
 The housing will mount in ceilings with at least 6" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 8 1/4" x 8". Rated for ceilings insulated to R-40. The housing will mount between 16" on center joists, using the 4 supplied housing mounting rails.
- Single Pack Shipping Info**  
 Box Dim: 14 1/2" x 11" x 8"  
 UPC: 0-8316227021-4  
 Shipping Weight: 5 lbs.

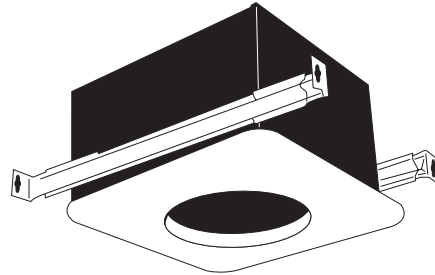

**CUL - TYPE IC RATED**

<b>PROJECT</b>							<b>ARCHITECT</b>			
<b>LOCATION</b>							<b>ENGINEER</b>			
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>		<b>DATE</b>	
<b>FAN NUMBER</b>	<b>MODEL NUMBER</b>	<b>CFM</b>	<b>IN W.G.</b>	<b>RPM</b>	<b>WATTS</b>	<b>AMPS</b>	<b>SONES</b>	<b>QTY</b>	<b>OPTIONAL EQUIPMENT &amp; REMARKS</b>	



**U.S.:** 820 Lincoln Drive  
 West Chester, Pennsylvania 19380-4466  
 Tel: (877)-304-3785  
 Fax: (610) 696-8048

**Canada:** 110 Glidden Road  
 Brampton, Ontario L6T 2J3  
 Tel: (905) 456-2033  
 Fax: (905) 456-1015