Model 28112 Series **DECT 6.0 Cordless** Handset Speakerphone Answering System User's Guide



Your new GE telephone system is EXPANDABLE up to a total of 4 handsets (by purchase of optional Model 28110 handset with charge cradle)

Important Information

NOTICE: This product meets the applicable Industry Canada technical specifications. Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The equipment must be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe systems, if present, are connected together. This precaution may be particularly important in rural areas.

CAUTION: Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate. NOTES: This equipment may not be used on coin service provided by the telephone



Thomson Digital Technologies Ltd 00015927 (Rev. 5 CAN E) © 2007 Thomson Digital Technologies Ltd. Trademark(s) ® Reaistered Printed in China Marauels) déposéels

Interference Information

This equipment generates and uses radio frequency energy which may interfere with residential radio and television reception if not properly installed and used in accordance with instructions contained in this manual. Reasonable protection against such interference is ensured, although there is no guarantee this will not occur in a given installation. If interference is suspected and verified by switching this equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient the radio/television receiver's antenna, relocate the equipment with respect to the receiver, plug the equipment and receiver into separate circuit outlets. The user may also wish to consult a qualified radio/television technician for additional suggestions. This equipment has been fully tested and complies with all limits for Class B computing devices pursuant to part 15 FCC Rules and Regulations.

Telephone Network Information

Should your equipment cause trouble on your line which may harm the telephone network, the telephone company, where practicable, may notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately

The telephone company may make changes in its communications facilities, equipment, operations or procedures where such action is required in the operation of its business. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company will likely give you adequate notice to allow you to maintain uninterrupted service.

Notice must be given to the telephone company upon termination of your telephone from your line.

REN Number

On the bottom of this equipment is a label indicating, among other information, the Ringer Equivalence Number (REN) for the equipment.

The REN is useful in determining the number of devices you may connect to your telephone line and still have all of these devices ring when your telephone number is called. In most (but not all) areas, the sum of the RENs of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone company. REN Number is located on the cabinet bottom.

Licensina

Licensed under US Patent 6.427.009.

Hearing Aid Compatibility (HAC)

This telephone system meets FCC/Industry Canada standards for Hearing Aid Compatibility.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines when used with the belt clip supplied with this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

WARNING: TO PREVENT FIRE OR **ELECTRICAL SHOCK** HAZARD, DO NOT **EXPOSETHIS** PRODUCT TO RAIN OR MOISTURE.

SEE MARKING ON BOTTOM / BACK OF PRODUCT

Introduction




CAUTION: When using telephone equipment, there are basic safety instructions that should always be followed. Refer to the IMPORTANT SAFETY INSTRUCTIONS provided with this product and save them for future reference.

IMPORTANT: Because cordless phones operate on electricity, you should have at least one phone in your home that isn't cordless, in case the power in your home goes out.

Before You Begin

Parts Checklist (for model 28112xx1)

Make sure your package includes the items shown here.

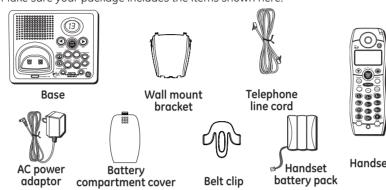


For Model 28112xx2 there will be ONE additional handset, charge cradle, belt clip, battery pack and cover than shown above.

For Model 28112xx3 there will be TWO additional handsets, charge cradles, belt clips, battery packs and covers than shown above.

For Model 28112xx4 there will be THREE additional handsets, charge cradles, belt clips, battery packs and covers than shown above.

Telephone Jack Requirements

To use this phone, you need an RJ11C type modular telephone jack, which might look like the one pictured here, installed in your home. If you don't have a modular jack, call your local phone company to find out how to get one installed.



Installation

Digital Security System

Your cordless phone uses a digital security system to protect against false ringing, unauthorized access, and charges to your phone line.


INSTALLATION NOTE: Some cordless telephones operate at frequencies that may cause or receive interference with nearby TVs, microwave ovens, and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near or on top of a TV, microwave ovens, or VCR. If such interference continues, move the cordless telephone farther away from these appliances.

Certain other communications devices may also use the 1.9 GHz frequency for communication, and, if not properly set, these devices may interfere with each other and/or your new telephone. If you are concerned with interference, please refer to the owner's manual for these devices on how to properly set channels to avoid interference. Typical devices that may use the 1.9 GHz frequency for communication include wireless audio/video senders. wireless computer networks, multi-handset cordless telephone systems, and some long-range cordless telephone systems.

Important Installation Guidelines


- Avoid sources of noise and heat, such as motors, fluorescent lighting, microwave ovens, heating appliances and direct sunlight.
- Avoid greas of excessive dust, moisture and low temperature.
- Avoid other cordless telephones or personal computers.
- Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch non-insulated telephone wires or terminals, unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines.

Handset Lavout

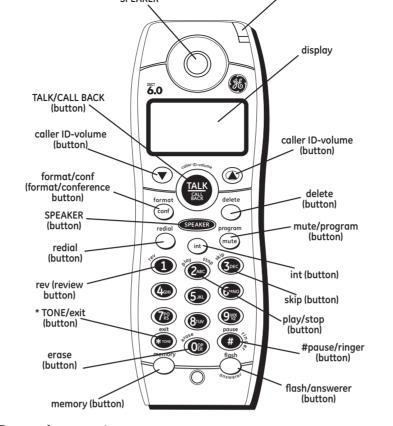

VMWI Indicator

Base Lavout

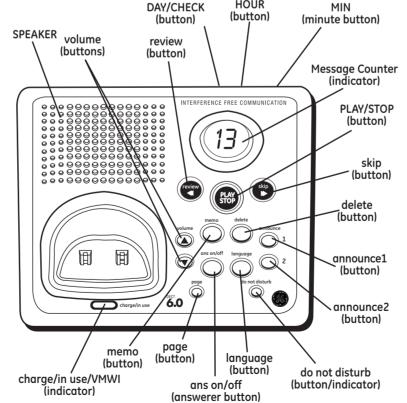


Installing the Phone


Installing the Handset Battery

NOTE: You must connect the handset battery before use.

CAUTION: To reduce the risk of fire or personal injury, use only the



- Thomson Inc. approved model 5-2721 Nickel-metal Hydride battery (Ni-MH), which is compatible with this unit.
- 1. Locate battery and battery door which are packaged together inside a plastic bag and are separate from the handset.
- 2. Locate the battery compartment on the back of the handset.
- 3. Plug the battery pack cord into the jack inside the compartment.
- NOTE: To ensure proper battery installation, the connector is keyed and can be inserted only one way.




4. Insert the battery pack

5. Close the battery compartment by pushing the door up until it snaps into place. **Base Station**

1. Choose an area near an electrical outlet and a telephone wall jack (RJ11C), and place

your cordless telephone on a level surface, such as a desktop or tabletop, or you may



- 2. Plug one end of the telephone line cord into the TEL LINE jack on the back of the base and the other end into a modular jack.
- 3. Plug the AC power converter into the electrical outlet and the DC connector into the jack on the back of the base.
- 4. Place the handset in the base cradle. The charge/in use/VMWI indicator turns on, verifying the battery is charging.
- 5. Allow the phone to charge for 16 hours prior to first use. If you don't properly charge the phone, battery performance is compromised.



CAUTION: To reduce risk of personal injury, fire, or damage use only the 5-2714 or 5-2760 power adaptor listed in the user's guide. This power adaptor is intended to be correctly orientated in a vertical or floor mount position

Wall Mounting

1. Turn the base over

- 2. Attach the wall mounting pedestal by first inserting the tabs on the open edge of the pedestal into the slots on the lower portion of the back of the base. Then push down and snap the pedestal into place
- 3. Slip the mounting holes (on the back of the base) over the wall plate posts, and slide the unit down into place. (Wall plate not included.)

NOTE: If desired, gather the extra telephone line and power adaptor cord and store inside the wall mounting bracket.

Answering System Setup

Setting the Voice Prompt Language

To change the answering system's voice prompt language,

voice prompt language cannot be switched remotely.

Voice Time/Day Stamp and Real Time Clock

2. Press and hold the DAY/CHECK button to set the day of the week.

blinks when you have new messages.

The default voice prompt language is English.

the message counter.

Speaker Volume

Voice Instruction

the voice instructions.

1. Make sure the answering system is **ON**.

and hold to increase by 5-minute increments.

This section shows you how to set up your answering system to receive incoming calls. Before you begin the set up process, you must turn on the answering system.

• Press the language button on front of base to change to the FRENCH voice promp

The unit announces "OPTION FRANCAISE" and Fr shows in the message counter

• Press the Language button again to change to the SPANISH voice prompt. The unit

NOTE: To change to English, press the Language button again. En shows in

NOTE: In remote access mode, the system follows the selected language. The

3. Press and hold the HOUR button to set the hour (a.m. or p.m.). Example: 12AM, 1AM, or

4. Press and release the MIN button to advance the clock in one minute intervals. Press

NOTE: You must set the day manually. You may choose to set the time manually

as well, although the time is automatically transmitted by your local phone

company as part of Caller ID service. If you subscribe to Caller ID service, the

If you need additional assistance, press the review button in standby mode and follow

For best results when recording, you should be about nine inches from the microphone,

You may record 2 outgoing announcements in the answerer or choose the default for

2. Press and hold the announce 1 or announce 2 button until the speaker announces

NOTE: If you choose not to record an outgoing announcement, a default

announcement plays instead. To return to the default announcement after

you have recorded your own outgoing announcement, press the announce

button and release it when you hear the beep. Or, press the delete button

current time is set automatically when you receive your first CID record.

Use the volume (▲ or ▼) buttons to adjust speaker volume on the base to a

comfortable level. L1 is the minimum speaker volume and L8 is the maximum.

Recording the Outgoing Announcement

and eliminate as much background noise as possible.

your current outgoing announcement.

1. Make sure the answering system is **ON**.

3. Begin speaking after you hear the beep.

"RECORD ANNOUNCEMENT AFTER TONE"

while the announcement is reviewing.

Sample Outgoing Announcement

your outgoing announcement.

minutes.

4. Release the button when you finish your announcement.

5. After the time is set, the real time clock will be displayed on the handset within 1

announces "SELECCION ESPANOL" and SP shows in the message counter.

• Press the ans on/off button to turn the answering system on and off.

NOTE: The answering system displays "--" when it is off.

The Message Counter indicator lights when the answering system is on. The indicator **USER NAME** HANDSET X

Programming Functions

The system uses a menu structure to give you access to all of the built-in features. You may program the following items in main menu: Room Monitor and Handset Setup.

Room Monitor (applicable only with additional handsets)

1. Make sure your phone is **OFF** (not in talk mode).

Programming the Telephone

The handset displays the handset number and user name.

- 2. Press the mute/program button to go to the main menu
- Press caller ID-volume (▼ or ▲) button to scroll to ROOM MONITOR.
- 4. Press mute/program button to enter ROOM MONITOR menu, ROOM MONITOR **EXTENSION?** shows in the display.



5. Use the touch tone pad to enter the handset name/number to be monitored

NOTE: When this phone system is expanded (up to 4 handsets by purchase

- of optional Model 28110 handset with recharge cradle), handsets are named HANDSET 1, HANDSET 2, HANDSET 3 and HANDSET 4 respectively. 6. The receiving handset will turn on the microphone and the originating handset will
- turn on the speakerphone to monitor sound from the receiving handset. NOTE: For room monitoring mode to work, the originating handset must NOT

be on the cradle.

NOTE: While in room monitoring mode, the handsets will emit an alert tone approximately every 5 seconds if there is an incoming call. You may press the SPEAKER button to guit room monitor and answer the call.

NOTE: While in room monitoring mode, the originating handset can be switched to monitor by handset earpiece by pressing the TALK/CALL BACK button once. Switch back to speakerphone by pressing the SPEAKER

NOTE: Press the *TONE/exit button on the handset to exit room monitor mode.

Handset Setup

- 1. Make sure your phone is **OFF** (not in talk mode).
- 2. Press the mute/program button to go to the main menu
- 3. Press caller ID-volume (▼ or ▲) button to scroll to **HANDSET SETUP**.
- 4. Press mute/program button to confirm and you may program the following items: Language, Handset Name, Ringer Tone, Ringer Volume, VIP Melody, Key Tone, Message Alert, Rings to Answer, Security Code, Area Code, Tone/Pulse, Registration, Deregistration and Default Setting.

NOTE: During programming, you may press the *TONE/exit button at any time to exit the sub-menu and return to the menu.

Language

From the Handset Setup Menu:

- 1. Press the caller ID-volume (or ▲) button to scroll to the **SET LANGUAGE** sub-menu. 2. Press mute/program button to enter the menu. **SET LANGUAGE 1ENG 2FRA 3ESP**
- Hi, this is (use your name here). I can't answer the phone right now, so please leave your shows in the display. name, number and a brief message after the tone, and I'll get back to you. Thanks. NOTE: The maximum recording time for the outgoing announcement is 2
 - 3. Use the touch tone pad on the handset to select **1ENG**, **2FRA**, **3ESP**, or use the caller ID-volume (or ▲) button to scroll to the desired language. English is the default settina.
- 4. Press the mute/program button to save your selection. You will hear a confirmation Press and release the announce 1 or announce 2 button to review and select this one as tone and the selected language shows in the display.

NOTE: Press the PLAY/STOP button at any time to stop playing announcement

Reviewing and Choosing the Announcement

Handset Name

From the Handset Setup Menu:

1. Press the caller ID-volume (▼ or ▲) button to scroll to the **HANDSET NAME** sub-

- 2. Press mute/program button to enter the menu. *HANDSET NAME* shows in the
- 3. Use the touch-tone pad to enter a name (up to 15 characters). More than one letter is stored in each of the number keys. For example, to enter Bill Smith, press the 2 key twice for the letter B. Press the 4 key 3 times for the letter I. Press the 5 key 3 times for the letter L. Press the 5 key 3 times for the second letter L, and press the 1 key to insert a space between the first and last name. Press the 7 key 4 times for the letter S; press the 6 key once for the letter M; press the 4 kev 3 times for the letter I: press the 8 kev for the letter T: press the 4 kev twice for the letter H.

NOTE: If you make a mistake, use the delete button to backspace and delete one character at a time.

4. Press the mute/program button to save your name. You will hear a confirmation tone and the handset name shows in the display.

You may choose from ten different ringer tones and ten different melodies. From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the *RINGER TONE* sub-menu.
- 2. Press mute/program button to enter the menu. **SET RINGER TONE 01** shows in the display. 01 is default setting.
- 3. Use the caller ID-volume (▼ or ▲) button to scroll to the desired setting (1 through 20). You will hear a sample of the ringer tone/melody you select.
- 4. Press the mute/program button to save your selection. You will hear a confirmation tone and the selected ringer tone shows in the display.

NOTE: You must have the Ringer Volume set to ON for ring tone to signal an incoming call.

Ringer Volume

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the RINGER VOLUME sub-menu. 2. Press mute/program button to enter the menu. SET RINGER 1HI 2LO 30FF shows in the display
- 3. Use the touch tone pad on the handset to select 1, 2 or 3, or use the caller ID-volume (▼ or ▲) button to scroll to your selection. HI is the default setting.
- 4. Press the mute/program button to save your selection. You will hear a confirmation tone and the new volume setting shows in the display.

NOTE: If you turn the ringer OFF, the ringer off icon shows in the display. VIP Melody

This features allows you to assign a specific melody to someone you want to get your attention when the person calls. When a VIP melody is assigned and that person calls, the unit rings the normal ring for the first ring and then follows with VIP melody ring. You may choose from ten different polyphonic melodies and may store up to 10 VIP

NOTE: This feature ONLY works when the following conditions are met. 1. You have subscribed to Caller ID.

- 2. You have your Caller ID record previously transferred to the memory.
- (Refer to Storing CID Records in Internal Memory), NO USER MEMORY will show in the display to remind the user to do CID record transfer first.

Storing VIP Melody

From the Handset Setup Menu:

- 1. Press the caller ID-volume (\checkmark or \blacktriangle) button to scroll to **VIP MELODY** sub-menu. 2. Press mute/program button to select VIP melody feature and then display VIP 1
- -If VIP1 does NOT contain any specific number/records, it will display **EMPTY**.
- 3. Press caller ID-volume (▼ or ▲) button to select the specific VIP melody memory location (10 VIP locations) that does not contain any record.
- 4. Press mute/program button to display **SELECT MEMORY**.

NOTE: If the memory location does not contain any CID memory records and you are trying to mark a specific record as VIP MELODY, then SELECT MEMORY will not be displayed. Instead, NO USER MEMORY will display in prompt to alert the user.

- 5. Press caller ID-volume (▼ or ▲) button to view the records from memory to be selected
- 6. Press mute/program button to confirm and then display **VIP MELODY 01** to wait for the melody tone selection.
- 7. Press caller ID-volume (▼ or ▲) button to select from melody 01 to melody 10 (a testing tone is generated while making melody selection)
- 8. Press mute/program button to confirm.
- NOTE: If the desired number/record was previously stored in any one of the ten VIP melody records, DUPLICATE NUMBER shows in the display.

Changing a Stored VIP Melody Record

Use the Storing VIP Melody procedure to change the number of a selected record and replace the old phone number with new phone number.

When **REPLACE VIP#?** shows in the display, you must press mute/program button on the handset to confirm replacement.

Reviewing And Deleting Stored VIP Melody Record From the Handset Setup Menu:

1. Press the mute/program button to enter to **VIP MELODY** menu.

- 2. Use the caller ID-volume (▼ or ▲) button to scroll to the desired VIP Melody Record.
- 3. If you want to delete the information, press the delete button on the handset while
- the entry displays. The display show **DELETE VIP#?**. 4. Press delete again to confirm. You will hear a confirmation tone and **VIP# DELETED**

shows in the display. **Key Tone**

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **KEY TONE** sub-menu. 2. Press mute/program button to enter the menu. **SET KEY TONE 10N 2 OFF** shows in
- 3. Use the touch tone pad on the handset to select 1 or 2, or use the caller ID-volume (

▼ or ▲) button to scroll to your selection. 10N is the default setting.

4. Press the mute/program button to confirm and the key tone setting shows in

Message Alert (for answering system)

This feature sets your answering system to give an alert tone every 10 seconds when there are new messages.

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **MESSAGE ALERT** sub-
- 2. Press mute/program button to enter the menu. NEW MSG ALERT 10N 20FF shows in
- 3. Use the touch-tone pad to enter the selection, or use the CALLER ID-VOL (▼ or ▲) button to scroll to the **10N** or **20FF**. The default setting is 20FF.

4. Press the mute/program button to confirm. You will hear a confirmation tone and the new setting shows in the display.

Rings to Answer (for answering system) This feature lets you select the number of times you want the phone to ring before the answering system answers a call.

From the Handset Setup Menu:

- 1. Press the caller ID-volume (or ▲) button to scroll to the *RING TO ANSWER* sub-menu.
- 2. Press mute/program button to enter the menu. RING TO ANSWER 3 4 5 6 TS shows in the display.
- 3. Use the caller ID-volume (or ▲) button to scroll to the your selection. The default setting is 5.
- 4. Press the mute/program button to confirm. You will hear a confirmation tone and the new setting shows in the display.
- NOTE: If you select Toll Saver (TS) the unit answers after the 3rd ring if there are NEW messages, OR the unit answers after the 5th ring if there are NO new messages. This allows user to access their answerer from another location and then hang up after 4 rings to save long distance charges.

Security Code (for answering system)

You can access the answering system from a tone dialing telephone in another (remote) location. The security code is required for remote access, and it prevents unauthorized access to your answering system.

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **SECURITY CODE** submenu.
- 2. Press mute/program button to enter the menu. **SECURITY CODE 123** shows in the display.
- 3. Use the touch-tone pad to enter your new 3-digit security code. The default setting is
- 4. Press the mute/program button to confirm. You will hear a confirmation tone and the new security code shows in the display

NOTE: If you make a mistake, use the delete button to delete the security code and begin again.

Area Code

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **AREA CODE** sub-menu.
- 2. Press mute/program button to enter the menu. **SET AREA CODE - -** shows in the display.
- 3. Use the touch-tone pad to enter your 3-digit area code.

shows in the display. The default setting is "1 TONE".

4. Press the mute/program button to confirm. You will hear a confirmation tone and the new area code shows in the display.

NOTE: To restore the default setting to - - -, press and release delete when SET AREA CODE shows in the display.

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▲ or ▼) button to scroll to the **TONE PULSE** sub-menu. 2. Press mute/program button to enter the menu. TONE/PULSE > 1TONE 2PULSE
- 3. Use the touch-tone pad or caller ID-volume (▲ or ▼) to enter 1 TONE or 2 PULSE.
- 4. Press the mute/program button to confirm. You will hear a confirmation tone and your selection shows in the display.

Registration

recommended that a handset be registered again unless absolutely necessary. From the Handset Setup Menu:

Your packaged handset(s) are pre-registered and ready to use. It is not

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **REGISTRATION** sub-menu. 2. Press the mute/program button to enter the menu. **REGISTRATION 1YES** ▶ 2NO
- 2. Press the mute/program button to enter the menu. **DEFAULT SETTING 1YES 2NO** shows in the display The default setting is "2NO". 3. Use the touch-tone pad to select 1 for YES or 2 for NO. Or use the caller ID-volume (3. Use the touch-tone pad to select 1YES or 2NO, or use the caller ID-volume (▼ or ▲)
- 4. If you select YES, press the mute/program button. HOLD BASE PAGE FOR 5
- **SECONDS, THEN PRESS HANDSET PROGRAM** shows in the display. (Your handset should be held near the base during registration process.)
- 5. Press and hold the page button on the base unit until the CHARGE /IN USE indicator flashes. Press the handset mute/program button. **REGISTERING** shows in the display. **HANDSET X REGISTERED** shows in the handset display, where X is the handset number. You may now rename your handset. (Refer to Step 3 & 4 of Handset Name Section)

NOTE: IF you are re-registering the handset through the handset menu; to rename your handset you must go to the Handset Name Section and start from the beginning step.

De-Registration

De-registration cancels registration. During the de-registration process, keep the handset near the base

From the Handset Setup Menu:

- 1. Press the caller ID-volume (▼ or ▲) button to scroll to the **DEREGISTRATION** sub-
- 2. Press the mute/program button to enter the menu. **DEREGISTRATION 1YES** ▶ 2NO shows in the display The default setting is "2NO".

3. Use the touch-tone pad to select 1 for YES or 2 for NO. Or use the caller ID-volume Speakerphone Operation

(▼ or ▲) button to scroll to 1YES or 2NO.

4. Select NO, if you do not want to de-register.

) button to scroll to 1YES or 2NO.

Global De-registration

registered.

4. Release the Page button

From the Handset Setup Menu:

returned to factory default setting.

Telephone Operation

charge/in use/VMWI Indicator on Base

TALK/CALL BACK Indicator on Handset

shows in the display

confirmation tone.

Visual Indicators

remain lit during a call.

phone company.

from your service provider.

VMWI Indicator on Handset

Default Settina

re-registered.

WARNING: It is not recommended that a handset be de-registered

unless absolutely necessary because once a handset is de-registered,

that handset's telephone features cannot be used until the handset is

5. If you select YES, press the mute/program button and MOVE NEAR TO BASE display

6. Press the touch-tone pad to select **1YES** or **2NO**, or use the caller ID-volume (▼ or

7. If you select YES, press the mute/program button to confirm. **DE-REGISTER...** shows

in the display. You will hear a confirmation tone. Then **HANDSET X DEREGISTERED**

for 2 seconds, then **CONFIRM? 1YES 2NO** appears in the display.

shows in the display to confirm the handset is deregistered.

NOTE: When you complete the de-registration process, HANDSET

you MUST re-register the handset using the Registration process.

If one or more handsets becomes lost, you should de-register all handsets to ensure

proper system operation. Follow the steps below to de-register all handsets at the

WARNING: It is not recommended that a handset be de-registered unless

absolutely necessary because once a handset is de-registered, that

handset's telephone features cannot be used until the handset is re-

1. Disconnect power from the base by pulling the plug out of the back of the unit.

3. Continue to hold the Page button until the charge/in use light flashes rapidly.

and **HANDSET NEEDS REGISTRATION** shows in the display.

settings. Follow the steps below to return to the factory default settings.

button to move the cursor to 1YES or 2NO. 2NO is default setting.

4. Press the mute/program button to save your selection. You will hear a

2. Press and hold the Page button and while holding the Page button reconnect the

5. Press and release the page button on the base once. All handsets are de-registered

As you become familiar with this system, you may prefer to use the system's original

1. Press the caller ID-volume (▼ or ▲) button to scroll to the **DEFAULT SETTING** sub-

NOTE: If you choose YES all the settings in the programmable menu are

The charge/in use/VMWI indicator on the base will flash to alert you to an incoming

call, during paging, or if you have a message waiting from your service provider. The

The TALK/CALL BACK and SPEAKER indicator buttons flash when you receive a call and

indicator will remain lit when a handset is in the base charging or when the line is

IMPORTANT: In order to use this unit's Visual Message Waiting

Indicator (VMWI) feature, you must subscribe to this service from your

The VMWI indicator on the top of the handset flashes when you receive a new message

NEEDS REGISTRATION shows in the display. To use the handset,

NOTE: If you are using the speakerphone, remain close to handset so the party you are speaking to can hear you.

If you are using the handset and want to switch to the speakerphone, press the SPEAKER button, press SPEAKER again to end conversation.

If you are using the speakerphone and want to switch to the handset, press the TALK/ CALL BACK button, press TALK/CALL BACK again to end conversation.

Making a Call

1. Press the TALK/CALL BACK or SPEAKER button. Dial the desired number.

Dial the number first, then press the TALK/CALL BACK or SPEAKER button. - OR -

Press the caller ID-volume (▼ or ▲) button to select the desired record, then press the TALK/CALL BACK or SPEAKER button.

NOTE: You may enter up to 32 pre-dial digits. NOTE: If you want to delete the pre-dial number you entered, press the

2. When finished, press the TALK/CALL BACK or SPEAKER button to hang up.

delete button until all of the digits are erased.

Answering Calls

- 1. When the phone rings, press the SPEAKER button on the handset. - OR -
- Pick up the handset and press the TALK/CALL BACK button.
- 2. When finished, press SPEAKER or TALK/CALL BACK to hang up.

NOTE: Adjust the handset volume by pressing the caller ID-volume (or ▲) button during a call.

Call Timer

After you press the TALK/CALL BACK button on the handset, the built-in call timer shows on the display and counts the length of time of the call in minutes and seconds.

Auto Standby

If you place the handset in the cradle while the handset is off the hook (during a call), the call is automatically disconnected.

Ringer HI/LO/OFF (Shortcut)

There are two ways to set the ringer to HI/LO/OFF. One is the traditional way as described in the Programming Functions; Handset Setup; Ringer Volume menus. The other one is this short cut to ringer menu.

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Press the #pause/ringer button to display **SET RINGER 1HI 2LO 30FF**.
- 3. Use the touch tone pad on the handset to select 1, 2 or 3, or use the caller ID-volume (▼ or ▲) button to scroll to your selection. HI is the default setting
- 4. Press #pause/ringer button again to save and display the new selection for a few seconds.

Flash/Call Waiting

If you subscribe to the combined Call Waiting Caller ID service from your local telephone company, you will receive Caller ID information (if available) on Call Waiting calls. During a phone call, you will hear a beep to indicate another call is waiting on the line and Caller ID information for the waiting call shows on the handset display.

- To connect to the waiting call, press the flash/answerer button on the handset, and your original call is put on hold.
- To switch between the two calls, press the flash/answerer button. TIP: Do not press the TALK/CALL BACK button on the handset to activate a

custom calling service, such as call waiting, or call will disconnect. Last Number Redial

You may redial a number up to 32 digits long. To guickly redial the last number you dialed:

- 1. Press the TALK/CALL BACK button.
- 2. Press the redial button.
- 3. Press the redial button first, then use the caller ID-volume (▼ or ▲) button to select the desired redial number.

- Press the caller ID-volume (•) to review the oldest call and scroll toward the most recent calls (higher numbers).
- Press the caller ID-volume (▼) to review the newest call and scroll to older calls

(lower numbers). NOTE: You may choose from three last dialed numbers.

If you get a busy signal and want to keep dialing the number, press the redial button to

Press the *TONE/exit button to exit a menu function and return to the standby screen.

The page feature helps you locate a misplaced handset. To send and receive pages, all

handsets must be registered. If your handset is not registered, follow the instructions in

Handset to Handset Paging (applicable only with additional handsets)

2. Press and release the int button on a handset. **PAGING EXTENSION?** shows in

4. To cancel the page, press the *TONE/exit, int, or TALK/CALL BACK button on the

originating handset, or press the *TONE/exit button on the receiving handset.

2. Press and release the int button on a handset. **PAGING EXTENSION?** shows in

Handset 1, 2=to page handset 2, etc., and 5=to page all handsets)

Use the base-only to page all registered handsets at the same time.

Paging All Handsets from a Handset (applicable only with additional hand-

3. Use the touch-tone pad to enter the handset number you want to page. (1= to page

4. To cancel the page, press the *TONE/exit, int, or TALK/CALL BACK button on the

originating handset, or press the *TONE/exit button on the receiving handset.

1. Press the page button on the base. All handsets beep for two minutes, and **PAGING**

2. To cancel the page, press the page button on the base, or press the TALK/CALL BACK

To have a private, off-line conversation, use the MUTE feature. The party on the

2. Press the mute/program button to cancel and return to your phone conversation.

When the handset is **ON** (in talk mode) you may adjust the receiver volume by pressing

When the maximum or minimum volume level is reached, the phone beeps twice. VOL

In the standby mode, press the do not disturb button on the base. The DND indicator

will light and **DO NOT DISTURB** shows in handset display. To cancel, press the do not

This feature enables pulse (rotary) service phone users to access touchtone services offered by

banks, credit card companies, etc. Temporarily switching to touchtone mode allows you to enter

4. Hang up the handset and the phone automatically returns to pulse (rotary) dialing

2. When your call is answered, press the TONE*/exit button on the handset to

the caller ID-volume (or ▲) button. There are four volume levels to choose from.

1. Press the mute/program button. The handset display shows **MUTE ON**.

NOTE: DND also mutes the call screening on the answerer.

1. Dial the telephone number and wait for the line to connect

temporarily change from pulse dialing to tone dialing.

3. Follow the automated instructions to get the information you need.

3. Use the touch-tone pad to enter the handset number you want to page.

1. Make sure the originating phone is **OFF** (not in talk mode).

quickly redial the number.

the display.

the Registration section of this manual.

1. Make sure the phone is **OFF** (not in talk mode).

Paging from the Base/Group Page

Receiver Volume Control

1 is minimum and VOL 4 is maximum.

account numbers if necessary to your call

DND allows you to mute the ringer on all handsets.

Do Not Disturb (DND)

disturb button again.

Temporary Tone

FROM BASE shows on each handset's display.

button or the *TONE/exit button on each handset.

telephone line cannot hear you, but you can hear them.

- 4. Press the TALK/CALL BACK button. The number dials automatically.

 - 2. Press the int button on the handset.
 - 3. Use the touch-tone pad to select the handset you want to page.

NOTE: To cancel page, press the int button again or the *TONE/exit button on the sending handset.

- 4. Wait for the person at the receiving handset to press the int button.
- intercom call is automatically canceled. The originating handset displays NO ANSWER.
- 5. When finished, press the *TONE/exit button or int button on either handset to deactivate the intercom

Model 28110 handset with recharge cradle). When 4 handsets are registered, the system can handle 2 separate intercom operations at once, for example, 1st handset intercoms with 2nd handset while 3rd handset intercoms with 4th handset.

Receiving an Intercom Call

When you receive an intercom call, your handset beeps. To answer the call press the int button or TALK/CALL BACK button.

Advanced Intercom Features

If you receive a telephone call during an intercom call, the intercom call is immediately terminated and both handsets ring. Either handset user may press the TALK/CALL BACK

handset and have an off line, private (two-way) intercom conversation. You may also

Using Intercom with External Telephone Calls

have a three-way conversation between the external caller and the handsets, or you may transfer the external telephone call to another handset.

NOTE: Before you intercom/page another handset, you must decide whether you want to create a two-way or a three-way conversation.

handset number you want to call.

hear the intercom conversation. 2. When finished, press the *TONE/exit button or int button to end the intercom call,

Three-Way Callina

- the display.
- **PAGING** shows in the originating handset's display. NOTE: PAGING FROM... shows in the display on the receiving handset, and

the receiving handset presses the int or TALK/CALL BACK button to answer the intercom.

originating handset to conference with the receiving handset and the external caller. **CONFERENCE** shows in the display on the originating and receiving handsets.

Intercom Operation (applicable only with additional handsets)

The intercom feature allows you to have a conversation with another registered handset without tying up the telephone line, allowing you to still receive incoming calls.

Makina an Intercom Call

- 1. Make sure the handset is **OFF** (not in talk mode).

- NOTE: If the receiving handset does not answer within two minutes, the
- NOTE: The system is expandable up to 4 handsets (by purchase of optional

- Receiving an Incoming Call During an Intercom Call
- button to answer the call.

During a telephone call, you may use the intercom/paging function to page another

Two-Way Calling 1. During an external call, press the int button, and use the touch-tone pad to enter the

NOTE: The receiving handset presses the int button to answer the intercom call. Both intercom users may speak privately. The external caller will not

return to the talk mode, and resume your original telephone conversation.

- 1. During an external call, press the int button, LINE ON HOLD EXTENSION? shows in
- 2. Use the touch-tone pad to select Handset #. You will hear a paging tone and

3. When the receiving handset connects, press the format/conf button on the

NOTE: A handset can enter conference mode directly by pressing TALK/ CALL BACK on the second handset during a call.

Transferring External Calls to Other Handsets

During an external call, you may transfer the external call to another handset.

- 1. Press the int button on the originating handset to put an external call on hold, and
- 2. Use the touch-tone pad on the handset to select Handset #. You will hear a paging tone. **PAGING** shows on the originating handset's display, and **PAGING FROM...** shows on the receiving handset's display.
- 3. When the receiving handset connects, press the TALK/CALL BACK button on the originating handset to transfer the call.


Press the TALK/CALL BACK button on the originating handset to transfer the call. If the receiving handset does not answer within 30 seconds, the originating handset rings back and displays **CALLBACK**. If the originating handset does not answer within 20 seconds, the call is automatically dropped.

Caller ID (CID)

then page the receiving handset.

IMPORTANT: In order to use this unit's Caller ID features, you must subscribe to either the standard Name/Number Caller ID Service or Call Waiting Caller ID Service. To know who is calling while you are on the phone, you must subscribe to Call Waiting Caller ID Service.

This unit receives and displays information transmitted by your local phone company This information can include the phone number, date, and time; or the name, phone number, date, and time.



Call Waiting Caller ID

Provided you subscribe to Call Waiting Caller ID service from your phone company; if you receive an incoming call and you are using the GE multi handset system, a beep indicates the presence of a Call Waiting call on the line. The Call Waiting Caller ID information will be displayed and stored in the history of all handsets in the system.

• When you hear the call waiting beep in the handset receiver, press the flash/ answerer button to put the current call on hold and answer the incoming call. Press FLASH/ answerer again to return to the original call.

Receiving CID Records

When you receive a call, the Caller ID information is transmitted between the first and second ring. The Caller ID information appears on the display while the phone rings, giving you a chance to monitor the information and decide whether or not to answer

Storing CID Records (In CID Memory)

If you are not at home or cannot answer, your telephone's Caller ID memory stores the data for the 40 most recent calls you received so you can see who called while you were unavailable. When the 41st call is received, the oldest Caller ID record (1st call) is

You may review the stored information at any time. Calls received since your last review show as **NEW** in the display. Calls that have not been previously reviewed but were received from the same number more than once show as **REPT** in the display.

Reviewing CID Records

As calls are received and stored, the display is updated to let you know how many calls have been received. To scroll CID records:

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Press the caller ID-volume (▼) button to review the newest CID record.
- 3. Press the caller ID-volume () button to review the oldest CID record first.

Dialina a CID Number

- 1. Make sure the phone is **OFF** (not in TALK mode).
- 2. Use the caller ID-volume (▼ or ▲) button to display the desired record.
- 3. Press the TALK/CALL BACK or SPEAKER button. The number dials automatically.

NOTE: Depending on (a) how the incoming caller's phone number is formatted when it is received, and (b) whether or not you previously preprogrammed your local area code into the set up menu, you may need to adjust the format of the incoming caller's stored phone number before making the call, press the format/conf button to adjust the number, and try

Available formats include:

Number of digits	Explanation	Example	
Eleven digits	long distance code "1" +3-digit area code +7-digit telephone number.	1-317-888-8888	
Ten digits	3-digit area code + 7-digit telephone number.	317-888-8888	
Seven digits	7-digit telephone number.	888-8888	

Storing CID Records in Internal Memory

You may also store CID information in the phone's internal memory.

NOTE: It is important that you format CID records correctly BEFORE storing in internal memory as you cannot reformat CID records stored in memory.

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Use the caller ID-volume (▼ or ▲) button to scroll to the desired CID record.
- 3. Press the Memory button to display SELECT MEMORY 01-50.
- 4. Use the touch-tone pad to enter a memory location to store the number in that memory location. You will hear a confirmation tone.

NOTE: If the memory location is occupied, REPLACE MEMO? is displayed, and you must confirm replacement by pressing the memory button.

NOTE: Press the *TONE/exit button once to keep the previous setting (making no changes) and return to the menu.

NOTE: If the selected CID record contains any information that is nonnumeric, the unit will not allow this record to transfer to the internal user memory. The handset will display UNABLE TO STORE.

To Replace a Stored CID Record

- 1. Repeat steps 1 through 3 in Storing CID Records in Internal Memory. After you enter the memory location, REPLACE MEMO? shows in the display.
- 2. Press the Memory button again, and the new CID record replaces the old memory in that location. You will hear a confirmation tone.

Deleting a CID Record

- 1. Make sure the phone is **OFF** (not in TALK mode).
- 2. Use the caller ID-volume (▼ or ▲) button to display the CID record you want to
- 3. Press the delete button. The display shows **DELETE CALL ID?**
- 4. Press the delete button to erase the record showing in the display. The display shows

NOTE: Press the *TONE/exit button to return to the standby mode without deleting any CID records.

Deleting All CID Records

- 1. Make sure the phone is **OFF** (not in TALK mode).
- 2. Use the caller ID-volume (▼ or ▲) button to display any Caller ID record.
- 3. Press and hold the delete button until **DELETE ALL?** shows in the display.
- 4. Press delete button to erase all of the current CID records. The display shows **DELETED** followed by **NO CALLS**.

NOTE: Press the *TONE/exit button to return to the standby mode without deleting any CID records.

Memory

Each handset can store up to fifty 20-digit numbers with up to 15-character names in memory for quick dialing. This memory feature is in addition to the CID memory log, which stores up to 40 CID records in each handset.

Storing a Name and Number in Memory

- 1. Make sure the phone is **OFF** (not in talk mode
- 2. Press the memory button to display **SELECT MEMORY 01-50**.
- 3. Press the desired memory location button (01 through 50) or use the caller ID-
- volume (▼ or ▲) button to scroll to desired the memory location. NOTE: If the memory location is occupied, the memory location number and stored name and telephone number shows in the display. If the memory
- 4. Press the memory button. The display shows **ENTER NAME**.

location is empty, EMPTY shows in the display

5. Use the touch-tone pad to enter a name (up to 15 characters). More than one letter is stored in each of the number keys. For example, to enter Bill Smith, press the 2 key twice for the letter B. Press the 4 key 3 times for the letter I. Press the 5 key 3 times for the letter L. Press the 5 key 3 times for the second letter L, and press the 1 key to insert a space between the first and last name. Press the 7 key 4 times for the letter S; press the 6 key once for the letter M; press the 4 key 3 times for the letter I; press the 8 key for the letter T; press the 4 key twice for the letter H.

NOTE: If you make a mistake press the delete button to backspace and erase the wrong character(s) or number(s).

- 6. Press the memory button to confirm and save the record. The display shows **ENTER** TEL NUMBR.
- 7. Use the touch-tone pad to enter the telephone number (up to 20 digits, including pauses (press #PAUSE button), and press the memory button again to save the record. The unit beeps to confirm.

NOTE: The system treats PAUSES as delays or spaces in the dialing sequence

8. To enter another name and number in a different memory location, return to step 2 and repeat the process.

Storing the Last Number Dialed

You may transfer all three redial numbers into internal user memory.

- 1. Make sure the phone in **OFF** (not in TALK mode).
- 2. Press redial button to display the most recent redial number.
- 3. Use the caller ID-volume (▼ or ▲) button to scroll to desired redial number.
- 4. Press memory button to display **SELECT MEMORY 01 50**. 5. Use touch-tone pad to enter two digit desired memory location (01 through 50). Display will show **ENTER NAME**.
- 6. Follow step 5 in the "Storing a Name and Number in Memory" section to enter name

NOTE: If the memory location is occupied, REPLACE MEMO? is displayed, and you must confirm replacement by pressing the memory button.

- 7. Press memory button to save.
- 8. To enter another name and number in a different memory location, return to step 2 and repeat the process.

NOTE: If the redial number has more than 20 digits, it cannot be stored in memory

Inserting a Pause in the Dialing Sequence (of a Stored Number)

Press the #pause/ringer button on the handset's touch-tone pad to insert a delay in dialing sequence when a pause is needed to wait for a dial tone (for example, after you dial 9 for an outside line, or to wait for a computer access tone.) Each pause counts as one digit in the dialing sequence.

Reviewing Records Stored in Memory

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Press the memory button to display **SELECT MEMORY 01-50**.
- 3. Press the caller ID-volume (▼ or ▲) buttons to scroll the records, or use the handset's touch-tone pad to enter the memory location number.

Changing Records Stored in Memory

Follow the procedure for Storing Names and Numbers in Memory, except replace a stored telephone number with a new one.

Deleting Records Stored in Memory

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Press the memory button to display **SELECT MEMORY 01-50**.
- 3. Press the caller ID-volume (▼ or ▲) button to scroll to the record you want to delete or use the touch-tone pad to enter the desired memory location.
- 4. Press the delete button to mark the record for deletion. The display shows **DELETE?**
- 5. Press the delete button to delete the record. **DELETED** shows in the display. NOTE: If you don't want to change or delete a record, simply press the *TONE/exit button, or wait for one minute to exit the review mode

Dialing a Number from Memory

- 1. Make sure the phone is **ON** (in talk mode) by pressing the TALK/CALL BACK or SPEAKER button.
- 2. Press the memory button to display MEMO # -
- 3. Use the touch tone pad to enter the memory location number. The number dials automatically.
 - -OR-

automatically

- 1. Make sure the phone is **OFF** (not in talk mode). 2. Press the memory button to display SELECT MEMORY 01-50.
- 3. Press the memory location for the phone number you want to dial, or use the caller ID-volume (▼ or ▲) button to scroll to the number you want to dial.
- 4. Press the TALK/CALL BACK or SPEAKER button. The number dials automatically.

Chain Dialing from Memory

Use this feature to make calls from records stored in memory which require a sequence of numbers, such as a callina card number used for a frequently called long distance number. The following example shows how you can store each part of the dialing sequence and use chain dialing to make a call through a long distance service:

•	•	3	5	
ne Number For			Memory Location	
ng Distance Access	Number		7	
ıthorization Code			8	
equently called long	distance number		9	

1. Make sure the phone is **ON** (in talk mode) by pressing the TALK/CALL BACK or

- 2. Press the memory button, and then press 07.
- 3. When you hear the access tone, press the memory button, and then press 08.
- 4. At the next access tone, press the memory button and then 09.

Answering System Operation

This section discusses the buttons and features on the answering system.

Message Counter Indicator

SPEAKER button.

The message counter gives you a numeric display of how many messages you have. The new message indicator flashes to indicate you have new messages. See below for the details.

- a) Message counter has a number displayed without flashing No new messages. Shows total number of old messages
- b) Message counter has a flashing number displayed There are new messages. Shows total number of old and new messages.

d) Message counter has an "F" flashing on the display - Memory is full.

- c) Message counter has bars (-) Answerer is off.
- e) Message counter has a "CL" flashing on the display Clock is not set since power up or after power failure.
- f) Message counter has six horizontal bars flashing on the display MEMO recording.
- g) Message counter has a "An" flashing on the display Answering incoming calls and recording an incoming call.

- h) Message counter has "LA" The answering system is being accessed remotely.
- i) Message counter has a "A1" or "A2" on the display Announcement 1 or Announcement 2 is selected as an current outgoing announcement during Announcement selection and announcement recording/playing.
- i) Message counter has "En" on the display English is selected as the current voice prompt during language selection.
- k) Message counter has "Fr" on the display French is selected as the current voice prompt during language selection.
- I) Message counter has "SP" on the display Spanish is selected as the current voice prompt during language selection.
- NOTE: While the messages are playing, the message counter will display the messages in the order they were received. NOTE: The maximum recording time for each message is 3 minutes and the
- total recording time of this unit is 12 minutes.

Leaving a Message/Memo

Use the memo feature to leave a message.

- 1. Press and hold the memo button.
- 2. Begin speaking after you hear "RECORD MESSAGE" and start tone.
- 3. Release the memo button when you are finished recording the memo.

NOTE: Maximum recording time for memo is 3 minutes.

Screening Calls from the Base 1. When the answering system answers the call, listen while the caller leaves a

TIP: Make sure the volume on the base is set loud enough to hear your

message (to determine who is calling). 2. To speak to the caller, pick up the handset, and press the TALK/CALL BACK or SPEAKER button.

The answering system automatically stops recording when you activate the handset or pick up an extension phone.

incoming calls. Messages Playback

The message counter let you know when you have message(s) or new message(s). To play the messages, press the PLAY/STOP button.

While a message is playing, you may do the following:

- Press the corresponding PLAY/STOP to stop the message playback.
- Press and release the review button to restart the current message.
- Press and release the review button twice to go to the previous message.
- Press and release the skip button to go to the next message • Press the delete button to erase the current message.

Memory Full

When the answering system memory is full, the system answers after 10 rings. You should erase some messages so the answering system may record new messages.

Erasing Messages

You may erase messages in the following three ways:

To erase a message while it is playing

- Press and release PLAY/STOP button.
- 2. Press the review and skip buttons to select and play the message you want to erase.
- 3. Press the delete button, the current message is erased, and the next message plays.

To erase all previously played Messages in a mailbox

- 1. Make sure the phone is **OFF** (not in talk mode)
- 2. Press and hold the delete button until "ALL OLD MESSAGES ERASED" is announced.

To erase a message from the handset:

- 1. Press the flash/answerer button on the handset
- 2. Press the play/stop (key 2) on the handset. 3. Press the erase (key 0) on the handset to erase a message during playback

NOTE: Erased messages cannot be restored.

Remote Access

You may access the answering system with the cordless handset or from any tone-dial compatible telephone.

Cordless Handset

Use the corresponding handset keys just like you would use the base buttons (see "Answering System Setup"). The button functions are located on the handset above each number key. For example, to play messages:

- Press the flash/answerer button. The display shows ANSWERER REMOTE ACCESS.
- Press 2 (play/stop) to play the message.
- When you are finished listening to your messages, press the flash/answerer button

Screening Calls from the Handset

Use the handset to screen calls even when you can't hear the answering system. When the answering system picks up:

- 1. Press the flash/answerer button to access the answering system. CALL SCREENING shows on the display.
- 2. Listen as the caller leaves a message.
- 3. Press the TALK/CALL BACK or SPEAKER buttons to speak to the person or press the flash/answerer button to stop screening the call.

Accessing the Answering System from Another Location

You can access your answering system from any touch-tone phone by entering your 3-digit security code during the playing of outgoing announcement or after you hear the outgoing announcement.

1. Dial the telephone number to which the answering system is connected.

3. Follow the voice menu to use the answering system's remote functions.

2. Enter the security code during the outgoing announcement or after you hear the tone.

Note: The default security code is 123

The remote feature lets you perform the following functions: Press this button Review message Play back messages Stop message playback Erase message 0 (during message playback) Skip message Turn off/on answerer

Review voice menu options Memory Full

When answering system memory is full, the system answers after 10 rings, beeps and waits for you to enter the 3-digit security code. If you don't enter the security code within 8 seconds, the phone hangs up.

You should erase some messages so the answering system can record new messages

NOTE: The unit also answers after the 10th ring if it is turned off. To access

the answering system, enter your 3-digit security code.

Connecting the Belt Clip

- 1. To attach the belt clip, insert the sides of the belt clip into the slots on each side of the handset
- 2. Snap the ends of the belt clip into place.


Connecting an Optional Headset to the Handset

Belt clip and Optional Headset

Each handset can be used with an optional headset hands free operation 1. Connect the headset to the headset jack on the side of the handset. The handset

- receiver and microphone are disabled when the headset is connected. 2. Adjust the headset to rest comfortably on top of your head and over your ear. Move the microphone to approximately two to three inches from your mouth.
- 3. Press the TALK/CALL BACK button to answer a call or make calls using the headset.
- 4. To return to normal operation, unplug the headset from the jack

Chanaina the Battery



will be compromised.

2. Remove the battery compartment door.

Thomson Inc. approved model 5-2721 Nickel-metal Hydride battery (Ni-MH), which is compatible with this unit. 1. Make sure the telephone is **OFF** (not in TALK mode) before you replace the battery.

- 3. Disconnect the battery plug from the jack inside the battery compartment and remove the battery pack from the handset.
- 4. Insert the new battery pack and connect the cord to the jack inside the battery compartment.
- 5. Put the battery compartment door back on. 6. Place handset in the base or handset charge cradle to charge. Allow the handset battery to properly charge (for 16 hours) prior to first use or when you install a new battery pack. If you do not properly charge the phone, battery performance

Battery Safety Precautions

- Do not burn, disassemble, mutilate, or puncture. Like other batteries of this type. toxic materials could be released which can cause injury.
- To reduce the risk of fire or personal injury, use only the Nickel-metal Hydride
- battery listed in the User's Guide. • Keep batteries out of the reach of children.
- Remove batteries if storing over 30 days.

NOTE: The RBRC seal on the battery used in your Thomson Inc. product indicates that we are participating in a program to collect and recycle the rechargeable battery (or batteries).

For more information go to the RBRC web site at www.rbrc.org

or call 1-800-8-BATTERY or contact a local recycling center.

Display Messages

The following messages shows the status of the phone, provides Caller ID information. or helps you set up and use your phone.

BLOCKED NUMBER Indicates the person is calling from a number which is blocked from transmission

CHARGING... Indicates the handset needs to charge for a period of time

before it can resume normal function.

DELETE ALL? Prompt asking if you want to erase all CID records.

DELETE CALL ID? Prompt asking if you want to erase the CID record showing on the display.

DELETE? Prompt asking if you want to erase one of the 50 records

stored in the phone's memory.

DUPLICATE NUMBER Under VIP melody feature, if the desired number/record was selected in any one of TEN VIP melody records before.

DUPLICATE NUMBER shows in the display.

END OF LIST Indicates that there is no additional information in CID memory. **ENTER NAME** Prompt telling you to enter a name in one of the 50

ENTER TEL NUMBR Prompt telling you to enter a telephone number in one of the

50 memory locations.

Indicates call or calls which have not been reviewed. HANDSET NAME Prompt telling you to enter the user name for the registered handset.

HANDSET NEEDS Indicates you must register a non-registered handset prior REGISTRATION to use.

INCOMPLETE DATA Caller information is interrupted during transmission or the phone line is excessively noisy. Indicates no CID information

was received, you are not subscribed to CID service, or CID service is not working.

LINE IN USE Displays on handset while the line is in use.

LONG DISTANCE Indicates CID record is from a long distance call. LOW BATTERY Indicates the battery needs to be charged.

NEW VOICE MAIL Indicates voice mail has not been retrieve from service provide CALL SCREENING Indicates you may use the handset to screen calls before answering the call

NEW CALL XX XX represents the number of new CID records not reviewed.

NO CALLS Indicates there are no CID records in memory. NO USER MEMORY Indicates the memory location contains no user memories and the user is trying to mark a specific user record for VIP MELODY.

May indicate handset is too far away from the base or that OUT OF RANGE the power has been interrupted. Move closer and

check connections.

Someone pressed the page button on the base or PAGING or PAGING FROM int button on the handset

Indicates a repeat call message. Indicates a new call from the

same number was received more than once.

SEARCHING Indicates handset is searching for the base. Indicates the handset is in speakerphone mode. SPKR

UNKNOWN CALLER/ Indicates incoming call is from an area not serviced by CID or NAME/NUMBER the CID information was not sent.

Answering System Display Messages

The following messages show the status of the answering system or help you set up and use the system.

0-59 Indicates the total number of messages. CL (blinking) The voice time/day stamp needs to be set.

An (blinking) The system is answering a call. F (blinking) Answering system memory is full.

Six bars (blinkina) The system is recording a memo or an announcement. LA (Line Access) External line remote answering system

Answering system is turned off.

Handset Sound Signals

Signal	Meaning
A long warbling tone (with ringer on)	Signals an incoming call
Three short beeps (several times)	Page signal
One beep every 7 seconds	Low battery warning

Troubleshooting Guide

Telephone Solutions

No dial tone

Check or repeat installation steps:

Make sure the base power cord is connected to a working electrical outlet. Make sure the telephone line cord is connected to the base and the wall jack.

- Connect another phone to the same jack. If it doesn't work, the problem might be your wiring or local service.
- The handset may be out of range of the base. Move closer to the base.
- Make sure the battery is properly charged (for 16 hours).
- Make sure the battery pack (in the handset) is properly installed.
- The handset should beep when you press the TALK/CALL BACK button, and the charge indicator on the base should be lit when the handset rests in the cradle. If not, the battery may need to be charged.
- Place handset in charge cradle for at least 20 seconds to reset the unit.

Handset does not ring

- Make sure the handset ringer software switch is set to on.
- The handset may be out of range of the base. Move closer to the base.
- You may have too many extension phones on your line. Try unplugging some
- Check for a dial tone.

You experience static, noise, or fading in and out

- The handset may be out of range of the base. Move closer to base.
- Make sure base is not plugged into an electrical outlet with another household appliance. If necessary, relocate the base.
- Charge the battery (for 16 hours).

Unit beeps

- Clean the charging contacts on the cordless handset and base charge cradle with a soft cloth or an eraser.
- See solutions for "No dial tone" on previous page.
- Replace the battery.

Memory dialing doesn't work

- Did you program the memory location keys correctly?
- Did you follow proper dialing sequence?

Unit locks up and no communication between the base and cordless handset

• Unplug the power adaptor from the electrical outlet and the back of the base. Remove the handset battery. Wait for 30 seconds and plug the power adaptor back into the base and electrical outlet. Reconnect the battery and charge for 16 hours.

Caller ID Solutions

No Display

- Charge the battery (for 16 hours). Or replace the battery.
- Make sure the unit is connected to a non-switched electrical outlet. Disconnect the power adaptor from the base and reconnect it.

Caller ID Error Message

• The unit displays this message if it detects anything other than valid Caller ID information during the silent period after the first ring. This message indicates the presence of noise on the line.

No Caller ID

 You must be subscribed to the standard Name/Number Caller ID service from your local telephone company to receive CID information.

If you experience any of the following problems, even after recharging the battery, you may need to replace the battery pack:

- Short talk time
- Poor sound quality
- Limited range
- Charge indicator fails to turn on

Can't hear messages, beep, etc.

Adjust speaker volume.

Time/Day setting stuck at 12 a.m Mon.

Set the time clock.

Incoming messages are incomplete

- An extension phone may have been lifted as a message is received.
- You may have accidently pressed the play/stop button during playback and stopped the message.

Won't respond to remote commands

- You must use a tone-dial phone. This phone does not support pulse (rotary) dialing.
- Make sure to enter the correct security code.
- Did unit hang up? If you take no action for a period of time, it automatically hangs up.

Causes of Poor Reception

- Aluminum sidina.
- Foil backing on insulation.
- Heating ducts and other metal construction that can shield radio signals.
- You're too close to appliances such as microwaves, stoves, computers, etc.
- Atmospheric conditions, such as strong storms.

General Product Care

Clean the phone with a soft cloth.

• Base is installed in the basement or lower floor of the house. Base is plugged into AC outlet with other electronic devices.

To keep your unit working and looking good, follow these guidelines:

• Avoid dropping the handset, as well as other rough treatment to the phone.

chemical products to clean the unit. Doing so will damage the finish.

• Never use strong cleaning agents, paint thinner, abrasive powder, alcohol, or other

• Retain the original packaging in case you need to ship the phone at a later date.

• Periodically clean the charge contacts on the handset and base with a clean pencil

- Baby monitor is using the same frequency.
- Handset battery is low. • You're out of range of the base.

Battery

Answering System Solutions

Answers on 10th ring

- Make sure answering system is turned on.
- Answering system memory may be full. Erase some messages.
- Answering system memory is full. Erase some messages.

Service

homson Digital Technologies Ltd., warrants to the purchaser or gift recipient that if any manufacturing defect becomes apparent in this product within 1 year from the original date of purchase, it will be replaced free of charge, including return transportation.

This warranty does not include damage to the product resulting from accidents, misuse or leaking batteries.

Should your product not perform properly during the warranty period, either:

- 1. Return it to the selling dealer with proof of purchase for replacement,
- 2. Remove the batteries (where applicable), and pack product complete with accessories in the original carton (or equivalent).
- Mail prepaid (with proof of purchase) and insured to:

Thomson Digital Technologies Ltd. 6200 Edwards Boulevard Mississauga, Ontario Canada L5T 2V7

The provisions of this written warranty are in addition to and not a modification of or subtraction from the statutory warranties and other rights and remedies contained in any applicable legislation, and to the extent that any such provisions purport to disclaim, exclude or limit any such statutory warranties and other rights and remedies such provisions shall be deemed to be amended to the extent necessary to comply therewith

If you are unable to find a qualified servicer for out of warranty service, you may

Thomson Digital Technologies Ltd. c/o Thomson Inc. P.O. Box 0944

Indianapolis, Indiana, U.S.A., 46206-0944 Attach your sales receipt to this booklet for future reference. This information is

required if service is needed during the warranty period. PURCHASE DATE NAME OF STORE

Accessory Information

DESCRIPTION	MODEL NO.	
Handset Replacement Battery	5-2721	
AC Power converter	5-2714 or 5-2760	
Belt Clip	5-2717	
Headset	5-2425	
Handset charge cradle	5-2730	

Ontario: (905) 624-8516 Manitoba: (204) 783-2088 British Columbia: (604) 438-8001 Quebec: (514) 352-9071 A shipping and handling fee will be charged upon ordering. It is required by law to collect appropriate sales tax for each individual state, country, and locality to which the merchandise is being sent. Items are subject to

To order, call the nearest distributor for your area: