

42" Flat-TV Monitor /AP



MATCH  **LINE**

- **Flat, Slim and Wide design**
- **Plasma ALiS/HD technology**
- **Superslim 9cm depth**
- **Brightness 700cd/m² (without filter plate)**
- **160° viewing angle / Anti-reflective coating**
- **HD in - 2fhYPbPr in / RGB+HV**
- **DVI-digital in / 1fh YUV in**
- **VGA in/out - SmartPort**
- **RC out - to iTV system**
- **Fanless design (no fan noise)**
- **Optional stands**

'Arch' stand optional



Let's make things better.



PHILIPS

42" Flat-TV Monitor /AP



Technical specifications

Plasma screen

- Visible screen diameter 42" / 106,7cm - 16:9 aspect ratio
- ALiSi/HD 1024x1024 pixels (x3)
- Contrast ratio : 400:1 (dark room)
- Brightness : 700cd/m² (without filter plate)
- Anti-reflex coated glass screen
- Fanless design (no fan noise)
- Wall mount kit : Flat-to-Wall as well as Tilted
- Optional stands : a.o. 'Arch' TC42 9964/2R

Picture processing

- Video standards :
 - PAL 4.43 (B, G, D, H, I, N)
 - PAL 3.58 (M, N)
 - NTSC 3.58 (M)
 - NTSC 4.43
 - SECAM
- Tint Control (3 modes)

Ease of Use

- Menu Languages : Danish, Dutch, English, Finnish, French, German, Italian, Norwegian, Portuguese, Swedish and Spanish
- Dynamic graphical user interface. Easy and intuitive operation through feedforward and backtracking display
- Full menu control of all functions through layered menus
- Onscreen status display for sources and functions (OSD)
- RS232 for service and control via PC
- Last Status (for picture & sound)

Remote Control

- RC19335009

Connections

- VGA
 - VGA in (15pin sub-D)
 - FlexVGA (Loop-through/in) (15pin sub-D)
- Audio / Video
 - VIDEO 1 : - Video CVBS
 - VIDEO 2 : - Video CVBS, S-Video (Y/C)
 - VIDEO 3 : - Component video in, YPbPr (+CVBS)
 - Component video in YPbPr (2Fh for DVD)
 - R/G/B/H/V (RCA)
 - DVI-d in (digital)
 - RS232 (service / control)

Miscellaneous

- VGA cable included, 2m
- CD-ROM with RS232 driver software included
- Ambient temperature : +5/+40°C
- Maximum operating altitude : 2000m / 6562ft
- Mains : AC 95-264V, 50/60Hz
- Power consumption : ±400W (normal operation)
Stand by : <2W
- Weight : monitor 40.0 Kg
- Dimensions (WxHxD):
monitor : 107.5x65.7x9.0 cm.
carton : 149.0x95.2x49.0 cm.

42FD9934/69S

Product highlights

ALiSi/HD Plasma technology with 1024x1024 pixels.

Dual HD component input and full 1080i resolution display for connection to high definition input.




480i, 576i, 1080i, 480p, 720p resolution support.

Continuous Zoom. Cursor movable zoom window.

Multi system Remote Control

YPbPr inputs for best DVD reproduction

11 menu languages, Danish, Dutch, English, Finnish, French, German, Italian, Norwegian, Portuguese, Swedish and Spanish

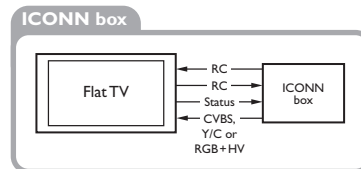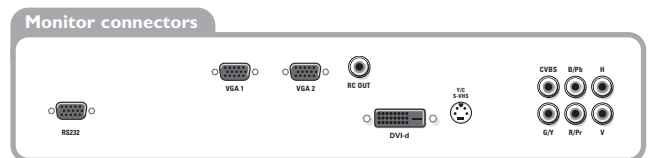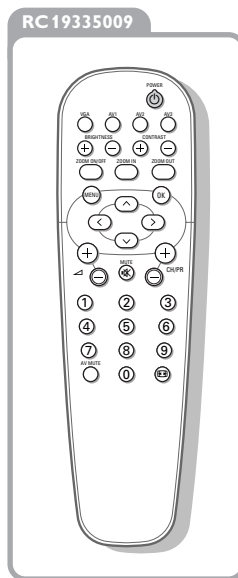

Introduction : Feb. 2002

Predecessor(s) : -

Date of issue : Jan. 2002

©2002 Royal Philips Electronics
All rights reserved

Reference : BCU High End TV

<http://www.philips.com>

Specifications subject to change without notice.

Let's make things better.



PHILIPS