



REPLACEMENT O-RING KIT
For Oil Supply Adapter #15010
Catalog #15018
INSTALLATION INSTRUCTIONS

PLEASE study these instructions carefully before installing your new Edelbrock Oil Supply Adapter. If you have any questions or problems, do not hesitate to contact our **Technical Hotline at: 1-800-416-8628**, from 7am-5pm, Monday-Friday, Pacific Standard Time or via e-mail at: **Edelbrock@Edelbrock.com**. Please fill out and mail your warranty card.

• **DESCRIPTION:**

This kit includes three (3) replacement o-rings for oil supply adapter #15010 (Adapter #15010 is also used in Edelbrock Turbo Kits #1500, 1501, 1502, 1503, & 1504).


• **KIT CONTENTS:**

- 1 - Oil Adapter to Engine Block O-Ring
- 1 - Insert to Adapter Housing O-Ring
- 1 - Supply Fitting to Adapter Housing O-Ring

Installation Procedure

1. Disconnect your supply line from the adapter, remove oil filter (replace), and remove Oil Supply Sandwich Adapter using a 1/2" Allen wrench.
2. Dissassemble the adapter and replace o-rings (See Figure 1).
3. When reinstalling the adapter, make sure the adapter to engine block o-ring is facing toward the engine block, and the threaded stud with 1/2" hex opening is facing out.
4. Tighten with a 1/2" Allen wrench. Make sure the blue fitting is facing toward the driver's side, pointing upward slightly, about the 10 o'clock position.
5. Install a new oil filter.
6. Reattach your supply line.

FIGURE 1 - Oil Supply Adapter

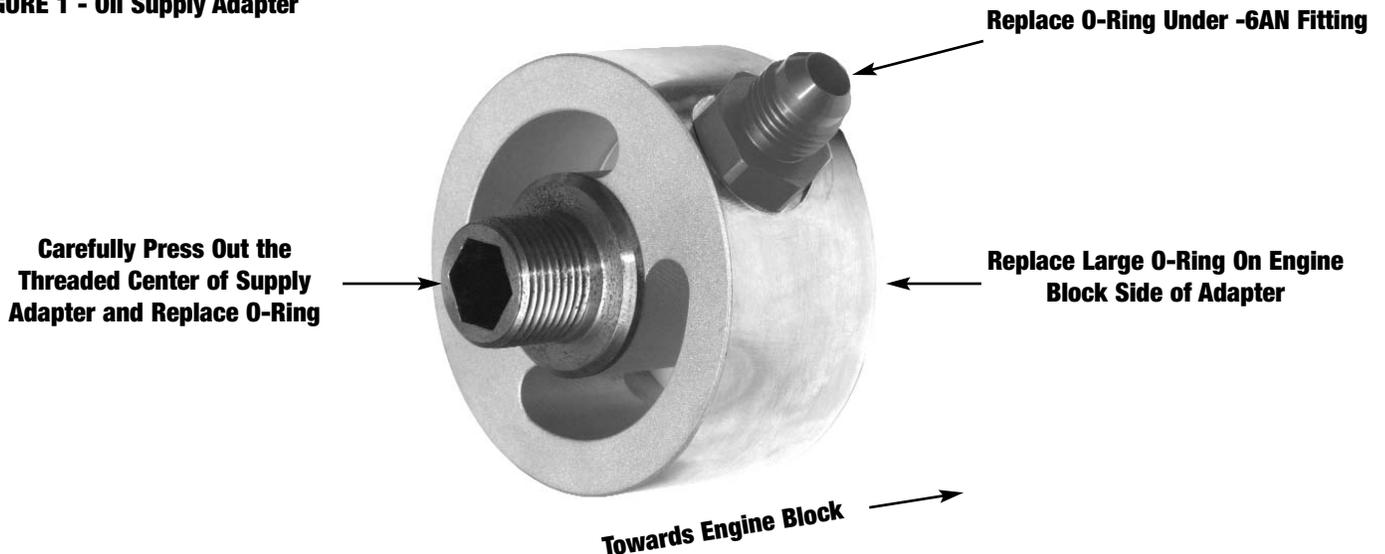

Edelbrock Corporation • 2700 California St. • Torrance, CA 90503
Tech Line: 1-800-416-8628 • E-Mail: Edelbrock@Edelbrock.com