



TURBOCHARGER FASTENER KIT
(For Turbocharger Kit #1500)
Catalog #15002
INSTALLATION INSTRUCTIONS



PLEASE study these instructions carefully before installing your new Edelbrock Turbocharger Fastener Kit. If you have any questions or problems, do not hesitate to contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday-Friday, Pacific Standard Time or via e-mail at: Edelbrock@Edelbrock.com. Please fill out and mail your warranty card.

- Description: This fastener replacement kit contains all necessary hardware to mount the turbine inlet to the exhaust manifold, and the outlet elbow to the turbine outlet. The hardware is constructed of high-quality stainless steel and can be used with any Garrett T25 or T28 Turbocharger.

Kit Contents	
Qty.	Description
□ 4	Stud, 8mm x 1.25 x 1.45" long
□ 5	Stud, 8mm x 1.25 x 1.75" long
□ 9	Nut, 8mm x 1.25
□ 9	Washer, 8mm

Installation Procedure

1. Hand tighten the 1.45" long studs into the exhaust manifold, with the shorter threads towards the manifold (See Fig. 1).
2. Hand tighten the 1.75" long studs into the turbine outlet, with the longer threads towards the turbine outlet (See Fig. 2).
3. When attaching the turbocharger to the exhaust manifold, and the turbo outlet elbow to the turbocharger, use an 8mm washer under each nut, and hand tighten the 8mm x 1.25 nuts onto the studs.
4. Torque the 8mm x 1.25 nuts to 190 inch/lbs. (approximately 16 ft/lbs).

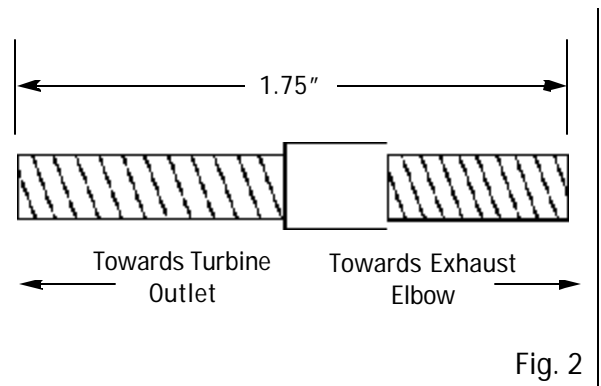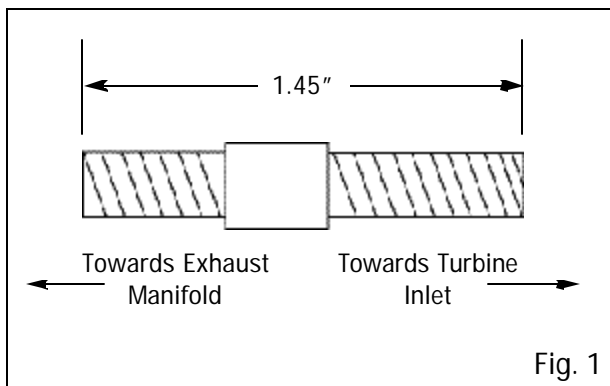

Edelbrock Corporation
2700 California St.
Torrance, CA 90503
Tech Line: 1-800-416-8628
Office: (310) 781-2222
E-Mail: Edelbrock@Edelbrock.com