




PresentationPro

Model PA300 Plus

1. Lightweight with built-in handle for easy mobility
2. Green LED light on front gives visual confirmation of power
3. Switchable power supply
4. Separate bass, treble controls for quality sound
5. Line output to additional speakers
6. Aux in and line inputs connect with LCD projectors, multimedia players, computers and whiteboards
7. CE/C-UL approved safe for school, church, government uses
8. Accepts XLR / 1/4" mic inputs so two microphones can operate at the same time
9. Rugged brass sunburst teeth for worry-free bracket MB350 mounting and guarantees speaker will not slip
 - Ideal for mobile presenters, classroom and athletic uses
 - Includes volume/mute remote control (not shown)
 - Warranty for school use - unlike some other audio products purchased from consumer electronics stores whose warranties would be voided if used in schools

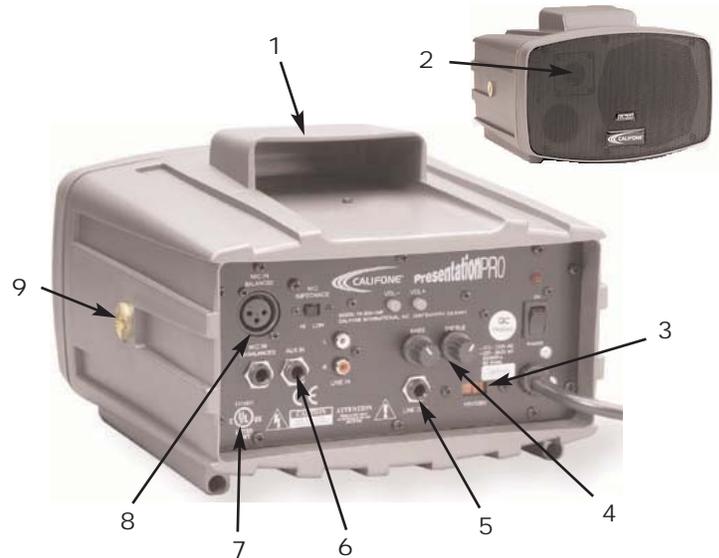

The PresentationPro is the first completely portable PA system that provides flexibility and power. It can be used as a single, portable setup for on the go presentations or installed in multiple classrooms.

"Project Intercept"

Please contact us immediately if you experience any difficulties with your PA300 Plus. Our "Project Intercept" customer service program will quickly repair or replace items under warranty. Simply contact us via phone or email rilane@califone.com.

Visit our website at www.califone.com to learn more about the complete line of wired and wireless *Califone*® headphones and other audio products including: Public address systems, wireless microphone systems, group listening centers, multimedia players and computer peripheral products.

We are proud of helping teachers enhance student understanding and achievements since 1947, with your satisfaction as our first priority.

The PresentationPro carries a limited six-year warranty and service support available through authorized dealers nationwide.

Distributed by:

Specifications

Rated Power Output:	30 watts RMS
Sensitivity for Rated Output:	Line: 125 mVrms Microphone: 4 mVrms Auxiliary: 250 mVrms
Frequency Response:	60 Hz – 20 kHz ± 3dB
Dispersion Angle:	90° H x 120° V
Speakers:	Woofer: 5-1/4" High efficiency Tweeter: 13mm mylar dome
Crossover:	L/C – 6dB/Octave @ 4 kHz
Inputs:	Line inputs (2): Hi-Z, RCA (summing L+R) Balanced mic: Hi or lo-Z, with phantom power (+15 volts D.C.) Unbalanced mic: Lo -Z, 1/4"-phone Auxiliary: Hi-Z Mono 1/4"-phone
Line Output:	250mv constant
AC Power Requirements:	110 – 125 VAC, 50/60 Hz or 208 – 240 VAC, 50/60 Hz
Dimensions (HWD):	6.25" x 10" x 8.5"
Weight:	10 pounds, shipping weight 13 lbs.
Safety Ratings	CE/C-UL approved safe for use in school, business, church and government facilities
Warranty	6 year from date of purchase

Califone® International Inc. 800-722-0500
www.califone.com