RECESSED PAR20MH

DESCRIPTION:

An adjustable PAR20MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

2 - PAR20MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Integral Aromat® electronic metal halide ballsts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog


Туре

Project

COMBOLIGHT® LV Series

TWO (2) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR20 Metal Halide

) () -	Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
î V		19.75″	7.09″	14.00″	5.30″	11.05″	19.75″	13.25″	17.20″ x 8.50″

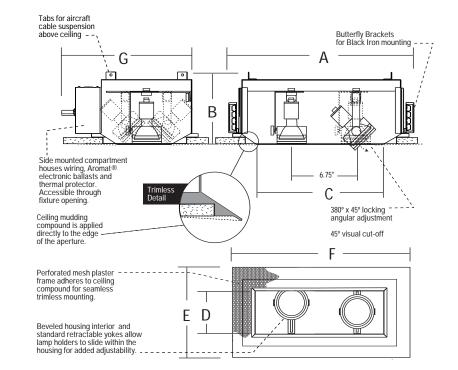



Other Adders CC - Two Circuit CP - Chicago Plenum

ORDERING EXAMPLE:LV220MHWH39120= Two Light Trimless Recessed PAR20MH- White Interior - 39 watt lamps - 120 Volt

Includes Aromat® Electronic

Metal Halide Ballasts



Cat. # / Des	cription	Interior Finish	Lamp Wattage	Voltage
LV220MH :	2 Light Recessed Next Generation Trimless Combo Fixture	BK - Black	39 - 39 Watt PAR20MH	120 - 120 Volt (Standard)
	PAR20MH	WH - White		277 - 277 Volt
		S - Silver		
		PT - Custom (Specify)		
SPECIFY -	LV220MH			



