RECESSED PAR30MH

DESCRIPTION:

An adjustable PAR30MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

6 - PAR30MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Aromat[®] electronic metal halide ballsts in remote housing. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

Includes Aromat® Electronic

Metal Halide Ballasts

ORDERING EXAMPLE: LV360MH



Catalog


Type

Project

COMBOLIGHT® LV Series

SIX (6) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR30 Metal Halide

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	48.77″	8.40″	43.00″	7.00″	12.75″	48.75″	14.95″	46.25" x 10.25"

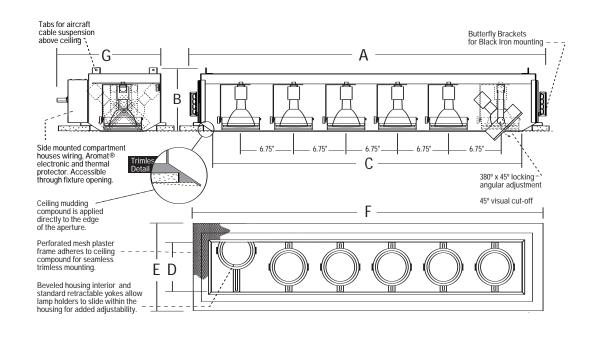



Optional Accessories - Details on Other Side

Other Adders CC - Two Circuit CP - Chicago Plenum

					-			
	= Six Light Trimless Recess 120 Volt	watt lamps -	8	0		0		
				Baffle	Snoots	Louvers	Lenses	
Cat. # / Description		Interior Finish	Lamp Wat	Lamp Wattage			Voltage	
LV360MH : 6 Light Recessed Next Generation Trimless Combo Fixture PAR30MH		BK - Black	39 - 39 W	39 - 39 Watt PAR30MH			120 - 120 Volt (Standard)	
		WH - White	70 - 70 W	70 - 70 Watt PAR30MH			277 - 277 Volt	
		S - Silver						
		PT - Custom (Specify)						
SPECIFY -	V360MH							

WH

70

120

ור



