RECESSED PAR38MH LV TRIMLESS

DESCRIPTION:

An adjustable PAR38MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

6 - PAR38MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

FLECTRICAL:

Aromat® electronic metal halide ballsts in remote housing. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog #


Type

Project

COMBOLIGHT® LV Series

SIX (6) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR38 Metal Halide

| Dimensions | A Housing Length | B Housing Height | C Aperture Length | D Aperture Width | E Plaster Frame Width | F Plaster Frame Length | G Above Ceiling Width | Ceiling Cut-Out |
|------------|------------------------|------------------------|-------------------------|------------------------|-----------------------------|------------------------------|------------------------------------|--------------------|
| | 59.10" | 9.02" | 53.33" | 8.90" | 14.65" | 59.08" | 16.85" | 56.42" x 12.10" |

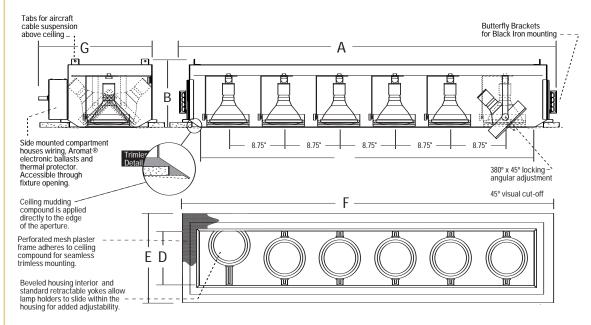

Includes Aromat® Electronic Metal Halide Ballasts

120 Volt



Other Adders

CC - Two Circuit

CP - Chicago Plenum

ORDERING EXAMPLE: LV860MH WH 70 120

= Six Light Trimless Recessed PAR38MH - White Interior - 70 watt lamps -

| ı | Optional Accessories - Details on Other Side | | | | | |
|---|--|--------|---------|--------|--|--|
| | @ | 0 | | | | |
| ı | Baffle | Snoots | Louvers | Lenses | | |

| Cat. # / Description | | Interior Finish | Lamp Wattage | Voltage |
|--|---------|-----------------------|-----------------------------|------------------------------|
| LV860MH: 6 Light Recessed Next Generation Trimless Combo Fixture PAR38MH | | BK - Black | 70 - 70 Watt PAR38MH | 120 - 120 Volt (Standard) |
| | | WH - White | 100 - 100 Watt PAR38MH | 277 - 277 Volt |
| | | S - Silver | | |
| | | PT - Custom (Specify) | | |
| SPECIFY - | LV860MH | | | |



