# RECESSED PAR38MH

#### DESCRIPTION:

An adjustable PAR38MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

#### CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

#### LAMP ASSEMBLY:

5 - PAR38MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

#### SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

#### ELECTRICAL:

Aromat<sup>®</sup> electronic metal halide ballsts in remote housing. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



### Catalog #


Туре

Project

## **COMBOLIGHT® LV Series**

FIVE (5) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR38 Metal Halide

D	imensions	<b>A</b> Housing Length	<b>B</b> Housing Height	C Aperture Length	D Aperture Width	<b>E</b> Plaster Frame Width	<b>F</b> Plaster Frame Length	<b>G</b> Above Ceiling Width	Ceiling Cut-Out
		50.20″	9.02″	44.43″	8.90″	14.65″	50.18″	16.85″	47.52" x 12.10"

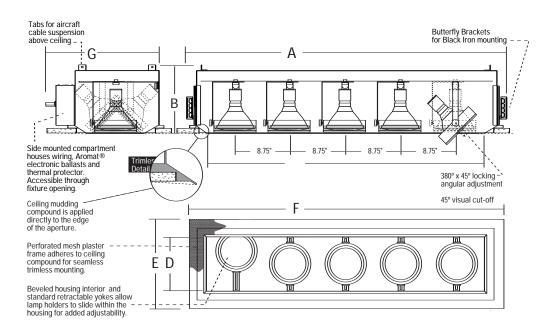



Optional A

Baffle

Other Adders CC - Two Circuit CP - Chicago Plenum

Lenses

ories - Details on Other Side

Louvers

Snoots

= Five Light Trimless Recessed PAR38MH - White Interior - 70 watt lamps -
120 Volt

Includes Aromat® Electronic

Metal Halide Ballasts

ORDERING EXAMPLE: LV850MH

Cat. # / Description		Interior Finish	Lamp Wattage	Voltage
LV850MH : 5 Light Recessed Next Generation Trimle Combo Fixture		BK - Black	70 - 70 Watt PAR38MH	120 - 120 Volt (Standard)
PAR38MH	PAR38MH	WH - White	100 - 100 Watt PAR38MH	277 - 277 Volt
		S - Silver		
		PT - Custom (Specify)		
SPECIFY -	LV850MH			

WH

70

120



