


## DIMENSIONS

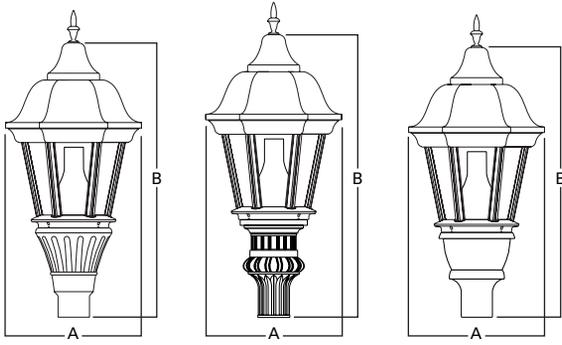

Fixture	A	B
CAC	20 3/8" [516mm]	40 7/8" [1038mm]
CAA	20 3/8" [516mm]	40 1/4" [1022mm]
CAR	20 3/8" [516mm]	41 1/4" [1048mm]

## DESCRIPTION

The Cascade Series from McGraw-Edison combines traditional styling with Dark Sky Friendly cutoff classified performance that provides excellent uniformity. Cascades' styling blends well in many settings downtown streetscapes, roadways residential neighborhoods and city parks.



## CAC/CAA/CAR CASCADE SERIES POST TOP

**50-250W**


**Metal Halide**

**High Pressure Sodium**

**DECORATIVE  
LUMINAIRE**

## ORDERING INFORMATION

**SAMPLE NUMBER:** CAC-150-HPS-277-3C-X-BK-L

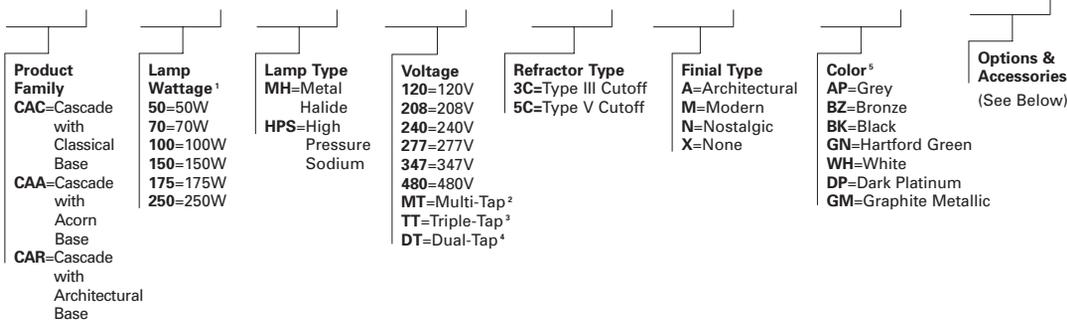

E.P.A. 2.1

### Options<sup>6</sup>

F=Single Fuse (120, 277 or 347V)  
FF=Double Fuse (208, 240 or 480V)  
CC=Matte Black Electrical Cover  
R=Internal NEMA photocontrol Receptacle  
L=Lamp Included

### Accessories<sup>7</sup>

OA/RA1016=NEMA Twistlock Photocontrol—Multi-Tap  
OA/RA1027=NEMA Twistlock Photocontrol—480V  
OA1201=NEMA Twistlock Photocontrol—347V

- Six-sided cast aluminum top with spun aluminum top access cover for tool-less lamp replacement
- Highly specular multi-faceted CVL reflector system provides a Type III or V Cutoff distribution. Vertical lamp position maximizes light output, ensures a uniform distribution and minimizes direct glare
- Six-sided thermoformed acrylic lens standard
- Decorative spun brushed aluminum electrical cover provided
- Ballast assembly is mounted on a removable tray with quick disconnects for ease of installation and maintenance
- Optional NEMA PCR is provided with quick disconnects for ease of maintenance
- Post top mount fits 3" O.D. tenons. Four (4) allen head stainless steel fasteners standard
- Approximate net weight: 50 lbs. (23 kgs.)

**NOTES:** 1 Medium-base lamps standard for 150W and below Metal Halide. 2 Multi-Tap ballast is 120/208/240/277V wired 277V. 3 Triple-Tap ballast is 120/277/347V wired 347V. 4 Dual-Tap ballast is 120/277V wired 277V. 5 Other finish colors available, including a full line of RAL color matches. Consult your Cooper Lighting Representative. 6 Add as suffix in the order shown. 7 Order separately. 8 Specifications and dimensions subject to change without notice.