

**Fixture Ordering Information**

Catalog No.	Description	Finish	Wattage	Volts	Lamp	Ballast (Dali)
FB5114UDA	Linear Bow Surface Mount Dali Dimming	Satin aluminum	14W	120V-277V	(1) T5	B114PUNVDV1

**Fixture Ordering Information**

Catalog No.	Description	Finish	Wattage	Volts	Lamp	Ballast (Dali)
FB5214UDA	Linear Bow Surface Mount Dali Dimming	Satin aluminum	14W	120-277V	(2) T5	B114PUNVDV1

**Diffuser Ordering Information**

Catalog No.	Description	Finish	Dimensions (Nominal)
FBA5	Acrylic Bow Diffuser	Opal	5" X 24"
FBG5	Glass Bow Diffuser	Opal	5" X 24"

**Features**

- Housing Sides and ends:** Die-cast aluminum.
- Back Pan:** Stamped 18ga. (0.048") sheet metal.
- Diffuser:** Bowed opal glass or opal acrylic
- Optics:** Internal white acrylic diffuser covers slots on housing sides and ends.

**Mounting**

Fixture Mounts directly to 4" octagonal junction box.

**Electrical**

**5. Ballast**

A. Dali Dimming 120V-277V	1 Lamp	2 Lamp
Voltage	120V 277V	120V 277V
Total Input Watts	18W 18W	35W 35W
Max. Line Current (Amps)	0.15A 0.07A	0.28A 0.13A
Power Factor	>0.98 >0.98	>0.98 >0.98
THD	<10% <10%	<10% <10%
Min. Starting Temp	50°F, -10°C	50°F, -10°C
Dimming Range	100%-1%	100%-1%

- 6. Luminaire-Ballast Disconnect:** Meets NEC 410.130(G) and CEC Disconnect Requirements.

**Lampholders**

Fluorescent: Mini Bi-Pin, G5 Base

**Lamping (by others)**

General Electric	Osram/Sylvania	Philips
(1) 14W T5 Linear Fluorescent		
F14W/T5/*/ECO	FP14/*	F14T5/*/ALTO
*Manufactures Color Temperature Designation		

**Finish**

Satin Aluminum


**Labels**

cULus Listed. Suitable for Damp Locations.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • A0408

FB5214U-FBG5

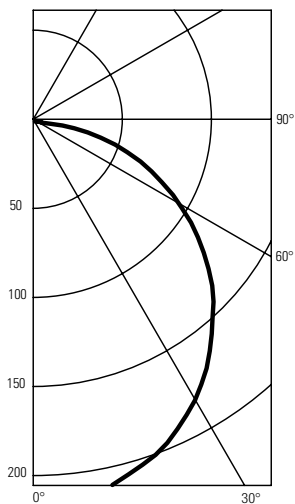

DECORATIVE LUMINAIRE CAT. # FB5214U-FBG5 2-14W PHILIPS T-5 LAMPS. LUMEN RATING = 1200 LMS. BALLAST/ ADVANCE ICN-2S28

**Candlepower Summary**

Angle	Along	22.5	45	67.5	Across	Output Lumens
0	220	220	220	220	220	220
5	218	219	219	218	219	21
15	210	211	210	210	210	60
25	196	197	196	195	195	90
35	175	175	174	173	173	109
45	148	148	147	146	146	114
55	117	117	116	115	115	104
65	84	84	83	82	81	82
75	50	50	49	49	48	52
85	20	20	19	17	16	21
90	10	10	9	7	6	
95	4	4	4	4	4	5
105	2	2	2	3	3	2
115	2	1	2	2	2	2
125	1	1	1	2	2	1
135	1	1	1	1	1	1
145	1	1	1	1	1	1
155	1	1	1	1	1	1
165	1	1	1	1	1	0
175	1	1	1	1	1	0
180	1	1	1	1	1	

**Coefficients of Utilization**

Ceiling	80%				70%				50%				30%				10%																																																																																																																																																																																																																																	
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10																																																																																																																																																																																																																														
Wall	Zonal Cavity Method - Effective Floor Reflectance = 20%																																																																																																																																																																																																																																																	
RCR	Zonal Cavity Method - Effective Floor Reflectance = 20%																																																																																																																																																																																																																																																	
Room Cavity Ratio	0	.33	.33	.33	.33	.32	.32	.32	.31	.31	.31	.29	.29	.29	.28	.28	.28	.27	1	.30	.29	.28	.27	.29	.28	.27	.26	.27	.26	.25	.26	.25	.24	.25	.24	.24	.23	2	.27	.25	.23	.22	.27	.25	.23	.22	.24	.22	.21	.23	.21	.20	.22	.21	.20	.22	.21	.20	.19	3	.25	.22	.20	.18	.24	.22	.20	.18	.21	.19	.18	.20	.19	.17	.19	.18	.17	.16	.17	.16	.16	4	.23	.20	.17	.16	.22	.19	.17	.15	.19	.17	.15	.18	.16	.15	.17	.16	.15	.14	.15	.14	.12	.12	5	.21	.17	.15	.13	.20	.17	.15	.13	.16	.14	.13	.16	.14	.13	.15	.14	.13	.12	.12	.12	.12	.12	6	.19	.16	.13	.11	.19	.15	.13	.11	.15	.13	.11	.14	.12	.11	.14	.12	.11	.10	.10	.09	.09	.09	7	.18	.14	.12	.10	.17	.14	.11	.10	.13	.11	.10	.13	.11	.10	.12	.11	.09	.09	.09	.08	.08	.08	8	.16	.13	.10	.09	.16	.12	.10	.08	.12	.10	.08	.12	.10	.08	.11	.09	.08	.08	.08	.07	.07	.07	9	.15	.11	.09	.07	.15	.11	.09	.07	.11	.09	.07	.10	.09	.07	.10	.08	.07	.07	.07	.06	.06	.06	10	.14	.10	.08	.07	.14	.10	.08	.06	.10	.08	.06	.09	.08	.06	.09	.08	.06	.06	.06	.06	.06	.06

Determined In Accordance With Current IES Published Procedures  
Luminaire Input Watts = 33.0

**Zonal Lumens and Percentages**

Zone	Lumens	% Lamp	%Luminaire	Certified Test Report no. 3577FR Computed by LSI Program **TEST-LITE** SC= 1.3
0-30	170	7.12	25.60	Prepared For: Lightolier Fall River, MA
0-40	279	11.66	41.95	
0-60	497	20.73	74.56	
0-90	653	27.23	97.93	
40-90	373	15.57	55.98	
60-90	155	6.50	23.37	
90-180	13	.58	2.07	
0-180	667	27.80	100.00	

\*\* Efficiency = 27.8%\*\*

TESTED ACCORDING TO IES PROCEDURES. TEST DISTANCE EXCEEDS FIVE TIMES THE GREATEST LUMINOUS OPENING OF LUMINAIRE.

**Job Information** **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2008 Philips Group • A0408