

# READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING LUMINAIRE

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electric shock, turn off electricity at fuse box before proceeding.

**Retain these instructions for maintenance reference.**

INSTRUCTION SHEET NO.

**IS:CTC**

A0504

Page 1 of 1

## INSTRUCTION SHEET FOR ASSEMBLY AND INSTALLATION OF 9",12"&16" PENDALYTE™ SERIES CLOSE TO CEILING MOUNT.

**Note:** This instruction sheet covers several luminaire styles. Powerhead assembly, lamp type, and reflector style may vary slightly from that shown, although installation is the same.

### CANOPY INSTALLATION (fig. 1):

1. Attach POWERHEAD ASSEMBLY to CANOPY using 8-32 SCREWS.
2. Using appropriate slots in CROSSBAR, secure CROSSBAR to outlet box using OUTLET BOX SCREWS (provided with outlet box).
3. Make electrical connections: black POWERHEAD lead to hot (black) supply lead; white POWERHEAD lead to neutral (white) supply lead. Green POWERHEAD lead is ground wire and must be connected to grounding terminal or ground lead inside outlet box. Use WIRE NUTS (local hardware item). Push supply leads into outlet box. **Note: Refer to POWERHEAD instruction sheet for detailed wiring information.**
4. Thread STUDS into outer holes on CROSSBAR.
5. Attach CANOPY/POWERHEAD ASSEMBLY by placing over STUDS and securing with CAP SCREWS.

**CAUTION: MAKE CERTAIN WIRES ARE NOT PINCHED BETWEEN PARTS.**

**CAUTION: MAXIMUM WATTAGE AS MARKED ON LUMINAIRE MUST NOT BE EXCEEDED.**

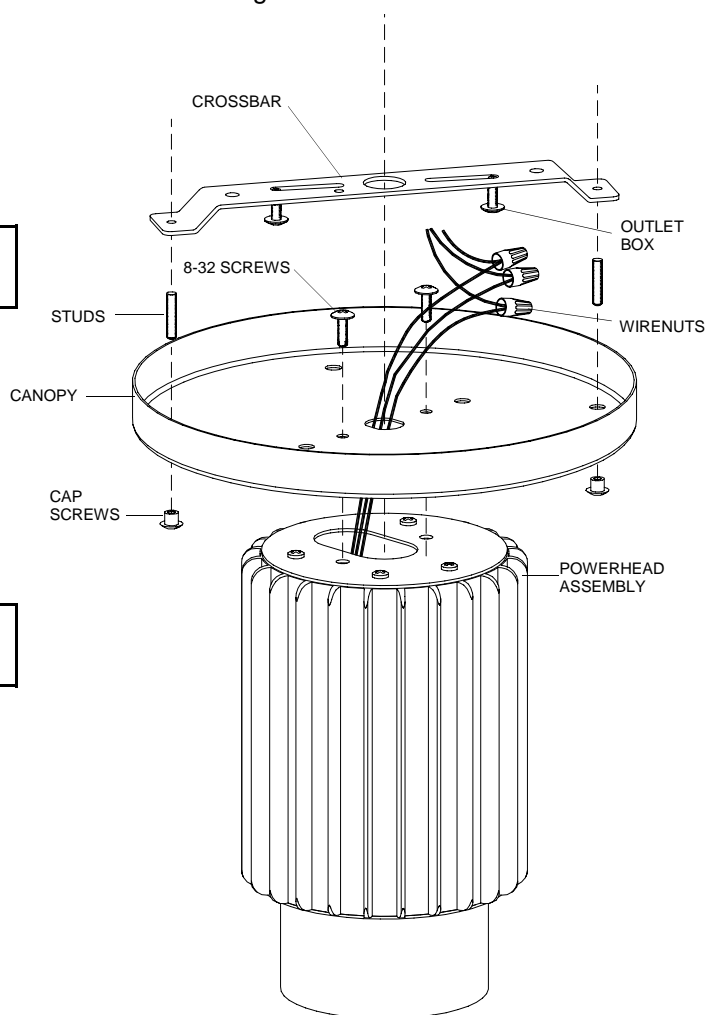


Fig. 1

**LIGHTOLIER®**

LIGHTOLIER A GENIYTE THOMAS COMPANY  
631 Airport Road, Fall River, MA 02720