
Page 1 of 2 Pendant Adapter

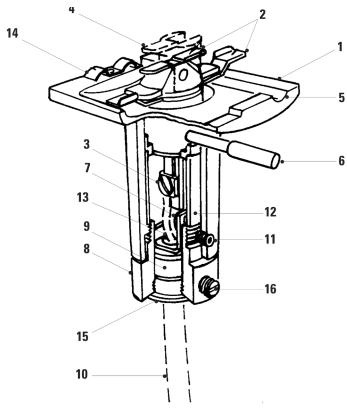

Catalog No.	Finish	Mounting	Dimensions
7599	Matte White	All Lytespan Track Systems	Height 3"
7599BK	Blacl		Dia. 1 1/16"

### **Features**

- 1. Attachment Fitting: Die-cast zinc alloy. Matte white or black finish.
- 2. Stem Locking Clamps/Electrical Contacts: Move in conjunction with lever
- 3. Screw Terminal: Connects onto individual conductors.
- Movable Brass Contact: Extends for connection to 2nd circuit in Advent Lytespan Track.
- 5. Polarity Keyway
- **6. Lever:** Energizes unit
- 7. Ground Screw/Ground Clip
- **8. Strain Relief Cap:** Machined brass. 1/4-18 I.P. internal thread for connecting stem or chain loop. .
- 9. Cord Protective Nylon Bushing: Prevents damage to fixture cord.
- 10. Fixture Cord, Stem or Chain: Note: Cord max dia. .340" (not sup-plied). Stem size: 1/2" O.D., .065" wall, 1/4-18 I.P. thread (not sup-plied). Chain: 1/4-18 I.P. thread (not supplied).
- 11.#8-32 Hex Head Set Screw: Allen wrench provided.
- 12. Insulator Housing: .032" plastic.
- 13. Conductor: #18 ga. max.
- 14. Ground Spring
- 15. Nylon Bushing: Used with pendant cord.
- 16.1/4" 20 Set Screw: Secures fixture cord, stem or chain loop.

# **Electrical**

Can be used with 3 conductor fixture cords up to a maximum diameter of 0.340", suitable for 2 conductor and 3 conductor stem or chain mounted fixtures.

### Finish

All painted finishes baked enamel.

# Labels

UL; I.B.E.W.

# **Patents**

U.S. Patent Nos. 3,496,518; 3,894,781. Foreign patents granted.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2009 Philips Group • B0109

