


Page 1 of 1

Theatrical Low Voltage Lytespot

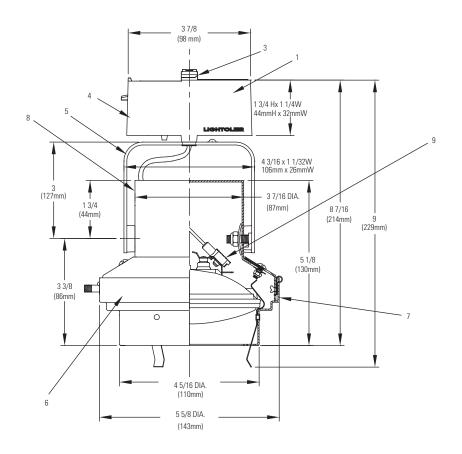

Ordering Information

Catalog Number	Finish	Mounting	Lamps
8266BK	Black	For use with Lytespan Basic, Advent, and Radius Track. Not compatible with extension wands or sloped ceiling adapters.	12V PAR36 50W Max (Not included)

Features

- 1. Transformer: Electronic. 120V 60Hz input for 20-50W load. .95 power factor.
- 2. Track Attachment Fitting: Molded polycarbonate; rotates into track?
- 3. Brass Contact: Extends for connection to second circuit (Advent Lytespan
- 4. Transformer Housing: Die cast aluminum
- 5. Yoke: Steel
- 6. Lamp Holder: Housing steel. Rotates lamp 90°.
- 7. Hinge: Allows lamp holder housing to open for re-lamping while staying attached to housing.
- 8. Housing: Aluminum no open holes.
- 9. Spade Terminals: Brass with silicone rubber insulators. Fastens to lamp terminals.

Finish

All Painted finishes are baked enamel.

Dimming

Use only dimmers specifically designed for use with electronic transformers. Low voltage fixtures may produce audible sound when dimmed.

Accessories

One AF3 Diffusion or AL3 Series

Labels

UL Listed

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • A0708

