
Tangent[™] Track Lighting System **FXT4P**

Page 1 of 1

T4 Pendant

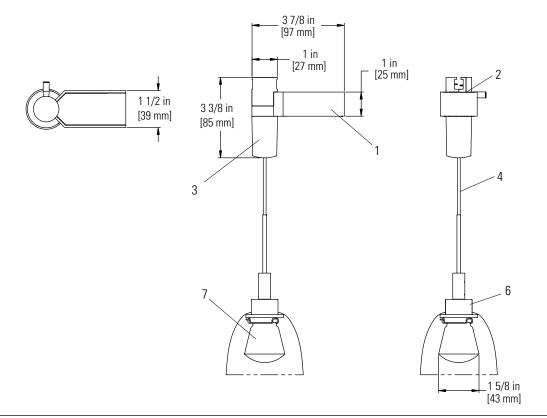

Ordering Information

Catalog No.	Finish	Track Mountings	Lamps
FXT4P	Silver	For use on all Tangent Track systems. For ceiling or suspended track installation. Not for use on wall mounted track.	12V T4 2-pin GY6.35 Base 35W Max

Features

- 1. Transformer: Class two electronic transformer for 12V Halogen lamps.
- 2. Track Attachment fitting: Molded thermoplastic clamping adapter with captive, nickel-plated steel pin. Clockwise rotation of pin secures fixture adapter to track.
- 3. Splicing Chamber: Allows for field cutting of power cable.
- 4. Power Cable: 1/8" dia. cord with nickel plated braided metal sleeving; field cuttable; 6' max suspension.
- 5. Socket: Bi-pin low voltage halogen socket with multipoint contact.
- 6. Lamp Husk: Die-cast aluminum with brushed finish; circular brim supports shades.
- 7. Glass Lamp Guard: Satin finish for effective light diffusion.

Compatible with all Lytejacks shades.

Dimming

Use only dimmers specifically designed for use with electronic transformers. Low Voltage fixtures may produce audible sound when dimmed.

Finish

All Painted finishes are baked enamel.

Accessories

No accessory capability.

Labels

cULus Listed

.

Job Information	Туре:	
Job Name:		
Cat. No.:		
Lamp(s):		
Notes:		
ightolier a Genlyte company	www.lightolier.co	n

Lig 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2007 Genlyte Group LLC • A0407