

4. Louver

## Ordering Information


<b>F74</b>	<b>2</b>	<b>3</b>		<b>1</b>	<b>4</b>		
<b>Style</b> F74 = Rectangle	<b>Lamps</b> 2 = Lamps	<b>Length</b> 3 = 3 Foot	<b>Wattage</b> 7 = 39W 8 = 39W Dimming	<b>Voltage</b> 1 = 120V	<b>Type</b> 4 = Louver	<b>Color</b> AL = Aluminum WH = White	<b>Mounting</b> F = Floor Stand P = Panel Bolt-on E = Expandable Bracket B = Binder Bin
<b>Example = F7423714ALF</b>							

## Features

- Housing:** High purity extruded aluminum, a portion from recycled material.
- F7400:** Block shape with lensed sides.
- Housing end:** Die-cast aluminum, welded to the housing.
- Finish:** Powder coat baked enamel. Standard colors: white or aluminum.
- Shielding:** Louver.
- Lamp:** 2x39 watt T5HO lamps (included).
- Ballast:** Electronic and meets ANSI starting, end of life protection, THD and sound rating specifications.
- Switching:** On/off switch on stem. Optional cord switch available.
- Wiring:** 3-wire cord with grounded low profile plug. Minimum length 9 feet.
- Listing:** UL/cUL listed.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

**Lightolier** a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • A0107



### Candlepower Curve


**Report No:**  
ITL54677.IES.MOD

**Catalog No:**  
F7423714xxx

**Lamps:**  
2-F39T5/HO

**Lumens:**  
3500 each


**Efficiency:**  
86.2%



### Coefficients of Utilization


	% Effective Ceiling Cavity Reflectance					
	80		70		50	
	% Wall Reflectance					
	50	30	10	50	30	10
0	66	66	66	59	59	59
1	57	55	53	52	50	48
2	50	46	43	45	42	39
3	44	40	36	40	36	33
4	39	34	31	36	31	28
5	35	30	26	32	28	24
6	31	26	23	29	24	21
7	28	23	20	26	22	19
8	26	21	18	23	19	16
9	23	19	16	21	17	15
10	21	17	14	20	16	13

Zone	Zonal Lumens	Zonal Lumen Summary % Barelamp	% Luminaire
0-90	1991	28.4	33.0
90-180	4046	57.8	67.0
0-180	6037	86.2	100.0

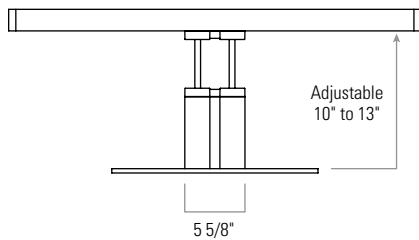


#### Binder Bin Mount Weighted Base

Weighted base allows fixture to sit atop shelves or overhead cabinets. Not recommended for use in seismic areas.

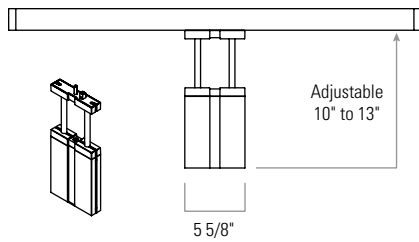


#### Panel Mount (Bolt-On)

Bolts to the top of furniture systems or short walls. A small steel bracket is bolted through the top cap. The stem assembly slides onto this bracket and is held in place with hidden set screws.

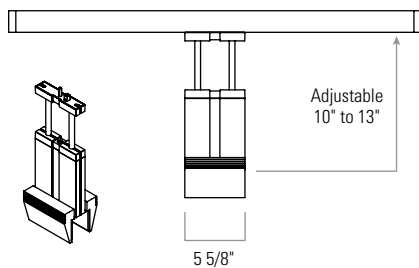

#### Expandable Bracket

This adjustable bracket clamps onto furniture systems ranging from 2" to 4" thick.

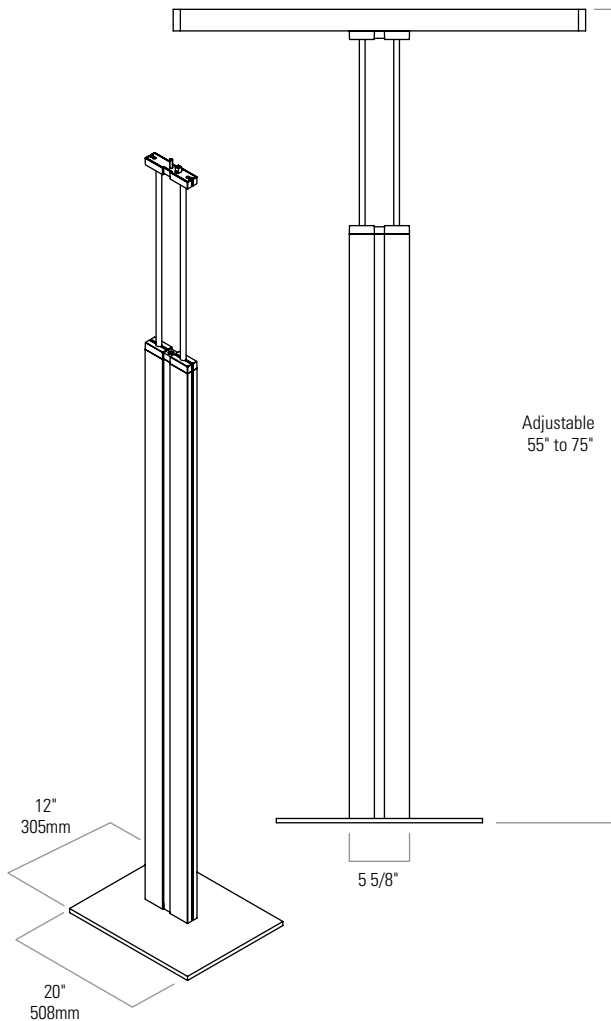

#### Floor Stand

### Job Information Type:

Lightolier a Genlyte company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • A0107