
# Lytecaster® Performance Recessed CFL Downlighting **2001SW**

Page 1 of 2

3 ¾" Aperture Vertical Wall Wash, Compact Fluorescent, Performance Series, Reflector Trim



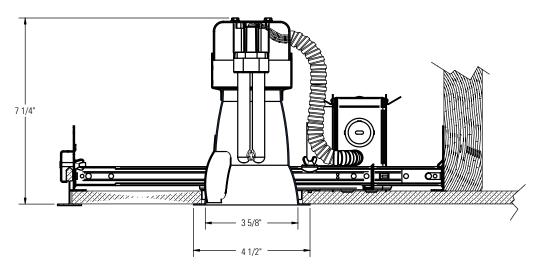

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

	M Compact Fluorescent Performance flector Trims	Compatible Frame-In Kits (See Individual Frame-In Kit Specification Sheets)				
Catalog No.	Description	Catalog No.	Installation Type	Lamping		
2001CLSW	3-3/4" Vertical Single Wall Wash — Specular Clear	2001F13U	Uniframe™ Non-IC 120/277v	13w Quad/Triple		
2001CDSW	3-3/4" Vertical Single Wall Wash – Clear Diffuse	2001F18U	Uniframe™ Non-IC 120/277v	18w Triple		
2001WHSW	3-3/4" Vertical Single Wall Wash – Matte White	2001F13ICU/N	Performance IC 120/277	13w Quad/Triple		
		2001F18ICU/N	Performance IC 120/277	18w Triple		

#### **Features**

- 1. Reflector: Formed aluminum. Matte White flange.
- 2. Finishes: CL = Specular Clear (Iridescent Free coating) CD = Clear Diffuse

WH = Matte White Paint

- 3. Wall Wash Kick Reflector: Formed aluminum. Clear finish.
- Performance Data: 65° Cutoff angle.
   See attached photometric reports for distribution and efficiency data.
   Go to www.lightolier.com for .IES files.

### Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

**Lightolier** a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2007 Genlyte Group LLC • D1007




## Lytecaster® Performance Recessed CFL Downlighting **2001SW**

Page 2 of 2

3 ¾" Aperture Vertical Wall Wash, Compact Fluorescent, Performance Series, Reflector Trim

### Lighting Data Footcandles On Wall: Multiple Units

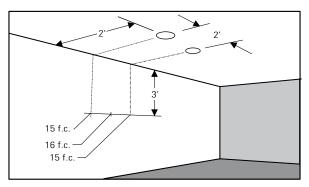

EXAMPLE: 18w with multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 15 f.c. beneath units and 16 f.c. between units.

_	2' From Wall-2' On Center 18w Triple Tube Lamp					2' From Wall-3' On Center 18W Triple Tube Lamp						
2'→1						I <del> </del> 3'- <b>→</b> I						
Feet	1'	21	18	21	et	1'	16	12	16			
in Fe	2'	29	29	29	From Ceiling in Feet	2'	20	19	20			
i gu	3'	23	23	23	i gu	3'	15	16	15			
From Ceiling	4'	16	16	16	:= :=	4'	11	11	11			
D W	5'	11	11	11	0 E	5'	8	8	8			
	6'	8	8	8	Distance Fro	6'	6	6	6			
	7'	5	5	5		7'	4	4	4			
Distance	8'	4	4	4		8'	3	3	3			
Ϊ́Θ	9'	3	3	3	Ö	9'	2	2	2			

2'	2' From Wall-2' On Center 13 Quad Tube Lamp				2' From Wall-3' On Center 13 Quad Tube Lamp					
			—2'—	<b>N</b>				—3'—	<b>▶</b> I	
et	1'	14	15	14	Feet	1'	11	9	11	
n Fe	2'	18	19	18	.⊑	2'	13	13	13	
ng i	3'	15	16	15	ng i	3'	10	11	10	
i iii	4'	11	11	11	Ceiling i	4'	7	7	7	
υ	5'	7	7	7	Distance From C	5'	5	5	5	
Fro	6'	5	5	5		6'	4	4	4	
ce	7'	4	4	4		7'	3	3	3	
Distance From Ceiling in Feet	8'	3	3	3		8'	2	2	2	
Di	9'	2	2	2	Ö	9'	2	2	2	

Footcandle values are initial, rounded off and based on minimum of six units.

LIGHTOLIER®