

Lighting Fixture

Installation Instruction

Warning:

Before installing fixture, be sure the electricity to the wires you are working with is shut off either by removing the fuse or by setting the circuit breaker off.

General Information

You don't need special tools to install this fixture. Be sure to follow the steps in the order given.

Under no circumstances should the fixture be hung on house electrical wires. The fixture must be installed by means of support that is installed on a ceiling which contains a radiant type heating system.

Remember that a fuse or circuit breaker protects wires from becoming overheated.

Overheated wires created an overload and cause the fuse to blow or the circuit breaker to trip. The cause of the overload is because too many appliances are on the same line or a short circuit.

Before tracing the wires for a short circuit, be sure to shut off the electricity at the main switch.

If you must replace a blown fuse be sure to replace it with one rated for the ampere capacity of the circuit. For example, if a 15-AMP fuse blows, do not replace it with a 30-AMP fuse. Use only one hand to screw out a fuse, and keep your other hand away from the wall or any other object, while you are touching the fuse.

Assemble the fixture


Carefully remove the fixture from the carton and check that all parts are included, as shown in figure. Be careful not to misplace any of the screws or wire connectors which are needed for installing the fixture.

1. Feed the wire through the center stem and top body.
2. Secure the center stem into the top body until tight.
3. Fix one end of rod into the ring of top body, and fix the other end of rod into ring of frame as shown.
4. Secure the finial with nipple onto the frame.
5. Thread hex nut over nipple and then thread the nipple into coupling.
6. Place cap over nipple and secure with finial.
7. Put the glass over the socket and secure with socket ring.
8. Install light bulbs.

NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.

Your installation is now complete. Return power to the junction box and test the fixture.

32093

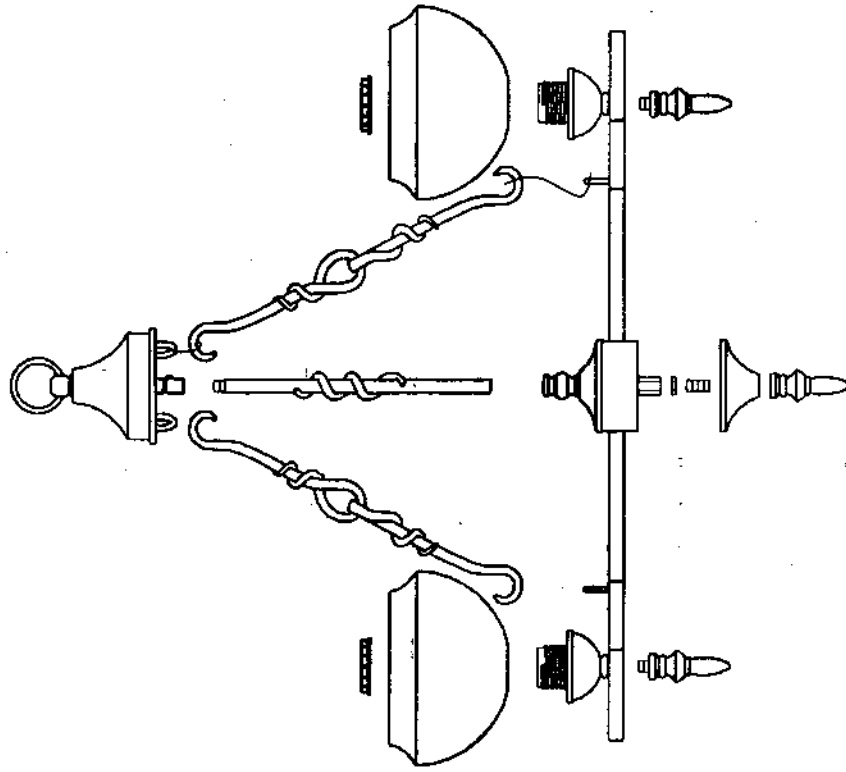

INSTALLATION INSTRUCTION

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS.
AS YOU MAY NEED THEM AT A LATER DATE.

CAUTION — Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


FOR CHAIN-SUSPENDED CEILING MOUNT

1. Screw the 1/8" IPS HEX NUTS (5.) with WASHER (19.) onto the 1/8" IPS NIPPLE (4.), and then attach the end of the NIPPLE that has the HEX NUT to the MOUNTING BRACKET (2.). Do not tighten the HEX NUT. Pull the SUPPLY GROUND WIRES (8.) out from the OUTLET BOX (1.), and attach the MOUNTING BRACKET (2.) assembly to the OUTLET BOX, by using the slotted holes on the MOUNTING BRACKET and the MOUNTING SCREWS (3.) provided.
2. Thread the SCREW COLLAR LOOP (6.) onto the NIPPLE (4.) end that is facing down, but do not tighten the HEX NUT. Place the CANOPY (15.) over the OUTLET BOX (1.) and adjust the SCREW COLLAR LOOP and NIPPLE until the outside threads on the SCREW COLLAR LOOP is centered with the center hole opening of the CANOPY. Take away the CANOPY and tighten the HEX NUTS down on the MOUNTING BRACKET (2.), and the SCREW COLLAR LOOP.
3. Open up the end links of the CHAIN (17.) and attach one end of the CHAIN onto the FIXTURE LOOP (18.). Slide the THREADED RING (16.) from the SCREW COLLAR LOOP (6.), and the CANOPY (15.) onto the CHAIN in that order, and attach the other end of the CHAIN on to the SCREW COLLAR LOOP. Close the ends of the chain links.
4. Unravel the fixture's lead and ground wires and thread the lead and ground wires through every other link of the CHAIN (17.), and out through the SCREW COLLAR LOOP (6.) and NIPPLE (4.) assembly, starting with the chain link attached to the FIXTURE'S LOOP (18.).
5. Attach the power supply wires to the fixture lead wires by connecting the BLACK POWER SUPPLY WIRE (11.) to the SMOOTH FIXTURE LEAD WIRE (12.), and the WHITE POWER SUPPLY WIRE (9.) to the RIBBED FIXTURE LEAD WIRE (10.). Attach the SUPPLY GROUND WIRE (8.) from the OUTLET BOX (1.), and the FIXTURE GROUND WIRE (7.) from the fixture onto the green GROUND SCREW (14.) on the MOUNTING BRACKET (2.), or, connect both wires together using the correct size of WIRE CONNECTORS (13.). Place connected wires inside of the OUTLET BOX.

6. Slide the CANOPY (15.) and the THREADED RING (16.) of the SCREW COLLAR LOOP (6.) up the CHAIN (17.). Place the CANOPY over the OUTLET BOX (1.), and secure in place by screwing the THREADED RING onto the SCREW COLLAR LOOP.

7. Screw in light bulbs that do not exceed the maximum wattage specified on the fixture's wattage rating label, into the socket(s) on the fixture.

INSTALLATION COMPLETED

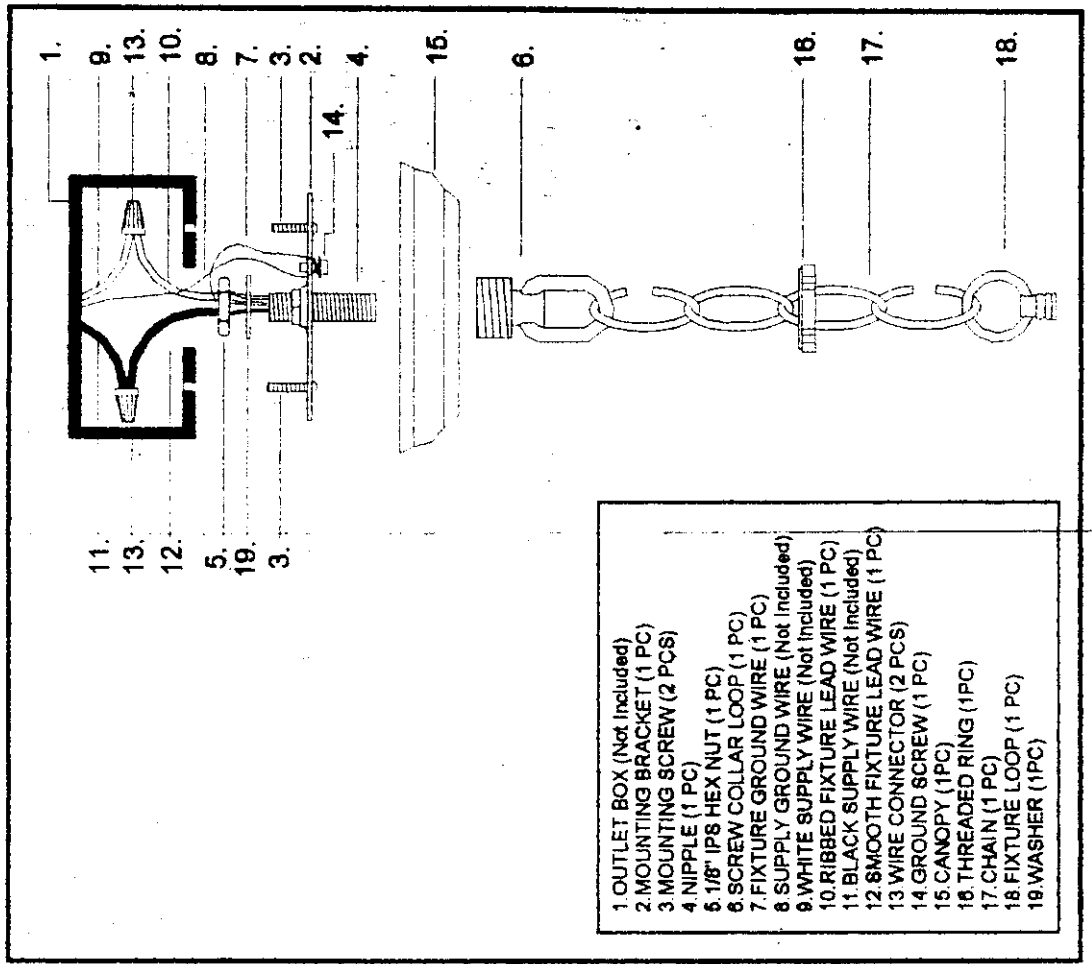

- | | |
|--------------------------------------|--------------------------------------|
| 1. OUTLET BOX (Not Included) | 11. BLACK SUPPLY WIRE (Not Included) |
| 2. MOUNTING BRACKET (1 PC) | 12. SMOOTH FIXTURE LEAD WIRE (1 PC) |
| 3. MOUNTING SCREW (2 PCS) | 13. WIRE CONNECTOR (2 PCS) |
| 4. NIPPLE (1 PC) | 14. GROUND SCREW (1 PC) |
| 5. 1/8" IPS HEX NUT (1 PC) | 15. CANOPY (1PC) |
| 6. SCREW COLLAR LOOP (1 PC) | 16. THREADED RING (1PC) |
| 7. FIXTURE GROUND WIRE (1 PC) | 17. CHAIN (1 PC) |
| 8. SUPPLY GROUND WIRE (Not Included) | 18. FIXTURE LOOP (1 PC) |
| 9. WHITE SUPPLY WIRE (Not Included) | 19. WASHER (1PC) |
| 10. RIBBED FIXTURE LEAD WIRE (1 PC) | |