

# LC “Light Condenser”

Vocals  
Recording  
Live Sound  
Sound/AV company

- Slender and elegant silhouette
- PB 1000 Presence boost adapter for increased intelligibility
- Condenser vocal microphone for onstage use
- XLR connector module with 24-carat gold plated pins for optimized connectivity
- 24-carat gold plated transducer case for optimum conductivity and resistance to corrosion and humidity
- Spring steel wire-mesh grill for extreme ruggedness incl. reliable control of pops and wind noise
- Internal elastic suspension

# LC




This professional condenser vocal microphone will make your voice cut through the loudest mix - on any stage. Its cardioid polar pattern ensures maximum gain before feedback and has been optimized for use with in-ear monitor systems. LC is custom-designed with piano black painting to address the aesthetic preferences of special performances: a slim line premium condenser microphone.

Delivering an extremely accurate, detailed and natural sound, the AKG LC features an XLR connector module with 24-carat gold plated pins for optimized connectivity, as well as resistance to corrosion and humidity. Additionally, the LC features a spring steel wire-mesh grill for extreme ruggedness offering reliable control of pops and wind noise while an artist is on stage.

The resulting LC microphone features a frequency range of 60 to 20,000 Hz and premium 24-carat gold plated transducer case for optimum conductivity. Offering a slender and elegant silhouette, the lightweight unit has a subtle piano black finish to visually complement any performance.

AKG SOUNDS BETTER



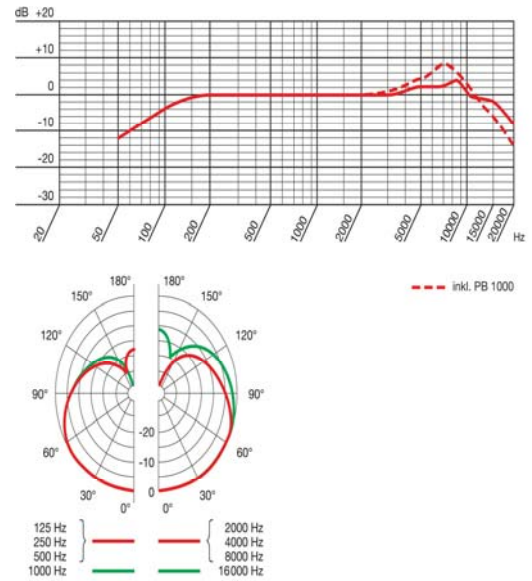

## Specifications

<b>Polar pattern</b>	cardioid
<b>Frequency range</b>	60 to 20,000 Hz
<b>Sensitivity</b>	4 mV/Pa (-52 dBV)
<b>Max. SPL for 1%/3% THD</b>	140/145 dB SPL
<b>Equivalent noise level</b>	25 dB-A
<b>Signal/noise ratio (A-weighted)</b>	69 dB
<b>Impedance/load Impedance</b>	≤200 ohms
<b>Recommended load impedance:</b>	>2000 ohms
<b>Powering:</b>	9 to 52 V phantom power to DIN 45596
<b>Current consumption:</b>	typ.3 mA
<b>Finish</b>	Piano Black
<b>Dimensions</b>	length: 185 mm (7.3 in.); diameter: 34 mm (1.3 in.)
<b>Net/shipping weight:</b>	260 g (9.2 oz.)/ 620 g (1.4 lbs.)
<b>Standard accessories:</b>	Microphone bag, SA 45, PB 1000
<b>Optional accessories:</b>	B 18, H 30, H 50, SA 44, SA 61, ST 1, ST 45, ST 46, ST 305, W 23, W 1000
<b>Item number</b>	<b>L C</b>
<b>Order Number</b>	3133A00030



[www.akg.com](http://www.akg.com)

**AKG Acoustics GmbH**  
Lemböckgasse 21–25, 1230 Vienna /AUSTRIA, phone: + 43 1 86654 0  
e-mail: [sales@akg.com](mailto:sales@akg.com)

**AKG Acoustics, U.S.**  
8400 Balboa Boulevard, Northridge, CA 91329, U.S.A., phone: + 1 818 920 3212  
e-mail: [akgusa@harman.com](mailto:akgusa@harman.com)

For other products and distributors worldwide visit [www.akg.com](http://www.akg.com)  
Specifications subject to change without notice.

**H** A Harman International Company

