

# DMT2420

## AMTK27, AMTK30, AMTK36, AOMTK27, AOMTK30




Revised  
06/17/08

### Microwave Oven


1/1

## PLANNING GUIDE

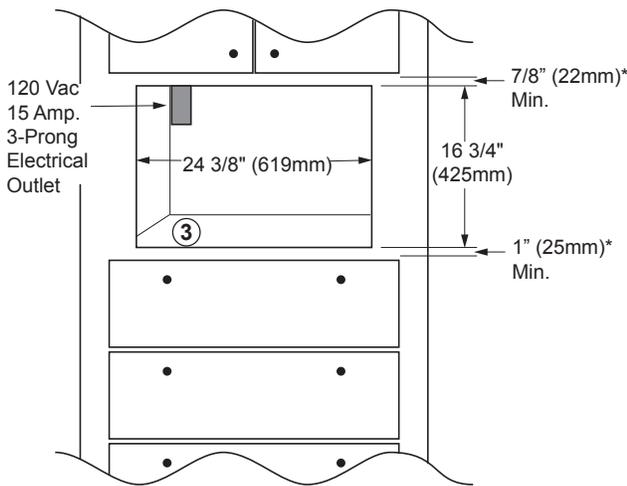


**MICROWAVE AND TRIM KIT**

\*Bare minimum spacing: Includes additional space to avoid scrapping/vibration.

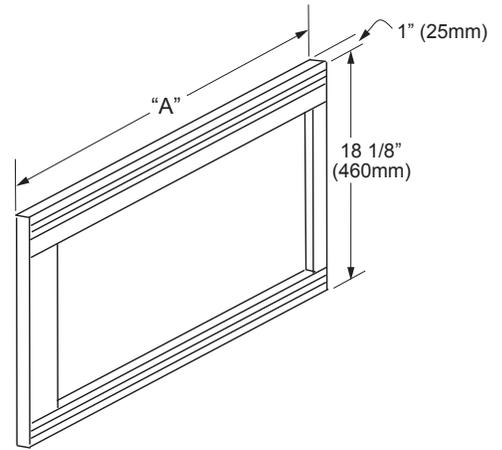


**AMTK OVERALL DIMENSIONS**  
(Epicure® or Millennia™ Trim Kit)

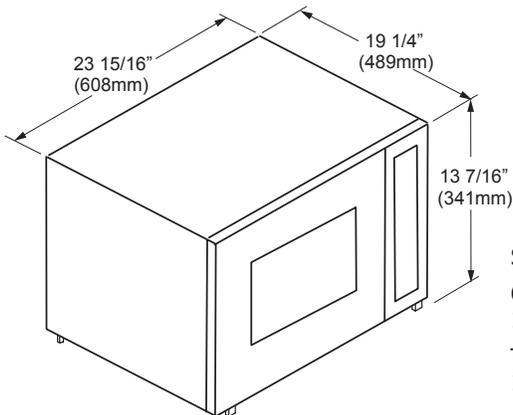

**DMT2420 SPECIFICATIONS**

Shipping Weight: 46 lbs.  
Circuit Required: 120 Vac,  
15 Amp. dedicated  
Total (Connected Load):  
1.5 Kw (12.5 Amp.)

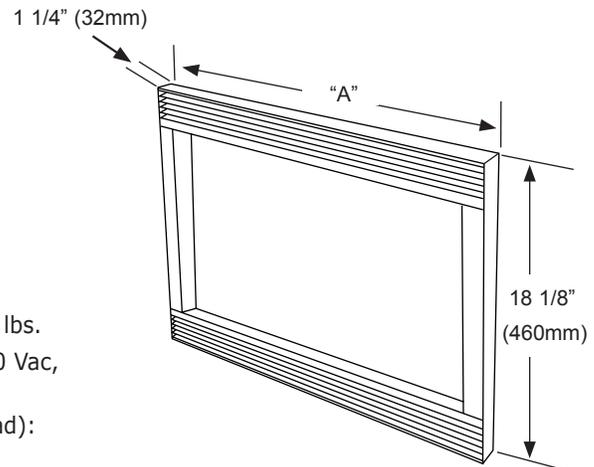

**AOMTK OVERALL DIMENSIONS**  
(Preference® Trim Kit)



**NOTE:**

1. 24" (610mm) minimum exterior cabinet depth.
2. See the Combination Installation (CI) Section if installing with a wall oven or warming oven.
3. 3/4" (19mm) support platform (flush with cutout).
4. Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.
5. Tolerances: +1/16" (1.6mm), -0 unless otherwise specified.

Model No.	"A" Overall Width	Trim Kit Overlays	Approximate Shipping Weight
AMTK27	27" (686mm)	5/8" (16mm) Top, 3/4" (19mm) Bottom	12 lbs.
AMTK30	30" (762mm)		12 lbs.
AMTK36	36" (914mm)		16 lbs.
AOMTK27	27" (686mm)		17 lbs.
AOMTK30	30" (762mm)		18 lbs.

# DCM24

## ACTK27, ACTK30, ACTK36, AOCTK27, AOCTK30


**dacor**  
The Life of the Kitchen.®

Revised  
05/05/08

**Convection Microwave Oven**


1/1

**PLANNING  
GUIDE**

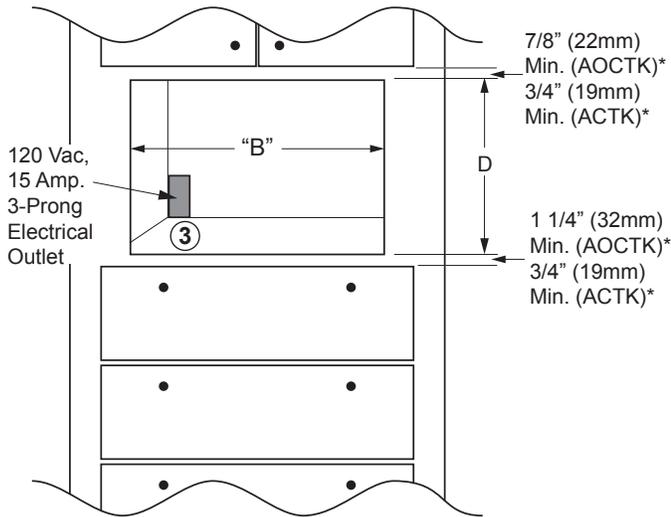

### MICROWAVE AND TRIM KIT

\*Bare minimum spacing: Includes additional space to avoid scragging/vibration.

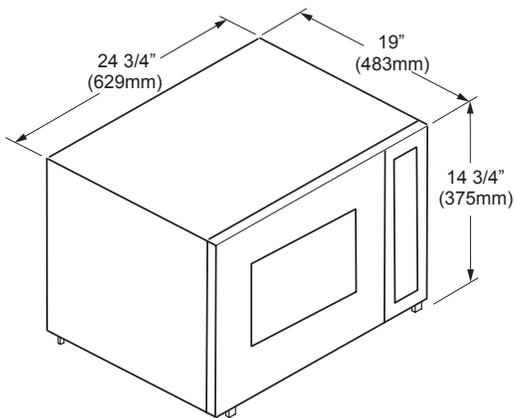


### DCM24 SPECIFICATIONS


#### NOTE:

1. 24" (610mm) minimum exterior cabinet depth.
2. See the Combination Installation (CI) Section if installing with a wall oven, or warming oven.
3. 3/4" (19mm) support platform (flush with cutout).
4. Microwave is supplied with a 42" (1067mm) power cord, with a three prong grounded plug.
5. Tolerances +1/16" (1.6mm), -0 unless otherwise specified

Shipping Weight: 60 lbs.  
Circuit Required: 120 Vac,  
15 Amp. dedicated  
Total (Connected Load):  
1.6 Kw (13 Amp.)

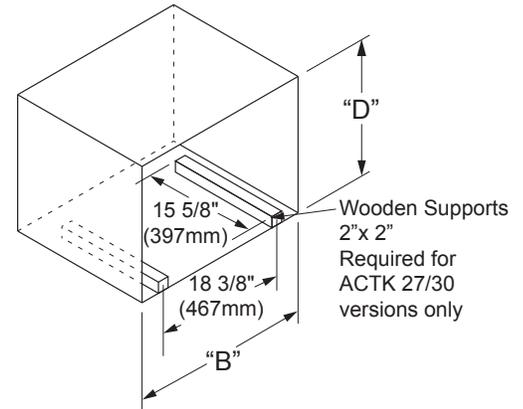


### CUTOUT DIMENSIONS ISOMETRIC VIEW

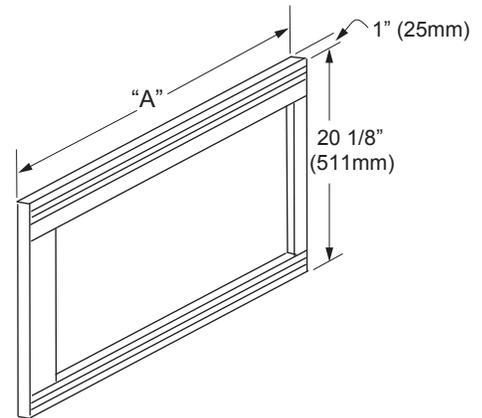

### ACTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Classic/Renaissance Wall Oven)

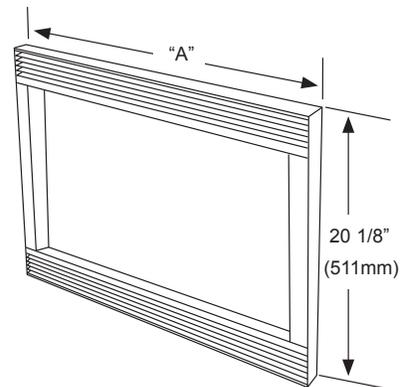

### AOCTK OVERALL DIMENSIONS

(Epicure® or Millennia™ Trim Kit - use these models when stacking with the Discovery Wall Oven)

Model No.	"A" Overall Width	"B" Cutout Width	"D" Cutout Height	Top Overlay	Bottom Overlay	Approximate Shipping Weight
ACTK27	27" (686mm)	25 1/4" (641mm)	19 1/8" (486mm)	1/2" (13mm)	1/2" (13mm)	15 lbs.
ACTK30	30" (762mm)	28 1/4" (718mm)	19 1/8" (486mm)			16 lbs.
ACTK36	36" (914mm)	25" (635mm)	19 1/8" (486mm)			20 lbs.
AOCTK27	27" (686mm)	25 1/4" (641mm)	18 1/2" (470mm)	5/8" (16mm)	1" (25mm)	19 lbs.
AOCTK30	30" (672mm)	25 1/4" (641mm)	18 1/2" (470mm)			20 lbs.

Web: <http://www.Dacor.com>  
Corporate Phone: 800-793-0093

Specifications are subject to change without notice.  
See installation instructions for additional details.