



Kantech™ IP Link

Features That Make a Difference:

- Powerful solution for connecting KT-100, KT-200 and KT-300 door controllers to existing network infrastructure
- Secure communication via 128-bit AES encryption
- Configured using either a static or dynamic IP address
- Up to 512 IP Links can be supported per EntraPass Gateway, a cost-effective solution to managing multiple remote sites
- Communicates over the network only as required, keeping network traffic down to a minimum
- Plug and play setup makes it quick and easy to use with EntraPass access control software
- Supports up to 32 door controllers per device
- Compatible with EntraPass Special, Corporate and Global Editions (Global Edition with Corporate Gateway only)

The Kantech™ IP Link makes it easy and affordable to manage your Kantech access control system over a network.

Unlike similar devices, the IP Link manages polling of door controllers and communicates with the EntraPass Gateway only when an event has occurred. Communication integrity is ensured through a heartbeat signal, which is sent at a regular interval to the EntraPass software. This asynchronous communication significantly reduces the amount of bandwidth required to manage your access control system over the network.

The IP Link is easy to set up. Use an EntraPass workstation, a web browser or the KT-Finder, an intuitive standalone application designed to locate and configure the IP Link.

In most installations, EntraPass software automatically detects and configures the IP Link using the MAC address.

The IP Link uses 128-bit AES encryption to communicate with EntraPass, which ensures secure communication when used over the Internet.

The IP Link leverages Kantech's robust portfolio of KT-controllers to offer a powerful security solution for any size application. The EntraPass access control system can control access for one door to thousands of doors and, with the IP Link, can effortlessly communicate over an existing network.

Physical

Weight

- KT-IP0.6 kg (1.3 lbs)
- KT-IP-PCB0.18 kg (0.4 lbs)
- KT-IP-CAB1.81 kg (4.0 lbs)

Dimensions

- KT-IP26.7 x 9.5 x 3.12 cm (10.5 x 3.72 x 1.23 in)
- KT-IP-PCB22 x 8.30 x 2.5 cm (8.66 x 3.25 x 1.0 in)
- KT-IP-CAB28.4 x 29.7 x 7.8 cm (11.2 x 11.7 x 3.1 in)

Communication Ports.....RJ-45 Ethernet 10/100Base-T and RS-232

Communication SpeedUp to 115200 baud for serial communication

Flash ROM2 MB

RAM.....8 MB

Compatibility.....KT-100, KT-200 and KT-300 door controllers


Maximum UnitUp to 512 IP Links per Corporate Gateway
Up to 64 IP Links per Special Edition

Environmental

Operating Temperature.....0°C to 49°C (32°F to 122°F)

Humidity.....0 to 85% non-condensing, indoor use only

Network Architecture

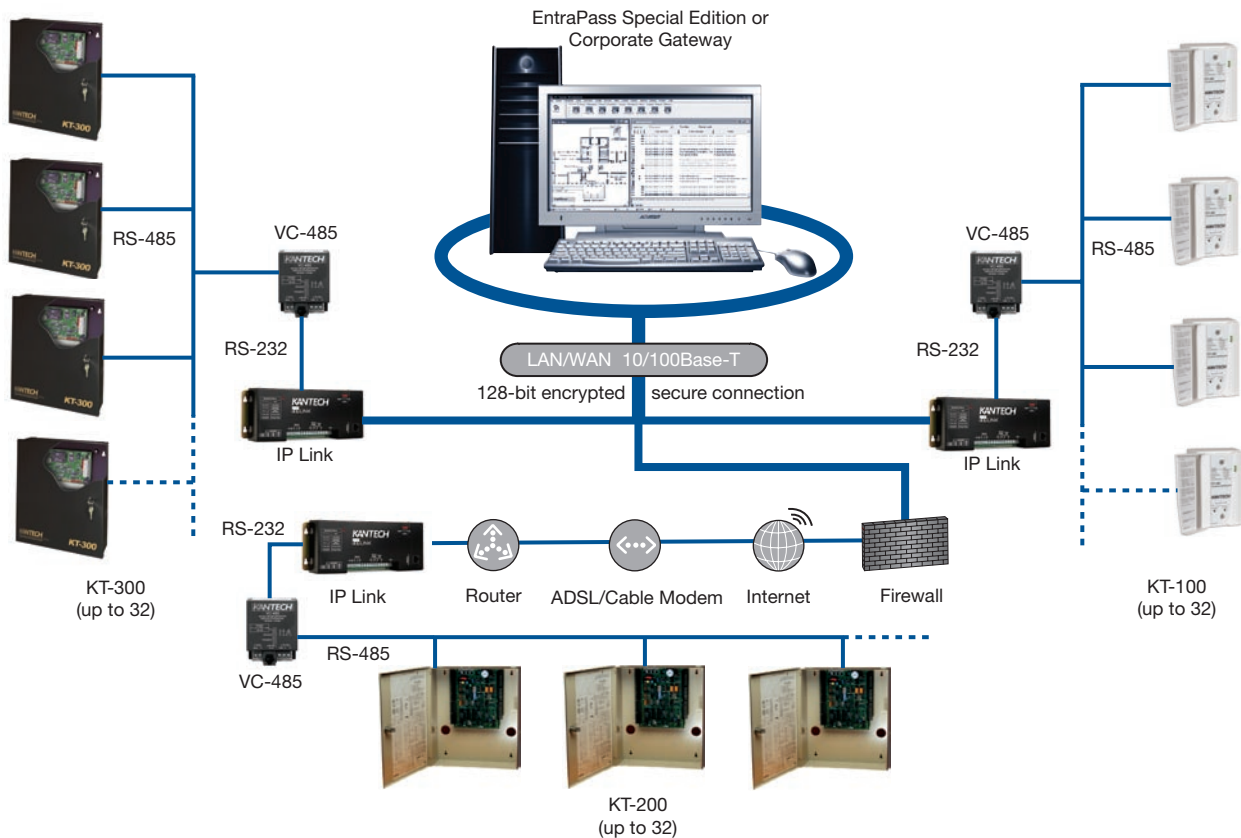

Electrical

DC Power Input12 VDC

Input CurrentMax: 175 mA, Typical: 125 mA

Regulatory

ComplianceFCC Part 15 Class A
EN55022 (CISPR22)
EN55024
CE
C-Tick

Certifications.....UL294

Environmental.....RoHS
WEEE

Model Numbers

KT-IPIP Link module with wall mount metal enclosure and accessories (ground wire, plastic stand off, cable/connector)

KT-IP-PCBIP Link module PCB only with accessories (ground wire, plastic stand off, cable/connector)

KT-IP-CABMetal cabinet for KT-IP-PCB

Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.

© 2007 Tyco Safety Products, Canada, Ltd. All rights reserved. KT0091-DS-200711-R02-LT-EN

