

6212-I3 4-Port Router User's Guide

May 2006

Document Part Number: 6212-A2-ZB83-20



Z H O N E[™]

Zhone Technologies

@Zhone Way

7001 Oakport Street

Oakland, CA 94621

USA

510.777.7000

www.zhone.com

info@zhone.com

COPYRIGHT 2000–2006 Zhone Technologies, Inc. All rights reserved.

This publication is protected by copyright law. No part of this publication may be copied, distributed, displayed, modified, transmitted, stored in a retrieval system, or translated without express written permission from Zhone Technologies, Inc.

Acculink, ADSL/R, Bitstorm, Comsphere, DSL the Easy Way, ETC, Etherloop, FrameSaver, GrandDSLAM, GrandVIEW, Hotwire, the Hotwire logo, iMarc, Jetstream, MVL, NextEDGE, Net to Net Technologies, OpenLane, Paradyne, the Paradyne logo, Performance Wizard, ReachDSL, StormPort, TruePut are registered trademarks of Zhone Technologies, Inc.

BAN, Connect to Success, GigMux, Hotwire Connected, JetFusion, JetVision, MALC, MicroBurst, PacketSurfer, Quick Channel, Raptor, Reverse Gateway, SLMS, Spectrum Manager, StormTracker, Z-Edge, Zhone, ZMS, and the Zhone logo are trademarks of Zhone Technologies, Inc.

All other products names or service marks mentioned herein are the trademarks, trade names and service names of their respective owners.

Zhone Technologies makes no representation or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability, noninfringement, or fitness for a particular purpose. Further, Zhone Technologies reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation of Zhone Technologies to notify any person of such revision or changes.

Important Safety Instructions

- 1** Read and follow all warning notices and instructions marked on the product or included in the manual.
- 2** Slots and openings in the cabinet are provided for ventilation. To ensure reliable operation of the product and to protect it from overheating, these slots and openings must not be blocked or covered.
- 3** Do not allow anything to rest on the power cord and do not locate the product where persons will walk on the power cord.
- 4** Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous high voltage points or other risks. Refer all servicing to qualified service personnel.
- 5** General purpose cables are used with this product for connection to the network. Special cables, which may be required by the regulatory inspection authority for the installation site, are the responsibility of the customer. Use a UL Listed, CSA certified, minimum No. 24 AWG line cord for connection to the Digital Subscriber Line (DSL) network.
- 6** When installed in the final configuration, the product must comply with the applicable Safety Standards and regulatory requirements of the country in which it is installed. If necessary, consult with the appropriate regulatory agencies and inspection authorities to ensure compliance.
- 7** A rare phenomenon can create a voltage potential between the earth grounds of two or more buildings. If products installed in separate buildings are interconnected, the voltage potential may cause a hazardous condition. Consult a qualified electrical consultant to determine whether or not this phenomenon exists and, if necessary, implement corrective action prior to interconnecting the products.
- 8** Input power to this product must be provided by one of the following: (1) a UL Listed/CSA certified power source with a Class 2 or Limited Power Source (LPS) output for use in North America, or (2) a certified transformer, with a Safety Extra Low Voltage (SELV) output having a maximum of 240 VA available, for use in the country of installation.
- 9** In addition, since the equipment is to be used with telecommunications circuits, take the following precautions:
 - Never install telephone wiring during a lightning storm.
 - Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
 - Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
 - Use caution when installing or modifying telephone lines.
 - Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
 - Do not use the telephone to report a gas leak in the vicinity of the leak.

CE Marking

When the product is marked with the CE mark on the equipment label, a supporting Declaration of Conformity may be downloaded from the Zhone World Wide Web site at www.zhone.com.

FCC Part 15 Declaration

An FCC Declaration of Conformity may be downloaded from the Zhone World Wide Web site at www.zhone.com.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The authority to operate this equipment is conditioned by the requirement that no modifications will be made to the equipment unless the changes or modifications are expressly approved by the responsible party.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Notice to Users of the United States Telephone Network

The following notice applies to versions of the modem that have been FCC Part 68 approved.

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the Administrative Council for Terminal Attachment (ACTA). On the bottom side of this equipment is a label that contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, this number must be provided to the Telephone Company.

This equipment is intended to connect to the Public Switched Telephone Network through a Universal Service Order Code (USOC) type RJ11C jack. A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It has been designed to be connected to a compatible modular jack that is also compliant.

The Ringer Equivalence Number (or REN) is used to determine the number of devices that may be connected to a telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local Telephone Company. The REN for this product is part of the product identifier that has the format US:AAAEQ##TXXXX. The digits represented by ## are the REN without a decimal point. For example, 03 represents a REN of 0.3.

If the modem causes harm to the telephone network, the Telephone Company will notify you in advance that temporary discontinuance of service may be required. But if advance notice is not practical, the Telephone Company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The Telephone Company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the Telephone Company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service. If trouble is experienced with the modem, refer to the repair and warranty information in this document.

If the equipment is causing harm to the telephone network, the Telephone Company may request that you disconnect the equipment until the problem is resolved.

The user may make no repairs to the equipment.

Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

If the site has specially wired alarm equipment connected to the telephone line, ensure the installation of the modem does not disable the alarm equipment. If you have questions about what will disable alarm equipment, consult your Telephone Company or a qualified installer.

Notice to Users of the Canadian Telephone Network

NOTICE: This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation IC before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

NOTICE: The Ringer Equivalence Number (REN) for this terminal equipment is labeled on the equipment. The REN assigned to each terminal equipment provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed five.

If your equipment is in need of repair, contact your local sales representative, service representative, or distributor directly.

CANADA - EMI NOTICE:

This Class B digital apparatus meets all requirements of the Canadian interference-causing equipment regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du règlement sur le matériel brouilleur du Canada.

Japan Notices

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラス B 情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。
取扱説明書に従って正しい取り扱いをして下さい。

This is a Class B product based on the standard of the Voluntary Control Council for Interference from Information Technology Equipment (VCCI). If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.

CONTENTS

	Document Summary	11
Chapter 1	Introduction	13
	Features	13
	System Requirements	13
	Parts List	14
	Front Panel	14
	Rear Panel	15
Chapter 2	Hardware Installation and PC Setup	17
	Overview	17
	Connecting the Hardware	17
	Configuring Your Computer	19
	Windows XP	20
	Windows 2000	22
	Windows ME	23
	Windows 95 and Windows 98	24
	Windows NT 4.0	24
	Logging in to Your Router	25
Chapter 3	Device Information	29
	Status Summary	29
	WAN	29
	LAN Statistics	30
	WAN Statistics	30
	ATM Statistics	31
	ADSL Statistics	31
	ADSL BER Test	32
	Route	33
	ARP	34

Chapter 4	Quick Setup	35
	Quick Setup with Auto-Connect Enabled	35
	Quick Setup with Auto-Connect Disabled	36
Chapter 5	Advanced Setup	41
	WAN	41
	Add Function – ATM PVC Configuration	41
	Connection Type Screen	43
	WAN Setup - Summary	44
	Remove Function	44
	Finish Function	45
	Local Area Network (LAN) Setup	45
	NAT	45
	Virtual Servers	45
	Port Triggering	47
	DMZ Host	48
	Firewall	49
	IP Filtering – Outgoing	49
	IP Filtering – Incoming	50
	Firewall – MAC Filtering	52
	Parental Control	53
	Port Mapping	55
	Quality of Service	56
	Routing – Default Gateway	57
	Routing – Static Route	58
	Routing – RIP	59
	DNS Server	59
	Dynamic DNS	60
	ADSL	61
	Modulation Methods	62
	Capability	62
	DSL Advanced Settings	62
	Tone Selection	63
	Certificate	64
Chapter 6	Diagnostics	65
	Testing the DSL Connection	65
Chapter 7	Management	67
	Saving and Restoring the Configuration	67
	Backing Up Configuration Settings	67
	Restoring Configuration Settings	69
	Restoring Default Settings	70
	System Log	71

View System Log.....	72
Configure System Log	72
TR-069 Client.....	74
Internet Time	74
Access Control – Services	75
Access Control – IP Addresses	75
Access Control – Passwords	76
Update Software.....	77
Reboot Router	77
 Appendix A Specifications	 79
 Index	 81

.....

ABOUT THIS GUIDE

This guide contains detailed information about the 6212-I2 router. It is intended for all users of the router.

Document Summary

Section	Description
Chapter 1, <i>Introduction</i>	Describes the features of the router.
Chapter 2, <i>Hardware Installation and PC Setup</i>	Shows how to connect the router and set up your PC to manage the router.
Chapter 3, <i>Device Information</i>	Explains how to use the web interface to obtain statistics and other information about the router.
Chapter 4, <i>Quick Setup</i>	Describes the Quick Setup configuration process.
Chapter 5, <i>Advanced Setup</i>	Describes configuration of the advanced router features.
Chapter 6, <i>Diagnostics</i>	Describes the test screen.
Chapter 7, <i>Management</i>	Describes the management functions of the router, including backing up and restoring configuration settings, viewing the system log, configuring access control, and upgrading software.
Appendix A, <i>Specifications</i>	Lists the specifications of the router.
Index	Lists key terms, concepts, and sections in alphabetical order.

.....

1

INTRODUCTION

Congratulations on becoming the owner of a 6212 ADSL router.

This User's Guide will show you how to set up the router, and how to customize its configuration to get the most out of this product.

Features

The 6212 router has the following features:

- Built-in ADSL modem which offers G.dmt, G.lite, T1.413, ADSL2, Annex L, and ADSL2+ to meet different linking speeds from your ISP.
- Four 10/100BaseT Ethernet ports to provide Internet connectivity to all computers on your LAN.
- Easy-to-use configuration program accessible through a standard web browser.

System Requirements

In order to use the 6212 ADSL router for Internet access, you must have the following:

- ADSL service subscription from your ISP
- A PC with:
 - An Ethernet 10/100BaseT network interface card
 - A processor equivalent to or faster than a Pentium II 133 MHz
 - 32 MB RAM or greater
 - Windows 95b, 98, 98SE, 2000, ME, NT, or XP (Note: Windows 95 requires the installation of the Winsock program, not included.)
 - (Optional) An Ethernet hub or switch, if you wish to connect the router to several computers on an Ethernet network.
 - For system configuration using the supplied web-based program: a web browser such as Internet Explorer Version 6.0 or later. Netscape is not supported.

Parts List

In addition to this document, your 6212 ADSL router should come with the following:

- 6212 ADSL router
- Power adapter
- Ethernet cable (RJ45, straight-through type)
- Phone cable (RJ11)

Front Panel

The front panel contains LED indicators that show the status of the unit.

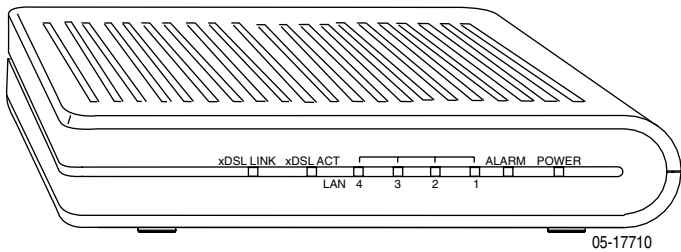


Figure 1: Front Panel LEDs


Table 1: Front Panel Label and LEDs (Sheet 1 of 2)

Label	Color	Function
xDSL LNK	Green	On: ADSL link is established.
		Flashing: ADSL link is established and active.
		Off: No ADSL link.
xDSL ACT	Green	Off: No PPP connection is established or the connection is not used.
		Blinking: a PPP connection is being attempted.
		Solid: A PPP connection is established.
		Flickering: There is activity over the link.

Table 1: Front Panel Label and LEDs (Sheet 2 of 2)

Label	Color	Function
LAN 1–4	Green	On: The Ethernet interface is successfully connected to a device through the LAN port.
		Flashing: Data transfer at LAN connection
		Off: No LAN link
ALARM	Red	On: ADSL is not connected.
		Off: ADSL is connected.
POWER	Green	On: Unit is powered on.
		Off: Unit is powered off.

Rear Panel

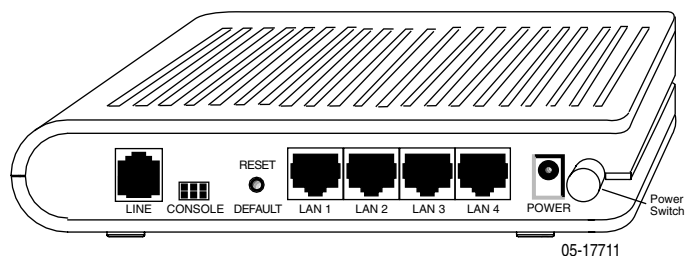**Figure 2: Back Panel**

The rear panel contains the ports for the router's data and power connections.

Table 2: Rear Panel Labels and Connectors

Label	Function
LINE	Connects to your ADSL line
LAN 1–4	Connects the router to Ethernet devices on your LAN, such as your PC's Ethernet port, or the uplink port on a hub or switch
RESET/DEFAULT	To reset the router to its default settings
POWER	Connects to the supplied power adapter

.....

2

HARDWARE INSTALLATION AND PC SETUP

Overview

This chapter provides basic instructions for connecting the router to a computer or a LAN and to the Internet using DSL. The first part provides instructions to set up the hardware, and the second part describes how to prepare your PC for use with the router.

It is assumed that you have already subscribed to DSL service with your Internet service provider (ISP).

Connecting the Hardware

Shut down your PC and any other equipment before connecting it to the router. To connect your router:

- 1** Verify that the router's power switch is in the Off (outward) position. Verify that any PCs and other LAN devices you will attach (such as hubs or switches) are turned off.
- 2** Use the provided modular phone cable to connect the LINE jack of the router to your RJ11 wall jack.
- 3** Use the provided Ethernet cable to connect your computer to the router. Attach one end of the Ethernet cable to one of the LAN ports on the back of the router and connect the other end to the Ethernet port or Network Interface Card (NIC) in your PC.

Connect any other PCs, hubs, and switches to the remaining LAN ports. Either a crossover or a straight-through Ethernet cable can be used: the router determines the type of signal required.

- 4** Connect the cylindrical power plug into the POWER connector on the back of the device. Next:
 - If you have a wall-mount adapter, plug the AC adapter into a wall outlet or a power strip.
 - If you have a table-top adapter, use the AC power cord to connect the adapter to a wall outlet or power strip.

The supplied power adapter may look different than the one illustrated here.

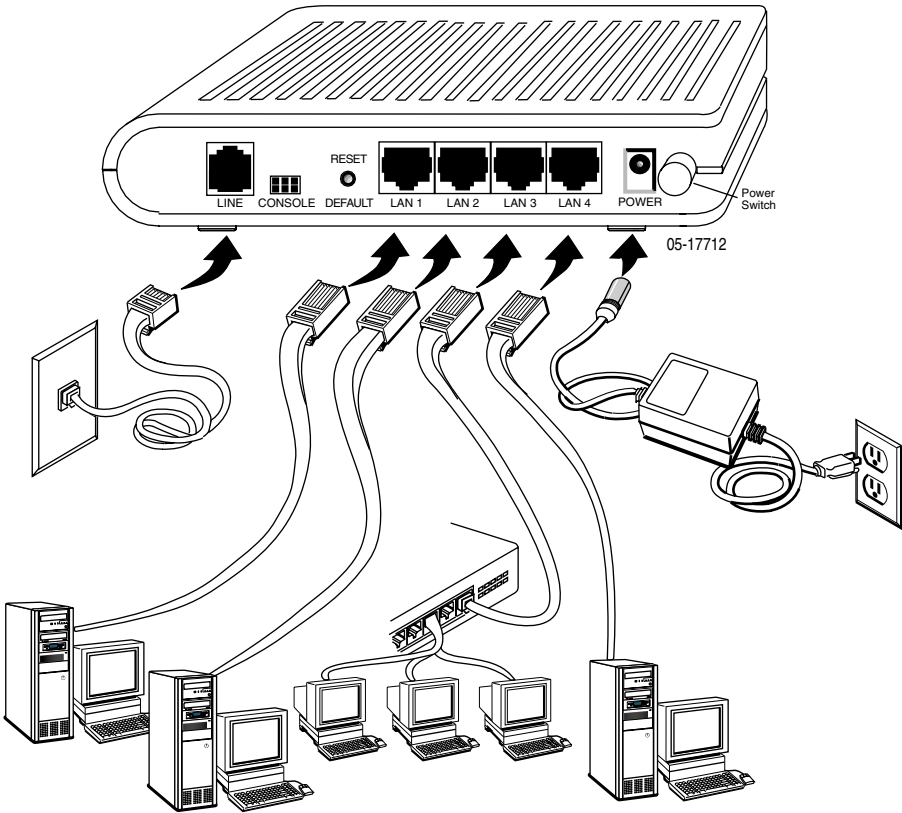


Figure 3: Hardware Installation

- 5 Turn on your PC and any other LAN devices, such as hubs or switches.
- 6 Turn on the router using its power switch.
- 7 Verify that the router's LEDs are illuminated as shown in [Table 3](#).

Table 3: LED Indicators (Sheet 1 of 2)

This LED . . .	Should be:
POWER	Solid green to indicate that the device is turned on. If this light is not on, check if the power adapter is attached to the router and plugged into an AC power source.
xDSL ACT	Solid green to indicate that the router can communicate with your ISP via ADSL, flashing when the device is sending or receiving data over the ADSL connection, or blinking when the router is trying to connect to your ISP.
xDSL LNK	Flashing when the device is sending or receiving data over the ADSL connection.

Table 3: LED Indicators (Sheet 2 of 2)


This LED . . .	Should be:
LAN 1–4	Solid green to indicate that the device can communicate with your PC via Ethernet, or flashing when the router is sending or receiving data over Ethernet.

If the LEDs are illuminated as expected, the router is working properly.

Configuring Your Computer

Before you can access the router over the LAN you have to configure your PC's TCP/IP address to be 192.168.1.x (where x is any number between 3 and 254), with a subnet mask of 255.255.255.0. Your router's default IP address is 192.168.1.1.

If you know the version of Windows that you use, go to the appropriate section below to learn how to set the IP address of your PC. To determine the version of Windows running on your PC, click on the Windows Start button, then click on Run... in the Start menu. Type **winver** in the Open selection box and click on OK.

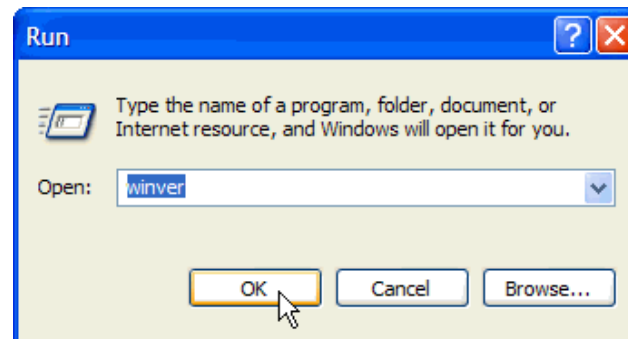**Figure 4: Windows Run Dialog**

The Windows version is displayed.



Figure 5: Windows Version

Windows XP

- 1 In the Windows task bar, click on the Start button, and then click on Control Panel.
- 2 Double-click on the Network Connections icon.
- 3 In the LAN or High-Speed Internet window, right-click on the icon corresponding to your network interface card (NIC), and select Properties. (Often this icon is labeled Local Area Connection). The Local Area Connection dialog box displays with a list of currently installed network items.
- 4 Ensure that the check box to the left of the item labeled Internet Protocol (TCP/IP) is checked, and click on Properties.

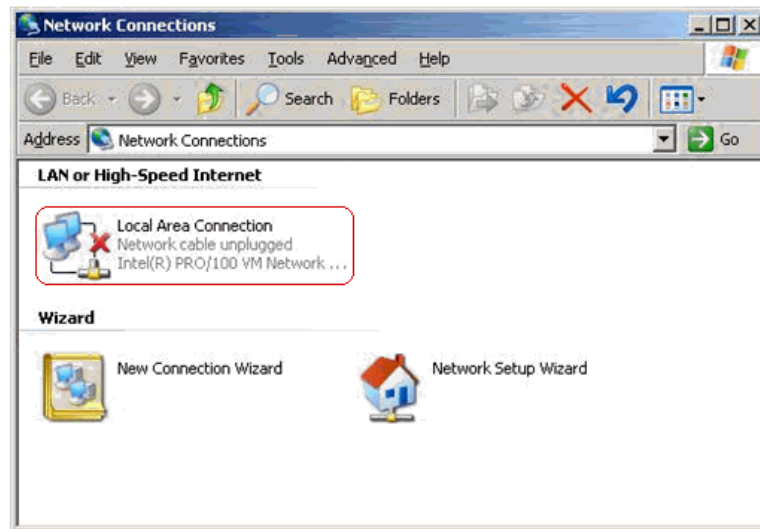


Figure 6: Network Connections (Windows XP)

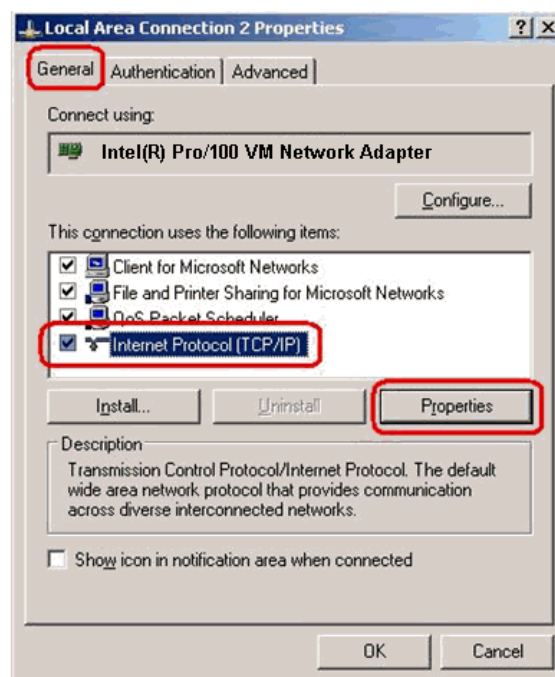


Figure 7: Local Area Connection Properties (Windows XP)

- 5 In the Internet Protocol (TCP/IP) Properties dialog box, click on the radio button labeled Use the following IP address. Type an address between 192.168.1.3 and 192.168.1.254 in the IP Address field (192.168.1.20 is shown here as an example) and 255.255.255.0 in the Subnet Mask field.

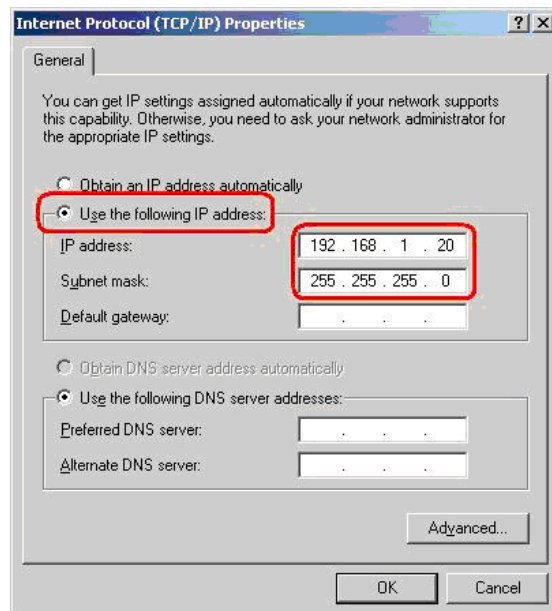


Figure 8: TCP/IP Properties (Windows XP)

- 6** Click on OK twice to confirm your changes, and close the Control Panel.

Windows 2000

- 1** In the Windows task bar, click on the Start button, point to Settings, and then click on Control Panel.
- 2** Double-click on the Network and Dial-up Connections icon.
- 3** In the Network and Dial-up Connections window, right-click on the Local Area Connection icon, and then select Properties.

The Local Area Connection Properties dialog box displays a list of currently installed network components. If the list includes Internet Protocol (TCP/IP), the protocol has already been enabled; skip to [Step 10](#).

- 4** If Internet Protocol (TCP/IP) does not appear as an installed component, click on Install.
- 5** In the Select Network Component Type dialog box, select Protocol, and then click on Add.
- 6** Select Internet Protocol (TCP/IP) in the Network Protocols list, and then click on OK.

You may be prompted to install files from your Windows 2000 installation CD or other medium. Follow the instructions to install the files.

- 7** If prompted, click on OK to restart your computer with the new settings.

- 8** After restarting your PC, double-click on the Network and Dial-up Connections icon in the Control Panel.
- 9** In Network and Dial-up Connections window, right-click on the Local Area Connection icon, and then select Properties.
- 10** In the Local Area Connection Properties dialog box, select Internet Protocol (TCP/IP), and then click on Properties.
- 11** In the Internet Protocol (TCP/IP) Properties dialog box, click on the radio button labeled Use the following IP address. Type an address between 192.168.1.3 and 192.168.1.254 in the IP Address field and 255.255.255.0 in the Subnet Mask field.
- 12** Click on OK twice to confirm and save your changes, and then close the Control Panel.

Windows ME

- 1** In the Windows task bar, click on the Start button, point to Settings, and then click on Control Panel.
- 2** Double-click on the Network and Dial-up Connections icon.
- 3** In the Network and Dial-up Connections window, right-click on the Network icon, and then select Properties.
The Network Properties dialog box displays a list of currently installed network components. If the list includes Internet Protocol (TCP/IP), the protocol has already been enabled; skip to [Step 11](#).
- 4** If Internet Protocol (TCP/IP) does not appear as an installed component, click on Add.
- 5** In the Select Network Component Type dialog box, select Protocol, and then click on Add.
- 6** Select Microsoft in the Manufacturers box.
- 7** Select Internet Protocol (TCP/IP) in the Network Protocols list, and then click on OK.
You may be prompted to install files from your Windows Me installation CD or other media. Follow the instructions to install the files.
- 8** If prompted, click on OK to restart your computer with the new settings.
- 9** After restarting your PC, double-click on the Network and Dial-up Connections icon in the Control Panel.
- 10** In Network and Dial-up Connections window, right-click on the Network icon, and then select Properties.
- 11** In the Network Properties dialog box, select TCP/IP, and then click on Properties.
- 12** In the TCP/IP Settings dialog box, click on the radio button labeled Use the following IP address. Type an address between 192.168.1.3 and

192.168.1.254 in the IP Address field and 255.255.255.0 in the Subnet Mask field.

- 13** Click on OK twice to confirm and save your changes, and then close the Control Panel.

Windows 95 and Windows 98

- 1** In the Windows task bar, click on the Start button, point to Settings, and then click on Control Panel.
- 2** Double-click on the Network icon.

The Network dialog box displays a list of currently installed network components. If the list includes TCP/IP, the protocol has already been enabled. Skip to step 9.
- 3** If TCP/IP does not appear as an installed component, click on Add. The Select Network Component Type dialog box appears.
- 4** Select Protocol, and then click on Add.

The Select Network Protocol dialog box appears.
- 5** Click on Microsoft in the Manufacturers list box, and then click on TCP/IP in the Network Protocols list box.
- 6** Click on OK to return to the Network dialog box, and then click on OK again.

You may be prompted to install files from your Windows 95/98 installation CD. Follow the instructions to install the files.
- 7** Click on OK to restart the PC and complete the TCP/IP installation.
- 8** After restarting your PC, open the Control Panel window, and then click on the Network icon.
- 9** Select the network component labeled TCP/IP, and then click on Properties.

If you have multiple TCP/IP listings, select the listing associated with your network card or adapter.
- 10** In the TCP/IP Properties dialog box, click on the IP Address tab.
- 11** Click in the radio button labeled Use the following IP address. Type an address between 192.168.1.3 and 192.168.1.254 in the IP Address field and 255.255.255.0 in the Subnet Mask field.
- 12** Click on OK twice to confirm and save your changes. You will be prompted to restart Windows. Click on Yes.

Windows NT 4.0

- 1** In the Windows NT task bar, click on the Start button, point to Settings, and then click on Control Panel.
- 2** In the Control Panel window, double click on the Network icon.

- 3** In the Network dialog box, click on the Protocols tab.
The Protocols tab displays a list of currently installed network protocols. If the list includes TCP/IP, the protocol has already been enabled. Skip to [Step 9](#).
- 4** If TCP/IP does not appear as an installed component, click on Add.
- 5** In the Select Network Protocol dialog box, select TCP/IP, and then click on OK.
You may be prompted to install files from your Windows NT installation CD or other medium. Follow the instructions to install the files.
After all files are installed, a window appears to inform you that a TCP/IP service called DHCP can be set up to dynamically assign IP information.
- 6** Click on Yes to continue, and then click on OK, if prompted, to restart your computer.
- 7** After restarting your PC, open the Control Panel window, and then double-click on the Network icon.
- 8** In the Network dialog box, click on the Protocols tab.
- 9** In the Protocols tab, select TCP/IP, and then click on Properties.
- 10** In the Microsoft TCP/IP Properties dialog box, click on the radio button labeled Use the following IP address. Type an address between 192.168.1.3 and 192.168.1.254 in the IP Address field and 255.255.255.0 in the Subnet Mask field.
- 11** Click on OK twice to confirm and save your changes, and then close the Control Panel.

Logging in to Your Router

This section shows how to connect to the router's web interface, configure settings, and observe some statistics of your Internet connection.

- 1** Open your Web browser, and type the following URL in the address/location box, and press Enter:

`http://192.168.1.1`

This is the default IP address for the LAN port on the router.

A login screen appears.

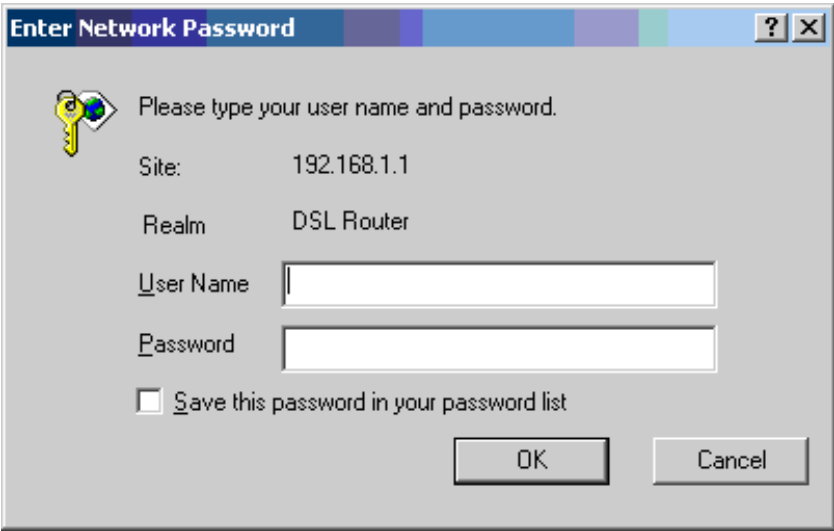


Figure 9: Login Screen

If you have problem connecting to the router, verify that your PC is properly configured within the subnet of the router's default IP address 192.168.1.1. Setup is described in [Configuring Your Computer on page 19](#).

- 2 Enter your user name and password, and then click on OK to display the home page of the router's web interface. There are two default user name and password combinations:

Table 4: Default User Names and Passwords

User Name	Password	Capability
user	user	Can display device status, but cannot change or save configuration options.
admin	admin	Can perform all functions.

You can change the passwords at any time.

The home page is shown in [Figure 10](#).

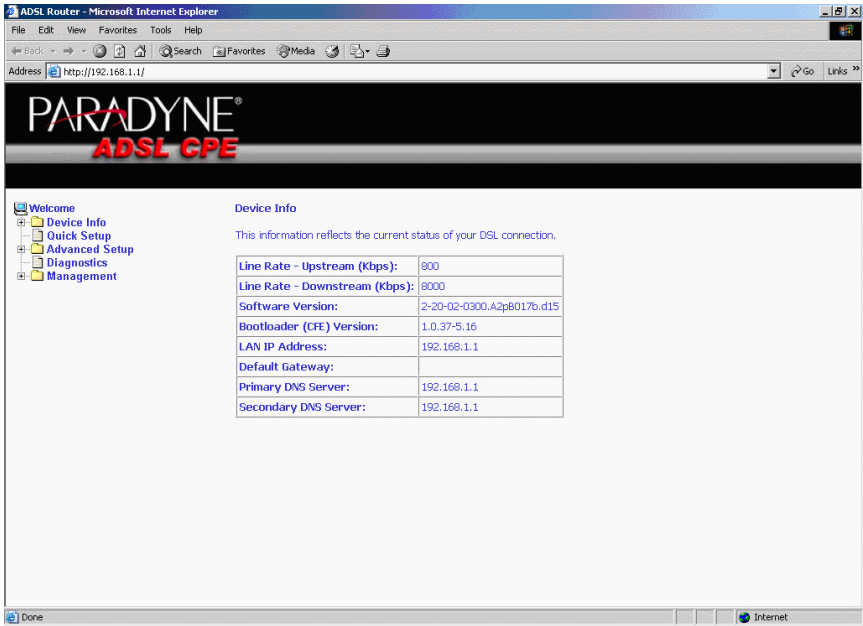


Figure 10: Web Interface Home Page


.....

3

DEVICE INFORMATION

Status Summary

Display the general status report for the router by clicking on Summary under Device Info (Figure 11).

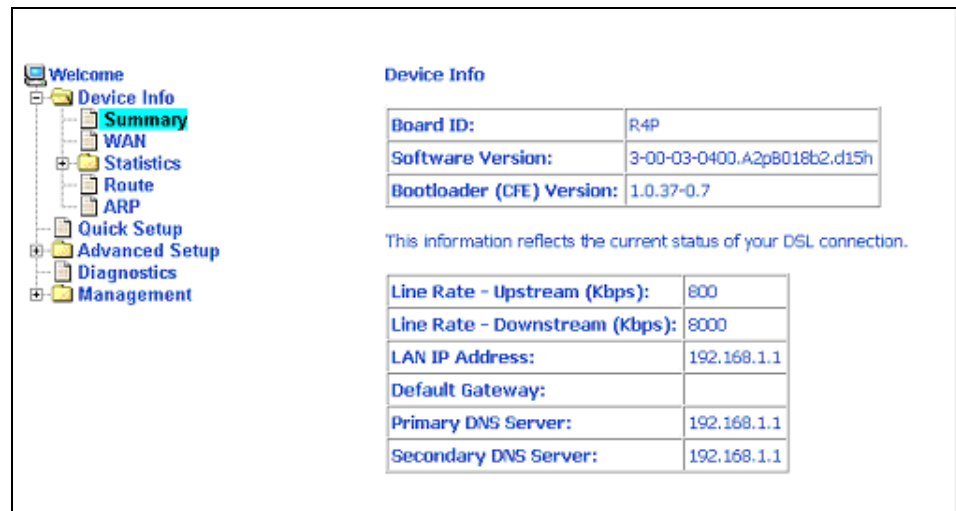

Device Info	
Board ID:	R4P
Software Version:	3-00-03-0400.A2p8018b2.d15h
Bootloader (CFE) Version:	1.0.37-0.7


This information reflects the current status of your DSL connection.

Line Rate - Upstream (Kbps):	800
Line Rate - Downstream (Kbps):	8000
LAN IP Address:	192.168.1.1
Default Gateway:	
Primary DNS Server:	192.168.1.1
Secondary DNS Server:	192.168.1.1

Figure 11: Status Summary

WAN

Display the WAN status report from the by clicking on WAN under Device Info (Figure 12).

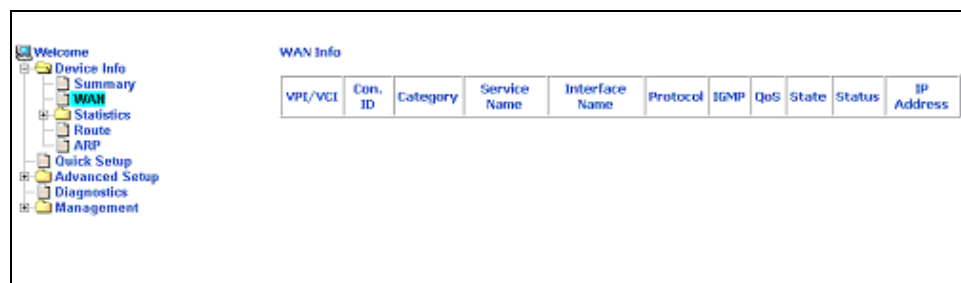

WAN Info										
VPI/VCI	Con. ID	Category	Service Name	Interface Name	Protocol	IGMP	QoS	State	Status	IP Address

Figure 12: WAN Status

When a WAN connection is configured, the screen looks like [Figure 13](#).

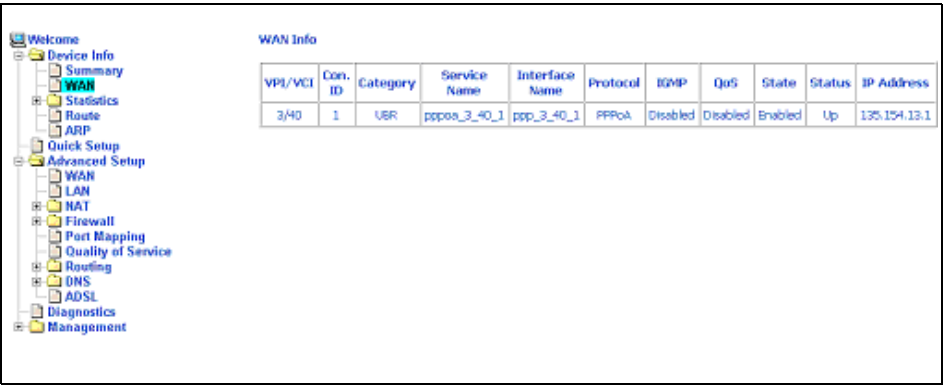


Figure 13: WAN Status with WAN Connection

LAN Statistics

Display LAN statistics by clicking on LAN under Statistics ([Figure 14](#)).

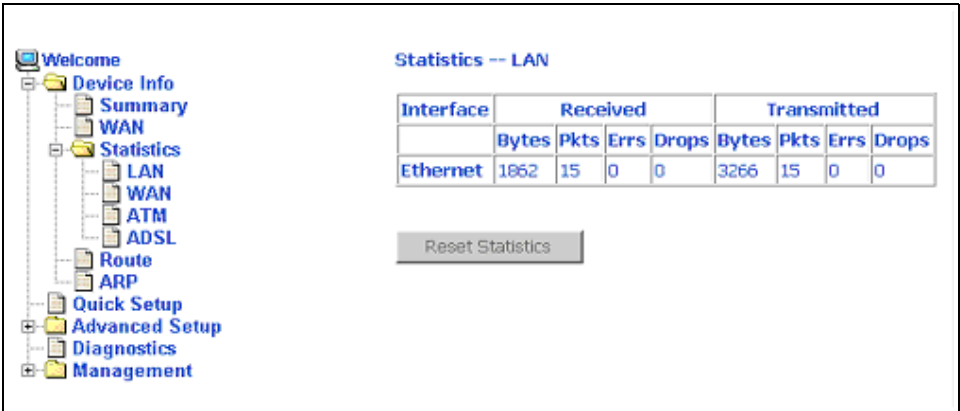


Figure 14: LAN Statistics

WAN Statistics

Display WAN statistics by clicking on WAN under Statistics ([Figure 15](#)).

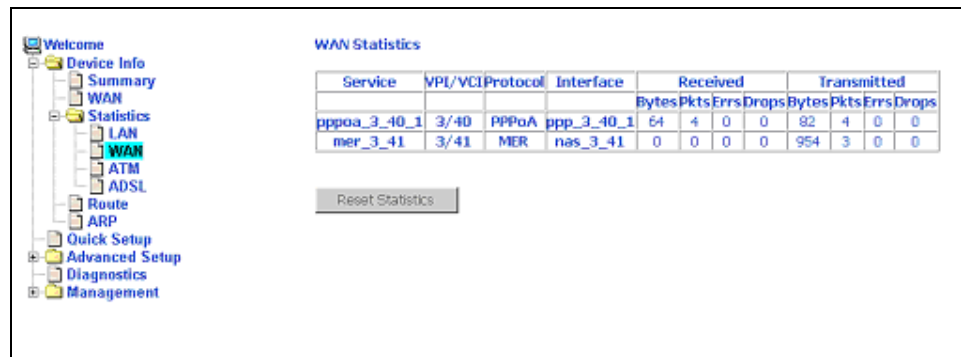


Figure 15: WAN Statistics

ATM Statistics

Display ATM statistics by clicking on ATM under Statistics (Figure 16).

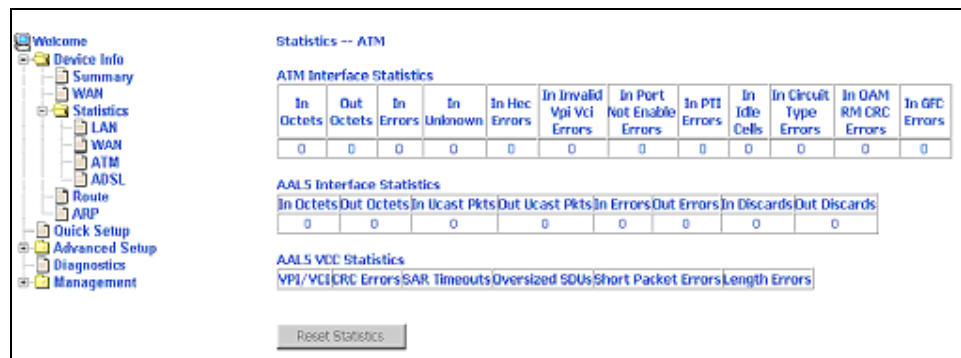


Figure 16: ATM Statistics

ADSL Statistics

Display ADSL statistics by clicking on ADSL under Statistics (Figure 17).

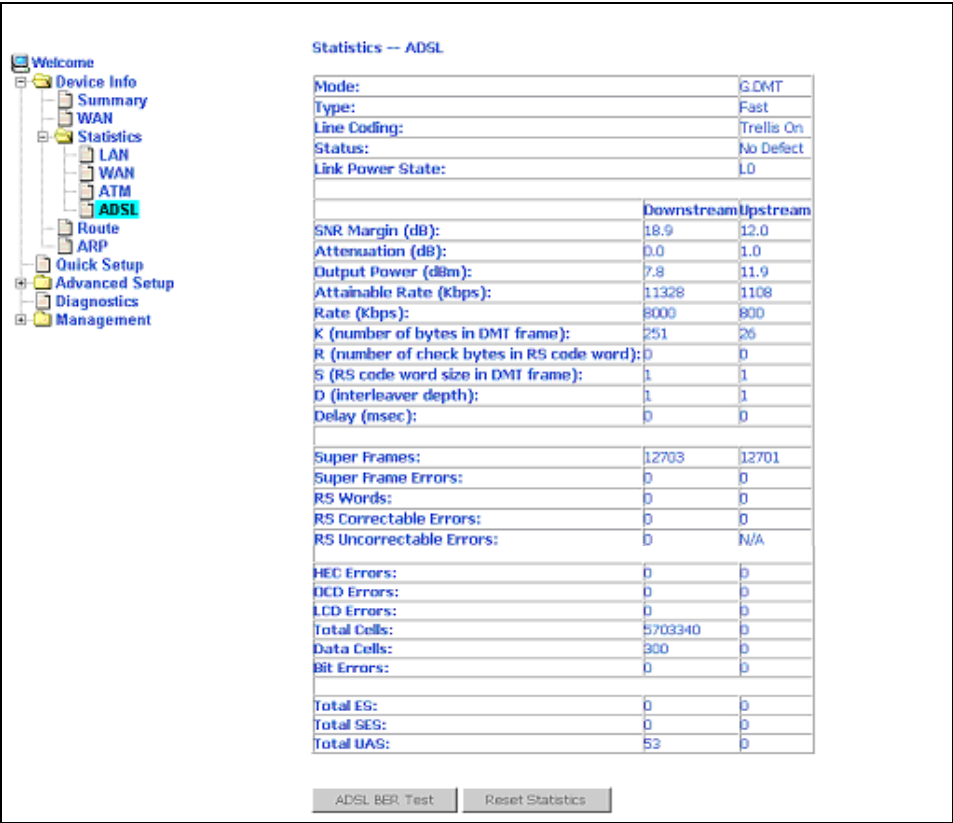


Figure 17: ADSL Status

ADSL BER Test

The ADSL Bit Error Rate (BER) test determines the quality of the ADSL connection. The test is performed by transferring idle cells containing a known pattern and comparing the received data with this known pattern to check for any errors (Figure 18 and Figure 19).

To run a BER test:

- 1 Click on the ADSL BER Test button.
- 2 Select the test duration and click on Start
- 3 Check the result.

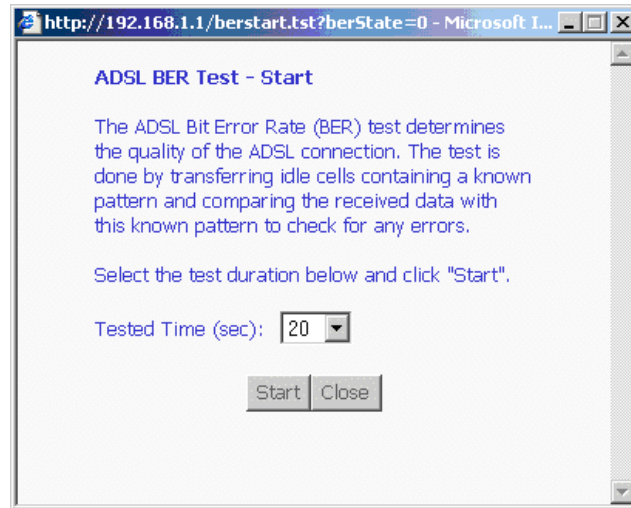


Figure 18: ADSL BER Test — Start

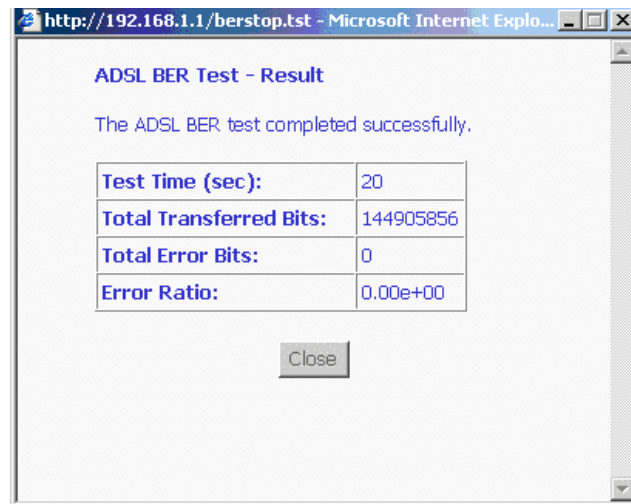


Figure 19: ADSL BER Test — Result

Route

Obtain the Routing status report by clicking on the Route item under Device Info (Figure 20)

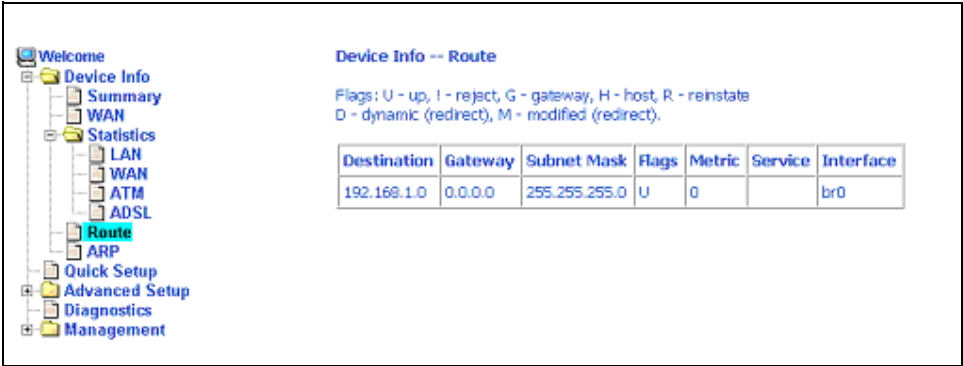


Figure 20: Route Information

ARP

Display the ARP status report by clicking on ARP under Device Info (Figure 21)

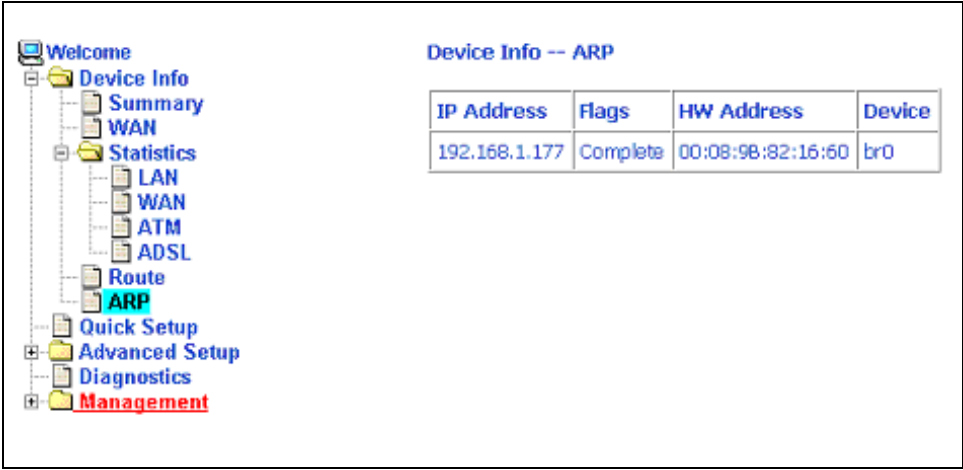


Figure 21: ARP Status

4 QUICK SETUP

Quick Setup with Auto-Connect Enabled

Auto-connect will automatically detect the first usable PVC and automatically detect PPPoE, PPPoA, and Bridge Protocol (with DHCP Server available). To use auto-connect:

- 1 Select Quick Setup. The Quick Setup initial screen appears.

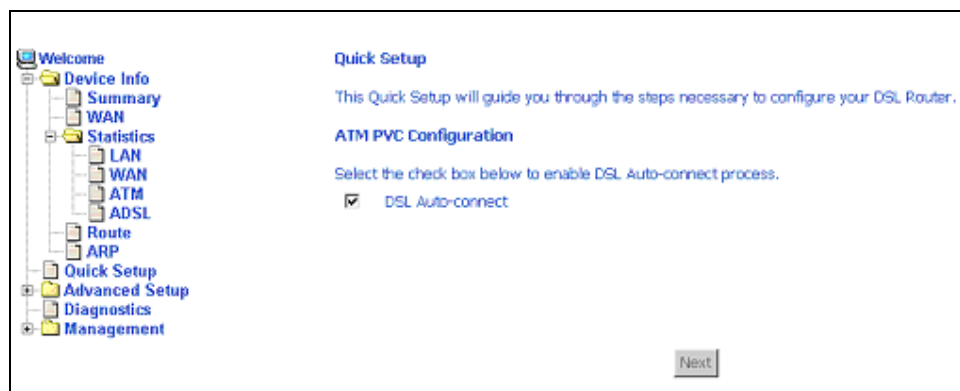


Figure 22: Quick Setup Initial Screen

- 2 Select DSL Auto-Connect, then click on Next. The progress information screen appears.

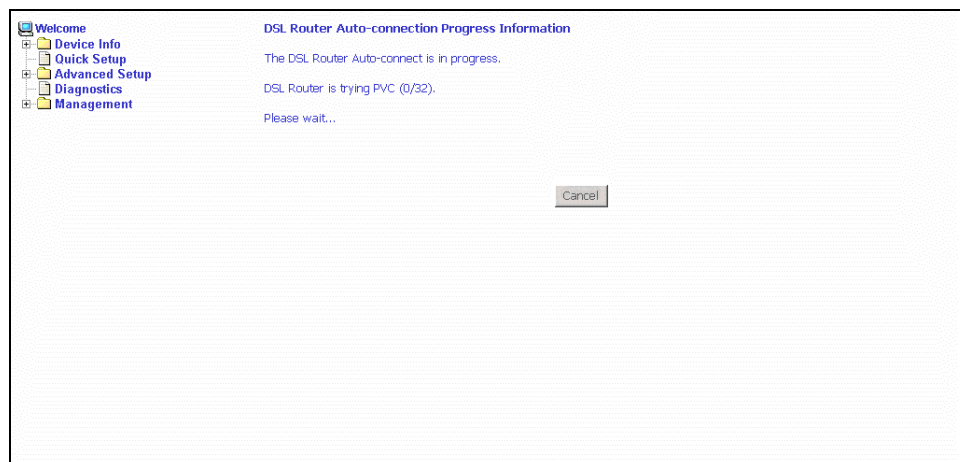


Figure 23: Detecting Available PVC

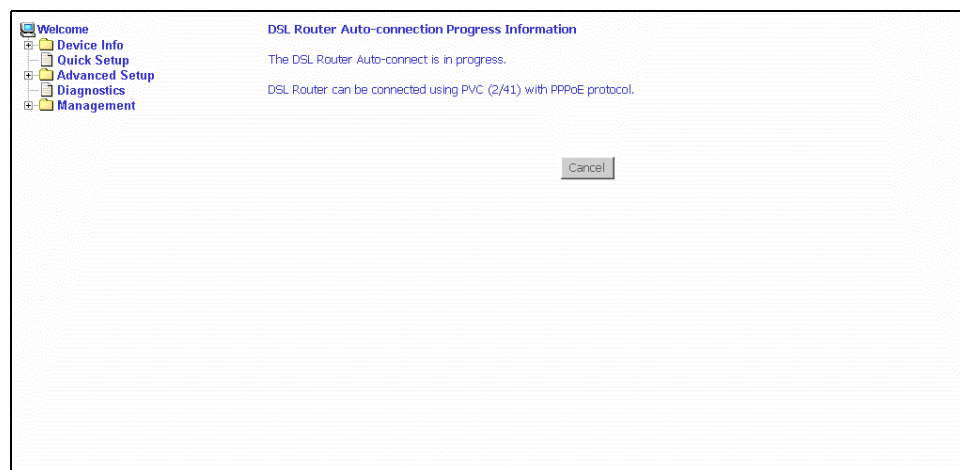


Figure 24: Detecting available PVC – Available PVC Detected

Quick Setup with Auto-Connect Disabled

- 1 Select Quick Setup. The Quick Setup initial screen appears.
- 2 Verify that DSL Auto-Connect is not selected. Entry boxes for VPI and VCI appear when DSL Auto-Connect is not selected.
- 3 Specify VPI and VCI as directed by your ISP.

Welcome

- Device Info
- Quick Setup
- Advanced Setup
- Diagnostics
- Management

Quick Setup

This Quick Setup will guide you through the steps necessary to configure your DSL Router.

ATM PVC Configuration

Select the check box below to enable DSL Auto-connect process.

☐ DSL Auto-connect

The Virtual Path Identifier (VPI) and Virtual Channel Identifier (VCI) are needed for setting up the ATM PVC. Do not change VPI and VCI numbers unless your ISP instructs you otherwise.

VPI: [0-255]

VCI: [32-65535]

Enable Quality Of Service

Enabling QoS for a PVC improves performance for selected classes of applications. However, since QoS also consumes system resources, the number of PVCs will be reduced consequently. Use **Advanced Setup/Quality of Service** to assign priorities for the applications.

Enable Quality Of Service ☐

[Next](#)

Figure 25: Specifying VPI and VCI

- Click on Next. The Connection Type screen appears.

Welcome

- Device Info
- Summary
- WAN
 - Statistics
 - LAN
 - WAN
 - ATM
 - ADSL
- Route
- ARP
- Quick Setup
- Advanced Setup
 - WAN
 - LAN
 - NAT
 - Firewall
 - Port Mapping
 - Quality of Service
 - Routing
 - DNS
 - DNS Server
 - Dynamic DNS
 - ADSL
- Diagnostics
- Management

Connection Type

Select the type of network protocol and encapsulation mode over the ATM PVC that your ISP has instructed you to use.

☒ PPP over ATM (PPPoA)
☐ PPP over Ethernet (PPPoE)
☐ MAC Encapsulation Routing (MER)
☐ IP over ATM (IPoA)
☐ Bridging

Encapsulation Mode

[Back](#) [Next](#)

Figure 26: Connection Type

- Select the protocol and encapsulation type required by your ISP.
- Click on Next. Further parameters for the selected protocol are presented. For example, if you selected PPPoA, the PPP Username and Password screen appears.

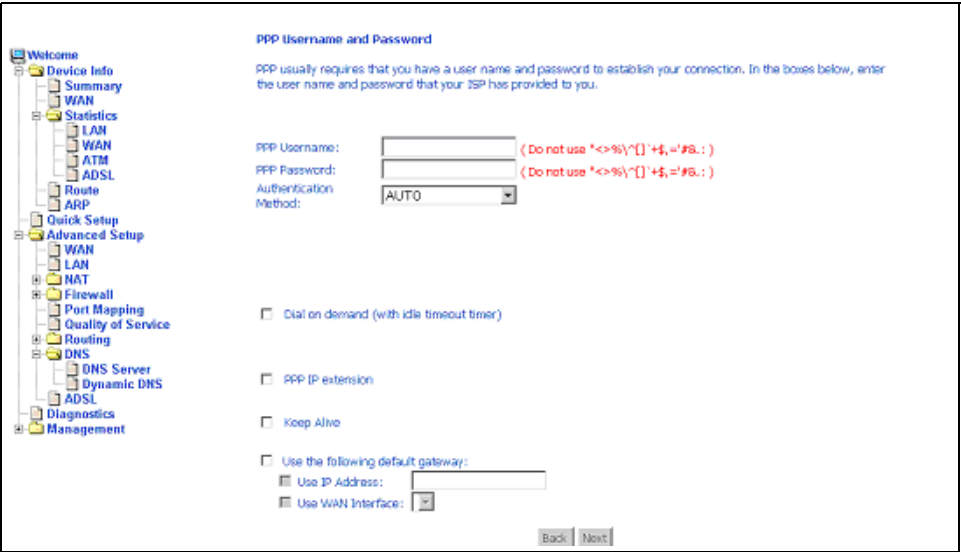


Figure 27: PPP Username and Password

7 Click on Next. The Network Address Translation Settings screen appears.



Figure 28: NAT Settings

8 Enter the settings specified by your ISP and click on Next. The Device Setup screen appears.

Welcome

- Device Info
 - Summary
- WAN
 - Statistics
 - LAN
 - WAN
 - ATM
 - ADSL
 - Route
 - ARP
- Quick Setup
- Advanced Setup
 - WAN
 - LAN
 - NAT
 - Firewall
 - Port Mapping
 - Quality of Service
 - Routing
 - DNS
 - DNS Server
 - Dynamic DNS
 - ADSL
- Diagnostics
- Management

Device Setup

Configure the DSL Router IP Address and Subnet Mask for LAN interface.

IP Address:

Subnet Mask:

☐ Disable DHCP Server
☒ Enable DHCP Server

Start IP Address:

End IP Address:

Leased Time (hour):

☐ Configure the second IP Address and Subnet Mask for LAN interface

Back Next

Figure 29: Device Setup

- 9** If desired, configure the DSL Router IP address and Subnet Mask for the LAN interface to correspond to your LAN's IP Subnet. If you want the DHCP server to automatically assign IP addresses, then enable the DHCP server and enter the range of IP addresses that the DHCP server can assign to your computers. Disable the DHCP server if you would like to manually assign IP addresses.

If you have a second IP address and subnet mask for the LAN interface, click on the checkbox to configure it.

- 10** Click on Next to continue. The WAN Setup Summary screen displays all WAN settings that you have made. Check that the settings are correct before clicking on the Save / Reboot button. Clicking on Save / Reboot saves your settings and restarts your router.

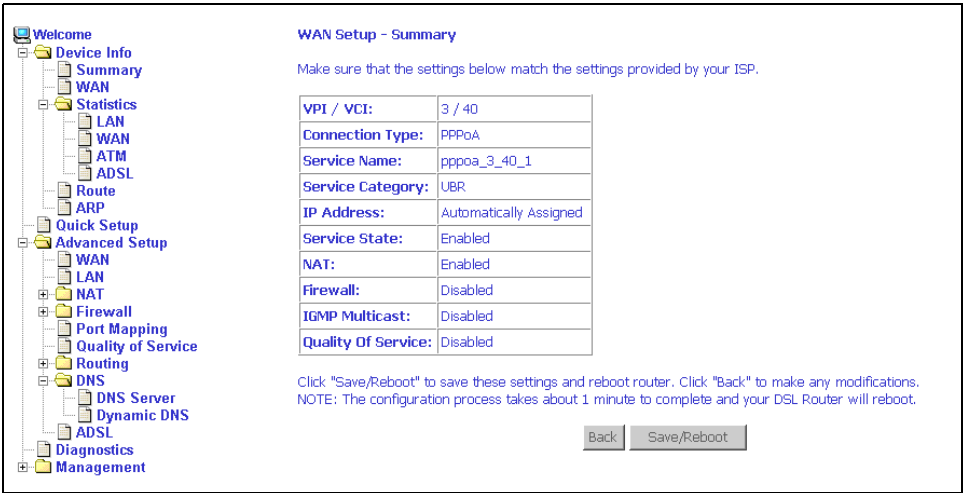


Figure 30: WAN Setup - Summary

5

ADVANCED SETUP

WAN

Set up WAN parameters as directed by your ISP.

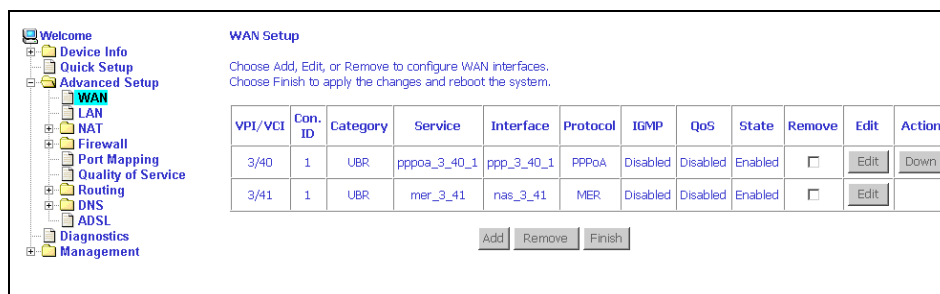


Figure 31: WAN Setup Screen

Add Function – ATM PVC Configuration

If you want to add a new rule for the WAN interface, click on the Add button. The ATM PVC Configuration screen appears. The ATM PVC Configuration screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category.

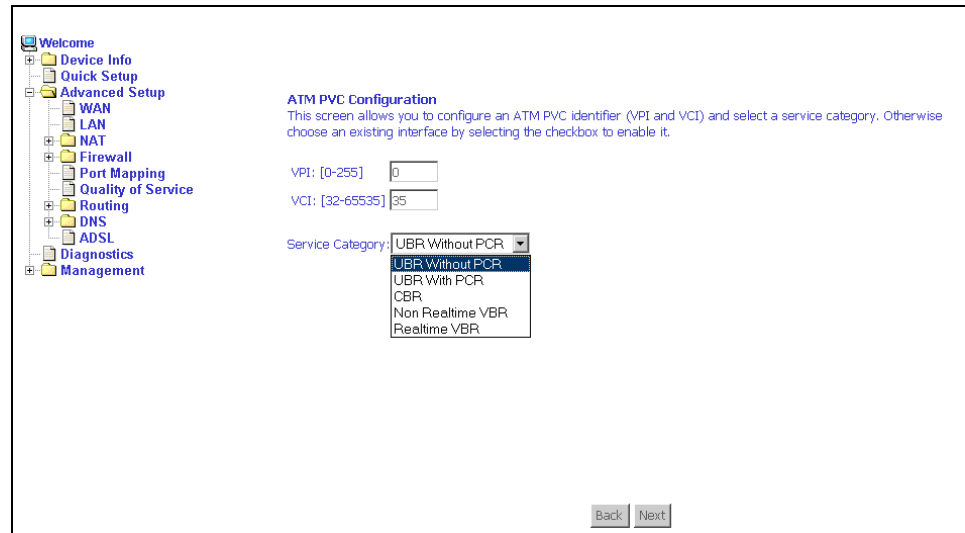


Figure 32: ATM PVC Configuration Screen

Verify the following values with your ISP before you change them.

- VPI (Virtual Path Identifier) – The valid range is 0 to 255.
- VCI (Virtual Channel Identifier) – The valid range is 32 to 65535.
- Service Category – Five classes of traffic defined are defined:
 - UBR Without PCR (Unspecified Bit Rate without Peak Cell Rate)
 - UBR With PCR (Unspecified Bit Rate with Peak Cell Rate) – UBR service is suitable for applications that can tolerate variable delays and some cell loss, such as data transfer, messaging, distribution, and retrieval, and remote terminal applications such as telecommuting.
 - CBR (Constant Bit Rate) – Used by applications that require a fixed data rate that is continuously available during the connection time. It is commonly used for uncompressed audio and video information such as videoconferencing, interactive audio (telephony), and audio and video distribution and retrieval.
 - Non-Realtime VBR (Non-Real-time Variable Bit Rate) – Can be used for data transfers that have critical response-time requirements such as airline reservations, banking transactions, and process monitoring.
 - Realtime VBR (Real-time Variable Bit Rate) – Used for time-sensitive applications such as real-time video. Rt-VBR service allows the network more flexibility than CBR.

Connection Type Screen

- 1 Select the type of network protocol and encapsulation mode over the ATM PVC that your ISP has instructed you to use, then click on Next button.

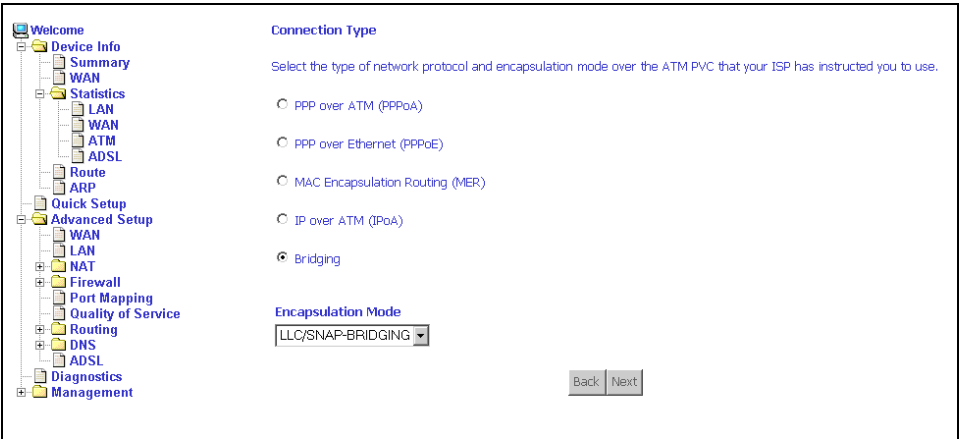


Figure 33: Connection Type Screen

- 2 Select a connection type and click on Next. In this example, the Bridge Service screen appears.

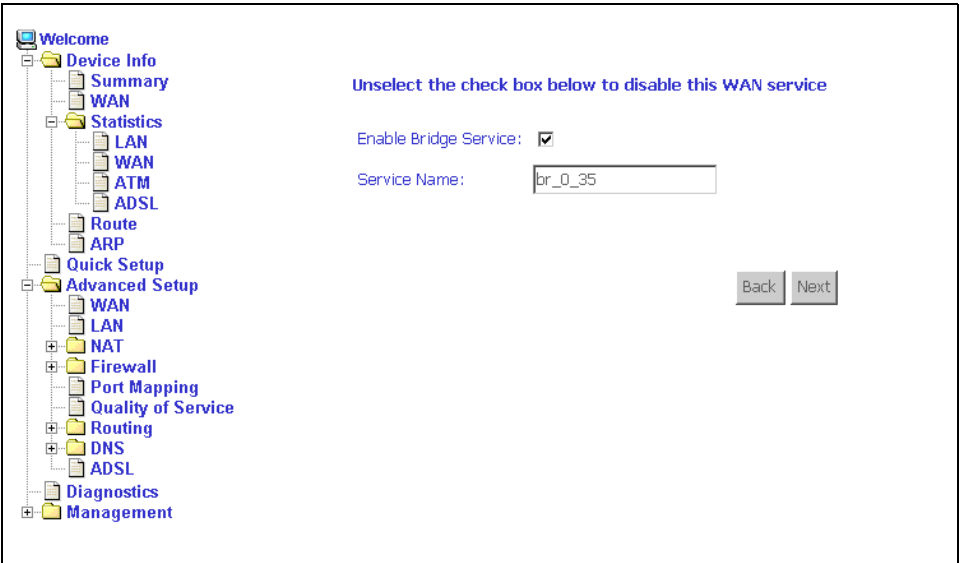


Figure 34: Bridge Service Screen

- 3 Enter or select the parameters presented for the service type, and click on Next. The WAN Setup - Summary screen appears.

WAN Setup - Summary

- 1 Make sure that the settings on the WAN Setup - Summary screen match the settings provided by your ISP. If all settings are correct, click on the Save button to save these settings; if not, click on the Back button to make any modifications. If you want to change any item after saving, click on the Edit button to make any modifications.

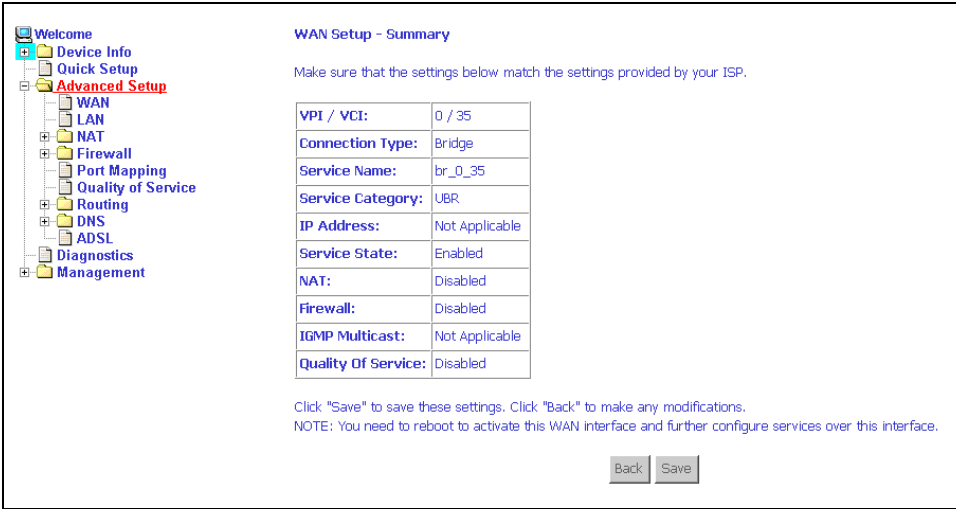


Figure 35: WAN Setup Summary

- 2 Activate this WAN interface by clicking on the Finish button and further configuring services over this interface. The router supports up to five WAN connections.

Remove Function

If you want to delete a connection from the listed WAN setup, click in the Remove check box next to the item, then click on the Remove button.

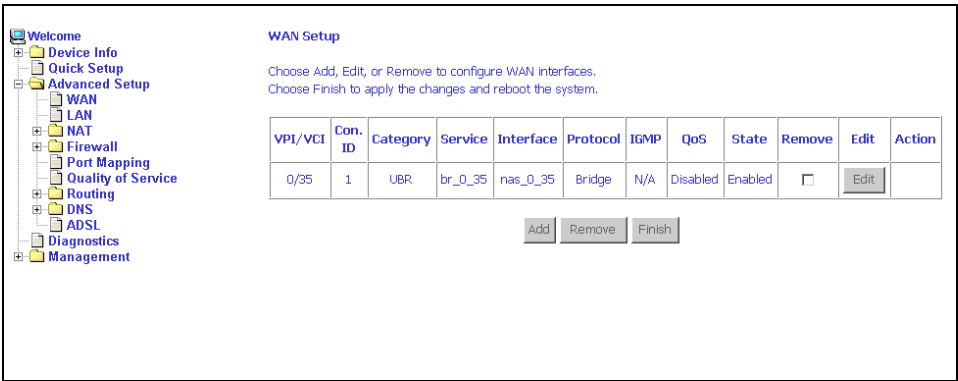


Figure 36: WAN Setup List

Finish Function

After you change any item in WAN Setup, remember to click on the Finish button to apply the changes and reboot the system.

Local Area Network (LAN) Setup

You can configure the DSL Router IP address and Subnet Mask for the LAN interface to conform your LAN's IP Subnet. If you want the DHCP server to automatically assign IP addresses, then enable the DHCP server and enter the range of IP addresses that the DHCP server can assign to your computers. Disable the DHCP server if you would like to manually assign IP addresses.

The Save button only saves the LAN configuration data. The Save/Reboot button saves the LAN configuration data and reboots the router to make the new configuration effective.

Figure 37: LAN Setup

NAT

You can configure the Virtual Server, Port Triggering, and DMZ Host when NAT is enabled.

Virtual Servers

A virtual server allows you to direct incoming traffic from the WAN side to a specific IP address on the LAN side. Click on the Add button to add a virtual server.

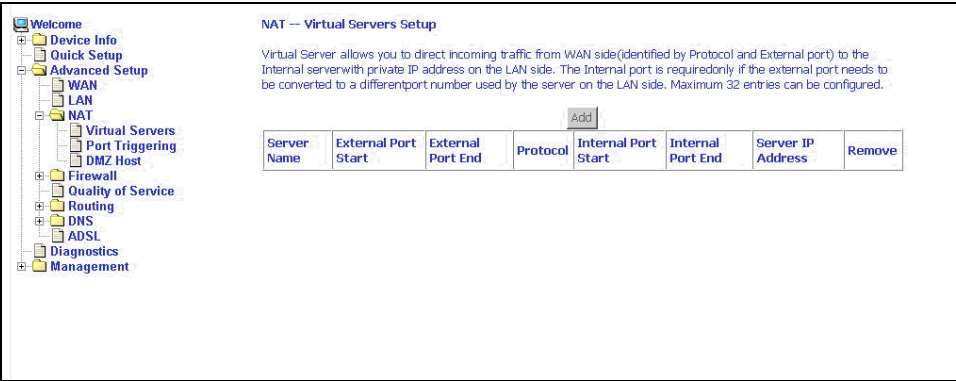


Figure 38: NAT Virtual Server Setup

You can select a Service or make new one. Enter the Server IP Address, then click on Save/Apply to submit your configuration.

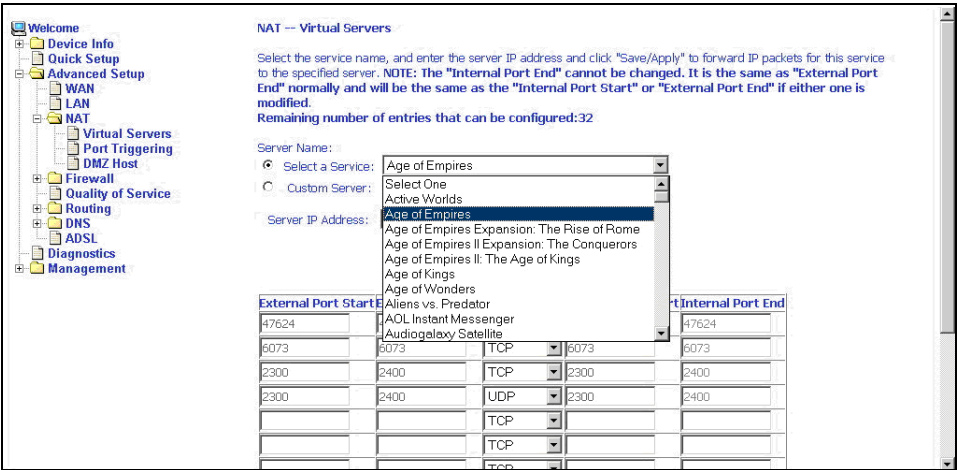


Figure 39: Virtual Server Add Screen

On this screen you can view and delete servers. Click in the check box under Remove and click on the Remove button to delete selected virtual servers.

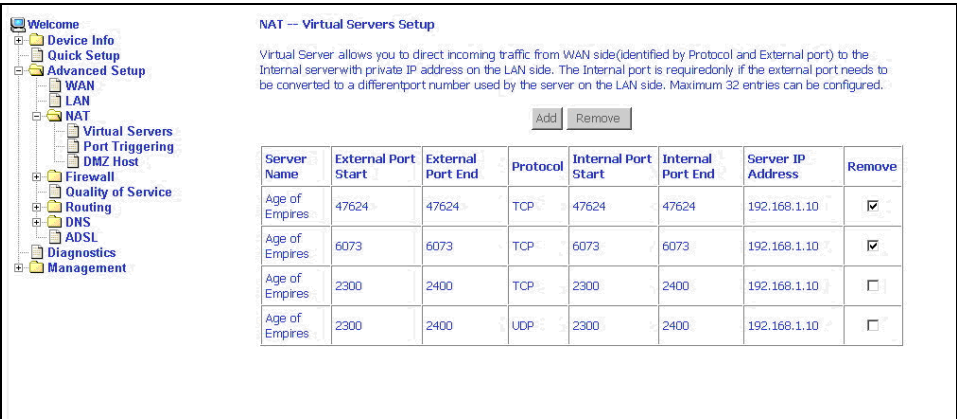


Figure 40: Removing Selected Virtual Servers

Port Triggering

Click the on the Add button to add Port Triggering for your Internet application.

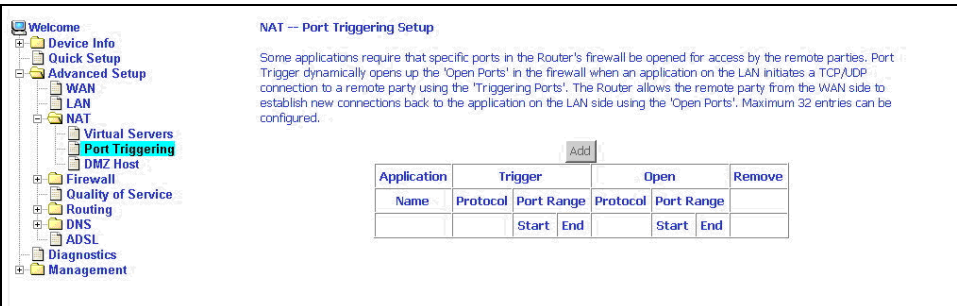


Figure 41: Port Triggering Setup Page

You can select an application every time or create new one for your application. Then click on Save/Apply to save your settings.

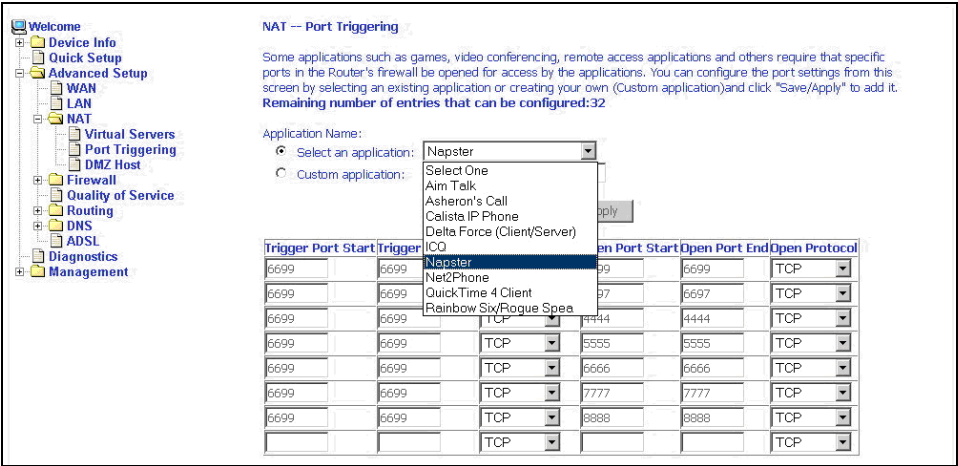


Figure 42: Port Triggering Add Page

On this screen you can view and delete applications. Click in the check box under Remove and click on the Remove button to delete selected applications.

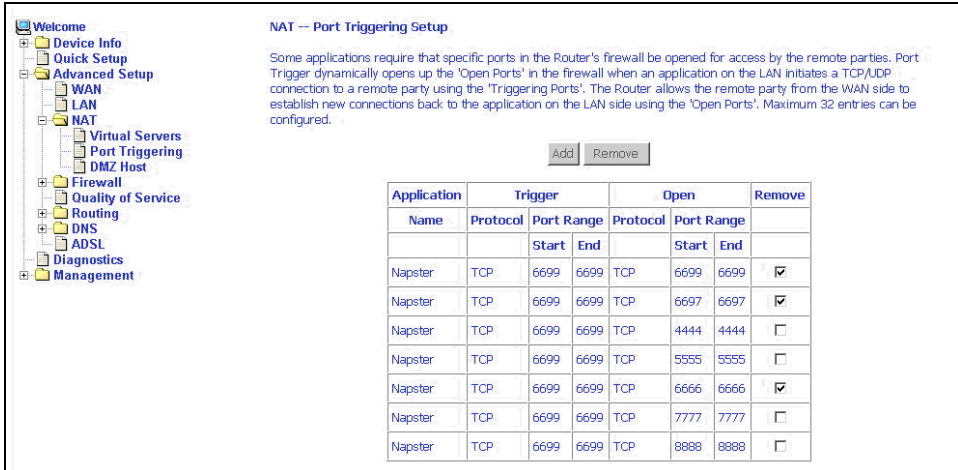


Figure 43: Port Triggering List

DMZ Host

You can define the IP address of the DMZ Host on this screen. Enter the IP address and click on Save/Apply.



Figure 44: DMZ Host Setup

Firewall

For security reasons, firewall options can be configured only from the LAN side of the router.

IP Filtering – Outgoing

The outgoing filter will block the traffic from the LAN side to the WAN side. Click on Add to create filters.

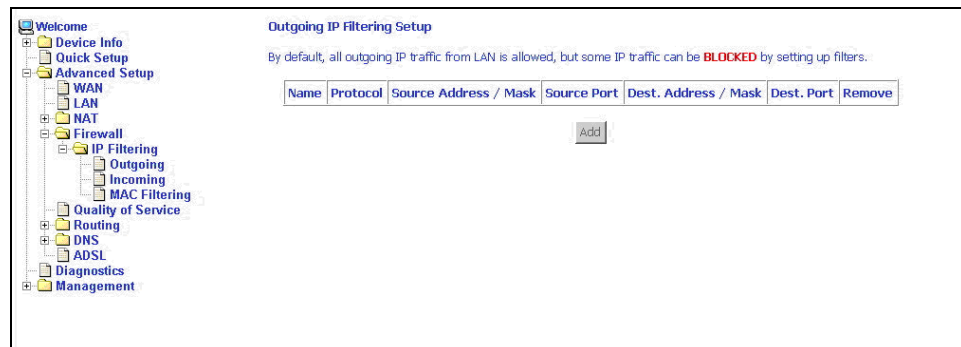


Figure 45: IP Filtering – Outgoing Filter Setup

Input the filter name, source information (from the LAN side), and Destination information (from the WAN side). Then click on Save/Apply.

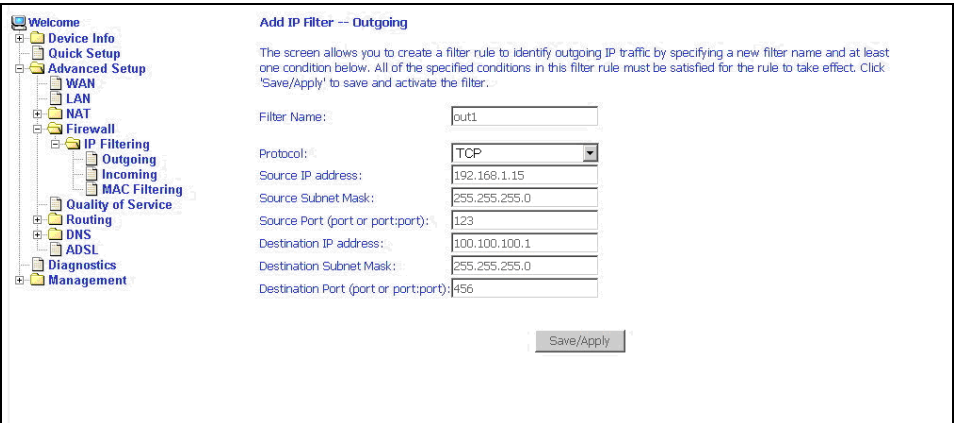


Figure 46: IP Filtering - Outgoing Filter Add Page

You can view and delete the outgoing filter settings on this screen.

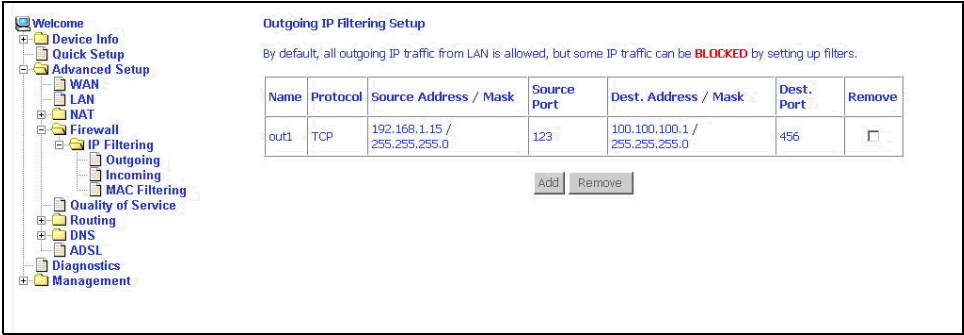


Figure 47: IP Filtering - Outgoing Filter Setup List

IP Filtering – Incoming

Incoming filter filters the traffic from the WAN side to the LAN side. Click on Add to add incoming filter settings.

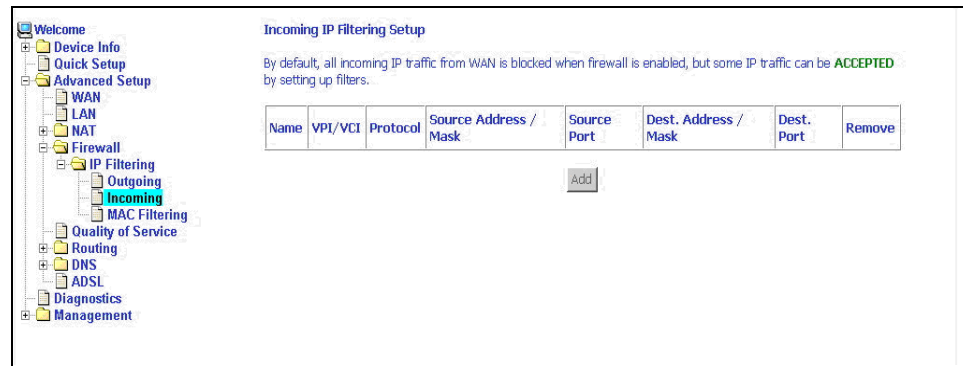


Figure 48: IP Filtering – Incoming Filter Setup Page

Enter a filter name, information about the source address (from the WAN side), and information about the destination address (to the LAN side). Select the protocol and WAN interface. Then click on Save/Apply to add the setting.

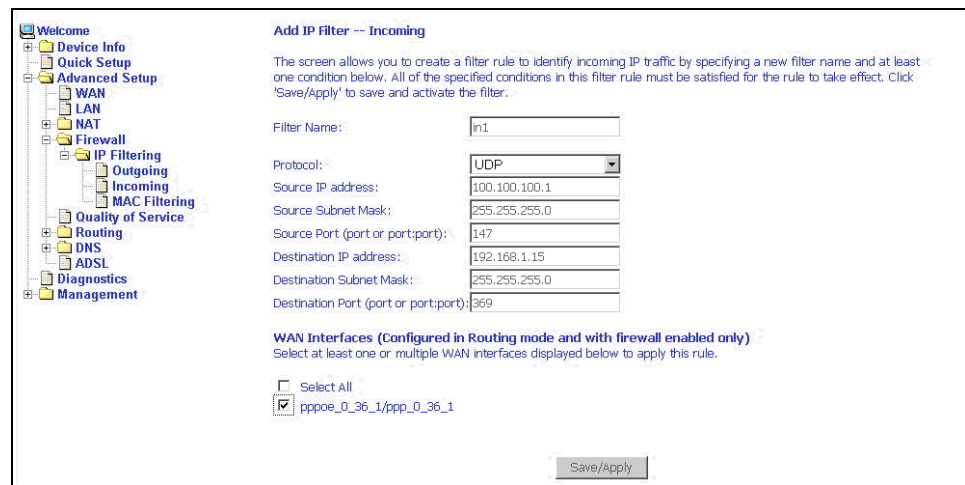


Figure 49: IP Filtering - Incoming Filter Add

You can view and delete the incoming filter settings from this screen.

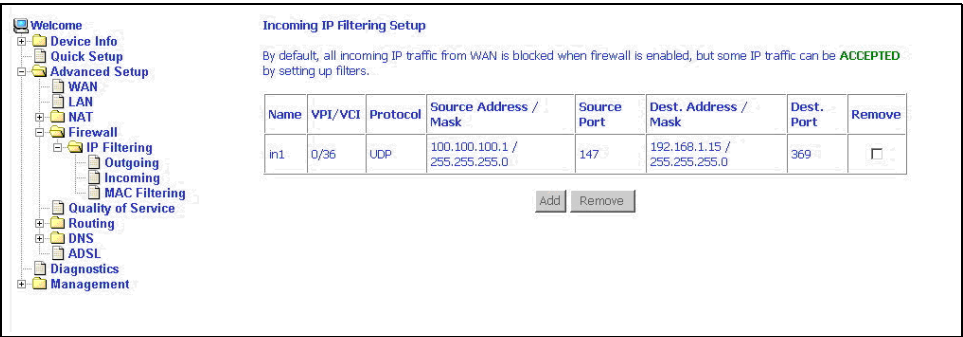


Figure 50: IP Filtering - Incoming Filtering List

Firewall – MAC Filtering

MAC filtering can forward or block traffic by MAC address. You can change the policy or add settings to the MAC filtering table using the MAC Filtering Setup screen.

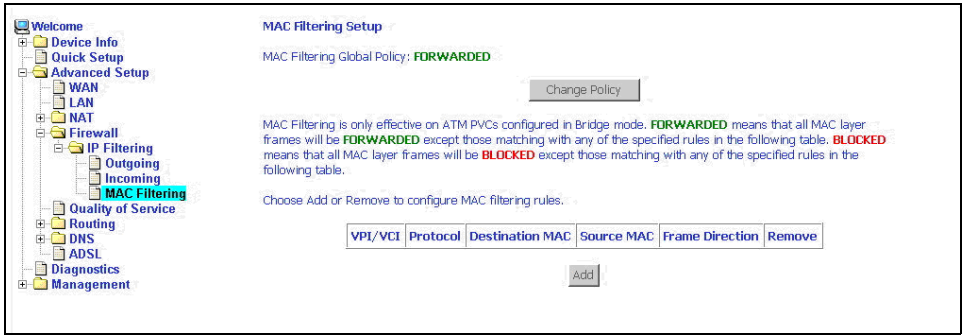


Figure 51: IP Filtering - MAC Filtering Setup

If you click on Change Policy, a confirmation dialog lets you verify your change.

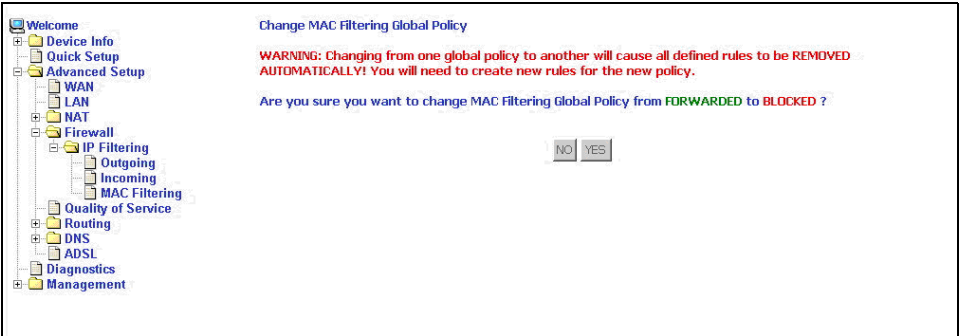


Figure 52: IP Filtering - MAC Filtering Policy Change Confirmation

If you want to add a setting to the MAC filtering table, enter the Source and Destination MAC address, and select protocol type, frame direction, and WAN interface. Then click on Save/Apply to save it.

Figure 53: IP Filtering - MAC Filtering Add Page

On this screen you can view and delete MAC filtering rules.

VPI/VCI	Protocol	Destination MAC	Source MAC	Frame Direction	Remove
ALL	IPv4	00:11:22:33:44:55	00:55:44:33:22:11	LAN<=>WAN	<input type="checkbox"/>

Figure 54: IP Filtering - MAC Filtering List

Parental Control

Use the Parental Control feature to restrict the days and times a particular device is allowed to access the Internet.

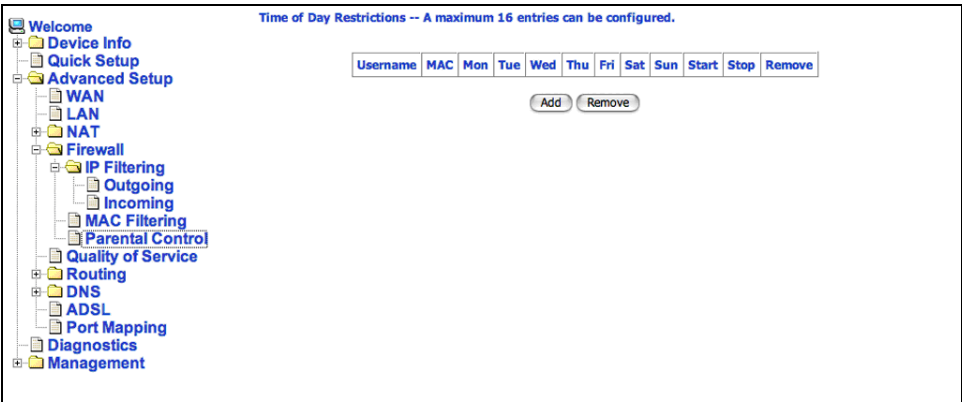


Figure 55: Parental Control Screen

To set up parental controls:

- 1 Click on Add. The Time of Day Restriction screen appears.

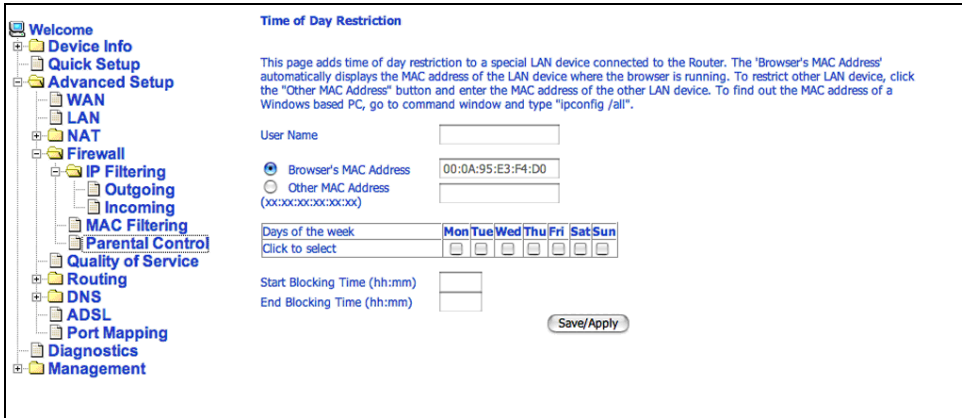


Figure 56: Parental Control – Time of Day Restrictions

- 2 Enter a User Name to identify the target of the restrictions.
- 3 Enter the MAC address of the network adapter to be restricted, and, optionally, another MAC address.
- 4 Select the days of the week the restriction is in force.
- 5 Specify the start and end times the restriction is in force. Use the form hh:mm, where 23:59, for example, is one minute before midnight.
- 6 Click on Save/Apply.

Port Mapping

Use the Port Mapping screen to map multiple ports to a PVC and create bridging groups. Each group will perform as an independent network.

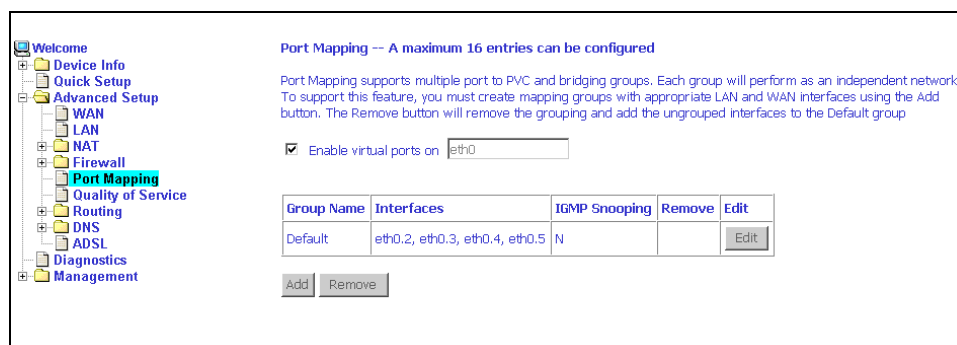


Figure 57: Port Mapping

To create a new mapping group:

- 1 Click on Add. The Port Mapping Configuration screen appears.

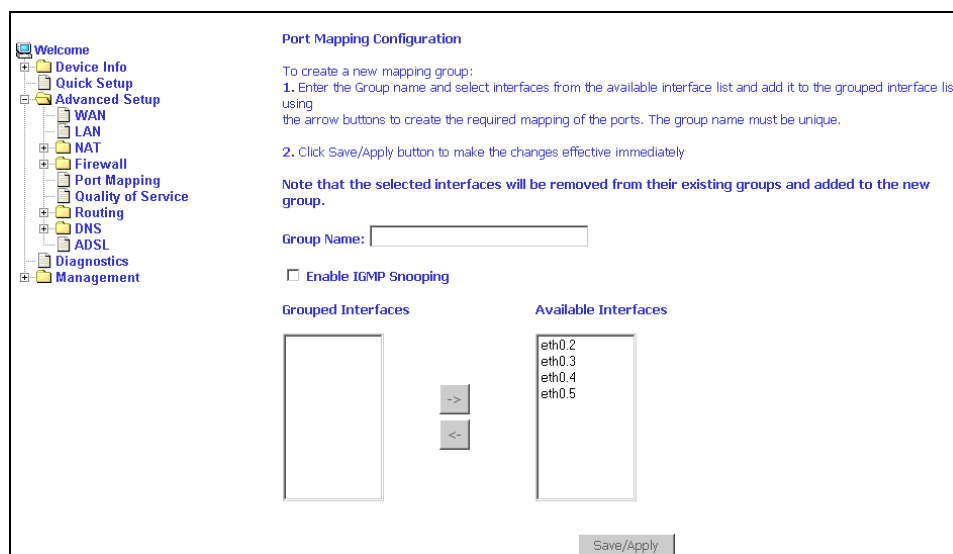


Figure 58: Creating a Port Mapping Entry

- 2 Enter a unique Group name.
- 3 Select interfaces from the available interface list and add them to the grouped interface list using the arrow buttons to create the required mapping of the ports.
- 4 Click on Save/Apply.

Quality of Service

You can configure the Quality of Service to apply different priorities to traffic on the router.

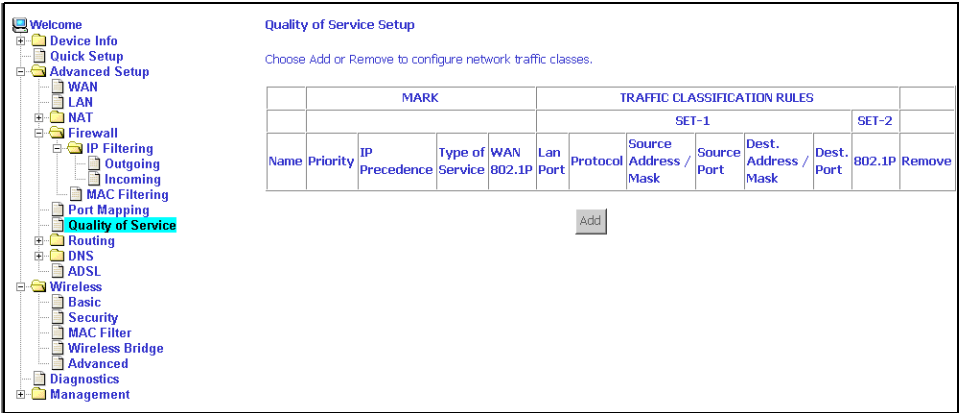


Figure 59: Quality of Service Setup

Click on Add and the Add Network Traffic Class Rule screen appears. To add a rule:

- 1 Give a name to this traffic class.
- 2 Assign a priority level-low, medium, and high-to this traffic class.
- 3 Select an IP precedence from the range of 0–7.
- 4 Enter an IP Type of Service from the following selections-
 - Normal Service
 - Minimize Cost
 - Maximize Reliability
 - Maximize Throughput
 - Minimize Delay
- 5 Last, enter the traffic conditions for the class such as the protocol (TCP / UDP, TCP, UDP, or ICMP) to be used.
- 6 Click on Save / Apply to save the settings.

Add Network Traffic Class Rule

The screen creates a traffic class rule to classify the upstream traffic, assign queuing priority and optionally overwrite the IP header TOS byte. A rule consists of a class name and at least one condition below. All of the specified conditions in this classification rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the rule.

Traffic Class Name:

Assign Priority and/or IP Precedence and/or Type Of Service for the class
If non-blank value is selected for 'IP Precedence' and/or 'IP Type Of Service', the corresponding TOS byte in the IP header of the upstream packet will be overwritten by the selected value.

Priority:

IP Precedence:

IP Type Of Service:

Specify Traffic Conditions for the class
Enter the following conditions either for IP layer or for the IEEE 802.1p priority.

Protocol:

Source IP Address:

Source Subnet Mask:

Source Port (port or port:port):

Destination IP Address:

Destination Subnet Mask:

Destination Port (port or port:port):

802.1p Priority:

Figure 60: Quality of Service Add Screen

Routing – Default Gateway

You can change the Default Gateway on the Routing - Default Gateway screen. By default the Enable Automatic Assigned Default Gateway box is checked.

Routing -- Default Gateway

If Enable Automatic Assigned Default Gateway checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.

NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.

☒ Enable Automatic Assigned Default Gateway

Figure 61: Default Gateway Setup

If you want to specify the default gateway address, then uncheck the box as seen below. Enter the default gateway address and, optionally, the WAN interface you will use. Click on Save / Apply to save the settings.

If you add or change the default gateway address, you must reboot the router to put the new default gateway IP address into effect.

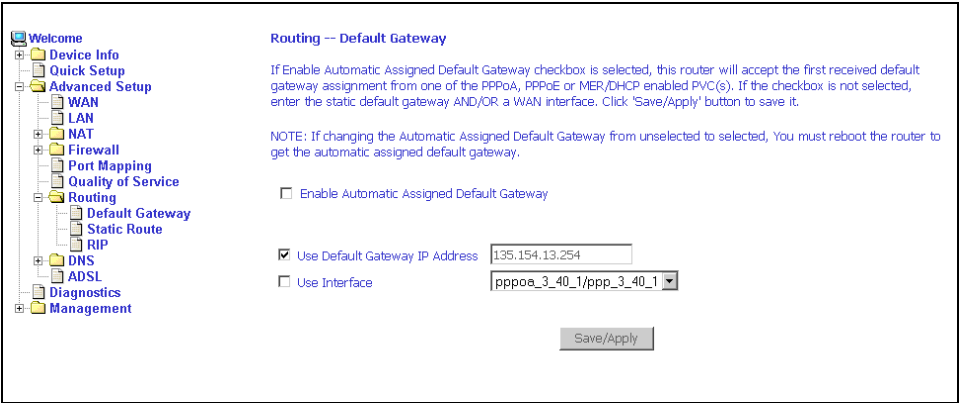


Figure 62: Default Gateway Setup

Routing – Static Route

Use the Routing - Static Route screen to add a static route to the routing table.



Figure 63: Static Route Setup

Enter the route information and click on Save/Apply to make it active. No reboot is required.

Routing -- Static Route Add

Enter the destination network address, subnet mask, gateway AND/OR available WAN interface then click "Save/Apply" to add the entry to the routing table.

Destination Network Address:

Subnet Mask:

☐ Use Gateway IP Address

☒ Use Interface

Figure 64: Static Route Add

Routing – RIP

If RIP is enabled, the router operation can be configured as Active or Passive.

Routing -- RIP Configuration

To activate RIP for the device, select the 'Enabled' radio button for Global RIP Mode. To configure an individual interface, select the desired RIP version and operation, followed by placing a check in the 'Enabled' checkbox for the interface. Click the 'Apply' button to save the configuration, and to start or stop RIP based on the Global RIP mode selected.

Global RIP Mode ☒ Disabled ☐ Enabled

Interface	VPI/VCI	Version	Operation	Enabled
br0	(LAN)	2	Active	<input type="checkbox"/>
ppp_3_40_1	3/40	2	Passive	<input type="checkbox"/>
nas_3_41	3/41	2	Passive	<input type="checkbox"/>

Figure 65: RIP Setup

DNS Server

Use the DNS Server screen to request automatic assignment of a DNS or to specify a primary and secondary DNS.

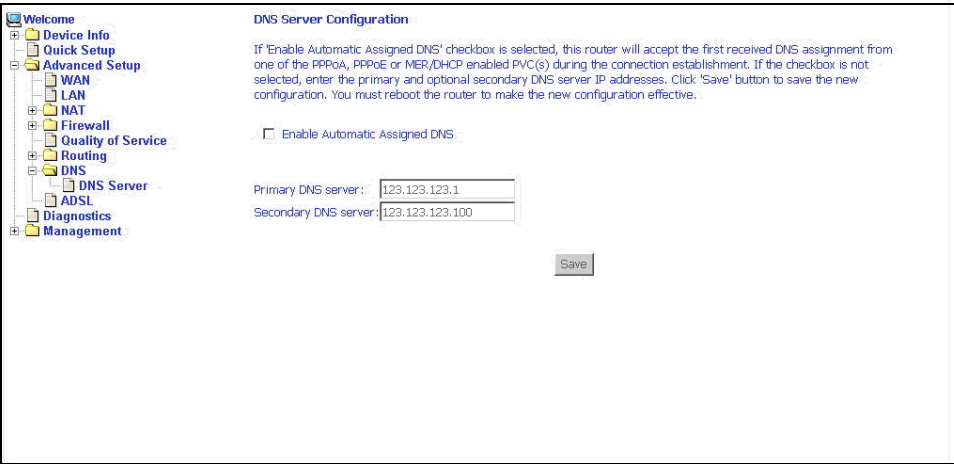


Figure 66: DNS Setup

Dynamic DNS

Use the Dynamic DNS screen to alias a dynamic IP address to a static hostname, allowing your router to be easily accessed from anywhere on the Internet.

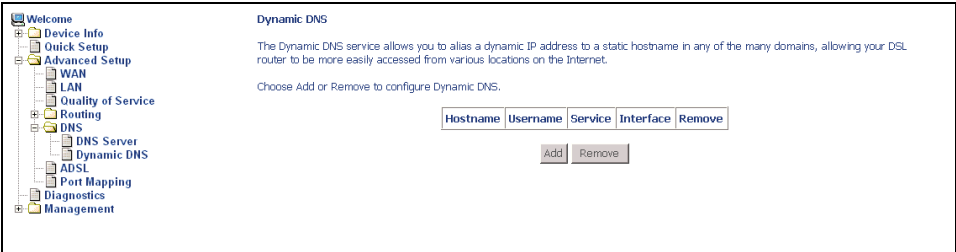


Figure 67: Dynamic DNS

To set up a Dynamic DNS entry:

- 1 Click on Add. The Add Dynamic DNS screen appears.

Figure 68: Adding a Dynamic DNS Entry

- 2 Select a D-DNS Provider from the drop-down list.
- 3 Enter the Hostname you have selected for the interface.
- 4 Select the router Interface from the drop-down list.
- 5 Enter the information you used to register with the dynamic DNS service: for DynDNS, enter your Username and Password; for TOZ, enter your E-mail address and Key.
- 6 Click on Save/Apply.

ADSL

There are three major items in the ADSL settings.

Figure 69: DSL Settings

Modulation Methods

The following modulation methods are supported by the 6212 ADSL router:

- G.dmt Enabled
- G.lite Enabled
- T1.413 Enabled
- ADSL Enabled
- Annex L Enabled
- ADSL2+ Enabled.

Do not change this setting unless so directed by your ISP.

Capability

The following are included under Capability:

- Bitswap Enable
- SRA (Seamless Rate Adaptation) Enable

Do not change these settings unless so directed by your ISP.

DSL Advanced Settings

Do not change the DSL Advanced Settings unless so directed by your ISP. To view the DSL Advanced Settings screen, click on the Advanced Settings button on the DSL Settings screen (see [Figure 69](#)).

There are five test modes between the router and your ISP:

- Normal test: Puts the router in a test mode in which it only sends a Normal signal.
- Reverb test: Puts the router in a test mode in which it only sends a Reverb signal.
- Medley test: Puts the router in a test mode in which it only sends a Medley signal.
- No Retrain: In this mode the router will try to establish a connection as in normal mode, but once the connection is up it will not retrain if the signal is lost.
- L3: Puts the router into the L3 power state.

Select a test mode and click on Apply. Then click on Tone Selection.

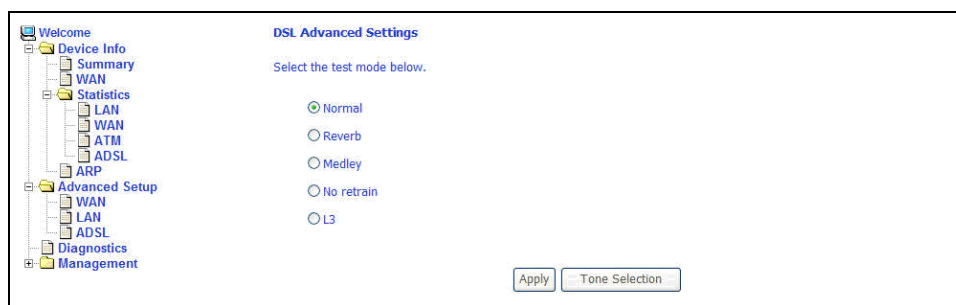


Figure 70: DSL Advanced Settings

Tone Selection

To view the ADSL Tone Settings screen, click on the Tone Selection button of the DSL Advanced Settings screen (see [Figure 70](#)).

The frequency band of ADSL is split up into 256 separate tones, each spaced 4.3125 kHz apart. With each tone carrying separate data, the technique operates as if 256 separate modems were running in parallel. The tone range is from 0 to 31 for upstream and from 32 to 255 for downstream.

Do not change these settings unless so directed by your ISP.

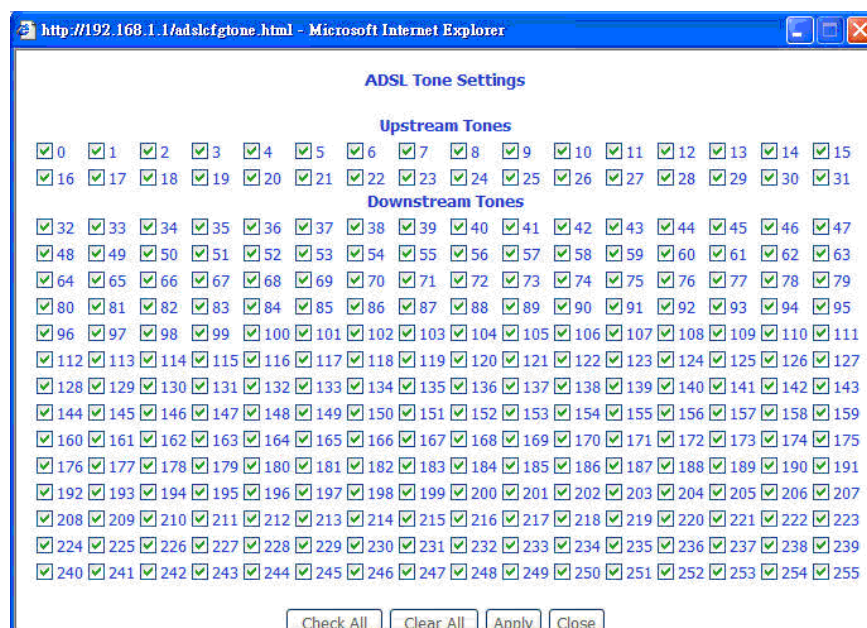


Figure 71: Tone Settings

Certificate

Use the Certificate screen to add, view, or remove a certificate for use by a peer to verify your identity. A maximum of four certificates can be stored. You can add a certificate either by creating a new one or importing an existing one from a location where one is stored.

Note

Certificates are used with TR-069. Firmware that does not support TR-069 will not support certificates.

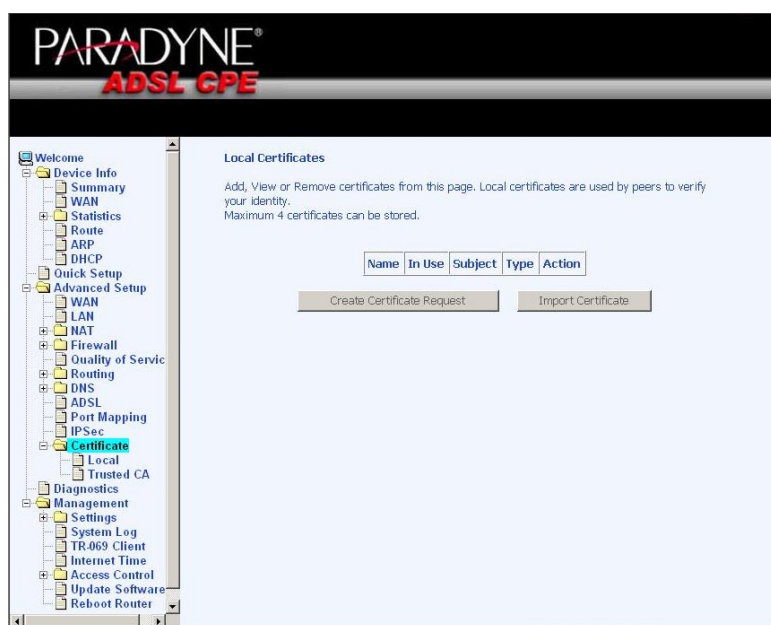


Figure 72: Certificate

To create a new certificate:

- 1** Click Create New Certificate Request. Follow the screens that appear to configure a new certificate.
- 2** Click on Save/Apply.

6 DIAGNOSTICS

Testing the DSL Connection

The diagnostics screen allows you to run diagnostic tests to check your DSL connection. The screen shows test results for three connections:

- Connection to your local network
- Connection to your DSL service provider
- Connection to your Internet service provider

Use the Test and Test with OAM F4 buttons to retest if necessary.

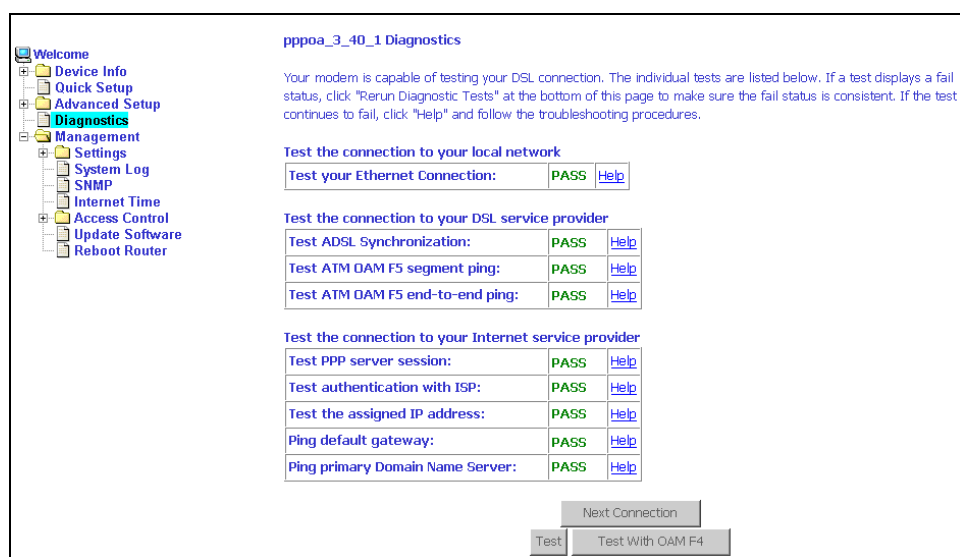


Figure 73: Diagnostics

.....

7 MANAGEMENT

Saving and Restoring the Configuration

The configuration of your router can be backed up to a file, and also can be restored from a file. You can also restore the router to its factory default configuration.

Backing Up Configuration Settings

To back up your settings, select Management -> Settings -> Backup Settings.

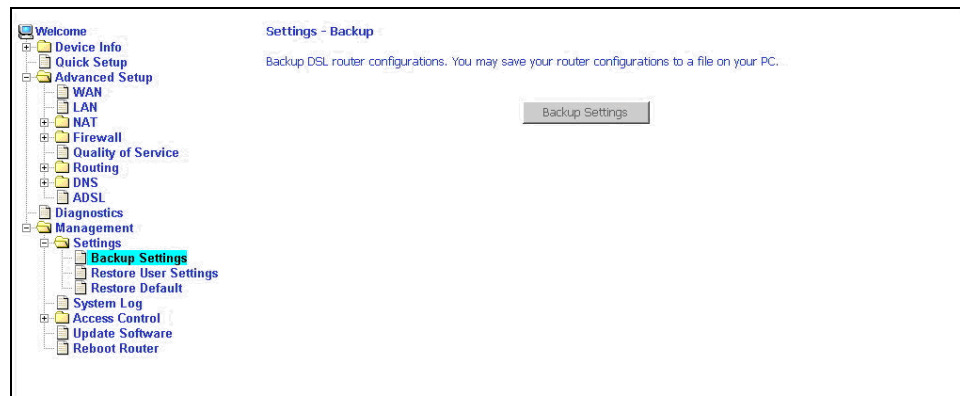


Figure 74: Back Up Settings Screen

Verify that you would like to save the file.

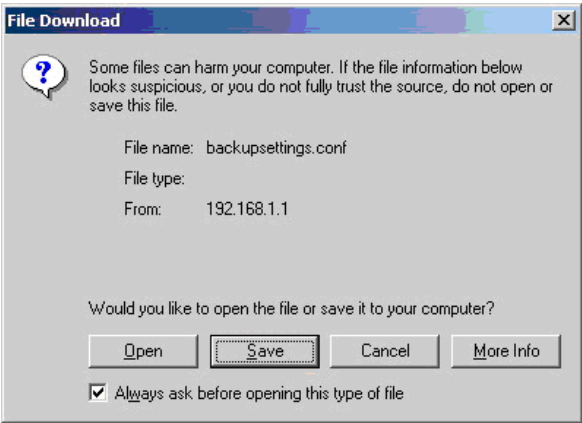


Figure 75: Backup Settings Upload Confirmation

Select the location where you want to save the file.

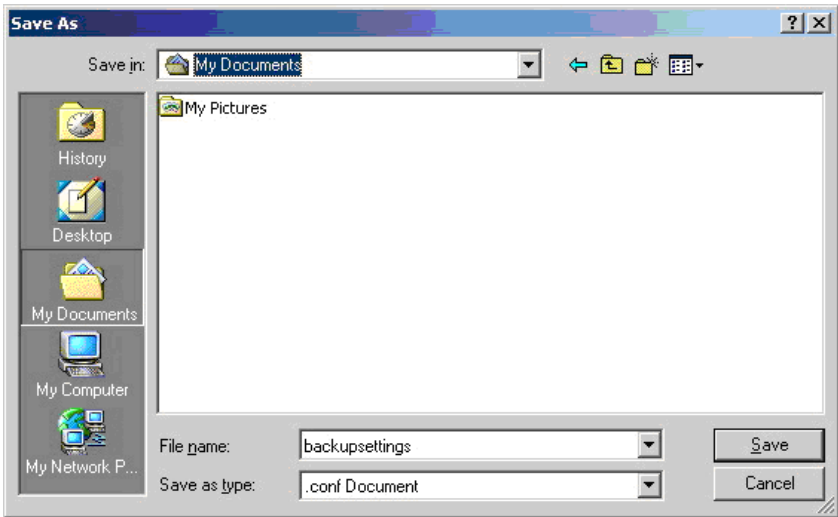


Figure 76: Backup Settings File Location

Restoring Configuration Settings

To restore saved settings, select Management -> Settings -> Restore User Settings.

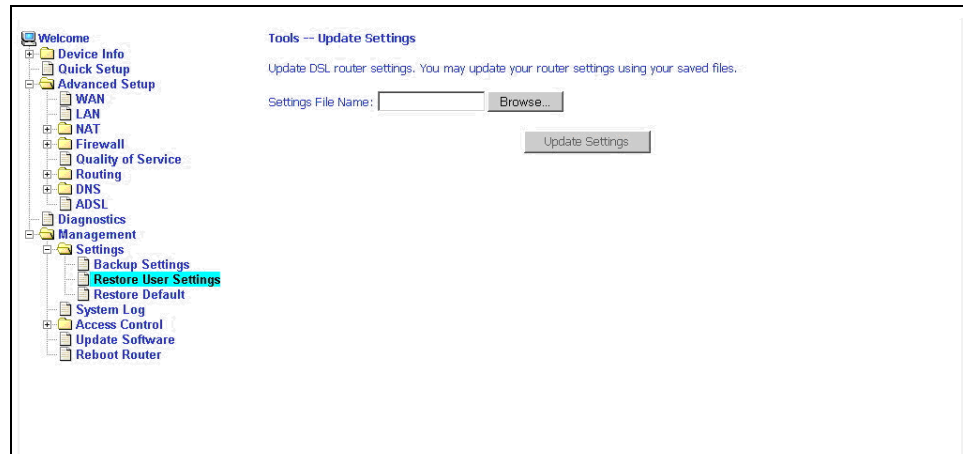


Figure 77: Restore User Settings Screen

Select the backup file you want to restore and click on Update Settings.

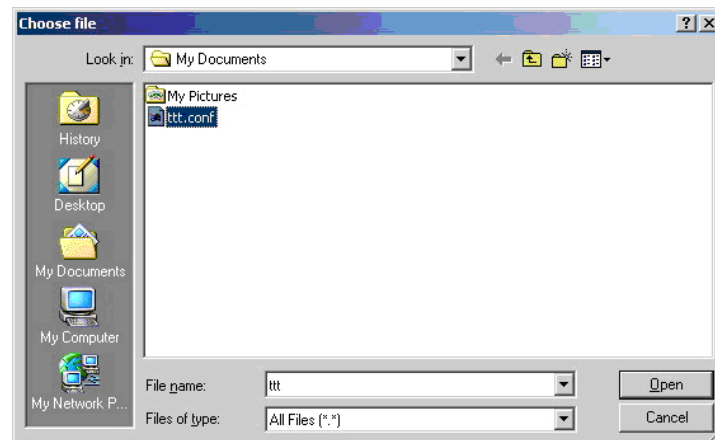


Figure 78: Restore Settings File Location

The router will restore settings and reboot to activate the restored settings.

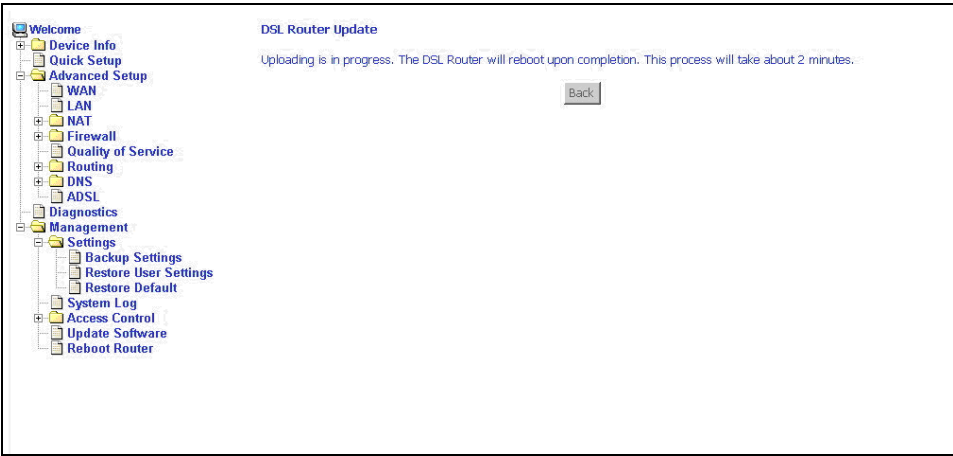


Figure 79: Upload in Progress Screen

Restoring Default Settings

Restore Default will erase all current settings and restore the router to factory default settings.

To restore the router to factory default settings, select Management -> Settings -> Restore Default.

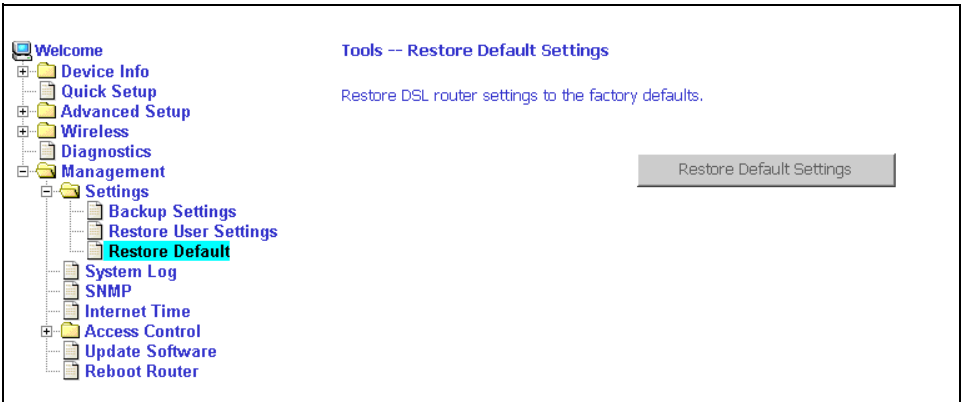


Figure 80: Restore Default Settings Screen

Reply OK to the confirmation dialog.

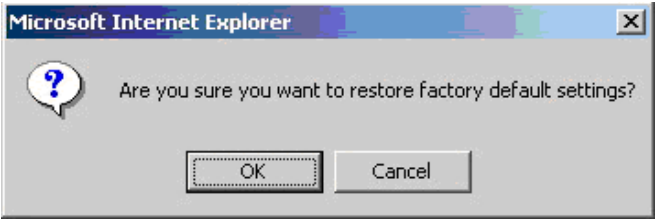


Figure 81: Restore Default Confirmation Dialog

The router will restore the default settings and reboot.

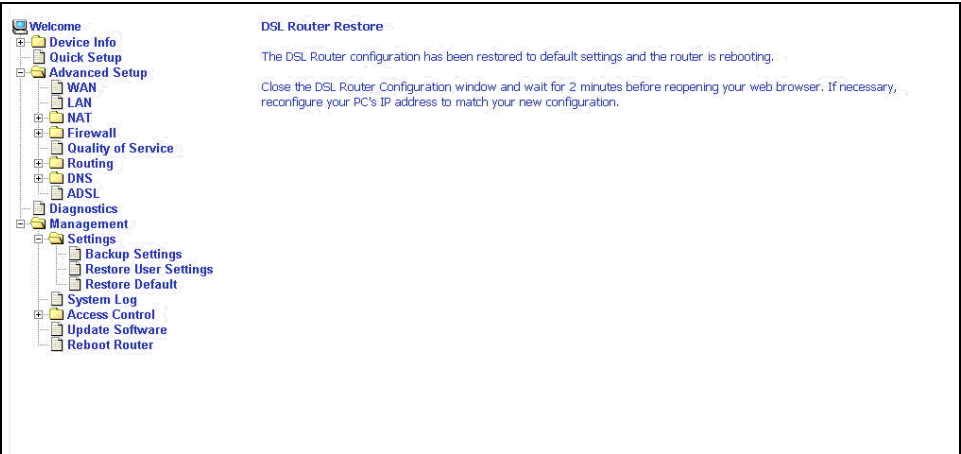


Figure 82: Restore Default Settings Reboot

System Log

The System Log dialog allows you to view the System Log and configure the System Log options.

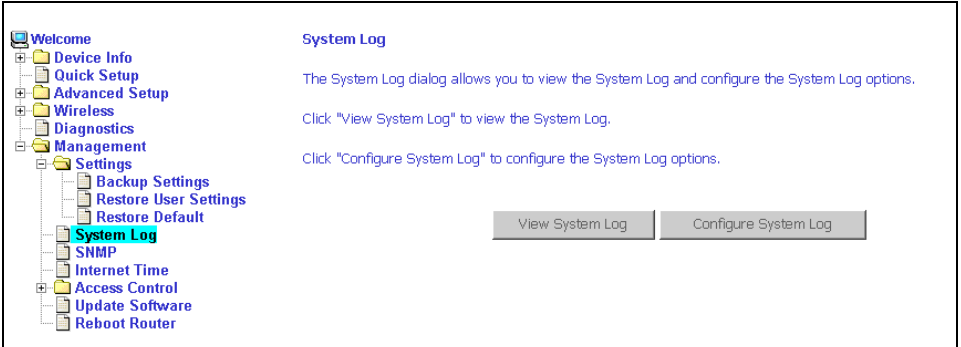


Figure 83: System Log

View System Log

Click on the "View System Log" button to check the log file.

System Log

Date/Time	Facility	Severity	Message
Jan 1 00:00:16	syslog	emerg	BCM96345 started: BusyBox v1.00 (2005.06.15-04:26+0000)
Jan 1 00:00:17	kern	crit	kernel: eth0 Link UP.
Jan 1 00:00:24	kern	crit	kernel: ADSL G.994 training
Jan 1 00:00:29	kern	crit	kernel: ADSL G.992 started
Jan 1 00:00:31	kern	crit	kernel: ADSL G.992 channel analysis
Jan 1 00:00:36	kern	crit	kernel: ADSL link up, fast, us=800, ds=8000
Jan 1 00:00:39	kern	crit	pppd[285]: PPP LCP UP.
Jan 1 00:00:40	kern	crit	pppd[285]: Received valid IP address from server. Connection UP.
Jan 1 00:02:49	kern	crit	kernel: OAM loopback response not received on VPI/VCI 3/41.
Jan 1 00:02:50	kern	crit	kernel: OAM loopback response not received on VPI/VCI 3/41.
Jan 1 00:03:01	kern	crit	kernel: OAM loopback response not received on VPI/VCI 3/3.
Jan 1 00:03:03	kern	crit	kernel: OAM loopback response not received on VPI/VCI 3/4.

Refresh

Close

Figure 84: View System Log

Configure System Log

If the log is enabled, the system will log selected events: Emergency, Alert, Critical, Error, Warning, Notice, Informational, and Debugging. All events above or equal to the selected log levels will be logged (maintained in the system log file) and displayed.

If the selected mode is Remote or Both, events will be sent to the specified IP address and UDP port of a remote system log server. If the selected mode is Local or Both, events will be recorded in the local memory.

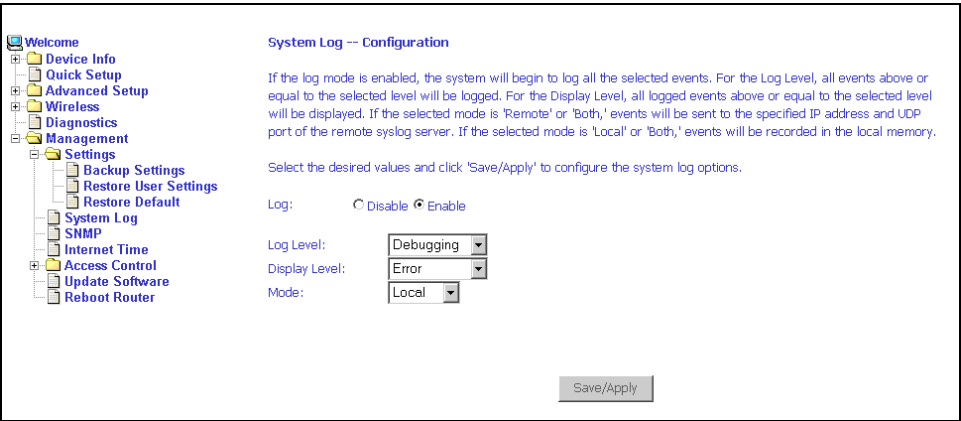


Figure 85: System Log Configuration

Select the desired values and click on the "Save/Apply" button to configure the system log options.

TR-069 Client

The router includes a TR-069 client which is a WAN management protocol. Default values are already filled in. If you wish to enable this protocol, then select **Enable** and fill in the text boxes according to your configuration. You must click on the **Save/Reboot** button for the change to take place. Firmware versions that support TR-069 do not support SNMP.

Internet Time

Use the Internet Time screen to specify whether the router uses Simple Network Time Protocol (SNTP) to obtain the time of day from NTP servers on the Internet.

To set up the router to obtain time from an NTP server:

- 1 Select “Automatically synchronize with Internet time servers”. The SNTP fields appear.

Figure 86: Internet Time Screen

- 2 Select NTP servers.

- 3 Specify the time zone offset for your router's location.
- 4 Click on Save/Apply.

Access Control – Services

You can enable or disable some services of your router by LAN or WAN. If no WAN connection is defined, only the LAN side can be configured.

Service	LAN	WAN
FTP	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
HTTP	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
ICMP	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
SNMP	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
SSH	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
TELNET	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled
TFTP	<input checked="" type="checkbox"/> Enabled	<input type="checkbox"/> Enabled

Figure 87: Services Setup

Access Control – IP Addresses

Web access to the router can be limited when Access Control Mode is enabled. The IP addresses of allowed hosts can be added using Access Control -> IP Address.

Access Control Mode: ☒ Disabled ☐ Enabled

IP Address	Remove

Figure 88: IP Address Setup

To assign the IP address of the management station that is permitted to access the local management services, enter the IP address in the box and click on the Save/Apply button.

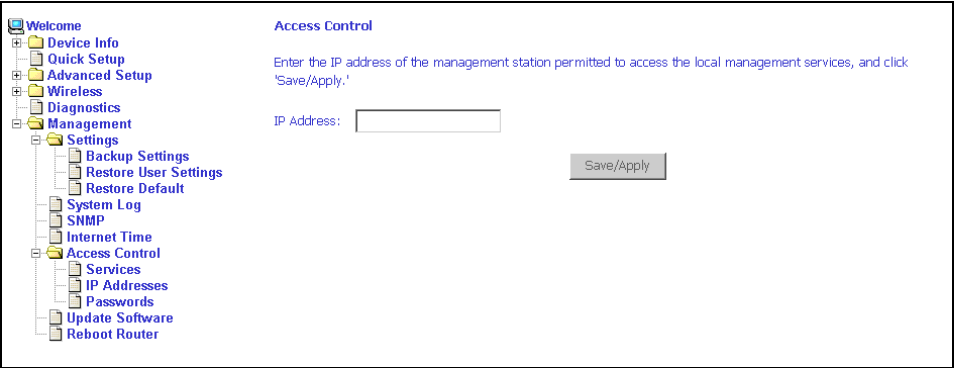


Figure 89: Access Control – IP Address Add Screen

Access Control – Passwords

Use Access Control -> Passwords to change a password. Select an account and enter the current password and the new password. Then click on Save/Apply.

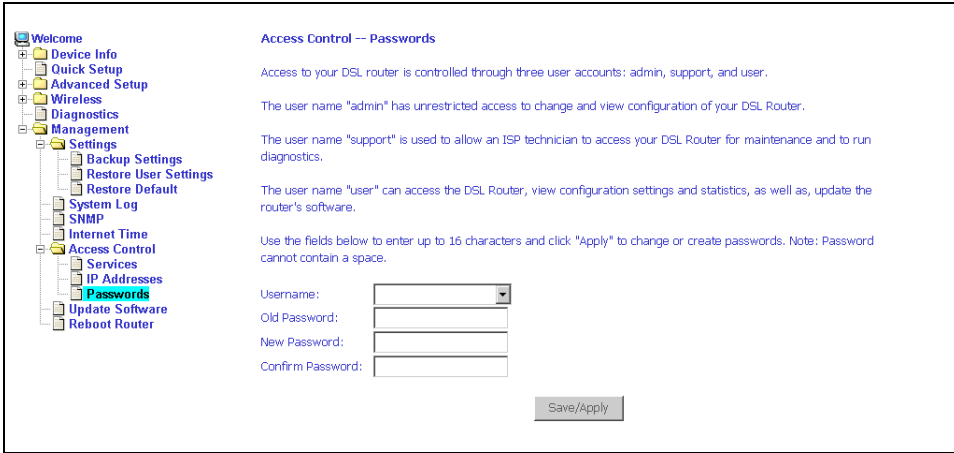


Figure 90: Access Control – Passwords Screen

Update Software

If your ISP releases new software for this router, follow these steps to perform an upgrade.

1. Obtain an updated software image file from your ISP.
2. Enter the path to the image file location or click on the "Browse" button to locate the image file.
3. Click on the Update Software button once to upload the new image file.

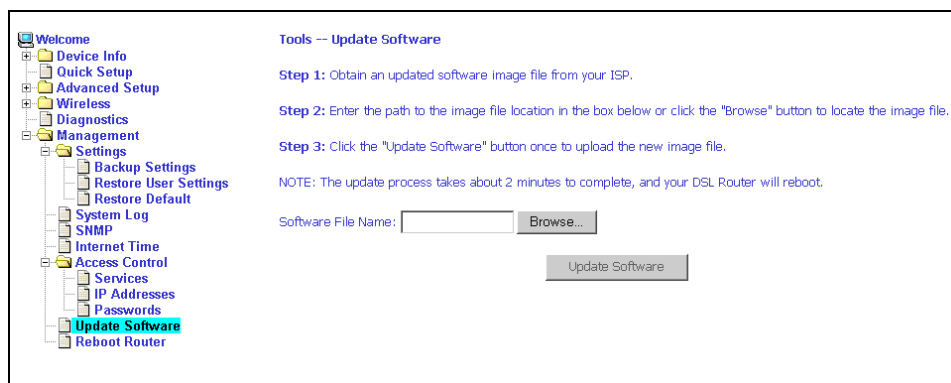


Figure 91: Update Software

Note

The update process takes about two minutes to complete, and your router will reboot automatically.

Reboot Router

Select Management -> Reboot Router to reboot the router using the web interface. The router will save the current configuration and reboot itself using the new configuration. The rebooting process takes about two minutes to complete.

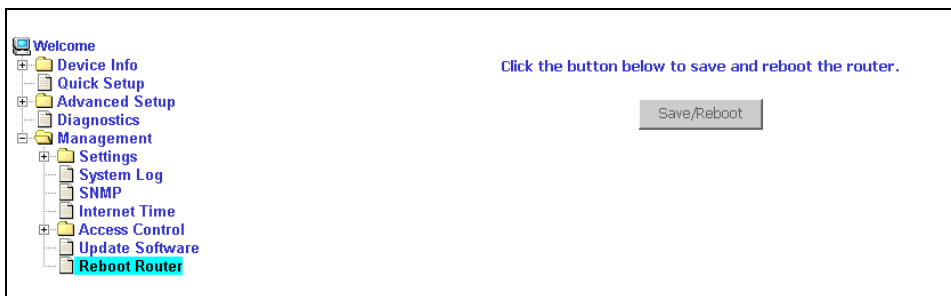


Figure 92: Reboot Router Screen

A

SPECIFICATIONS

Specifications are subject to change without notice.

Table 5: 6212-I2 Specifications

Specification	Criteria
Environment	Operating Temperature: 32° F to 104° F (0° C to 40° C) Storage Temperature: -4° F to 149° F (-20° C to 65° C) Humidity: 5% to 95%, non-condensing
Interfaces	DSL Line: RJ11 Ethernet: 10/100BaseT, RJ45
Power	100 VAC, 50 Hz 110 VAC, 60 Hz 220 VAC, 50/60 Hz
Protocol Support	ANSI T1.413 (Full Rate ADSL) ITU G.992.1 (DMT) ITU G.992.2 (G.lite) ITU G.992.3 (ADSL2) ITU G.992.5 (ADSL2+) ITU G.994.1 (G.hs) ITU G.997.1
Size	1.2" High x 6.5" Wide x 4.4" Deep (3.0 cm High x 16.5 cm Wide x 11.2 cm Deep)
Weight (Shipping)	1.5 lbs (0.7 kg)



INDEX

A

- About This Guide 11
- Access Control
 - IP Addresses 75
 - Passwords 76
 - Services 75
- ADSL 61
 - BER Test 32
 - Statistics 31
- Advanced Settings, DSL 62
- Advanced Setup 41
- ARP 34
- ATM
 - PVC Configuration 41
 - Statistics 31

B

- Backing Up Configuration Settings 67
- BER Test 32
- Bridge Service 44
- Bridging groups 55

C

- Cables
 - Installing 17
- Capability 62
- CE Marking 4
- Configuring
 - PC 19
 - System Log 72
- Connecting Hardware 17
- Connection Type 43

D

- Default Gateway 57
- Default IP Address 19
- Definitions 13
- Device Information 29
- Diagnostics 65
- Dimensions 79

- DMZ Host 48
- DNS 59
 - Dynamic 60
- Document
 - Purpose and Intended Audience 11
 - Summary 11
- Domain Name Server 59
- Dynamic DNS 60

E

- EMI Notice
 - Canada 6
 - Japan 6
- Environment 79
- Ethernet
 - cable 17

F

- FCC Part 15 Declaration 4
- Features 13
- Firewall 49
 - MAC Filtering 52
- Firmware Update 77
- Front Panel 14

G

- Gateway, Default 57

H

- Hardware
 - Connections 17
 - Installation 17

I

- Important Safety Instructions 3
- Installing
 - Hardware 17
- Interfaces 79
- Internet

Restricting access 53
Internet Time 74
Introduction 13
IP Address
 Access Control 75
 Of Router 19
IP Filtering
 Incoming 50
 Outgoing 49

J

Japan Notices 6

L

LAN
 ports, connecting 17
Local Area Network (LAN)
 Setup 45
 Statistics 30
Logging In 29

M

MAC Filtering 52
Management 67
Mapping ports 55
Modulation Methods 62

N

NAT 45
Network Interface Card 17
Notice
 to Users of the Canadian Telephone Network 5
 to Users of the United States Telephone
 Network 4

O

Operating Environment 79

P

Parental Control 53
Parts List 14
Password
 Access Control 76

Default 26
PC Setup 17
Port Mapping 55
Port Triggering 47
Power
 Specifications 79
 Supply 17
Protocols Supported 79
PVC
 Adding 41
 Configuring 41
 Detecting 35

Q

Quality of Service 44, 56
Quick Setup 35

R

Rear Panel 15
Reboot Router 77
Restoring
 Configuration Settings 69
 Default Settings 70
Restricting access to Internet 53
RIP 59
Route status 33
Routing
 Default Gateway 57
 RIP 59
 Static Route 58

S

Saving and Restoring Configuration 67
Services
 Access Control 75
Shipping Weight 79
Size 79
SNTP 74
Specifications 79
Static Route 58
Statistics
 ADSL 31
 ATM 31
 LAN 30
 WAN 30
Status

- ARP 34
- Route 33
- Summary 29
- WAN 29
- System Log 71
 - Configuring 72
- System Requirements 13

T

- Test
 - BER 32
 - DSL Connection 65
- Time 74
- Tone Selection 63

U

- Update Software 77
- User Name, Default 26

V

- View System Log 72
- Virtual Servers 45

W

- WAN 29, 41
 - Setup 44
 - Statistics 30
 - Status 29
- Web Interface
 - Home Page 27
 - Using 29
- Weight 79
- Windows 2000 22
- Windows 95 24
- Windows 98 24
- Windows ME 23
- Windows NT 24
- Windows XP 20

.....