

NBG4115

Wireless N-lite 3G Router

User's Guide



Default Login Details

IP Address	http://192.168.1.1
Password	1234

Firmware Version 1.0
Edition 2, 7/2009

www.zyxel.com

ZyXEL

About This User's Guide

Intended Audience

This manual is intended for people who want to configure the NBG4115 using the Web Configurator. You should have at least a basic knowledge of TCP/IP networking concepts and topology.

Tips for Reading User's Guides On-Screen

When reading a ZyXEL User's Guide On-Screen, keep the following in mind:

- If you don't already have the latest version of Adobe Reader, you can download it from <http://www.adobe.com>.
- Use the PDF's bookmarks to quickly navigate to the areas that interest you. Adobe Reader's bookmarks pane opens by default in all ZyXEL User's Guide PDFs.
- If you know the page number or know vaguely which page-range you want to view, you can enter a number in the toolbar in Reader, then press [ENTER] to jump directly to that page.
- Type [CTRL] + [F] to open the Adobe Reader search utility and enter a word or phrase. This can help you quickly pinpoint the information you require. You can also enter text directly into the toolbar in Reader.
- To quickly move around within a page, press the [SPACE] bar. This turns your cursor into a "hand" with which you can grab the page and move it around freely on your screen.
- Embedded hyperlinks are actually cross-references to related text. Click them to jump to the corresponding section of the User's Guide PDF.

Related Documentation

- Quick Start Guide

The Quick Start Guide is designed to help you get your NBG4115 up and running right away. It contains information on setting up your network and configuring for Internet access.

- Supporting Disc

The embedded Web Help contains descriptions of individual screens and supplementary information.

- Support Disc

Refer to the included CD for support documents.

Documentation Feedback

Send your comments, questions or suggestions to: techwriters@zyxel.com.tw

Thank you!

The Technical Writing Team, ZyXEL Communications Corp.,
6 Innovation Road II, Science-Based Industrial Park, Hsinchu, 30099, Taiwan.

Need More Help?

More help is available at www.zyxel.com.



- Download Library

Search for the latest product updates and documentation from this link. Read the Tech Doc Overview to find out how to efficiently use the User Guide, Quick Start Guide and Command Line Interface Reference Guide in order to better understand how to use your product.

- Knowledge Base

If you have a specific question about your product, the answer may be here. This is a collection of answers to previously asked questions about ZyXEL products.

- Forum

This contains discussions on ZyXEL products. Learn from others who use ZyXEL products and share your experiences as well.

Customer Support

Should problems arise that cannot be solved by the methods listed above, you should contact your vendor. If you cannot contact your vendor, then contact a ZyXEL office for the region in which you bought the device.

See http://www.zyxel.com/web/contact_us.php for contact information. Please have the following information ready when you contact an office.

- Product model and serial number.
- Warranty Information.
- Date that you received your device.

Document Conventions

Warnings and Notes

These are how warnings and notes are shown in this User's Guide.

Warnings tell you about things that could harm you or your device.











Note: Notes tell you other important information (for example, other things you may need to configure or helpful tips) or recommendations.

Syntax Conventions

- The NBG4115 may be referred to as the "NBG4115", the "device", the "product" or the "system" in this User's Guide.
- Product labels, screen names, field labels and field choices are all in **bold** font.
- A key stroke is denoted by square brackets and uppercase text, for example, [ENTER] means the "enter" or "return" key on your keyboard.
- "Enter" means for you to type one or more characters and then press the [ENTER] key. "Select" or "choose" means for you to use one of the predefined choices.
- A right angle bracket (>) within a screen name denotes a mouse click. For example, **Maintenance > Log > Log Setting** means you first click **Maintenance** in the navigation panel, then the **Log** sub menu and finally the **Log Setting** tab to get to that screen.
- Units of measurement may denote the "metric" value or the "scientific" value. For example, "k" for kilo may denote "1000" or "1024", "M" for mega may denote "1000000" or "1048576" and so on.
- "e.g.," is a shorthand for "for instance", and "i.e.," means "that is" or "in other words".

Icons Used in Figures

Figures in this User's Guide may use the following generic icons. The NBG4115 icon is not an exact representation of your device.

NBG4115 	Computer 	Notebook computer 
Server 	DSLAM 	Firewall 
Telephone 	Switch 	Router 
Modem 		

Safety Warnings

- Do NOT use this product near water, for example, in a wet basement or near a swimming pool.
- Do NOT expose your device to dampness, dust or corrosive liquids.
- Do NOT store things on the device.
- Do NOT install, use, or service this device during a thunderstorm. There is a remote risk of electric shock from lightning.
- Connect ONLY suitable accessories to the device.
- Do NOT open the device or unit. Opening or removing covers can expose you to dangerous high voltage points or other risks. ONLY qualified service personnel should service or disassemble this device. Please contact your vendor for further information.
- Make sure to connect the cables to the correct ports.
- Place connecting cables carefully so that no one will step on them or stumble over them.
- Always disconnect all cables from this device before servicing or disassembling.
- Use ONLY an appropriate power adaptor or cord for your device.
- Connect the power adaptor or cord to the right supply voltage (for example, 110V AC in North America or 230V AC in Europe).
- Do NOT allow anything to rest on the power adaptor or cord and do NOT place the product where anyone can walk on the power adaptor or cord.
- Do NOT use the device if the power adaptor or cord is damaged as it might cause electrocution.
- If the power adaptor or cord is damaged, remove it from the power outlet.
- Do NOT attempt to repair the power adaptor or cord. Contact your local vendor to order a new one.
- Do not use the device outside, and make sure all the connections are indoors. There is a remote risk of electric shock from lightning.
- Do NOT obstruct the device ventilation slots, as insufficient airflow may harm your device.
- Antenna Warning! This device meets ETSI and FCC certification requirements when using the included antenna(s). Only use the included antenna(s).
- If you wall mount your device, make sure that no electrical lines, gas or water pipes will be damaged.

Your product is marked with this symbol, which is known as the WEEE mark. WEEE stands for Waste Electronics and Electrical Equipment. It means that used electrical and electronic products should not be mixed with general waste. Used electrical and electronic equipment should be treated separately.



Contents Overview

Introduction	19
Introduction	21
The WPS Button	25
The Web Configurator	27
Connection Wizard	39
AP Mode	55
Tutorials	63
Network	79
Wireless LAN	81
WAN	101
LAN	115
DHCP Server	119
NAT	125
DDNS	135
Security	139
Firewall	141
Content Filtering	147
Management	151
Static Route	153
Bandwidth Management	157
Remote Management	165
UPnP	169
Maintenance and Troubleshooting	179
System	181
Logs	187
Tools	189
Sys OP Mode	195
Language	199
Troubleshooting	201
Appendices and Index	209

Table of Contents

About This User's Guide	3
Document Conventions.....	6
Safety Warnings.....	8
Contents Overview	9
Table of Contents.....	11
 Part I: Introduction.....	 19
 Chapter 1	
Introduction	21
1.1 Overview	21
1.2 Applications	21
1.3 Ways to Manage the NBG4115	22
1.4 Good Habits for Managing the NBG4115	22
1.5 LEDs	22
 Chapter 2	
The WPS Button.....	25
2.1 Overview	25
 Chapter 3	
The Web Configurator	27
3.1 Overview	27
3.2 Accessing the Web Configurator	27
3.3 Resetting the NBG4115	29
3.3.1 Procedure to Use the Reset Button	29
3.4 Navigating the Web Configurator	29
3.5 The Status Screen in Router Mode	30
3.5.1 Navigation Panel	32
3.5.2 Summary: DHCP Table	34
3.5.3 Summary: Packet Statistics	35
3.5.4 Summary: WLAN Station Status	36
 Chapter 4	
Connection Wizard	39

4.1 Overview	39
4.2 Wizard Setup	39
4.3 STEP 1: System Information	40
4.3.1 System Name	40
4.3.2 Domain Name	41
4.4 STEP 2: Wireless LAN	42
4.4.1 Extend (WPA-PSK or WPA2-PSK) Security	43
4.5 STEP 3: Internet Configuration	43
4.5.1 Ethernet Connection	44
4.5.2 PPPoE Connection	45
4.5.3 PPTP Connection	46
4.5.4 Mobile 3G	48
4.5.5 Your IP Address	49
4.5.6 WAN IP Address Assignment	49
4.5.7 IP Address and Subnet Mask	50
4.5.8 DNS Server Address Assignment	50
4.5.9 WAN IP and DNS Server Address Assignment	51
4.5.10 WAN MAC Address	52
4.6 Connection Wizard Complete	53
Chapter 5	
AP Mode.....	55
5.1 Overview	55
5.2 Setting your NBG4115 to AP Mode	55
5.3 The Status Screen in AP Mode	56
5.3.1 Navigation Panel	58
5.4 LAN Settings	59
5.5 WLAN and Maintenance Settings	60
5.6 Logging in while in AP Mode	61
Chapter 6	
Tutorials.....	63
6.1 Overview	63
6.2 Set Up a 3G Connection	63
6.3 Set Up the NBG4115 for Gaming	65
6.4 Set Up a Wireless Network with WPS	68
6.4.1 Push Button Configuration (PBC)	68
6.4.2 PIN Configuration	70
6.5 Configure Wireless Security without WPS	71
6.5.1 Configure Your Notebook	72
6.6 Bandwidth Management	74
6.6.1 Bandwidth Management by Application	74
6.6.2 Custom Bandwidth Management	75

6.6.3 Bandwidth Management by IP or IP Range	76
Part II: Network.....	79
Chapter 7	
Wireless LAN.....	81
7.1 Overview	81
7.1.1 What You Can Do in this Chapter	82
7.1.2 What You Should Know	82
7.2 General	85
7.2.1 No Security	87
7.2.2 WEP Encryption	87
7.2.3 WPA-PSK/WPA2-PSK	89
7.3 MAC Filter	90
7.4 Advanced	92
7.5 QoS	94
7.5.1 Application Priority Configuration	95
7.6 WPS	97
7.7 WPS Station	98
7.8 Scheduling	99
Chapter 8	
WAN.....	101
8.1 Overview	101
8.2 What You Can Do in this Chapter	101
8.2.1 What You Need To Know	102
8.3 Internet Connection	105
8.3.1 Ethernet	105
8.3.2 PPPoE	106
8.3.3 PPTP	108
8.3.4 Mobile 3G	111
8.4 Advanced	113
Chapter 9	
LAN.....	115
9.1 Overview	115
9.1.1 What You Can Do in this Chapter	115
9.2 What You Need To Know	115
9.3 IP	117
Chapter 10	
DHCP Server.....	119

10.1 Overview	119
10.1.1 What You Can Do in this Chapter	119
10.1.2 What You Need To Know	119
10.2 General	120
10.3 Advanced	121
10.4 Client List	122
 Chapter 11	
NAT.....	125
11.1 Overview	125
11.1.1 What You Can Do in this Chapter	126
11.1.2 What You Need To Know	126
11.2 General	128
11.3 Application	129
11.4 Advanced	131
11.5 Technical Reference	132
11.5.1 NATPort Forwarding: Services and Port Numbers	132
11.5.2 NAT Port Forwarding Example	132
11.5.3 Trigger Port Forwarding	133
11.5.4 Trigger Port Forwarding Example	134
11.5.5 Two Points To Remember About Trigger Ports	134
 Chapter 12	
DDNS.....	135
12.1 Overview	135
12.1.1 What You Can Do in this Chapter	135
12.1.2 What You Need To Know	135
12.2 General	136
 Part III: Security.....	139
 Chapter 13	
Firewall.....	141
13.1 Overview	141
13.1.1 What You Can Do in this Chapter	141
13.1.2 What You Need To Know	142
13.2 General	144
13.3 Services	144
 Chapter 14	
Content Filtering	147

14.1 Overview	147
14.1.1 What You Can Do in this Chapter	147
14.1.2 What You Need To Know	147
14.2 Filter	148
14.3 Technical Reference	149
14.3.1 Customizing Keyword Blocking URL Checking	149
 Part IV: Management.....	151
 Chapter 15	
Static Route	153
15.1 Overview	153
15.1.1 What You Can Do in this Chapter	153
15.2 IP Static Route	154
15.2.1 Static Route Setup Screen	155
 Chapter 16	
Bandwidth Management.....	157
16.1 Overview	157
16.1.1 What You Can Do in this Chapter	157
16.1.2 What You Need To Know	157
16.2 General	158
16.3 Advanced	159
16.3.1 Pre-Configured Gaming Ports	162
16.3.2 Priority Levels	162
16.3.3 User Defined Service Rule Configuration	162
16.3.4 Predefined Bandwidth Management Services	163
16.3.5 Services and Port Numbers	164
 Chapter 17	
Remote Management.....	165
17.1 Overview	165
17.1.1 What You Can Do in this Chapter	165
17.1.2 What You Need To Know	165
17.2 WWW	166
 Chapter 18	
UPnP	169
18.1 Overview	169
18.1.1 What You Can Do in this Chapter	169
18.1.2 What You Need To Know	169

18.2 General	170
18.3 Technical Reference	171
18.3.1 Installing UPnP in Windows XP	171
 Part V: Maintenance and Troubleshooting	179
 Chapter 19	
System	181
19.1 Overview	181
19.1.1 What You Can Do in this Chapter	181
19.2 General	181
19.3 Time Setting	183
 Chapter 20	
Logs	187
20.1 Overview	187
20.1.1 What You Can Do in this Chapter	187
20.2 View Log	187
 Chapter 21	
Tools.....	189
21.1 Overview	189
21.1.1 What You Can Do in this Chapter	189
21.2 Firmware	190
21.3 Configuration	192
21.3.1 Backup Configuration	192
21.3.2 Restore Configuration	193
21.3.3 Back to Factory Defaults	194
21.4 Restart	194
 Chapter 22	
Sys OP Mode.....	195
22.1 Overview	195
22.1.1 What You Can Do in this Chapter	195
22.1.2 What You Need to Know	195
22.2 General	196
 Chapter 23	
Language.....	199
23.1 Overview	199
23.2 Language	199

Chapter 24	
Troubleshooting.....	201
24.1 Overview	201
24.2 Power, Hardware Connections, and LEDs	201
24.3 NBG4115 Access and Login	202
24.4 Internet Access	204
24.5 Resetting the NBG4115 to Its Factory Defaults	206
24.6 Wireless Router/AP Troubleshooting	206
Part VI: Appendices and Index	209
Appendix A Product Specifications.....	211
Appendix B Pop-up Windows, JavaScripts and Java Permissions	215
Appendix C IP Addresses and Subnetting	223
Appendix D Setting up Your Computer's IP Address	233
24.6.1 Verifying Settings	250
Appendix E Wireless LANs	251
24.6.2 WPA(2)-PSK Application Example	261
24.6.3 WPA(2) with RADIUS Application Example	261
Appendix F Services	263
Appendix G Legal Information.....	267
Index.....	275

PART I

Introduction

[Introduction \(21\)](#)

[The WPS Button \(25\)](#)

[The Web Configurator \(27\)](#)

[Connection Wizard \(39\)](#)

[AP Mode \(55\)](#)

[Tutorials \(63\)](#)

Introduction

1.1 Overview

This chapter introduces the main features and applications of the NBG4115.

The NBG4115 extends the range of your existing wired network without additional wiring, providing easy network access to mobile users. You can set up a wireless network with other IEEE 802.11b/g/n compatible devices.

A range of services such as a firewall and content filtering are also available for secure Internet computing.

1.2 Applications

You can create the following networks using the NBG4115:

- **Wired.** You can connect network devices via the Ethernet ports of the NBG4115 so that they can communicate with each other and access the Internet.
- **Wireless.** Wireless clients can connect to the NBG4115 to access network resources.
- **WAN.** Connect to a broadband modem/router for Internet access.
- **WPS.** Create an instant network connection with another WPS-compatible device, sharing your network connection with it.
- **3G Wireless.** Connect to a local 3G wireless network to take advantage of superior connection speeds and improved download times.

Figure 1 NBG4115 Network



1.3 Ways to Manage the NBG4115

Use any of the following methods to manage the NBG4115.

- WPS (Wi-Fi Protected Setup). You can use the WPS button or the WPS section of the Web Configurator to set up a wireless network with your ZyXEL Device.
- Web Configurator. This is recommended for everyday management of the NBG4115 using a (supported) web browser.


1.4 Good Habits for Managing the NBG4115

Do the following things regularly to make the NBG4115 more secure and to manage the NBG4115 more effectively.

- Change the password. Use a password that's not easy to guess and that consists of different types of characters, such as numbers and letters.
- Write down the password and put it in a safe place.
- Back up the configuration (and make sure you know how to restore it). Restoring an earlier working configuration may be useful if the device becomes unstable or even crashes. If you forget your password, you will have to reset the NBG4115 to its factory default settings. If you backed up an earlier configuration file, you would not have to totally re-configure the NBG4115. You could simply restore your last configuration.

1.5 LEDs

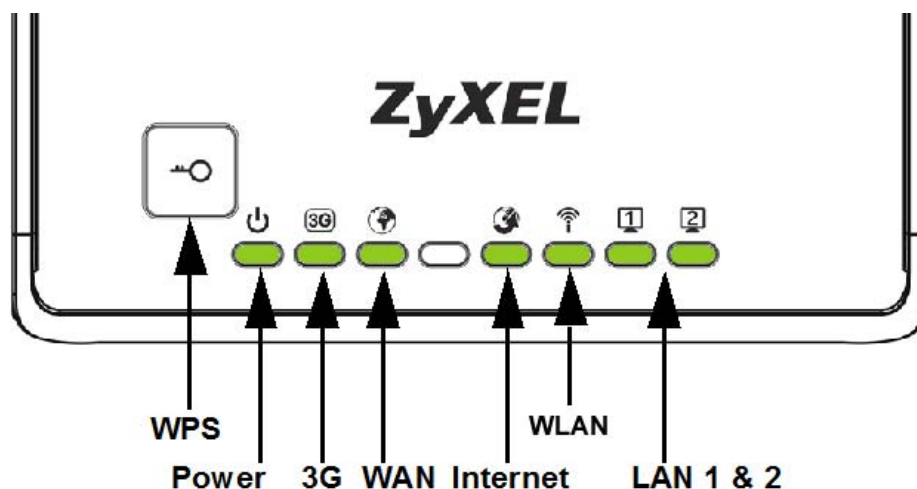Figure 2 Front Panel



The following table describes the LEDs and the WPS button.

Table 1 Front Panel LEDs and WPS Button

LED	COLOR	STATUS	DESCRIPTION
POWER	Green	On	The NBG4115 is receiving power and functioning properly.
		Off	The NBG4115 is not receiving power.
WLAN	Green	On	The NBG4115 is ready, but is not sending/receiving data through the wireless LAN.
		Blinking	The NBG4115 is sending/receiving data through the wireless LAN. The NBG4115 is negotiating a WPS connection with a wireless client.
		Off	The wireless LAN is not ready or has failed.
WAN	Green	On	The NBG4115 has a successful 10/100MB WAN connection.
		Blinking	The NBG4115 is sending/receiving data through the WAN.
		Off	The WAN connection is not ready, or has failed.
LAN 1-2	Green	On	The NBG4115 has a successful 10/100MB Ethernet connection.
		Blinking	The NBG4115 is sending/receiving data through the LAN.
		Off	The LAN is not connected.
3G	Green	On	The NBG4115 has a 3G card installed and is communicating with routers.
		Blinking	The NBG4115 is transmitting and/or receiving data from routers through an installed 3G card.
		Off	There is no 3G card installed.
Internet	Green	On	The NBG4115 has received an IP address through either the WAN or WLAN interface and can connect to the Internet.
		Off	The NBG4115 has not received an IP address through either the WAN or WLAN interface and as such cannot connect to the Internet.
WPS Button	Press this button for 1 second to set up a wireless connection via WiFi Protected Setup with another WPS-enabled client. You must press the WPS button on the client side within 120 seconds for a successful connection.		

The WPS Button

2.1 Overview

Your NBG4115 supports WiFi Protected Setup (WPS), which is an easy way to set up a secure wireless network. WPS is an industry standard specification, defined by the WiFi Alliance.

WPS allows you to quickly set up a wireless network with strong security, without having to configure security settings manually. Each WPS connection works between two devices. Both devices must support WPS (check each device's documentation to make sure).

Depending on the devices you have, you can either press a button (on the device itself, or in its configuration utility) or enter a PIN (a unique Personal Identification Number that allows one device to authenticate the other) in each of the two devices. When WPS is activated on a device, it has two minutes to find another device that also has WPS activated. Then, the two devices connect and set up a secure network by themselves.

For more information on using WPS, see [Section 6.4 on page 68](#).

The Web Configurator

3.1 Overview

This chapter describes how to access the NBG4115 Web Configurator and provides an overview of its screens.

The Web Configurator is an HTML-based management interface that allows easy setup and management of the NBG4115 via Internet browser. Use Internet Explorer 6.0 and later or Netscape Navigator 7.0 and later versions or Safari 2.0 or later versions. The recommended screen resolution is 1024 by 768 pixels.

In order to use the Web Configurator you need to allow:

- Web browser pop-up windows from your device. Web pop-up blocking is enabled by default in Windows XP SP (Service Pack) 2.
- JavaScripts (enabled by default).
- Java permissions (enabled by default).

Refer to the Troubleshooting chapter to see how to make sure these functions are allowed in Internet Explorer.

3.2 Accessing the Web Configurator

- 1 Make sure your NBG4115 hardware is properly connected and prepare your computer or computer network to connect to the NBG4115 (refer to the Quick Start Guide).
- 2 Launch your web browser.
- 3 Type "http://192.168.1.1" as the website address.

Your computer must be in the same subnet in order to access this website address.

- 4 Type "1234" (default) as the password and click **Login**. In some versions, the default password appears automatically - if this is the case, click **Login**.
- 5 You should see a screen asking you to change your password (highly recommended) as shown next. Type a new password (and retype it to confirm) and click **Apply** or click **Ignore**.

Figure 3 Change Password Screen


The image shows a web browser window displaying the ZyXEL Change Password screen. At the top is a blue header with the 'ZyXEL' logo. Below the header, the text 'Please enter a new password' is centered. A paragraph of text explains that the router is currently using the default password and suggests changing it for security. It also states that the administrator password should be between 1 and 30 characters. There are two input fields: 'New Password:' and 'Retype to Confirm:'. Below these fields are two buttons: 'Apply' and 'Ignore'.

Note: The management session automatically times out when the time period set in the **Administrator Inactivity Timer** field expires (default five minutes). Simply log back into the NBG4115 if this happens.

- 6 Select the setup mode you want to use.
 - Click **Go to Wizard Setup** to use the Configuration Wizard for basic Internet and Wireless setup.
 - Click **Go to Advanced Setup** to view and configure all the NBG4115's settings.

- Select a language to go to the basic Web Configurator in that language. To change to the advanced configurator see [Chapter 23 on page 199](#).

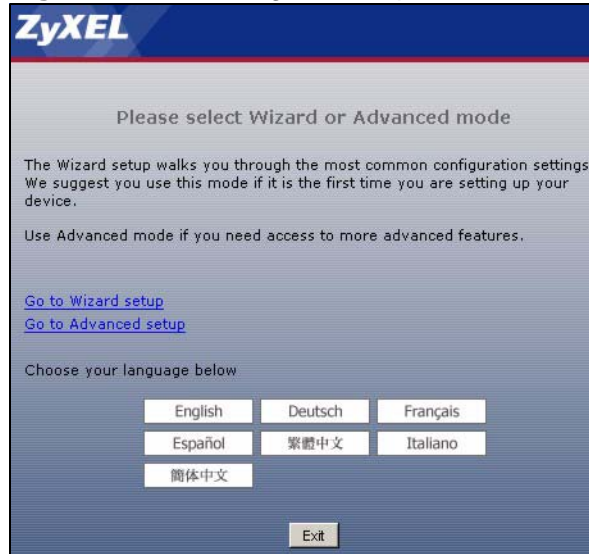Figure 4 Selecting the setup mode



3.3 Resetting the NBG4115

If you forget your password or IP address, or you cannot access the Web Configurator, you will need to use the **RESET** button at the back of the NBG4115 to reload the factory-default configuration file. This means that you will lose all configurations that you had previously saved, the password will be reset to “1234” and the IP address will be reset to “192.168.1.1”.

3.3.1 Procedure to Use the Reset Button

- 1 Make sure the power LED is on.
- 2 Press the **RESET** button for longer than 1 second to restart/reboot the NBG4115.
- 3 Press the **RESET** button for longer than five seconds to set the NBG4115 back to its factory-default configurations.

3.4 Navigating the Web Configurator

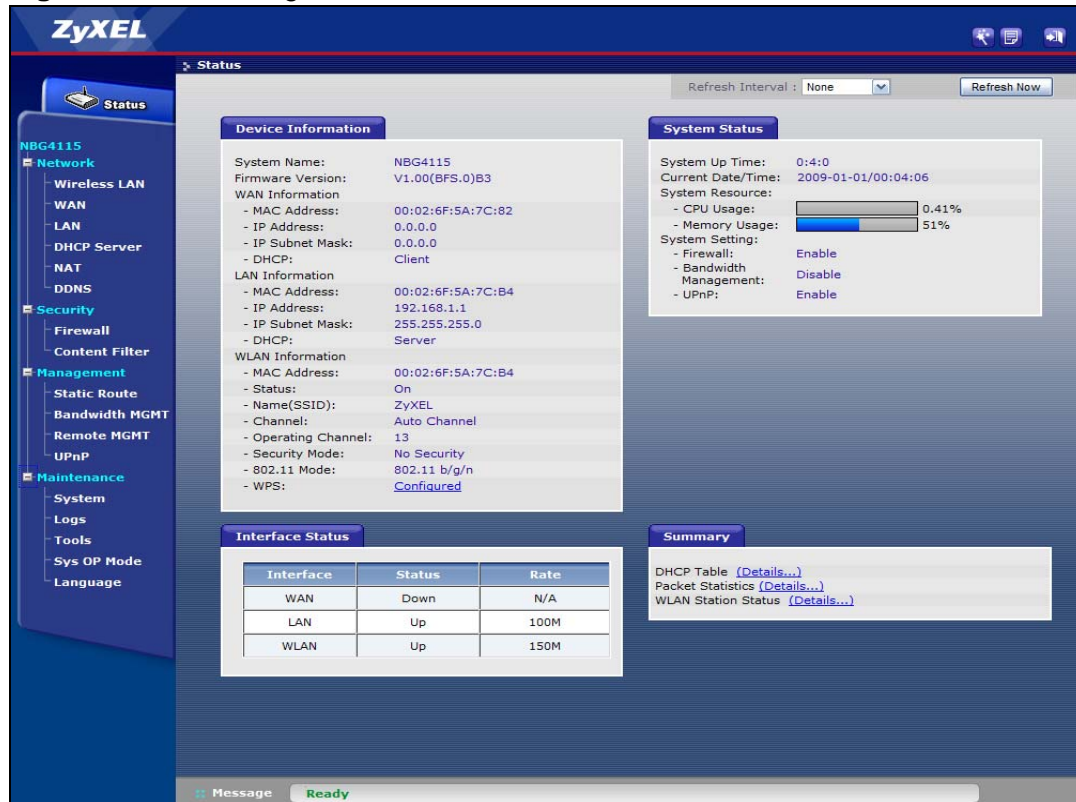
The following summarizes how to navigate the Web Configurator from the **Status** screen in **Router Mode** and **AP Mode**.

3.5 The Status Screen in Router Mode

Click on **Status**. The screen below shows the status screen in **Router Mode**.






(For information on the status screen in **AP Mode** see [Chapter 5 on page 56](#).)

Figure 5 Web Configurator Status Screen



The following table describes the icons shown in the **Status** screen.

Table 2 Status Screen Icon Key

ICON	DESCRIPTION
	Click this icon to open the setup wizard.
	Click this icon to view copyright and a link for related product information.
	Click this icon at any time to exit the Web Configurator.
	Select a number of seconds or None from the drop-down list box to refresh all screen statistics automatically at the end of every time interval or to not refresh the screen statistics.
	Click this button to refresh the status screen statistics.

The following table describes the labels shown in the **Status** screen.

Table 3 Web Configurator Status Screen

LABEL	DESCRIPTION
Device Information	
System Name	This is the System Name you enter in the Maintenance > System > General screen. It is for identification purposes.
Firmware Version	This is the firmware version and the date created.
WAN Information	
- SIM Card Status	(3G Only) When a 3G USB device is attached to the NBG4115, this provides information specific to it.
- MAC Address	This shows the WAN Ethernet adapter MAC Address of your device.
- IP Address	This shows the WAN port's IP address.
- IP Subnet Mask	This shows the WAN port's subnet mask.
- DHCP	This shows the WAN port's DHCP role - Client or None .
LAN Information	
- MAC Address	This shows the LAN Ethernet adapter MAC Address of your device.
- IP Address	This shows the LAN port's IP address.
- IP Subnet Mask	This shows the LAN port's subnet mask.
- DHCP	This shows the LAN port's DHCP role - Server or None .
WLAN Information	
- MAC Address	This shows the wireless adapter MAC Address of your device.
- Status	This shows the current status of the Wireless LAN - On , Off or Off by scheduler .
- Name (SSID)	This shows a descriptive name used to identify the NBG4115 in the wireless LAN.
- Channel	This shows the channel number which you select manually.
- Operating Channel	This shows the channel number which the NBG4115 is currently using over the wireless LAN.
- Security Mode	This shows the level of wireless security the NBG4115 is using.
- 802.11 Mode	This shows the wireless standard.
- WPS	This displays Configured when the WPS has been set up. This displays Unconfigured if the WPS has not been set up. Click the status to display Network > Wireless LAN > WPS screen.
System Status	
System Up Time	This is the total time the NBG4115 has been on.
Current Date/Time	This field displays your NBG4115's present date and time.
System Resource	
- CPU Usage	This displays what percentage of the NBG4115's processing ability is currently used. When this percentage is close to 100%, the NBG4115 is running at full load, and the throughput is not going to improve anymore. If you want some applications to have more throughput, you should turn off other applications.

Table 3 Web Configurator Status Screen (continued)

LABEL	DESCRIPTION
- Memory Usage	This shows what percentage of the heap memory the NBG4115 is using.
System Setting	
- Firewall	This shows whether the firewall is active or not.
- Bandwidth Management	This shows whether bandwidth management is enabled or not.
- UPnP	This shows whether UPnP is active or not.
Interface Status	
Interface	This displays the NBG4115 port types. The port types are: WAN , LAN and WLAN .
Status	For the 3G, LAN and WAN ports, this field displays Down (line is down) or Up (line is up or connected). For the WLAN, it displays Up when the WLAN is enabled or Down when the WLAN is disabled.
Rate	For the LAN ports, this displays the port speed and duplex setting or N/A when the line is disconnected. For the WAN port, it displays the port speed and duplex setting if you're using Ethernet encapsulation and Idle (line (ppp) idle), Dial (starting to trigger a call) and Drop (dropping a call) if you're using PPPoE or PPTP encapsulation. This field displays N/A when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and N/A when the WLAN is disabled.
Summary	
DHCP Table	Use this screen to view current DHCP client information.
Packet Statistics	Use this screen to view port status and packet specific statistics.
WLAN Station Status	Use this screen to view the wireless stations that are currently associated to the NBG4115.

3.5.1 Navigation Panel

Use the sub-menus on the navigation panel to configure NBG4115 features.

The following table describes the sub-menus.

Table 4 Screens Summary

LINK	TAB	FUNCTION
Status		This screen shows the NBG4115's general device, system and interface status information. Use this screen to access the wizard, and summary statistics tables.
Network		

Table 4 Screens Summary

LINK	TAB	FUNCTION
Wireless LAN	General	Use this screen to configure wireless LAN.
	MAC Filter	Use the MAC filter screen to configure the NBG4115 to block access to devices or block the devices from accessing the NBG4115.
	Advanced	This screen allows you to configure advanced wireless settings.
	QoS	Use this screen to configure Wi-Fi Multimedia Quality of Service (WMM QoS). WMM QoS allows you to prioritize wireless traffic according to the delivery requirements of individual services.
	WPS	Use this screen to configure WPS.
	WPS Station	Use this screen to add a wireless station using WPS.
	Scheduling	Use this screen to schedule the times the Wireless LAN is enabled.
WAN	Internet Connection	This screen allows you to configure ISP parameters, WAN IP address assignment, DNS servers and the WAN MAC address.
	Advanced	Use this screen to configure other advanced properties.
LAN	IP	Use this screen to configure LAN IP address and subnet mask.
DHCP Server	General	Use this screen to enable the NBG4115's DHCP server.
	Advanced	Use this screen to assign IP addresses to specific individual computers based on their MAC addresses and to have DNS servers assigned by the DHCP server.
	Client List	Use this screen to view current DHCP client information and to always assign an IP address to a MAC address (and host name).
NAT	General	Use this screen to enable NAT.
	Application	Use this screen to configure servers behind the NBG4115.
	Advanced	Use this screen to change your NBG4115's port triggering settings.
DDNS	General	Use this screen to set up dynamic DNS.
Security		
Firewall	General	Use this screen to activate/deactivate the firewall.
	Services	This screen shows a summary of the firewall rules, and allows you to edit/add a firewall rule.
Content Filter	Filter	Use this screen to block certain web features and sites containing certain keywords in the URL.
Management		
Static Route	IP Static Route	Use this screen to configure IP static routes.

Table 4 Screens Summary

LINK	TAB	FUNCTION
Bandwidth Management	General	Use this screen to use pre-configured bandwidth management profiles for how your NBG4115 manages incoming and outgoing data.
	Advanced	Use this screen to create your own bandwidth management profile for how your NBG4115 manages incoming and outgoing data.
Remote MGMT	WWW	Use this screen to configure through which interface(s) and from which IP address(es) users can use HTTP to manage the NBG4115.
UPnP	General	Use this screen to enable UPnP on the NBG4115.
Maintenance		
System	General	Use this screen to view and change administrative settings such as system and domain names, password and inactivity timer.
	Time Setting	Use this screen to change your NBG4115's time and date.
Logs	View Log	Use this screen to view the logs for the categories that you selected.
Tools	Firmware	Use this screen to upload firmware to your NBG4115.
	Configuration	Use this screen to backup and restore the configuration or reset the factory defaults to your NBG4115.
	Restart	This screen allows you to reboot the NBG4115 without turning the power off.
Sys OP Mode	General	This screen allows you to select whether your device acts as a Router or a Access Point.
Language	Language	This screen allows you to select the language you prefer.

3.5.2 Summary: DHCP Table

DHCP (Dynamic Host Configuration Protocol, RFC 2131 and RFC 2132) allows individual clients to obtain TCP/IP configuration at start-up from a server. You can configure the NBG4115's LAN as a DHCP server or disable it. When configured as a server, the NBG4115 provides the TCP/IP configuration for the clients. If DHCP service is disabled, you must have another DHCP server on that network, or else the computer must be manually configured.

Click the **DHCP Table (Details...)** hyperlink in the **Status** screen. Read-only information here relates to your DHCP status. The DHCP table shows current

DHCP client information (including **IP Address**, **Host Name** and **MAC Address**) of all network clients using the NBG4115's DHCP server.

Figure 6 Summary: DHCP Table

DHCP Table			
#	IP Address	Host Name	MAC Address
1	192.168.1.33	TWPC12731	00:19:cb:04:80:1e
2	192.168.1.35	twpc12116	00:02:e3:56:16:9d
<div>Refresh</div>			

The following table describes the labels in this screen.

Table 5 Summary: DHCP Table

LABEL	DESCRIPTION
#	This is the index number of the host computer.
IP Address	This field displays the IP address relative to the # field listed above.
Host Name	This field displays the computer host name.
MAC Address	<p>This field shows the MAC address of the computer with the name in the Host Name field.</p> <p>Every Ethernet device has a unique MAC (Media Access Control) address which uniquely identifies a device. The MAC address is assigned at the factory and consists of six pairs of hexadecimal characters, for example, 00:A0:C5:00:00:02.</p>
Refresh	Click Refresh to renew the screen.

3.5.3 Summary: Packet Statistics

Click the **Packet Statistics (Details...)** hyperlink in the **Status** screen. Read-only information here includes port status, packet specific statistics and the "system up time". The **Poll Interval(s)** field is configurable and is used for refreshing the screen.

Figure 7 Summary: Packet Statistics

Packet Statistics						
Port	Status	TxPkts	RxPkts	Collisions	Tx B/s	Rx B/s
WAN	100M	876235	809818	0	0	150
LAN	100M	810753	886992	0	821	1676
WLAN	N/A	958	3019	0	0	0
System Up Time : 1:41:47						
<div> Poll Interval : 5 sec Set Interval Stop </div>						

The following table describes the labels in this screen.

Table 6 Summary: Packet Statistics

LABEL	DESCRIPTION
Port	This is the NBG4115's port type.
Status	<p>For the LAN ports, this displays the port speed and duplex setting or Down when the line is disconnected.</p> <p>For the WAN port, it displays the port speed and duplex setting if you're using Ethernet encapsulation and Idle (line (ppp) idle), Dial (starting to trigger a call) and Drop (dropping a call) if you're using PPPoE or PPTP encapsulation. This field displays Down when the line is disconnected.</p> <p>For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and Down when the WLAN is disabled.</p>
TxPkts	This is the number of transmitted packets on this port.
RxPkts	This is the number of received packets on this port.
Collisions	This is the number of collisions on this port.
Tx B/s	This displays the transmission speed in bytes per second on this port.
Rx B/s	This displays the reception speed in bytes per second on this port.
System Up Time	This is the total time the NBG4115 has been on.
Poll Interval(s)	Enter the time interval for refreshing statistics in this field.
Set Interval	Click this button to apply the new poll interval you entered in the Poll Interval(s) field.
Stop	Click Stop to stop refreshing statistics.

3.5.4 Summary: WLAN Station Status

Click the **WLAN Station Status (Details...)** hyperlink in the **Status** screen. View the wireless stations that are currently associated to the NBG4115 in the **Association List**. Association means that a wireless client (for example, your network or computer with a wireless network card) has connected successfully to the AP (or wireless router) using the same SSID, channel and security settings.

Figure 8 Summary: Wireless Association List

Association List		
#	MAC Address	Association Time
001	00:19:cb:04:80:1e	03:52:42 2000/01/01
<div>Refresh</div>		

The following table describes the labels in this screen.

Table 7 Summary: Wireless Association List

LABEL	DESCRIPTION
#	This is the index number of an associated wireless station.
MAC Address	This field displays the MAC address of an associated wireless station.
Association Time	This field displays the time a wireless station first associated with the NBG4115's WLAN network.
Refresh	Click Refresh to reload the list.

Connection Wizard

4.1 Overview

This chapter provides information on the wizard setup screens in the Web Configurator.

4.2 Wizard Setup

The Web Configurator's wizard setup helps you configure your device to access the Internet. Refer to your ISP (Internet Service Provider) checklist in the Quick Start Guide to know what to enter in each field. Leave a field blank if you don't have that information.

- 1 After you access the NBG4115 Web Configurator, click the **Go to Wizard setup** hyperlink.

You can click **Go to Advanced setup** hyperlink to skip this wizard setup and configure basic or advanced features accordingly.

Figure 9 Select Wizard or Advanced Mode



- 2 Choose a language by clicking on the language's button. The screen will update. Click the **Next** button to proceed to the next screen.

Figure 10 Select a Language



- 3 Read the on-screen information and click **Next**.

Figure 11 Welcome to the Connection Wizard



4.3 STEP 1: System Information

System Information contains administrative and system-related information.

4.3.1 System Name

System Name is for identification purposes. However, because some ISPs check this name you should enter your computer's "Computer Name".

- In Windows 2000, click **Start > Settings > Control Panel** and then double-click **System**. Click the **Network Identification** tab and then the **Properties** button. Note the entry for the **Computer name** field and enter it as the **System Name**.
- In Windows XP, click **Start > My Computer > View system information** and then click the **Computer Name** tab. Note the entry in the **Full computer name** field and enter it as the NBG4115 **System Name**.

4.3.2 Domain Name

The **Domain Name** entry is what is propagated to the DHCP clients on the LAN. If you leave this blank, the domain name obtained by DHCP from the ISP is used. While you must enter the host name (System Name) on each individual computer, the domain name can be assigned from the NBG4115 via DHCP.

Click **Next** to configure the NBG4115 for Internet access.

Figure 12 Wizard Step 1: System Information

The following table describes the labels in this screen.

Table 8 Wizard Step 1: System Information

LABEL	DESCRIPTION
System Name	System Name is a unique name to identify the NBG4115 in an Ethernet network. Enter a descriptive name. This name can be up to 30 alphanumeric characters long. Spaces are not allowed, but dashes "-" and underscores "_" are accepted.
Domain Name	Type the domain name (if you know it) here. If you leave this field blank, the ISP may assign a domain name via DHCP. The domain name entered by you is given priority over the ISP assigned domain name.
Back	Click Back to display the previous screen.
Next	Click Next to proceed to the next screen.
Exit	Click Exit to close the wizard screen without saving.

4.4 STEP 2: Wireless LAN

Set up your wireless LAN using the following screen.

Figure 13 Wizard Step 2: Wireless LAN

The following table describes the labels in this screen.

Table 9 Wizard Step 2: Wireless LAN

LABEL	DESCRIPTION
Name (SSID)	Enter a descriptive name (up to 32 printable 7-bit ASCII characters) for the wireless LAN. If you change this field on the NBG4115, make sure all wireless stations use the same SSID in order to access the network.
Security	Select a Security level from the drop-down list box. Choose Auto (WPA2-PSK) to have the NBG4115 generate a pre-shared key automatically. After you click Next a screen pops up displaying the generated pre-shared key. Write down the key for use later when connecting other wireless devices to your network. Click OK to continue. Choose None to have no wireless LAN security configured. If you do not enable any wireless security on your NBG4115, your network is accessible to any wireless networking device that is within range. If you choose this option, skip directly to Section 4.5 on page 43 . Choose Extend (WPA-PSK or WPA2-PSK) security to configure a Pre-Shared Key. Choose this option only if your wireless clients support WPA-PSK or WPA2-PSK respectively. If you choose this option, skip directly to Section 4.4.1 on page 43 .
Channel Selection	The range of radio frequencies used by IEEE 802.11b/g/n wireless devices is called a channel. The device will automatically select the channel with the least interference.
Back	Click Back to display the previous screen.
Next	Click Next to proceed to the next screen.
Exit	Click Exit to close the wizard screen without saving.

Note: The wireless stations and NBG4115 must use the same SSID, channel ID, WPA-PSK (if WPA-PSK is enabled) or WPA2-PSK (if WPA2-PSK is enabled) for wireless communication.

4.4.1 Extend (WPA-PSK or WPA2-PSK) Security

Choose **Extend (WPA-PSK)** or **Extend (WPA2-PSK)** security in the Wireless LAN setup screen to set up a **Pre-Shared Key**.

Figure 14 Wizard Step 2: Extend (WPA-PSK or WPA2-PSK) Security

The following table describes the labels in this screen.

Table 10 Wizard Step 2: Extend (WPA-PSK or WPA2-PSK) Security

LABEL	DESCRIPTION
Pre-Shared Key	Type from 8 to 63 case-sensitive ASCII or HEX characters. You can set up the most secure wireless connection by configuring WPA in the wireless LAN screens. You need to configure an authentication server to do this.
Back	Click Back to display the previous screen.
Next	Click Next to proceed to the next screen.
Exit	Click Exit to close the wizard screen without saving.

4.5 STEP 3: Internet Configuration

The NBG4115 offers four Internet connection types. They are **Ethernet**, **PPP over Ethernet**, **PPTP** or **Mobile 3G**. The wizard attempts to detect which WAN connection type you are using. If the wizard does not detect a connection type, you must select one from the drop-down list box.


If you have an always-on connection, most likely you should use **Ethernet**. If your connection requires a user name and password to authenticate your connection, then choose either **PPPoE** or **PPTP**. Finally, if you are using a USB-based 3G device, select the **Mobile 3G** option.

Note: When you select Mobile 3G, then all WAN connections are made through this.

Check with your ISP to make sure you use the correct type.

This wizard screen varies according to the connection type that you select.

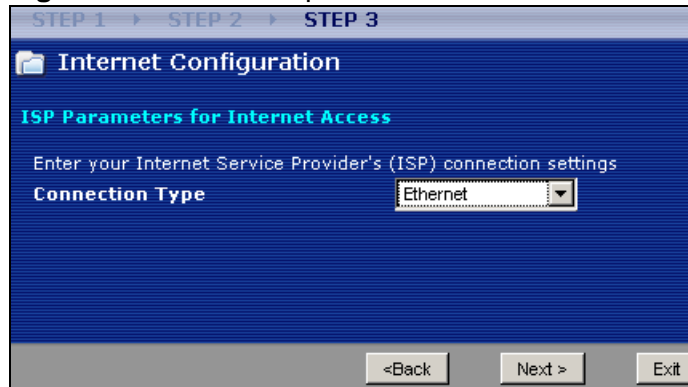Figure 15 Wizard Step 3: ISP Parameters.



The following table describes the labels in this screen,

Table 11 Wizard Step 3: ISP Parameters

CONNECTION TYPE	DESCRIPTION
Ethernet	Select the Ethernet option when the WAN port is used as a regular Ethernet.
PPPoE	Select the PPP over Ethernet option for a dial-up connection. If your ISP gave you an IP address and/or subnet mask, then select PPTP .
PPTP	Select the PPTP option for a dial-up connection.
Mobile 3G	Select the Mobile 3G option for a USB 3G connection.

4.5.1 Ethernet Connection

Choose **Ethernet** when the WAN port is used as a regular Ethernet. Continue to [Section 4.5.5 on page 49](#).

Figure 16 Wizard Step 3: Ethernet Connection



4.5.2 PPPoE Connection

Point-to-Point Protocol over Ethernet (PPPoE) functions as a dial-up connection. PPPoE is an IETF (Internet Engineering Task Force) standard specifying how a host personal computer interacts with a broadband modem (for example DSL, cable, wireless, etc.) to achieve access to high-speed data networks.

For the service provider, PPPoE offers an access and authentication method that works with existing access control systems (for instance, RADIUS).

One of the benefits of PPPoE is the ability to let end users access one of multiple network services, a function known as dynamic service selection. This enables the service provider to easily create and offer new IP services for specific users.

Operationally, PPPoE saves significant effort for both the subscriber and the ISP/ carrier, as it requires no specific configuration of the broadband modem at the subscriber's site.

By implementing PPPoE directly on the NBG4115 (rather than individual computers), the computers on the LAN do not need PPPoE software installed, since the NBG4115 does that part of the task. Furthermore, with NAT, all of the LAN's computers will have Internet access.

Figure 17 Wizard Step 3: PPPoE Connection

The following table describes the labels in this screen.

Table 12 Wizard Step 3: PPPoE Connection

LABEL	DESCRIPTION
ISP Parameter for Internet Access	
Connection Type	Select the PPP over Ethernet option for a dial-up connection.
Service Name	Type the name of your service provider.
User Name	Type the user name given to you by your ISP.
Password	Type the password associated with the user name above.
Back	Click Back to return to the previous screen.

Table 12 Wizard Step 3: PPPoE Connection

LABEL	DESCRIPTION
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.

4.5.3 PPTP Connection

Point-to-Point Tunneling Protocol (PPTP) is a network protocol that enables transfers of data from a remote client to a private server, creating a Virtual Private Network (VPN) using TCP/IP-based networks.

PPTP supports on-demand, multi-protocol, and virtual private networking over public networks, such as the Internet.

Refer to the appendix for more information on PPTP.

Note: The NBG4115 supports one PPTP server connection at any given time.

Figure 18 Wizard Step 3: PPTP Connection

The following table describes the fields in this screen

Table 13 Wizard Step 3: PPTP Connection

LABEL	DESCRIPTION
ISP Parameters for Internet Access	
Connection Type	Select PPTP from the drop-down list box. To configure a PPTP client, you must configure the User Name and Password fields for a PPP connection and the PPTP parameters for a PPTP connection.

Table 13 Wizard Step 3: PPTP Connection

LABEL	DESCRIPTION
User Name	Type the user name given to you by your ISP.
Password	Type the password associated with the User Name above.
PPTP Configuration	
Server IP Address	Type the IP address of the PPTP server.
Connection ID/ Name	Enter the connection ID or connection name in this field. It must follow the "c:id" and "n:name" format. For example, C:12 or N:My ISP. This field is optional and depends on the requirements of your ISP.
Get automatically from ISP	Select this radio button if your ISP did not assign you a fixed IP address.
Use fixed IP address	Select this radio button, provided by your ISP to give the NBG4115 a fixed, unique IP address.
My IP Address	Type the (static) IP address assigned to you by your ISP.
My IP Subnet Mask	Type the subnet mask assigned to you by your ISP (if given).
Back	Click Back to return to the previous screen.
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.

4.5.4 Mobile 3G

Mobile 3G is a set of international “third generation” standards for the sending and receiving of voice, video, and wireless data in a mobile environment. For the NBG4115, this type of wireless connection requires a connected 3G-compatible USB device (see the included Quick Start Guide for installation information), and a 3G account with your local ISP.

Note: When you use Mobile 3G, all WAN connections are made through it.

Figure 19 Wizard Step 3: Mobile 3G Connection

The following table describes the fields in this screen

Table 14 Wizard Step 3: Mobile 3G Connection

LABEL	DESCRIPTION
ISP Parameters for Internet Access	
Connection Type	Select Mobile 3G from the drop-down list box.
PIN Code	Enter the 4-digit 3G account PIN code given to you by your ISP.
APN Code	Enter the Access Point Name (APN) given to you by your ISP.
Dial Number	Enter the phone number that must be dialed in order to login to your 3G account from the NBG4115.
User Name	Type the user name given to you by your ISP.
Password	Type the password associated with the User Name above.
Back	Click Back to return to the previous screen.
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.

4.5.5 Your IP Address

The following wizard screen allows you to assign a fixed IP address or give the NBG4115 an automatically assigned IP address depending on your ISP.

Figure 20 Wizard Step 3: Your IP Address



The following table describes the labels in this screen

Table 15 Wizard Step 3: Your IP Address

LABEL	DESCRIPTION
Get automatically from your ISP	Select this option If your ISP did not assign you a fixed IP address. This is the default selection. If you choose this option, skip directly to Section 4.5.10 on page 52 .
Use fixed IP address provided by your ISP	Select this option if you were given IP address and/or DNS server settings by the ISP. The fixed IP address should be in the same subnet as your broadband modem or router.
Back	Click Back to return to the previous screen.
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.

4.5.6 WAN IP Address Assignment

Every computer on the Internet must have a unique IP address. If your networks are isolated from the Internet, for instance, only between your two branch offices, you can assign any IP addresses to the hosts without problems. However, the Internet Assigned Numbers Authority (IANA) has reserved the following three blocks of IP addresses specifically for private networks.

Table 16 Private IP Address Ranges

10.0.0.0	-	10.255.255.255
172.16.0.0	-	172.31.255.255
192.168.0.0	-	192.168.255.255

You can obtain your IP address from the IANA, from an ISP or have it assigned by a private network. If you belong to a small organization and your Internet access is through an ISP, the ISP can provide you with the Internet addresses for your

local networks. On the other hand, if you are part of a much larger organization, you should consult your network administrator for the appropriate IP addresses.

Note: Regardless of your particular situation, do not create an arbitrary IP address; always follow the guidelines above. For more information on address assignment, please refer to RFC 1597, Address Allocation for Private Internets and RFC 1466, Guidelines for Management of IP Address Space.

4.5.7 IP Address and Subnet Mask

Similar to the way houses on a street share a common street name, so too do computers on a LAN share one common network number.

Where you obtain your network number depends on your particular situation. If the ISP or your network administrator assigns you a block of registered IP addresses, follow their instructions in selecting the IP addresses and the subnet mask.

If the ISP did not explicitly give you an IP network number, then most likely you have a single user account and the ISP will assign you a dynamic IP address when the connection is established. The Internet Assigned Number Authority (IANA) reserved this block of addresses specifically for private use; please do not use any other number unless you are told otherwise. Let's say you select 192.168.1.0 as the network number; which covers 254 individual addresses, from 192.168.1.1 to 192.168.1.254 (zero and 255 are reserved). In other words, the first three numbers specify the network number while the last number identifies an individual computer on that network.

Once you have decided on the network number, pick an IP address that is easy to remember, for instance, 192.168.1.1, for your NBG4115, but make sure that no other device on your network is using that IP address.

The subnet mask specifies the network number portion of an IP address. Your NBG4115 will compute the subnet mask automatically based on the IP address that you entered. You don't need to change the subnet mask computed by the NBG4115 unless you are instructed to do otherwise.

4.5.8 DNS Server Address Assignment

Use DNS (Domain Name System) to map a domain name to its corresponding IP address and vice versa, for instance, the IP address of `www.zyxel.com` is 204.217.0.2. The DNS server is extremely important because without it, you must know the IP address of a computer before you can access it.

The NBG4115 can get the DNS server addresses in the following ways.

- 1 The ISP tells you the DNS server addresses, usually in the form of an information sheet, when you sign up. If your ISP gives you DNS server addresses, enter them in the **DNS Server** fields in the **Wizard** and/or **WAN > Internet Connection** screen.
- 2 If the ISP did not give you DNS server information, leave the **DNS Server** fields set to **0.0.0.0** in the **Wizard** screen and/or set to **From ISP** in the **WAN > Internet Connection** screen for the ISP to dynamically assign the DNS server IP addresses.

4.5.9 WAN IP and DNS Server Address Assignment

The following wizard screen allows you to assign a fixed WAN IP address and DNS server addresses.

Figure 21 Wizard Step 3: WAN IP and DNS Server Addresses

STEP 1 > STEP 2 > **STEP 3**

Internet Configuration

WAN IP Address Assignment

My WAN IP Address: 0.0.0.0

My WAN IP Subnet Mask: 0.0.0.0

Gateway IP Address: 0.0.0.0

DNS Server Address Assignment

First DNS Server: 0.0.0.0

Second DNS Server: 0.0.0.0

<Back Next > Exit

The following table describes the labels in this screen

Table 17 Wizard Step 3: WAN IP and DNS Server Addresses

LABEL	DESCRIPTION
WAN IP Address Assignment	
My WAN IP Address	Enter your WAN IP address in this field. The WAN IP address should be in the same subnet as your DSL/Cable modem or router.
My WAN IP Subnet Mask	Enter the IP subnet mask in this field.
Gateway IP Address	Enter the gateway IP address in this field.
System DNS Server Address Assignment (if applicable)	
DNS (Domain Name System) is for mapping a domain name to its corresponding IP address and vice versa. The DNS server is extremely important because without it, you must know the IP address of a computer before you can access it. The NBG4115 uses a system DNS server (in the order you specify here) to resolve domain names for DDNS and the time server.	

Table 17 Wizard Step 3: WAN IP and DNS Server Addresses

LABEL	DESCRIPTION
First DNS Server	Enter the DNS server's IP address in the fields provided.
Second DNS Server	If you do not configure a system DNS server, you must use IP addresses when configuring DDNS and the time server.
Back	Click Back to return to the previous screen.
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.


4.5.10 WAN MAC Address

Every Ethernet device has a unique MAC (Media Access Control) address. The MAC address is assigned at the factory and consists of six pairs of hexadecimal characters, for example, 00:A0:C5:00:00:02.

Table 18 Example of Network Properties for LAN Servers with Fixed IP Addresses

Choose an IP address	192.168.1.2-192.168.1.32; 192.168.1.65-192.168.1.254.
Subnet mask	255.255.255.0
Gateway (or default route)	192.168.1.1(NBG4115 LAN IP)

This screen allows users to configure the WAN port's MAC address by either using the NBG4115's MAC address, copying the MAC address from a computer on your LAN or manually entering a MAC address. Once it is successfully configured, the address will be copied to configuration file. It is advisable to clone the MAC address from a computer on your LAN even if your ISP does not presently require MAC address authentication.

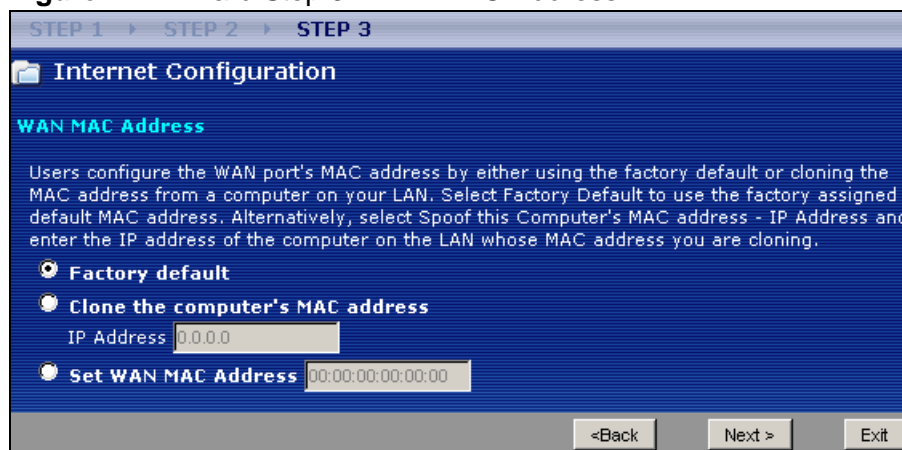Figure 22 Wizard Step 3: WAN MAC Address

The following table describes the fields in this screen.


Table 19 Wizard Step 3: WAN MAC Address

LABEL	DESCRIPTION
Factory Default	Select Factory Default to use the factory assigned default MAC address.
Clone the computer's MAC address	Select this option and enter the IP address of the computer on the LAN whose MAC you are cloning. It is advisable to clone the MAC address from a computer on your LAN even if your ISP does not presently require MAC address authentication.
Set WAN MAC Address	Select this option and enter the MAC address you want to use.
Back	Click Back to return to the previous screen.
Next	Click Next to continue.
Exit	Click Exit to close the wizard screen without saving.

4.6 Connection Wizard Complete

Click **Finish** to complete the wizard setup.

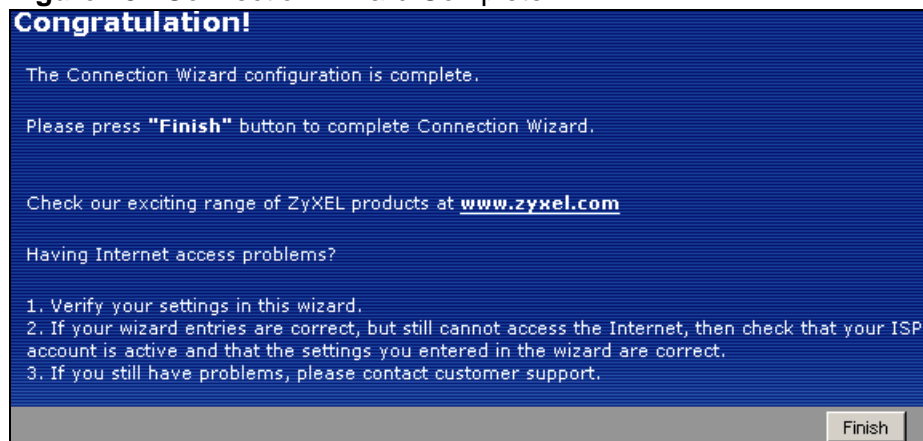Figure 23 Connection Wizard Complete



You have successfully set up your NBG4115 to operate on your network and access the Internet.

AP Mode


5.1 Overview

This chapter discusses how to configure settings while your NBG4115 is set to **AP Mode**. Many screens that are available in **Router Mode** are not available in **AP Mode**.

Note: See [Chapter 6 on page 63](#) for an example of setting up a wireless network in AP mode.

Use your NBG4115 as an AP if you already have a router or gateway on your network. In this mode your device bridges a wired network (LAN) and wireless LAN (WLAN) in the same subnet. See the figure below for an example.

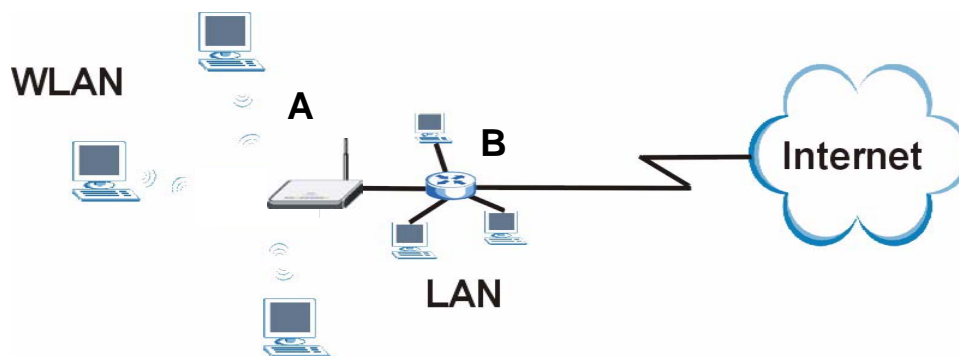Figure 24 Wireless Internet Access in AP Mode



5.2 Setting your NBG4115 to AP Mode

- 1 Log into the Web Configurator if you haven't already. See the Quick start Guide for instructions on how to do this.

- To set your NBG4115 to **AP Mode**, go to **Maintenance > Sys OP Mode > General** and select **Access Point**.

Figure 25 Maintenance > Sys OP Mode > General

General

System Operation Mode

☐ Router
☒ Access Point

Note:

Router: In this mode, the device is supported to connect to internet via ADSL/Cable Modem. PCs in LAN ports share the same IP to ISP through WAN Port.

Access Point: In this mode, all Ethernet ports are bridged together. The device allows the wireless-equipped computer can communicate with a wired network.

- A pop-up appears providing information on this mode. Click **OK** in the pop-up message window. (See [Section 22.2 on page 196](#) for more information on the pop-up.) Click **Apply**. Your NBG4115 is now in **AP Mode**.

Note: You have to log in to the Web Configurator again when you change modes.

5.3 The Status Screen in AP Mode

Click on **Status**. The screen below shows the status screen in **AP Mode**.

Figure 26 Status: AP Mode

ZyXEL

Status

Refresh Interval: None

Device Information

System Name: NBG4115
 Firmware Version: V1.00(BFS.0)B3

LAN Information

- MAC Address: 00:02:6F:5A:7C:82
 - IP Address: 192.168.1.2
 - IP Subnet Mask: 255.255.255.0
 - DHCP: None

WLAN Information

- MAC Address: 00:02:6F:5A:7C:B4
 - Status: On
 - Name(SSID): ZyXEL
 - Channel: Auto Channel
 - Operating Channel: 13
 - Security Mode: No Security
 - 802.11 Mode: 802.11 b/g/n
 - WPS: Configured

System Status

System Up Time: 0:3:2
 Current Date/Time: 2009-01-01/00:03:26

System Resource:

- CPU Usage: 3.22%
- Memory Usage: 49%

Interface Status

Interface	Status	Rate
LAN	Up	100M
WLAN	Up	150M

Summary

Packet Statistics ([Details...](#))
 WLAN Station Status ([Details...](#))

Message: Ready

The following table describes the labels shown in the **Status** screen.

Table 20 Web Configurator Status Screen

LABEL	DESCRIPTION
Device Information	
System Name	This is the System Name you enter in the Maintenance > System > General screen. It is for identification purposes.
Firmware Version	This is the firmware version and the date created.
LAN Information	
- MAC Address	This shows the LAN Ethernet adapter MAC Address of your device.
- IP Address	This shows the LAN port's IP address.
- IP Subnet Mask	This shows the LAN port's subnet mask.
- DHCP	This shows the LAN port's DHCP role - None .
WLAN Information	
- MAC Address	This shows the wireless adapter MAC Address of your device.
- Status	This shows the current status of the Wireless LAN - On, Off or Off by scheduler .
- Name (SSID)	This shows a descriptive name used to identify the NBG4115 in the wireless LAN.
- Channel	This shows the channel number which you select manually.
- Operating Channel	This shows the channel number which the NBG4115 is currently using over the wireless LAN.
- Security Mode	This shows the level of wireless security the NBG4115 is using.
- 802.11 Mode	This shows the IEEE 802.11 standard that the NBG4115 supports. Wireless clients must support the same standard in order to be able to connect to the NBG4115
- WPS	This shows the WPS (WiFi Protected Setup) Status. Click the status to display Network > Wireless LAN > WPS screen.
System Status	
System Uptime	This is the total time the NBG4115 has been on.
Current Date/Time	This field displays your NBG4115's present date and time.
System Resource	
- CPU Usage	This displays what percentage of the NBG4115's processing ability is currently used. When this percentage is close to 100%, the NBG4115 is running at full load, and the throughput is not going to improve anymore. If you want some applications to have more throughput, you should turn off other applications.
- Memory Usage	This shows what percentage of the heap memory the NBG4115 is using.
Interface Status	
Interface	This displays the NBG4115 port types. The port types are: LAN and WLAN .
Status	For the LAN port, this field displays Down (line is down) or Up (line is up or connected). For the WLAN, it displays Up when the WLAN is enabled or Down when the WLAN is disabled.

Table 20 Web Configurator Status Screen (continued)

LABEL	DESCRIPTION
Rate	For the LAN ports, this displays the port speed and duplex setting or N/A when the line is disconnected. For the WLAN, it displays the maximum transmission rate when the WLAN is enabled and N/A when the WLAN is disabled.
Summary	
Packet Statistics	Use this screen to view port status and packet specific statistics.
WLAN Station Status	Use this screen to view the wireless stations that are currently associated to the NBG4115.

5.3.1 Navigation Panel

Use the menu in the navigation panel to configure NBG4115 features in **AP Mode**.

The following screen and table show the features you can configure in **AP Mode**.

Figure 27 Menu: AP Mode

The following table describes the sub-menus.

Table 21 Screens Summary

LINK	TAB	FUNCTION
Status		This screen shows the NBG4115's general device, system and interface status information. Use this screen to access the wizard, and summary statistics tables.
Network		

Table 21 Screens Summary

LINK	TAB	FUNCTION
Wireless LAN	General	Use this screen to configure wireless LAN.
	MAC Filter	Use the MAC filter screen to configure the NBG4115 to block access to devices or block the devices from accessing the NBG4115.
	Advanced	This screen allows you to configure advanced wireless settings.
	QoS	Use this screen to configure Wi-Fi Multimedia Quality of Service (WMM QoS). WMM QoS allows you to prioritize wireless traffic according to the delivery requirements of individual services.
	WPS	Use this screen to configure WPS.
	WPS Station	Use this screen to add a wireless station using WPS.
	Scheduling	Use this screen to schedule the times the Wireless LAN is enabled.
LAN	IP	Use this screen to configure LAN IP address and subnet mask or to get the LAN IP address from a DHCP server.
Maintenance		
System	General	Use this screen to view and change administrative settings such as system and domain names, password and inactivity timer.
	Time Setting	Use this screen to change your NBG4115's time and date.
Logs	View Log	Use this screen to view the logs for the categories that you selected.
Tools	Firmware	Use this screen to upload firmware to your NBG4115.
	Configuration	Use this screen to backup and restore the configuration or reset the factory defaults to your NBG4115.
	Restart	This screen allows you to reboot the NBG4115 without turning the power off.
Sys OP Mode	General	This screen allows you to select whether your device acts as a Router or a Access Point.
Language		This screen allows you to select the language you prefer.

5.4 LAN Settings

Use this section to configure your LAN settings while in **AP Mode**.

Click **Network > LAN** to see the screen below.

Note: If you change the IP address of the NBG4115 in the screen below, you will need to log into the NBG4115 again using the new IP address.

Figure 28 Network > LAN > IP

The table below describes the labels in the screen.

Table 22 Network > LAN > IP

LABEL	DESCRIPTION
Get from DHCP Server	Select this to let the DHCP server in the gateway assign the NBG4115 IP address.
User Defined LAN IP	Select this to give the NBG4115 a static IP address.
IP Address	Type the IP address in dotted decimal notation. The default setting is 192.168.1.2. If you change the IP address you will have to log in again with the new IP address.
IP Subnet Mask	The subnet mask specifies the network number portion of an IP address. Your NBG4115 will automatically calculate the subnet mask based on the IP address that you assign. Unless you are implementing subnetting, use the subnet mask computed by the NBG4115.
Apply	Click Apply to save your changes to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

5.5 WLAN and Maintenance Settings

The configuration of wireless and maintenance settings in **AP Mode** is the same as for **Router Mode**.

- See [Chapter 5 on page 69](#) for information on the configuring your wireless network.
- See [Maintenance and Troubleshooting \(179\)](#) for information on the configuring your Maintenance settings.

5.6 Logging in while in AP Mode

- 1 Connect your computer to the LAN port of the NBG4115.
- 2 The default IP address of the NBG4115 is "192.168.1.2". In this case, your computer must have an IP address in the range between "192.168.1.3" and "192.168.1.254".
- 3 Click **Start > Run** on your computer in Windows.
- 4 Type "cmd" in the dialog box.
- 5 Type "ipconfig" to show your computer's IP address. If your computer's IP address is not in the correct range then see [Appendix D on page 233](#) for information on changing your computer's IP address.
- 6 After you've set your computer's IP address, open a web browser such as Internet Explorer and type "192.168.1.2" as the web address in your web browser.

See [Chapter 6 on page 63](#) for a tutorial on setting up a network with an AP.

Tutorials

6.1 Overview

This chapter provides tutorials for setting up your NBG4115.

6.2 Set Up a 3G Connection

This section shows you how to make a 3G connection with your NBG4115. There are two ways to set up your 3G options.

- 1 Use the **Wizard**, which was introduced in the Quick Start Guide. The wizard is good for getting up and running in as little time as possible. It allows you to configure the minimum number of options required to get connected.
- 2 Use the Web Configurator's **Network** options. This is handy because it gives you access to other options not available in the Wizard, allowing you to have more control over your device.

This tutorial shows you how to do the second one.


You will need the following information, which should be provided by your ISP:

FIELD	DESCRIPTION	EXAMPLE
PIN Code	This is the 4-digit Personal Identification Number (PIN) for your 3G device's SIM card.	1234
APN Code	This is the Access Point Name (APN) of the 3G network to which you intend to connect.	mobile.p3.cz.co gprsinternet
Dial Number	This is the number used to instruct your 3G device to make its data connection to the 3G network.	*99# *99***3#


FIELD	DESCRIPTION	EXAMPLE
User Name	This is your account user name.	dcmchale 0b1ken@kashiik.org
Password	This is your account user name's password.	* * * * *

To set up a 3G connection:

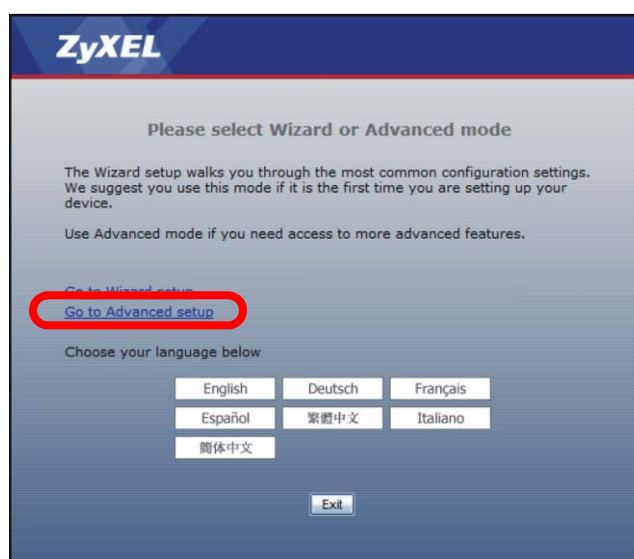- 1 Connect to the Web Configurator, as described in the Quick Start Guide.
- 2 When presented with the option to choose either **Wizard** or **Advanced**, click **Go to Advanced setup**.



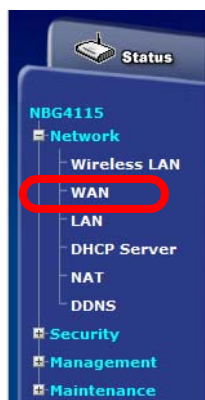- 3 Expand the **Network** submenu on the navigation pane, then click **WAN**.



- 4 From the **Connection Type** menu, select **Mobile 3G** then configure your 3G settings when the screen updates itself.f

The screenshot shows the 'Internet Connection' window with the 'Advanced' tab selected. The 'ISP Parameters for Internet Access' section is highlighted with a red oval. It contains the following fields:

- Connection Type: Mobile 3G (dropdown menu)
- Pin Code: (text input)
- APN Code: (text input)
- Dial Number: (text input)
- User Name: (text input)
- Password: (password input)
- Enabled-up Connection: (checkbox)
- Idle Timeout: 0 (in minutes)

Below the ISP parameters are the 'DNS Servers' and 'WAN MAC Address' sections.

DNS Servers

- First DNS Server: From ISP (dropdown), 0.0.0.0 (text input)
- Second DNS Server: From ISP (dropdown), 0.0.0.0 (text input)

WAN MAC Address

- ☒ Factory default
- ☐ Clone the computer's MAC address - IP Address: 0.0.0.0 (text input)
- ☐ Set WAN MAC Address: 00:02:6F:5A:7C:82 (text input)

At the bottom are 'Apply' and 'Reset' buttons.

- 5 Click **Apply** to save your changes, then exit the Web Configurator.

Note: Once you set up and enable a 3G device, all incoming and outgoing network connections are made through it and not the WAN port on your NBG4115.

6.3 Set Up the NBG4115 for Gaming

Gaming is a very popular online activity, and one that can be extremely bandwidth sensitive. Some video games may have higher performance expectations than other types of software. As such, they tend to require more finely tuned Quality of Service (QoS) prioritization. If the data packets from a game are assigned a lower priority by the NBG4115, then they may take longer to reach their destination; but if they are given a higher priority, then they should arrive at their destination marginally faster. This is because Internet servers that rely on QoS to sort packets that are in transit generally pass higher priority packets on first, while lower priority packets are held back slightly longer.

When this happens on a single server with a single data packet, your gameplay is not affected. When it happens over 15 servers from beginning to end with thousands of bytes of data, then the build up of low-priority latency can become significant. For Massively Multiplayer Online (MMOs) and First Person Shooters (FPS) (which account for 3-4% of all Internet-related traffic) a latency difference of even 200 milliseconds is enough to ruin the gaming experience.

Bandwidth management allows you to set up custom parameters on the NBG4115 so that whenever you play a game, the QoS is automatically upgraded to the highest priority in order to ensure your game data packets are plucked first from the pool of incoming information and sent on ahead of lower priority packets.

This tutorial shows you how to set up your NBG4115 for gaming.

- 1 In the Web Configurator, expand the navigation pane's **Management** category and then select **Bandwidth MGMT**




- 2 Select the **Advanced** tab.



- 3 Enable the **Gaming** check box and set its **Priority** to High.

Unlimited Priority Queue

Local IP Address

 **Note : The IP address will not be bounded in the QoS limitation**

Priority Queue

#	Enable	Service	Priority	Specific Port
1	<input type="checkbox"/>	FTP	Low ▼	
2	<input type="checkbox"/>	WWW	High ▼	
3	<input type="checkbox"/>	TELNET	Low ▼	
4	<input type="checkbox"/>	E-Mail	Low ▼	
5	<input type="checkbox"/>	VoIP (SIP)	High ▼	
6	<input type="checkbox"/>	BitTorrent	Low ▼	
7	<input checked="" type="checkbox"/>	Gaming	High ▼	
8	<input type="checkbox"/>		High ▼	Both ▼ <input type="text"/> ~ <input type="text"/>
9	<input type="checkbox"/>		High ▼	Both ▼ <input type="text"/> ~ <input type="text"/>
10	<input type="checkbox"/>		High ▼	Both ▼ <input type="text"/> ~ <input type="text"/>
11	<input type="checkbox"/>		High ▼	Both ▼ <input type="text"/> ~ <input type="text"/>
12	<input type="checkbox"/>		High ▼	Both ▼ <input type="text"/> ~ <input type="text"/>

The following gaming ports are preconfigured on your NBG4115 and are enabled when you select the 'gaming' **Service** in the **Management > Bandwidth MGMT > Advanced** screen:

Table 23 Preconfigured Gaming Ports

APPLICATION	TCP PORTS	UDP PORTS
XBox 360	3074, 3390, 3932, 5555	1900, 3776, 7777, 88, 3074
Playstation	80, 443, 5223, 5223	3478, 3479, 3658, 4658
Battlenet	40, 6112, 4000, 6113-6119, 112	
MSN Game Zone	6667, 28800-29000	6667, 28800-29000

Note: If you need to customize specific ports, go to the next step. Otherwise, skip ahead to step 5.

- 4 To create a custom QoS setting for a specific game, enter the following information in the first available custom Priority Queue line:

#	Enable	Service	Priority	Specific Port
7	<input checked="" type="checkbox"/>	Gaming	High ▼	
8	<input checked="" type="checkbox"/>	Warcraft3	High ▼	TCP ▼ 6112 ~ 6119

Service: This is the name by which your custom service is labeled. It can be anything with the limitation that it cannot be longer than 10 characters.

Priority: Set this to **High**.

Specific Port: From the list, select the communication protocol your game uses. In this example, our game uses TCP/IP so we choose **TCP**. If you are not sure, then select **Both**. Enter the starting port in the first port range box, then enter then last port in the second port range box. For our game, we used 6112 to 6119.

- 5 Click **Apply** to save your changes, then exit the Web Configurator.

6.4 Set Up a Wireless Network with WPS

This section gives you an example of how to set up wireless network using WPS. This example uses the NBG4115 as the AP and NWD210N as the wireless client which connects to a notebook.

Note: The wireless client must be a WPS-aware device (for example, a WPS USB adapter or PCI card).

There are two WPS methods for creating a secure connection. This tutorial shows you how to do both.

- **Push Button Configuration (PBC)** - create a secure wireless network simply by pressing a button. See [Section 6.4.1 on page 68](#). This is the easier method.
- **PIN Configuration** - create a secure wireless network simply by entering a wireless client's PIN (Personal Identification Number) in the NBG4115's interface. See [Section 6.4.2 on page 70](#). This is the more secure method, since one device can authenticate the other.

6.4.1 Push Button Configuration (PBC)

- 1 Make sure that your NBG4115 is turned on and that it is within range of your computer.
- 2 Make sure that you have installed the wireless client (this example uses the NWD210N) driver and utility in your notebook.

- 3 In the wireless client utility, find the WPS settings. Enable WPS and press the WPS button (**Start** or **WPS** button)
- 4 Log into NBG4115's Web Configurator and press the **Push Button** button in the **Network > Wireless Client > WPS Station** screen.


Note: Your NBG4115 has a WPS button located on its panel, as well as a WPS button in its configuration utility. Both buttons have exactly the same function; you can use one or the other.

Note: It doesn't matter which button is pressed first. You must press the second button within two minutes of pressing the first one.

The NBG4115 sends the proper configuration settings to the wireless client. This may take up to two minutes. Then the wireless client is able to communicate with the NBG4115 securely.

The following figure shows you an example to set up wireless network and security by pressing a button on both NBG4115 and wireless client (the NWD210N in this example).

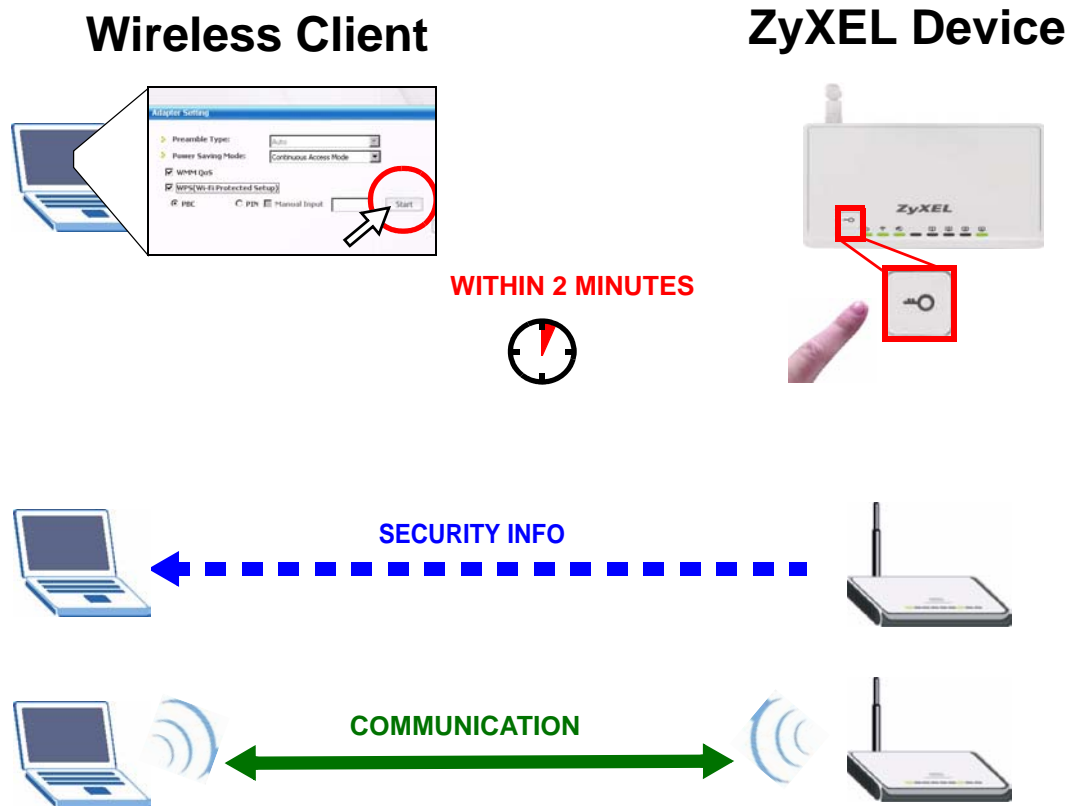Figure 29 Example WPS Process: PBC Method



6.4.2 PIN Configuration


When you use the PIN configuration method, you need to use both NBG4115's configuration interface and the client's utilities.

- 1 Launch your wireless client's configuration utility. Go to the WPS settings and select the PIN method to get a PIN number.
- 2 Enter the PIN number to the **PIN** field in the **Network > Wireless LAN > WPS Station** screen on the NBG4115.
- 3 Click **Start** buttons (or button next to the PIN field) on both the wireless client utility screen and the NBG4115's **WPS Station** screen within two minutes.

The NBG4115 authenticates the wireless client and sends the proper configuration settings to the wireless client. This may take up to two minutes. Then the wireless client is able to communicate with the NBG4115 securely.

The following figure shows you the example to set up wireless network and security on NBG4115 and wireless client (ex. NWD210N in this example) by using PIN method.

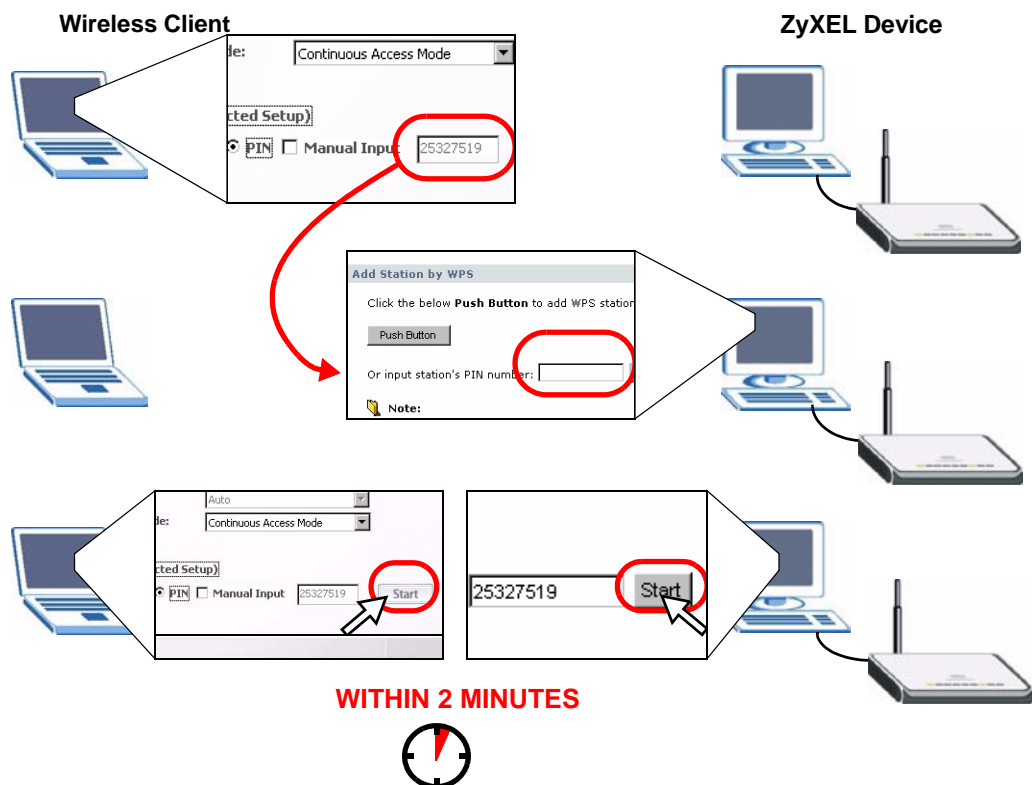Figure 30 Example WPS Process: PIN Method



6.5 Configure Wireless Security without WPS

This example shows you how to configure wireless security settings with the following parameters on your NBG4115.

SSID	SSID_Example3
Channel	6
Security	WPA-PSK (Pre-Shared Key: ThisismyWPA-PSKpre-sharedkey)

Follow the steps below to configure the wireless settings on your NBG4115.

The instructions require that your hardware is connected (see the Quick Start Guide) and you are logged into the Web Configurator through your LAN connection (see [Section 3.2 on page 27](#)).

- 1 Open the **Wireless LAN > General** screen in the AP's Web Configurator.
- 2 Make sure the **Enable Wireless LAN** check box is selected.
- 3 Enter **SSID_Example3** as the SSID and select a channel.
- 4 Set security mode to **WPA-PSK** and enter **ThisismyWPA-PSKpre-sharedkey** in the **Pre-Shared Key** field. Click **Apply**.

Figure 31 Tutorial: Network > Wireless LAN > General

Wireless Setup

☒ Enable Wireless LAN

Name(SSID)

☐ Hide SSID

Channel Selection ☐ Auto Channel Selection

Operating Channel

Channel Width

Security

Security Mode


Pre-Shared Key ☒ ASCII ☐ Hex

Group Key Update Timer (In Seconds)

Note: WPA-PSK and WPA2-PSK can be configured when WPS enabled

- 5 Open the **Status** screen. Verify your wireless and wireless security settings under **Device Information** and check if the WLAN connection is up under **Interface Status**.

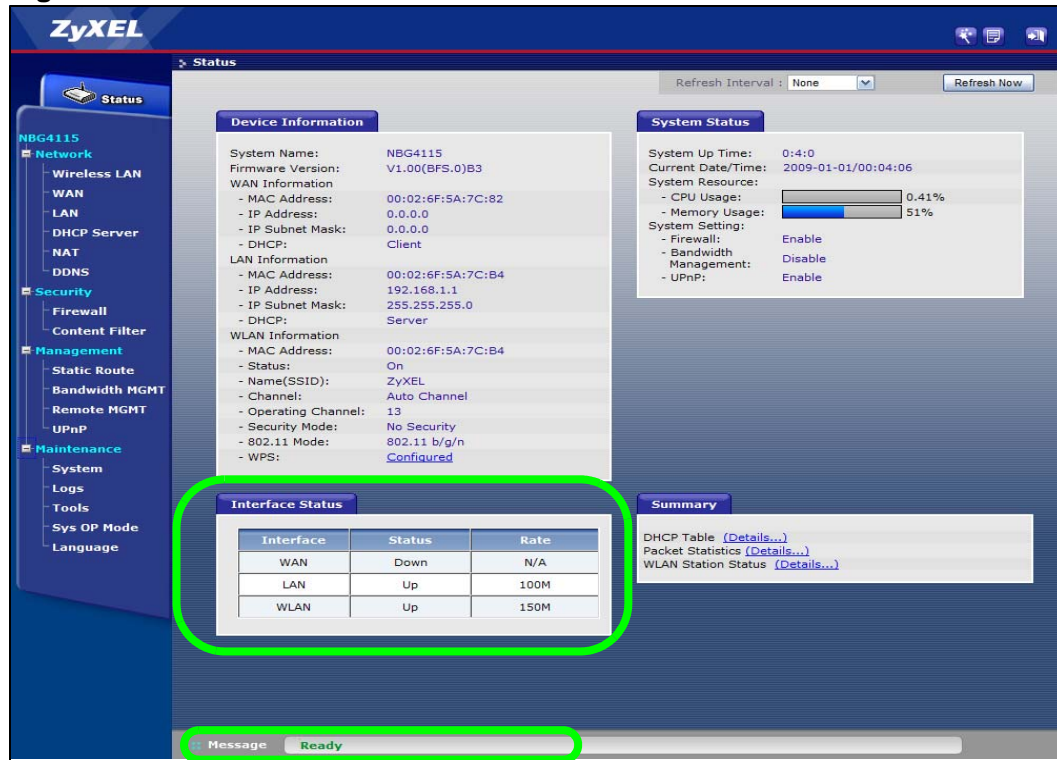Figure 32 Tutorial: Status Screen




6.5.1 Configure Your Notebook

Note: We use the ZyXEL M-302 wireless adapter utility screens as an example for the wireless client. The screens may vary for different models.

- 1 The NBG4115 supports IEEE 802.11b, IEEE 802.11g and IEEE 802.11n wireless clients. Make sure that your notebook or computer's wireless adapter supports one of these standards.
- 2 Wireless adapters come with software sometimes called a "utility" that you install on your computer. See your wireless adapter's User's Guide for information on how to do that.
- 3 After you've installed the utility, open it. If you cannot see your utility's icon on your screen, go to **Start > Programs** and click on your utility in the list of programs that appears. The utility displays a list of APs within range, as shown in the example screen below.


- 4 Select SSID_Example3 and click **Connect**.

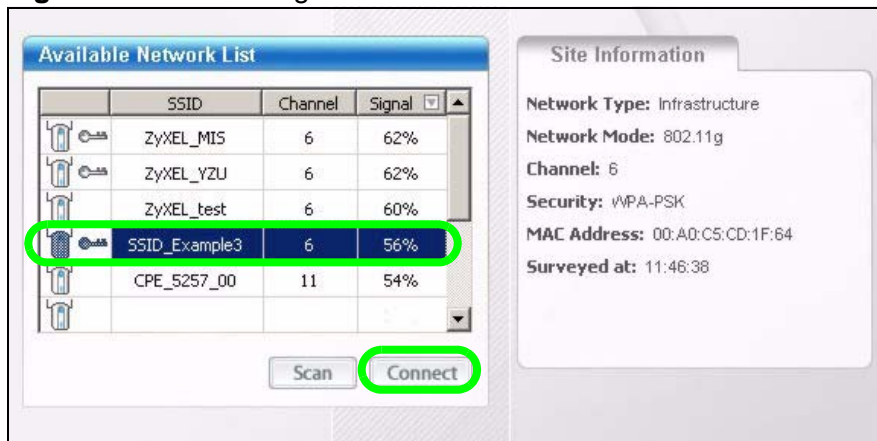Figure 33 Connecting a Wireless Client to a Wireless Network




- 5 Select WPA-PSK and type the security key in the following screen. Click **Next**.

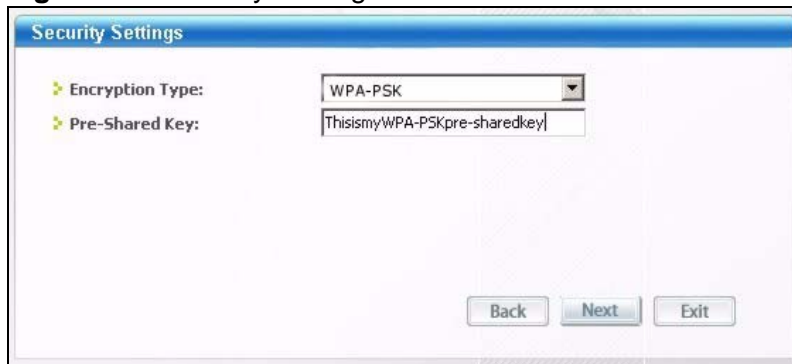Figure 34 Security Settings




- 6 The **Confirm Save** window appears. Check your settings and click **Save** to continue.

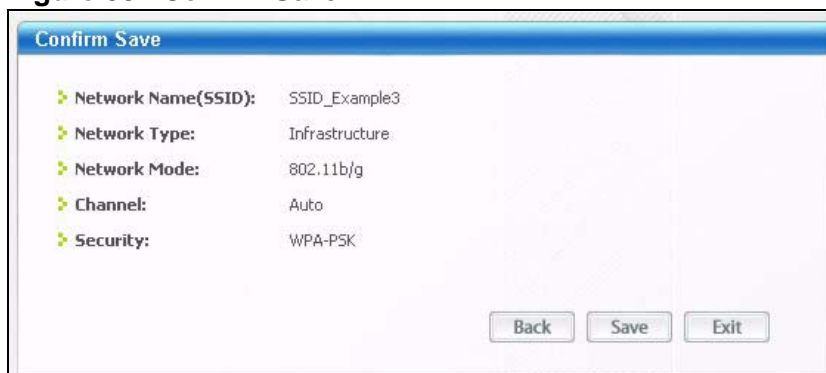Figure 35 Confirm Save



- 7 Check the status of your wireless connection in the screen below. If your wireless connection is weak or you have no connection, see the Troubleshooting section of this User's Guide.

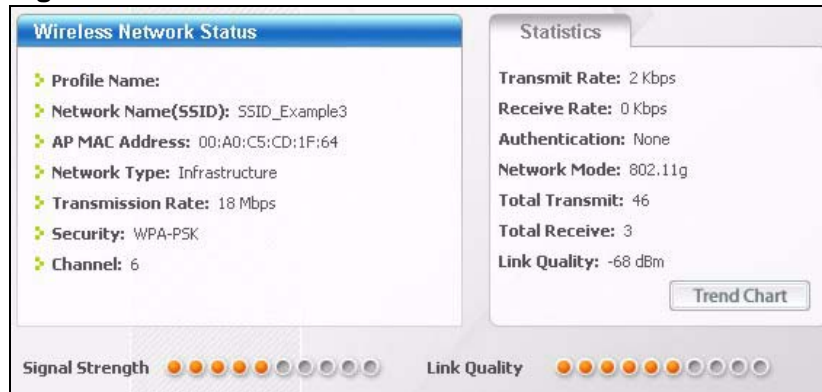Figure 36 Link Status



If your connection is successful, open your Internet browser and enter <http://www.zyxel.com> or the URL of any other web site in the address bar. If you are able to access the web site, your wireless connection is successfully configured.

6.6 Bandwidth Management

This section shows you how to configure the bandwidth management feature on the NBG4115 to limit the bandwidth for specific kinds of outgoing traffic. ZyXEL's bandwidth management feature allows you to specify bandwidth management rules based on an application or subnet.

Use the **Management > Bandwidth MGMT > Advanced** screen to configure bandwidth management for your network.

6.6.1 Bandwidth Management by Application

For this example, your company's customer support department wants to prioritize VoIP, e-mail and MSN Messenger services.

In the **Priority Queue** table, VoIP and e-mail services are already pre-defined. However, you still need to add MSN Messenger in the list (refer to [Section 6.6.2 on page 75](#)).

In the following screen, you set the priorities for VoIP and e-mail.

Figure 37 Tutorial: Priority Queue

Priority Queue				
#	Enable	Service	Priority	Specific Port
1	<input checked="" type="checkbox"/>	FTP	Low	
2	<input checked="" type="checkbox"/>	WWW	Low	
3	<input checked="" type="checkbox"/>	TELNET	Low	
4	<input checked="" type="checkbox"/>	E-Mail	High	
5	<input checked="" type="checkbox"/>	VoIP (SIP)	High	
6	<input checked="" type="checkbox"/>	BitTorrent	Low	
7	<input checked="" type="checkbox"/>	Gaming	Low	
8	<input type="checkbox"/>		High	Both ~
9	<input type="checkbox"/>		High	Both ~
10	<input type="checkbox"/>		High	Both ~
11	<input type="checkbox"/>		High	Both ~
12	<input type="checkbox"/>		High	Both ~

Click **Enable** for the VoIP (SIP) service and set priority to **High**. Do the same for E-mail. For the rest of the applications, click **Enable** if you need these services and set the priority to **Low**.

Note: You can also leave the **Enable** field blank for the rest of the applications. In doing so, the NBG4115 does not apply bandwidth management to these services.

6.6.2 Custom Bandwidth Management

Aside from the VOIP and e-mail services, you need to set the priority for MSN Messenger. To do this, add the service in the **Priority Queue** table of the **Management > Bandwidth MGMT > Advanced** screen.

Figure 38 Tutorial: Adding TFTP to Priority Queue

Priority Queue				
#	Enable	Service	Priority	Specific Port
1	<input checked="" type="checkbox"/>	FTP	Low	
2	<input checked="" type="checkbox"/>	WWW	Low	
3	<input checked="" type="checkbox"/>	TELNET	Low	
4	<input checked="" type="checkbox"/>	E-Mail	High	
5	<input checked="" type="checkbox"/>	VoIP (SIP)	High	
6	<input checked="" type="checkbox"/>	BitTorrent	Low	
7	<input checked="" type="checkbox"/>	Gaming	Low	
8	<input checked="" type="checkbox"/>	MSN	High	TCP 1863 ~
9	<input type="checkbox"/>		High	Both ~
10	<input type="checkbox"/>		High	Both ~
11	<input type="checkbox"/>		High	Both ~
12	<input type="checkbox"/>		High	Both ~

To add the MSN Messenger service in the **Priority Queue**:

- 1 Click **Enable** in one of the fields for additional services.
- 2 Add **MSN** as the service name.
- 3 Set the priority for this to **High**.
- 4 For the port, choose **TCP** from the drop-down menu and enter **1863** in the **Specific Port** field.

Your priority table should now have the VoIP, e-mail and MSN Messenger services priorities set to **High**.

6.6.3 Bandwidth Management by IP or IP Range

For this example, your company's 20th anniversary is coming up. You want to use the multimedia room's Internet connection to upload some videos to the website. You also use this room for video conferences, radio broadcasts, live video streaming, and so on throughout the day. While these media-heavy activities are going on, you still want to keep uploading the videos in the background. As such, you want to dedicate the minimum amount of bandwidth for this traffic.

You know the following:

- Multimedia room's LAN IP range: 192.168.1.1 to 192.168.1.34
- IP Address of the computer uploading through FTP: 192.168.1.34
- Services you want to configure:

REAL AUDIO	TCP 7070
RTSP	TCP or UDP 554
VDO LIVE	TCP 7000
FTP	TCP 20 ~ 21

Click the **Edit** icon in **Management > Bandwidth MGMT > Advanced** to open the following screen. The following screen appears.

Figure 39 Tutorial: Bandwidth Allocation Example





















Enter the following values for each service you want to add. For this tutorial, you need to add each of the following service (see table below) and click **Apply**.

Table 24

FIELDS	SERVICES			
	REAL AUDIO	RTSP	VDO LIVE	FTP
Active	Check this to turn on this bandwidth management rule.			
Direction	Select Both applies bandwidth management to traffic that the NBG4115 forwards to both the LAN and the WAN.			Select To WAN
LAN IP Range	Enter 192.168.1.1 ~ 192.168.1.33 .			Enter 192.168.1.34
Protocol	TCP	TCP or UDP	TCP	TCP
Port Range	7070	554	7000	20 ~ 21
Policy	Min			Max
Rate	Select 30M as the minimum bandwidth allowed.			Select 64K
Apply	Click this to add the rule to the Bandwidth Allocation table.			

After adding these services, go to **Management > Bandwidth MGMT > Advanced** and check if you have the correct values.

Figure 40 Tutorial: Bandwidth Allocation Example

Bandwidth Allocation							
#	Enable	LAN IP Range	Direction	Port Range	Policy	Rate	Modify
1	<input checked="" type="checkbox"/>	192.168.1.1~192.168.1.33	Both	7070	Min	30720	 
2	<input checked="" type="checkbox"/>	192.168.1.1~192.168.1.33	Both	554	Min	30720	 
3	<input checked="" type="checkbox"/>	192.168.1.1~192.168.1.33	Both	7000	Min	30720	 
4	<input checked="" type="checkbox"/>	192.168.1.34	Both	20~21	Max	64	 
5	<input type="checkbox"/>						 
6	<input type="checkbox"/>						 
7	<input type="checkbox"/>						 
8	<input type="checkbox"/>						 
9	<input type="checkbox"/>						 
10	<input type="checkbox"/>						 

Note: The **Policy** column displays either **Max** (maximum) or **Min** (minimum). This is directly directed to the value in the **Rate** column. For example, you selected **Min** and entered **30M** as the rate for the VoIP service. The NBG4115 allocates at least 30 megabytes for the VoIP service.

Refer to [Appendix F on page 263](#) for a list of common services that you can add in the **Bandwidth Mgmt** screen.

PART II

Network

Wireless LAN (81)

WAN (101)

LAN (115)

DHCP Server (119)

NAT (125)

DDNS (135)


Wireless LAN

7.1 Overview

This chapter discusses how to configure the wireless network settings in your NBG4115. See the appendices for more detailed information about wireless networks.

The following figure provides an example of a wireless network.

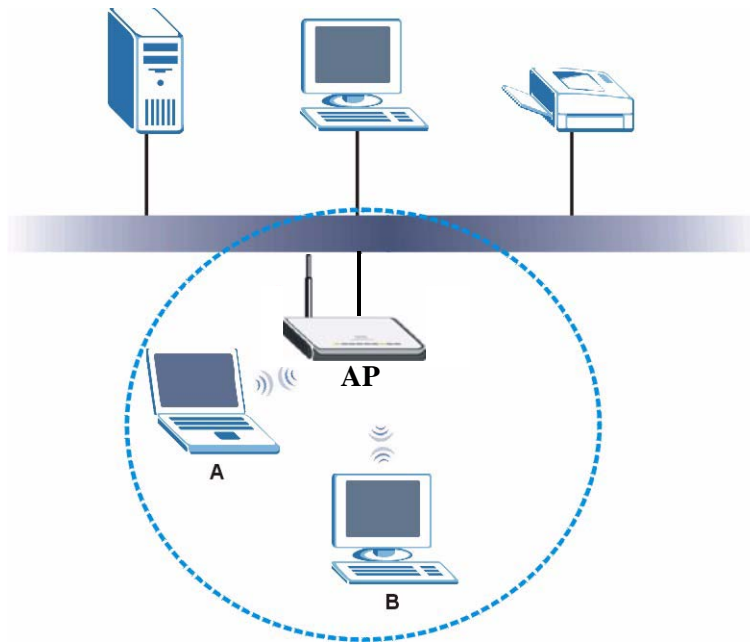Figure 41 Example of a Wireless Network



The wireless network is the part in the blue circle. In this wireless network, devices A and B are called wireless clients. The wireless clients use the access point (AP) to interact with other devices (such as the printer) or with the Internet. Your NBG4115 is the AP.

7.1.1 What You Can Do in this Chapter

- Use the **General** screen ([Section 7.2 on page 85](#)) to enable the Wireless LAN, enter the SSID and select the wireless security mode.
- Use the **MAC Filter** screen ([Section 7.3 on page 90](#)) to allow or deny wireless stations based on their MAC addresses from connecting to the NBG4115.
- Use the **Advanced** screen ([Section 7.4 on page 92](#)) to allow intra-BSS networking and set the RTS/CTS Threshold.
- Use the **QoS** screen ([Section 7.5 on page 94](#)) to ensure Quality of Service (QoS) in your wireless network.
- Use the **WPS** screen ([Section 7.6 on page 97](#)) to quickly set up a wireless network with strong security, without having to configure security settings manually.
- Use the **WPS Station** screen ([Section 7.7 on page 98](#)) to add a wireless station using WPS.
- Use the **Scheduling** screen ([Section 7.8 on page 99](#)) to set the times your wireless LAN is turned on and off.

7.1.2 What You Should Know

Every wireless network must follow these basic guidelines.

- Every wireless client in the same wireless network must use the same SSID.
The SSID is the name of the wireless network. It stands for Service Set IDentity.
- If two wireless networks overlap, they should use different channels.
Like radio stations or television channels, each wireless network uses a specific channel, or frequency, to send and receive information.
- Every wireless client in the same wireless network must use security compatible with the AP.
Security stops unauthorized devices from using the wireless network. It can also protect the information that is sent in the wireless network.

Wireless Security Overview

The following sections introduce different types of wireless security you can set up in the wireless network.

SSID

Normally, the AP acts like a beacon and regularly broadcasts the SSID in the area. You can hide the SSID instead, in which case the AP does not broadcast the SSID. In addition, you should change the default SSID to something that is difficult to guess.

This type of security is fairly weak, however, because there are ways for unauthorized devices to get the SSID. In addition, unauthorized devices can still see the information that is sent in the wireless network.

MAC Address Filter

Every wireless client has a unique identification number, called a MAC address.¹ A MAC address is usually written using twelve hexadecimal characters²; for example, 00A0C5000002 or 00:A0:C5:00:00:02. To get the MAC address for each wireless client, see the appropriate User's Guide or other documentation.

You can use the MAC address filter to tell the AP which wireless clients are allowed or not allowed to use the wireless network. If a wireless client is allowed to use the wireless network, it still has to have the correct settings (SSID, channel, and security). If a wireless client is not allowed to use the wireless network, it does not matter if it has the correct settings.

This type of security does not protect the information that is sent in the wireless network. Furthermore, there are ways for unauthorized devices to get the MAC address of an authorized wireless client. Then, they can use that MAC address to use the wireless network.

User Authentication

You can make every user log in to the wireless network before they can use it. This is called user authentication. However, every wireless client in the wireless network has to support IEEE 802.1x to do this.

For wireless networks, there are two typical places to store the user names and passwords for each user.

- In the AP: this feature is called a local user database or a local database.
- In a RADIUS server: this is a server used in businesses more than in homes.

If your AP does not provide a local user database and if you do not have a RADIUS server, you cannot set up user names and passwords for your users.

Unauthorized devices can still see the information that is sent in the wireless network, even if they cannot use the wireless network. Furthermore, there are ways for unauthorized wireless users to get a valid user name and password. Then, they can use that user name and password to use the wireless network.

1. Some wireless devices, such as scanners, can detect wireless networks but cannot use wireless networks. These kinds of wireless devices might not have MAC addresses.

2. Hexadecimal characters are 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, and F.


Local user databases also have an additional limitation that is explained in the next section.

Encryption

Wireless networks can use encryption to protect the information that is sent in the wireless network. Encryption is like a secret code. If you do not know the secret code, you cannot understand the message.

The types of encryption you can choose depend on the type of user authentication. (See [Section on page 83](#) for information about this.)

Table 25 Types of Encryption for Each Type of Authentication

	NO AUTHENTICATION	RADIUS SERVER
Weakest  Strongest	No Security	WPA
	Static WEP	
	WPA-PSK	
	WPA2-PSK	WPA2

For example, if the wireless network has a RADIUS server, you can choose **WPA** or **WPA2**. If users do not log in to the wireless network, you can choose no encryption, **Static WEP**, **WPA-PSK**, or **WPA2-PSK**.

Usually, you should set up the strongest encryption that every wireless client in the wireless network supports. For example, suppose the AP does not have a local user database, and you do not have a RADIUS server. Therefore, there is no user authentication. Suppose the wireless network has two wireless clients. Device A only supports WEP, and device B supports WEP and WPA. Therefore, you should set up **Static WEP** in the wireless network.

Note: It is recommended that wireless networks use **WPA-PSK**, **WPA**, or stronger encryption. IEEE 802.1x and WEP encryption are better than none at all, but it is still possible for unauthorized devices to figure out the original information pretty quickly.

Note: It is not possible to use **WPA-PSK**, **WPA** or stronger encryption with a local user database. In this case, it is better to set up stronger encryption with no authentication than to set up weaker encryption with the local user database.

When you select **WPA2** or **WPA2-PSK** in your NBG4115, you can also select an option (**WPA Compatible**) to support WPA as well. In this case, if some wireless clients support WPA and some support WPA2, you should set up **WPA2-PSK** or **WPA2** (depending on the type of wireless network login) and select the **WPA Compatible** option in the NBG4115.

Many types of encryption use a key to protect the information in the wireless network. The longer the key, the stronger the encryption. Every wireless client in the wireless network must have the same key.

WPS

WiFi Protected Setup (WPS) is an industry standard specification, defined by the WiFi Alliance. WPS allows you to quickly set up a wireless network with strong security, without having to configure security settings manually. Depending on the devices in your network, you can either press a button (on the device itself, or in its configuration utility) or enter a PIN (Personal Identification Number) in the devices. Then, they connect and set up a secure network by themselves. See how to set up a secure wireless network using WPS in the [Section 6.4 on page 68](#).

7.2 General

Use this screen to enable the Wireless LAN, enter the SSID and select the wireless security mode.

Note: If you are configuring the NBG4115 from a computer connected to the wireless LAN and you change the NBG4115's SSID, channel or security settings, you will lose your wireless connection when you press **Apply** to confirm. You must then change the wireless settings of your computer to match the NBG4115's new settings.

Click **Network > Wireless LAN** to open the **General** screen.

Figure 42 Network > Wireless LAN > General

General	MAC Filter	Advanced	QoS	WPS	WPS Station	Scheduling
Wireless Setup						
<input checked="" type="checkbox"/> Enable Wireless LAN Name(SSID) <input type="text" value="SSID_Example3"/> <input type="checkbox"/> Hide SSID Channel Selection <input type="text" value="Channel-06 2437MHz"/> <input type="checkbox"/> Auto Channel Selection Operating Channel <input type="text" value="Channel-6"/> Channel Width <input type="text" value="Auto 20/40 MHz"/>						
Security						
Security Mode <input type="text" value="No security"/> Note: WPA-PSK and WPA2-PSK can be configured when WPS enabled						
<div> <input type="button" value="Apply"/> <input type="button" value="Reset"/> </div>						

The following table describes the general wireless LAN labels in this screen.

Table 26 Network > Wireless LAN > General

LABEL	DESCRIPTION
Enable Wireless LAN	Click the check box to activate wireless LAN.
Name(SSID)	(Service Set IDentity) The SSID identifies the Service Set with which a wireless station is associated. Wireless stations associating to the access point (AP) must have the same SSID. Enter a descriptive name (up to 32 printable 7-bit ASCII characters) for the wireless LAN.
Hide SSID	Select this check box to hide the SSID in the outgoing beacon frame so a station cannot obtain the SSID through scanning using a site survey tool.
Channel Selection	Set the operating frequency/channel depending on your particular region. Select a channel from the drop-down list box. The options vary depending on the frequency band and the country you are in. Refer to the Connection Wizard chapter for more information on channels. This option is only available if Auto Channel Selection is disabled.
Auto Channel Selection	Select this check box for the NBG4115 to automatically choose the channel with the least interference. Deselect this check box if you wish to manually select the channel using the Channel Section field.
Operating Channel	This displays the channel the NBG4115 is currently using.
Channel Width	Select whether the NBG4115 uses a wireless channel width of 20 or 40 MHz. A standard 20 MHz channel offers transfer speeds of up to 150Mbps whereas a 40MHz channel uses two standard channels and offers speeds of up to 300 Mbps. Because not all devices support 40 MHz channels, select Auto 20/40MHz to allow the NBG4115 to adjust the channel bandwidth automatically.
Security Mode	Select WPA-PSK or WPA2-PSK to add security on this wireless network. The wireless clients which want to associate to this network must have same wireless security settings as this device. After you select to use a security, additional options appears in this screen. See 7.2.2 and 7.2.3 sections. Or you can select No Security to allow any client to associate this network without authentication. Note: If you enable the WPS function, only No Security , WPA-PSK and WPA2-PSK are available in this field.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

See the rest of this chapter for information on the other labels in this screen.

7.2.1 No Security

Select **No Security** to allow wireless stations to communicate with the access points without any data encryption.

Note: If you do not enable any wireless security on your NBG4115, your network is accessible to any wireless networking device that is within range.

Figure 43 Network > Wireless LAN > General: No Security

The screenshot shows the 'General' tab of the 'Wireless LAN' configuration page. The 'Wireless Setup' section includes:

- ☒ Enable Wireless LAN
- Name(SSID): SSID_Example3
- ☐ Hide SSID
- Channel Selection: Channel-06 2437MHz (dropdown), ☐ Auto Channel Selection
- Operating Channel: Channel-6
- Channel Width: Auto 20/40 MHz (dropdown)

 The 'Security' section shows:

- Security Mode: No security (dropdown)
- Note: WPA-PSK and WPA2-PSK can be configured when WPS enabled

 At the bottom are 'Apply' and 'Reset' buttons.

The following table describes the labels in this screen.

Table 27 Wireless No Security

LABEL	DESCRIPTION
Security Mode	Choose No Security from the drop-down list box.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

7.2.2 WEP Encryption

WEP encryption scrambles the data transmitted between the wireless stations and the access points to keep network communications private. It encrypts unicast and multicast communications in a network. Both the wireless stations and the access points must use the same WEP key.

Your NBG4115 allows you to configure up to four 64-bit or 128-bit WEP keys but only one key can be enabled at any one time.

In order to configure and enable WEP encryption; click **Network > Wireless LAN** to display the **General** screen. Select **Static WEP** from the **Security Mode** list.

Figure 44 Network > Wireless LAN > General: Static WEP

General | MAC Filter | Advanced | QoS | WPS | WPS Station | Scheduling

Wireless Setup

☒ Enable Wireless LAN
 Name(SSID)
☐ Hide SSID
 Channel Selection ☐ Auto Channel Selection
 Operating Channel
 Channel Width

Security

Security Mode
 WEP Encryption
 Authentication Method

Note:
64-bit WEP: Enter 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
128-bit WEP: Enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F") for each Key (1-4).
 (Select one WEP key as an active key to encrypt wireless data transmission.)

☒ ASCII ☐ Hex

☒ Key 1
☐ Key 2
☐ Key 3
☐ Key 4

Note: WPA-PSK and WPA2-PSK can be configured when WPS enabled

The following table describes the wireless LAN security labels in this screen.

Table 28 Network > Wireless LAN > General: Static WEP

LABEL	DESCRIPTION
WEP Encryption	Select 64-bit WEP or 128-bit WEP to enable data encryption.
Authentication Method	<p>This field is activated when you select 64-bit WEP or 128-bit WEP in the WEP Encryption field.</p> <p>Select Auto, Open System or Shared Key from the drop-down list box.</p> <p>This field specifies whether the wireless clients have to provide the WEP key to login to the wireless client. Keep this setting at Auto or Open System unless you want to force a key verification before communication between the wireless client and the ZyXEL Device occurs. Select Shared Key to force the clients to provide the WEP key prior to communication.</p>
ASCII	Select this option in order to enter ASCII characters as WEP key.

Table 28 Network > Wireless LAN > General: Static WEP

LABEL	DESCRIPTION
Hex	Select this option in order to enter hexadecimal characters as a WEP key. The preceding "0x", that identifies a hexadecimal key, is entered automatically.
Key 1 to Key 4	The WEP keys are used to encrypt data. Both the NBG4115 and the wireless stations must use the same WEP key for data transmission. If you chose 64-bit WEP , then enter any 5 ASCII characters or 10 hexadecimal characters ("0-9", "A-F"). If you chose 128-bit WEP , then enter 13 ASCII characters or 26 hexadecimal characters ("0-9", "A-F"). You must configure at least one key, only one key can be activated at any one time. The default key is key 1.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

7.2.3 WPA-PSK/WPA2-PSK

Click **Network > Wireless LAN** to display the **General** screen. Select **WPA-PSK** or **WPA2-PSK** from the **Security Mode** list.

Figure 45 Network > Wireless LAN > General: WPA-PSK/WPA2-PSK

General | MAC Filter | Advanced | QoS | WPS | WPS Station | Scheduling

Wireless Setup

☒ Enable Wireless LAN

Name(SSID)

☐ Hide SSID

Channel Selection ☐ Auto Channel Selection

Operating Channel

Channel Width

Security

Security Mode

☐ WPA Compatible

Pre-Shared Key ☒ ASCII ☐ Hex

Group Key Update Timer (In Seconds)

Note: WPA-PSK and WPA2-PSK can be configured when WPS enabled

The following table describes the labels in this screen.

Table 29 Network > Wireless LAN > General: WPA-PSK/WPA2-PSK

LABEL	DESCRIPTION
WPA Compatible	<p>This check box is available only when you select WPA2-PSK in the Security Mode field.</p> <p>Select the check box to have both WPA2 and WPA wireless clients be able to communicate with the NBG4115 even when the NBG4115 is using WPA2-PSK.</p>
Pre-Shared Key	<p>WPA-PSK/WPA2-PSK uses a simple common password for authentication.</p> <p>Type a pre-shared key from 8 to 63 case-sensitive ASCII characters (including spaces and symbols).</p> <p>Type a pre-shared key less than 64 case-sensitive HEX characters ("0-9", "A-F").</p>
Group Key Update Timer	<p>The Group Key Update Timer is the rate at which the AP (if using WPA-PSK/WPA2-PSK key management) or RADIUS server (if using WPA/WPA2 key management) sends a new group key out to all clients. The re-keying process is the WPA/WPA2 equivalent of automatically changing the WEP key for an AP and all stations in a WLAN on a periodic basis. Setting of the Group Key Update Timer is also supported in WPA-PSK/WPA2-PSK mode. The default is 1800 seconds (30 minutes).</p>
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

7.3 MAC Filter

The MAC filter screen allows you to configure the NBG4115 to give exclusive access to up to 16 devices (Allow) or exclude up to 16 devices from accessing the NBG4115 (Deny). Every Ethernet device has a unique MAC (Media Access Control) address. The MAC address is assigned at the factory and consists of six pairs of hexadecimal characters, for example, 00:A0:C5:00:00:02. You need to know the MAC address of the devices to configure this screen.

To change your NBG4115's MAC filter settings, click **Network > Wireless LAN > MAC Filter**. The screen appears as shown.

Figure 46 Network > Wireless LAN > MAC Filter

General **MAC Filter** Advanced QoS WPS WPS Station Scheduling

MAC Address Filter

☐ Active

Filter Action ☒ Allow ☐ Deny

Set	MAC Address
1	00:00:00:00:00:00
2	00:00:00:00:00:00
3	00:00:00:00:00:00
4	00:00:00:00:00:00
5	00:00:00:00:00:00
6	00:00:00:00:00:00
7	00:00:00:00:00:00
8	00:00:00:00:00:00
9	00:00:00:00:00:00
10	00:00:00:00:00:00
11	00:00:00:00:00:00
12	00:00:00:00:00:00
13	00:00:00:00:00:00
14	00:00:00:00:00:00
15	00:00:00:00:00:00
16	00:00:00:00:00:00

Apply Reset

The following table describes the labels in this menu.

Table 30 Network > Wireless LAN > MAC Filter

LABEL	DESCRIPTION
Active	Select Yes from the drop down list box to enable MAC address filtering.
Filter Action	<p>Define the filter action for the list of MAC addresses in the MAC Address table.</p> <p>Select Deny to block access to the NBG4115, MAC addresses not listed will be allowed to access the NBG4115</p> <p>Select Allow to permit access to the NBG4115, MAC addresses not listed will be denied access to the NBG4115.</p>
Set	This is the index number of the MAC address.
MAC Address	Enter the MAC addresses of the wireless station that are allowed or denied access to the NBG4115 in these address fields. Enter the MAC addresses in a valid MAC address format, that is, six hexadecimal character pairs, for example, 12:34:56:78:9a:bc.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

7.4 Advanced

Click **Network > Wireless LAN > Advanced**. The screen appears as shown.

Figure 47 Network > Wireless LAN > Advanced

The screenshot shows the 'Wireless Advanced Setup' configuration page. It features several tabs: General, MAC Filter, Advanced (which is currently selected), QoS, WPS, WPS Station, and Scheduling. Below the tabs, the 'Wireless Advanced Setup' section contains the following settings:

- RTS/CTS Threshold:** A text box with the value '2346' and a range '(256 ~ 2346)'.
- Fragment Threshold:** A text box with the value '2346' and a range '(256 ~ 2346)'.
- Beacon Interval:** A text box with the value '100' and a range '(20 ~ 1024 ms)'.
- DTIM Period:** A text box with the value '1' and a range '(1 ~ 10)'.
- Preamble Type:** Two radio buttons: 'Long Preamble' (unselected) and 'Short Preamble' (selected).
- CTS Protection:** Three radio buttons: 'Auto' (unselected), 'Always' (unselected), and 'None' (selected).
- Tx Power:** A dropdown menu showing '100 %'.
- Enable Intra-BSS Traffic:** A checked checkbox.

At the bottom of the page, there are two buttons: 'Apply' and 'Reset'.

The following table describes the labels in this screen.

Table 31 Network > Wireless LAN > Advanced

LABEL	DESCRIPTION
Wireless Advanced Setup	
RTS/CTS Threshold	Data with its frame size larger than this value will perform the RTS (Request To Send)/CTS (Clear To Send) handshake. Enter a value between 0 and 2432.
Fragmentation Threshold	The threshold (number of bytes) for the fragmentation boundary for directed messages. It is the maximum data fragment size that can be sent. Enter an even number between 256 and 2346 . This field is not available when Super Mode is selected.
Beacon Interval	When a wirelessly networked device sends a beacon, it includes with it a beacon interval. This specifies the time period before the device sends the beacon again. The interval tells receiving devices on the network how long they can wait in low-power mode before waking up to handle the beacon. This value can be set from 20ms to 1000ms. A high value helps save current consumption of the access point.
DTIM	Delivery Traffic Indication Message (DTIM) is the time period after which broadcast and multicast packets are transmitted to mobile clients in the Active Power Management mode. A high DTIM value can cause clients to lose connectivity with the network. This value can be set from 1 to 100.
Preamble	A preamble affects the timing in your wireless network. There are two preamble modes: long and short. If a device uses a different preamble mode than the NBG4115 does, it cannot communicate with the NBG4115.

Table 31 Network > Wireless LAN > Advanced

LABEL	DESCRIPTION
CTS Protection	<p>When set to None, the NBG4115 protects wireless communication against interference.</p> <p>When set to Always, the NBG4115 improves performance within mixed wireless modes.</p> <p>Select Auto to let the NBG4115 determine whether to turn this feature on or off in the current environment.</p>
Tx Power	<p>This field controls the transmission power of the NBG4115. When using the NBG4115 with a notebook computer, select a lower transmission power level when you are close to the AP in order to conserve battery power.</p>
Enable Intra-BSS Traffic	<p>A Basic Service Set (BSS) exists when all communications between wireless clients or between a wireless client and a wired network client go through one access point (AP).</p> <p>Intra-BSS traffic is traffic between wireless clients in the BSS. When Intra-BSS is enabled, wireless client A and B can access the wired network and communicate with each other. When Intra-BSS is disabled, wireless client A and B can still access the wired network but cannot communicate with each other.</p>
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

7.5 QoS

The QoS screen allows you to automatically give a service (such as e-mail, VoIP or FTP) a priority level.

Click **Network > Wireless LAN > QoS**. The following screen appears.

Figure 48 Network > Wireless LAN > QoS

#	Name	Service	Dest Port	Priority	Modify
1	-	-	0	-	
2	-	-	0	-	
3	-	-	0	-	
4	-	-	0	-	
5	-	-	0	-	
6	-	-	0	-	
7	-	-	0	-	
8	-	-	0	-	
9	-	-	0	-	
10	-	-	0	-	
11	-	-	0	-	
12	-	-	0	-	
13	-	-	0	-	
14	-	-	0	-	
15	-	-	0	-	
16	-	-	0	-	

Apply

The following table describes the labels in this screen.

Table 32 Network > Wireless LAN > QoS

LABEL	DESCRIPTION
WMM QoS Policy	<p>Select Default to have the NBG4115 automatically give a service a priority level according to the ToS value in the IP header of packets it sends. WMM QoS (Wifi MultiMedia Quality of Service) gives high priority to voice and video, which makes them run more smoothly.</p> <p>Select Application Priority from the drop-down list box to display a table of application names, services, ports and priorities to which you want to apply WMM QoS.</p> <p>The table appears only if you select Application Priority in WMM QoS Policy.</p>
#	This is the number of an individual application entry.
Name	This field displays a description given to an application entry.
Service	This field displays either FTP , WWW , E-mail or a User Defined service to which you want to apply WMM QoS.

Table 32 Network > Wireless LAN > QoS (continued)

LABEL	DESCRIPTION
Dest Port	This field displays the destination port number to which the application sends traffic.
Priority	<p>This field displays the priority of the application.</p> <p>Highest - Typically used for voice or video that should be high-quality.</p> <p>High - Typically used for voice or video that can be medium-quality.</p> <p>Mid - Typically used for applications that do not fit into another priority. For example, Internet surfing.</p> <p>Low - Typically used for non-critical “background” applications, such as large file transfers and print jobs that should not affect other applications.</p>
Modify	<p>Click the Edit icon to open the Application Priority Configuration screen. Modify an existing application entry or create a application entry in the Application Priority Configuration screen.</p> <p>Click the Remove icon to delete an application entry.</p>
Apply	Click Apply to save your changes to the NBG4115.

7.5.1 Application Priority Configuration

Use this screen to edit a WMM QoS application entry. Click the edit icon under **Modify**. The following screen displays.

Figure 49 Network > Wireless LAN > QoS: Application Priority Configuration

See [Appendix F on page 263](#) for a list of commonly-used services and destination ports. The following table describes the fields in this screen.

Network > Wireless LAN > QoS: Application Priority Configuration

LABEL	DESCRIPTION
Name	Type a description of the application priority.

Network > Wireless LAN > QoS: Application Priority Configuration (continued)

LABEL	DESCRIPTION
Service	<p>The following is a description of the applications you can prioritize with WMM QoS. Select a service from the drop-down list box.</p> <ul style="list-style-type: none"> • E-Mail <p>Electronic mail consists of messages sent through a computer network to specific groups or individuals. Here are some default ports for e-mail:</p> <p>POP3 - port 110</p> <p>IMAP - port 143</p> <p>SMTP - port 25</p> <p>HTTP - port 80</p> <ul style="list-style-type: none"> • FTP <p>File Transfer Protocol enables fast transfer of files, including large files that it may not be possible to send via e-mail. FTP uses port number 21.</p> <ul style="list-style-type: none"> • WWW <p>The World Wide Web is an Internet system to distribute graphical, hyper-linked information, based on Hyper Text Transfer Protocol (HTTP) - a client/server protocol for the World Wide Web. The Web is not synonymous with the Internet; rather, it is just one service on the Internet. Other services on the Internet include Internet Relay Chat and Newsgroups. The Web is accessed through use of a browser.</p> <ul style="list-style-type: none"> • User-Defined <p>User-defined services are user specific services configured using known ports and applications.</p>
Dest Port	This displays the port the selected service uses. Type a port number in the field provided if you want to use a different port to the default port.
Priority	Select a priority from the drop-down list box.
Apply	Click Apply to save your changes back to the NBG4115.
Cancel	Click Cancel to return to the previous screen.

7.6 WPS

Use this screen to enable/disable WPS, view or generate a new PIN number and check current WPS status.

To open this screen, click **Network > Wireless LAN > WPS** tab.

Figure 50 WPS

The screenshot shows the WPS configuration interface. At the top, there are tabs: General, MAC Filter, Advanced, QoS, **WPS**, WPS Station, and Scheduling. The WPS Setup section includes a checkbox for 'Enable WPS' which is checked, a 'PIN Number : 54403000', and a 'Generate' button. The WPS Status section displays the following information: Status : Configured (with a 'Release Configuration' button), 802.11 Mode : 802.11 b/g/n, SSID : ZyXEL WPS, Security : WPA2-PSK (WPA Compatible), and Key : d005DjPH6K. A note with a yellow icon states: 'Note : If you enable WPS, the [UPnP](#) service will be turned on automatically.' An 'Apply' button is located at the bottom right of the status section.

The following table describes the labels in this screen.

Table 33 WPS

LABEL	DESCRIPTION
WPS Setup	
Enable WPS	Select this to enable the WPS feature.
PIN Number	This displays a PIN number last time system generated. Click Generate to generate a new PIN number.
WPS Status	
Status	<p>This displays Configured when the NBG4115 has connected to a wireless network using WPS or when Enable WPS is selected and wireless or wireless security settings have been changed. The current wireless and wireless security settings also appear in the screen.</p> <p>This displays Unconfigured if WPS is disabled and there are no wireless or wireless security changes on the NBG4115 or you click Release_Configuration to remove the configured wireless and wireless security settings.</p>
Release Configuration	<p>This button is only available when the WPS status displays Configured.</p> <p>Click this button to remove all configured wireless and wireless security settings for WPS connections on the NBG4115.</p>


Table 33 WPS

LABEL	DESCRIPTION
Apply	Click Apply to save your changes back to the NBG4115.
Refresh	Click Refresh to get this screen information afresh.

7.7 WPS Station

Use this screen when you want to add a wireless station using WPS. To open this screen, click **Network > Wireless LAN > WPS Station** tab.

Note: Note: After you click **Push Button** on this screen, you have to press a similar button in the wireless station utility within 2 minutes. To add the second wireless station, you have to press these buttons on both device and the wireless station again after the first 2 minutes.

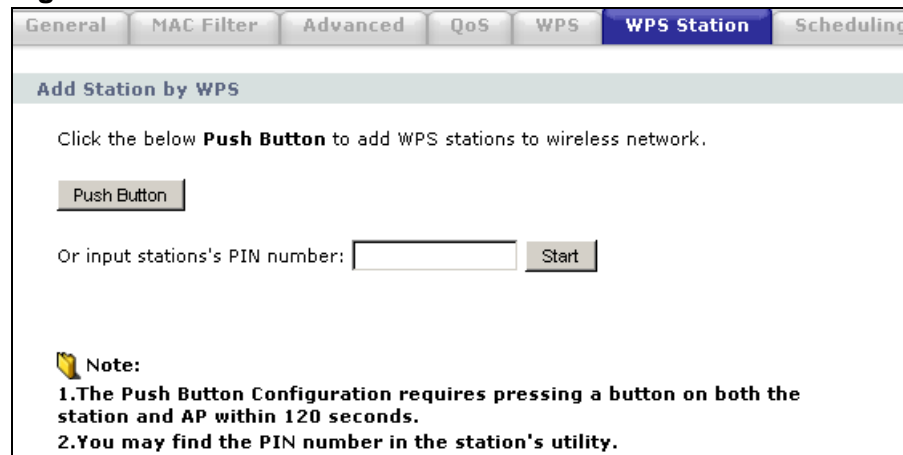Figure 51 WPS Station


Add Station by WPS

Click the below **Push Button** to add WPS stations to wireless network.

Push Button

Or input stations's PIN number: **Start**

Note:

1. The Push Button Configuration requires pressing a button on both the station and AP within 120 seconds.
2. You may find the PIN number in the station's utility.

The following table describes the labels in this screen.

Table 34 WPS Station

LABEL	DESCRIPTION
Push Button	Use this button when you use the PBC (Push Button Configuration) method to configure wireless stations's wireless settings. See Section 6.4.1 on page 68 . Click this to start WPS-aware wireless station scanning and the wireless security information synchronization.
Or input station's PIN number	Use this button when you use the PIN Configuration method to configure wireless station's wireless settings. See Section 6.4.2 on page 70 . Type the same PIN number generated in the wireless station's utility. Then click Start to associate to each other and perform the wireless security information synchronization.

7.8 Scheduling

Use this screen to set the times your wireless LAN is turned on and off. Wireless LAN scheduling is disabled by default. The wireless LAN can be scheduled to turn on or off on certain days and at certain times. To open this screen, click **Network** > **Wireless LAN** > **Scheduling** tab.

Figure 52 Scheduling

Action	Day	Except for the following times
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Everyday	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Mon	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Tue	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Wed	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Thu	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Fri	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Sat	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)
<input type="radio"/> On <input checked="" type="radio"/> Off	<input type="checkbox"/> Sun	[00] (hour) [00] (min) ~ [00] (hour) [00] (min)

The following table describes the labels in this screen.

Table 35 Scheduling

LABEL	DESCRIPTION
Enable Wireless LAN Scheduling	Select this to enable Wireless LAN scheduling.
Action	Select On or Off to specify whether the Wireless LAN is turned on or off. This field works in conjunction with the Day and Except for the following times fields.
Day	Select Everyday or the specific days to turn the Wireless LAN on or off. If you select Everyday you can not select any specific days. This field works in conjunction with the Except for the following times field.

Table 35 Scheduling


LABEL	DESCRIPTION
Except for the following times (24-Hour Format)	<p>Select a begin time using the first set of hour and minute (min) drop down boxes and select an end time using the second set of hour and minute (min) drop down boxes. If you have chosen On earlier for the WLAN Status the Wireless LAN will turn off between the two times you enter in these fields. If you have chosen Off earlier for the WLAN Status the Wireless LAN will turn on between the two times you enter in these fields.</p> <p>Note: Entering the same begin time and end time will mean the whole day.</p>
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to reload the previous configuration for this screen.

8.1 Overview

This chapter discusses the NBG4115's **WAN** screens. Use these screens to configure your NBG4115 for Internet access.

A WAN (Wide Area Network) connection is an outside connection to another network or the Internet. It connects your private networks (such as a LAN (Local Area Network)) and other networks, so that a computer in one location can communicate with computers in other locations.

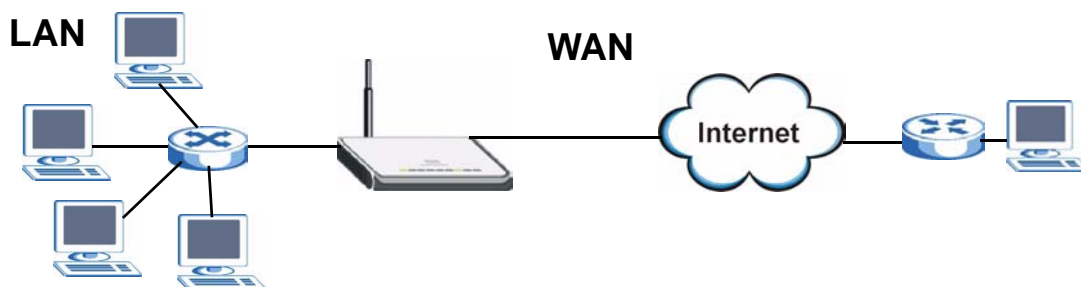Figure 53 LAN and WAN



See the chapter about the connection wizard for more information on the fields in the WAN screens.

8.2 What You Can Do in this Chapter

- Use the **Internet Connection** ([Section 8.3 on page 105](#)) screen to enter your ISP information and set how the computer acquires its IP, DNS and WAN MAC addresses.
- Use the **Advanced** ([Section 8.4 on page 113](#)) screen to enable multicasting, configure Windows networking and bridge.

8.2.1 What You Need To Know

The following terms and concepts may help as you read through this chapter.

Encapsulation Method

Encapsulation is used to include data from an upper layer protocol into a lower layer protocol. To set up a WAN connection to the Internet, you need to use the same encapsulation method used by your ISP (Internet Service Provider). If your ISP offers a dial-up Internet connection using PPPoE (PPP over Ethernet) or PPTP (Point-to-Point Tunneling Protocol), they should also provide a username and password (and service name) for user authentication.

WAN IP Address

The WAN IP address is an IP address for the NBG4115, which makes it accessible from an outside network. It is used by the NBG4115 to communicate with other devices in other networks. It can be static (fixed) or dynamically assigned by the ISP each time the NBG4115 tries to access the Internet.

If your ISP assigns you a static WAN IP address, they should also assign you the subnet mask and DNS server IP address(es) (and a gateway IP address if you use the Ethernet or ENET ENCAP encapsulation method).

DNS Server Address Assignment

Use Domain Name System (DNS) to map a domain name to its corresponding IP address and vice versa, for instance, the IP address of `www.zyxel.com` is `204.217.0.2`. The DNS server is extremely important because without it, you must know the IP address of a computer before you can access it.

The NBG4115 can get the DNS server addresses in the following ways.

- 1 The ISP tells you the DNS server addresses, usually in the form of an information sheet, when you sign up. If your ISP gives you DNS server addresses, manually enter them in the DNS server fields.
- 2 If your ISP dynamically assigns the DNS server IP addresses (along with the NBG4115's WAN IP address), set the DNS server fields to get the DNS server address from the ISP.

WAN MAC Address


The MAC address screen allows users to configure the WAN port's MAC address by either using the factory default or cloning the MAC address from a computer on your LAN. Choose **Factory Default** to select the factory assigned default MAC Address.

Otherwise, click **Clone the computer's MAC address - IP Address** and enter the IP address of the computer on the LAN whose MAC you are cloning. Once it is successfully configured, the address will be copied to configuration file. It is recommended that you clone the MAC address prior to hooking up the WAN Port.

Multicast

Traditionally, IP packets are transmitted in one of either two ways - Unicast (1 sender - 1 recipient) or Broadcast (1 sender - everybody on the network). Multicast delivers IP packets to a group of hosts on the network - not everybody and not just 1.

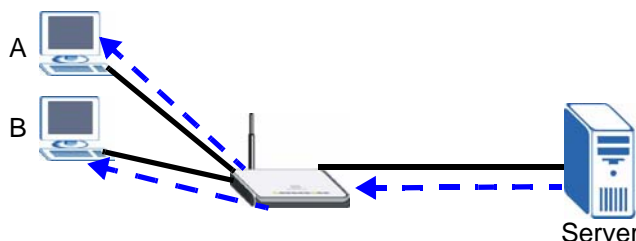Figure 54 Multicast Example



In the multicast example above, systems A and B comprise one multicast group. In multicasting, the server only needs to send one data stream and this is delivered to systems A and B.

IGMP (Internet Group Multicast Protocol) is a network-layer protocol used to establish membership in a multicast group - it is not used to carry user data. The NBG4115 supports both IGMP version 1 (**IGMP-v1**) and IGMP version 2 (**IGMP-v2**).

At start up, the NBG4115 queries all directly connected networks to gather group membership. After that, the NBG4115 periodically updates this information. IP multicasting can be enabled/disabled on the NBG4115 LAN and/or WAN interfaces in the Web Configurator (**LAN**; **WAN**). Select **None** to disable IP multicasting on these interfaces.

NetBIOS over TCP/IP

NetBIOS (Network Basic Input/Output System) are TCP or UDP broadcast packets that enable a computer to connect to and communicate with a LAN. For some dial-

up services such as PPPoE or PPTP, NetBIOS packets cause unwanted calls. However it may sometimes be necessary to allow NetBIOS packets to pass through to the WAN in order to find a computer on the WAN.

Auto-Bridge

In the rear panel of your NBG4115, you can see four LAN ports (1 to 2) and one WAN port. The WAN port is for your Internet access connection, and the LAN ports are for your network devices. The WAN port has a different IP address from the LAN ports.

When you enable auto-bridging in your NBG4115, all three ports (2 LAN ports and the WAN port) share the same IP address. This might happen if you put the NBG4115 behind a NAT router that assigns it this IP address. When the NBG4115 is in auto-bridge mode, the NBG4115 acts as an AP and all the interfaces (LAN, WAN and WLAN) are bridged. In this mode, your NAT, DHCP server and firewall on the NBG4115 are not available. You do not have to reconfigure them if you return to router mode.

Auto-bridging only works under the following conditions:

- The WAN IP must be 192.168.x.y (where x and y must be from zero to nine). If the LAN IP address and the WAN IP address are in the same subnet but x or y is greater than nine, the device operates in router mode (with firewall available).
- The device must be in **Router Mode** (see [Chapter 22 on page 195](#) for more information) for auto-bridging to become active.

8.3 Internet Connection

Use this screen to change your NBG4115's Internet access settings. Click **Network > WAN**. The screen differs according to the connection you choose.

8.3.1 Ethernet

This screen displays when you select the **Ethernet** connection type.

Figure 55 Network > WAN > Internet Connection: Ethernet Encapsulation

The following table describes the labels in this screen.

Table 36 Network > WAN > Internet Connection: Ethernet

LABEL	DESCRIPTION
Connection Type	You must choose the Ethernet option when the WAN port is used as a regular Ethernet.
WAN IP Address Assignment	
Get automatically from ISP	Select this option If your ISP did not assign you a fixed IP address. This is the default selection.
Use Fixed IP Address	Select this option If the ISP assigned a fixed IP address.

Table 36 Network > WAN > Internet Connection: Ethernet

LABEL	DESCRIPTION
IP Address	Enter your WAN IP address in this field if you selected Use Fixed IP Address .
IP Subnet Mask	Enter the IP Subnet Mask in this field.
Gateway IP Address	Enter a Gateway IP Address (if your ISP gave you one) in this field.
DNS Servers	
First DNS Server Second DNS Server	<p>Select From ISP if your ISP dynamically assigns DNS server information (and the NBG4115's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns.</p> <p>Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. If you chose User-Defined, but leave the IP address set to 0.0.0.0, User-Defined changes to None after you click Apply. If you set a second choice to User-Defined, and enter the same IP address, the second User-Defined changes to None after you click Apply.</p> <p>Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.</p>
WAN MAC Address	The MAC address section allows users to configure the WAN port's MAC address by either using the NBG4115's MAC address, copying the MAC address from a computer on your LAN or manually entering a MAC address.
Factory default	Select Factory default to use the factory assigned default MAC Address.
Clone the computer's MAC address - IP Address	Select Clone the computer's MAC address - IP Address and enter the IP address of the computer on the LAN whose MAC you are cloning. Once it is successfully configured, the address will be copied to the rom file. It will not change unless you change the setting or upload a different ROM file.
Set WAN MAC Address	Select this option and enter the MAC address you want to use.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

8.3.2 PPPoE

The NBG4115 supports PPPoE (Point-to-Point Protocol over Ethernet). PPPoE is an IETF standard (RFC 2516) specifying how a personal computer (PC) interacts with a broadband modem (DSL, cable, wireless, etc.) connection. The **PPP over Ethernet** option is for a dial-up connection using PPPoE.

For the service provider, PPPoE offers an access and authentication method that works with existing access control systems (for example Radius).

One of the benefits of PPPoE is the ability to let you access one of multiple network services, a function known as dynamic service selection. This enables the service provider to easily create and offer new IP services for individuals.

Operationally, PPPoE saves significant effort for both you and the ISP or carrier, as it requires no specific configuration of the broadband modem at the customer site.

By implementing PPPoE directly on the NBG4115 (rather than individual computers), the computers on the LAN do not need PPPoE software installed, since the NBG4115 does that part of the task. Furthermore, with NAT, all of the LANs' computers will have access.

This screen displays when you select the **PPPoE** connection type.

Figure 56 Network > WAN > Internet Connection: PPPoE

The following table describes the labels in this screen.

Table 37 Network > WAN > Internet Connection: PPPoE

LABEL	DESCRIPTION
ISP Parameters for Internet Access	
Connection Type	Select PPP over Ethernet if you connect to your Internet via dial-up.
Service Name	Type the PPPoE service name provided to you. PPPoE uses a service name to identify and reach the PPPoE server.
User Name	Type the user name given to you by your ISP.

Table 37 Network > WAN > Internet Connection: PPPoE

LABEL	DESCRIPTION
Password	Type the password associated with the user name above.
Retype to Confirm	Type your password again to make sure that you have entered is correctly.
Nailed-Up Connection	Select Nailed-Up Connection if you do not want the connection to time out.
Idle Timeout	This value specifies the time in minutes that elapses before the router automatically disconnects from the PPPoE server.
DNS Servers	
First DNS Server	<p>Select From ISP if your ISP dynamically assigns DNS server information (and the NBG4115's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns.</p> <p>Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. If you chose User-Defined, but leave the IP address set to 0.0.0.0, User-Defined changes to None after you click Apply. If you set a second choice to User-Defined, and enter the same IP address, the second User-Defined changes to None after you click Apply.</p> <p>Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.</p>
Second DNS Server	
WAN MAC Address	The MAC address section allows users to configure the WAN port's MAC address by using the NBG4115's MAC address, copying the MAC address from a computer on your LAN or manually entering a MAC address.
Factory default	Select Factory default to use the factory assigned default MAC Address.
Clone the computer's MAC address - IP Address	Select Clone the computer's MAC address - IP Address and enter the IP address of the computer on the LAN whose MAC you are cloning. Once it is successfully configured, the address will be copied to the rom file. It will not change unless you change the setting or upload a different ROM file.
Set WAN MAC Address	Select this option and enter the MAC address you want to use.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

8.3.3 PPTP

Point-to-Point Tunneling Protocol (PPTP) is a network protocol that enables secure transfer of data from a remote client to a private server, creating a Virtual Private Network (VPN) using TCP/IP-based networks.

PPTP supports on-demand, multi-protocol and virtual private networking over public networks, such as the Internet.

This screen displays when you select the **PPTP** connection type.

Figure 57 Network > WAN > Internet Connection: PPTP

The following table describes the labels in this screen.

Table 38 Network > WAN > Internet Connection: PPTP

LABEL	DESCRIPTION
ISP Parameters for Internet Access	
Connection Type	<p>Point-to-Point Tunneling Protocol (PPTP) is a network protocol that enables secure transfer of data from a remote client to a private server, creating a Virtual Private Network (VPN) using TCP/IP-based networks. PPTP supports on-demand, multi-protocol, and virtual private networking over public networks, such as the Internet. The NBG4115 supports only one PPTP server connection at any given time.</p> <p>To configure a PPTP client, you must configure the User Name and Password fields for a PPP connection and the PPTP parameters for a PPTP connection.</p>
User Name	Type the user name given to you by your ISP.

Table 38 Network > WAN > Internet Connection: PPTP

LABEL	DESCRIPTION
Password	Type the password associated with the User Name above.
Retype to Confirm	Type your password again to make sure that you have entered is correctly.
Nailed-up Connection	Select Nailed-Up Connection if you do not want the connection to time out.
Idle Timeout	This value specifies the time in minutes that elapses before the NBG4115 automatically disconnects from the PPTP server.
PPTP Configuration	
Server IP Address/ Domain	Type the IP address of the PPTP server.
Connection ID/ Name	Type your identification name for the PPTP server.
Get automatically from ISP	Select this option If your ISP did not assign you a fixed IP address. This is the default selection.
Use Fixed IP Address	Select this option If the ISP assigned a fixed IP address.
My WAN IP Address	Enter your WAN IP address in this field if you selected Use Fixed IP Address .
My IP Subnet Mask	Your NBG4115 will automatically calculate the subnet mask based on the IP address that you assign. Unless you are implementing subnetting, use the subnet mask computed by the NBG4115.
WAN IP Address Assignment	
Get automatically from ISP	Select this to get your WAN IP address from your ISP.
DNS Servers	
First DNS Server Second DNS Server	<p>Select From ISP if your ISP dynamically assigns DNS server information (and the NBG4115's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns.</p> <p>Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. If you chose User-Defined, but leave the IP address set to 0.0.0.0, User-Defined changes to None after you click Apply. If you set a second choice to User-Defined, and enter the same IP address, the second User-Defined changes to None after you click Apply.</p> <p>Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.</p>
WAN MAC Address	The MAC address section allows users to configure the WAN port's MAC address by either using the NBG4115's MAC address, copying the MAC address from a computer on your LAN or manually entering a MAC address.
Factory default	Select Factory default to use the factory assigned default MAC Address.

Table 38 Network > WAN > Internet Connection: PPTP

LABEL	DESCRIPTION
Clone the computer's MAC address - IP Address	Select Clone the computer's MAC address - IP Address and enter the IP address of the computer on the LAN whose MAC you are cloning. Once it is successfully configured, the address will be copied to the rom file. It will not change unless you change the setting or upload a different ROM file.
Set WAN MAC Address	Select this option and enter the MAC address you want to use.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

8.3.4 Mobile 3G

3G is an International Telecommunication Union (ITU) mobile networking standard that provides high-speed connectivity, greater network capacity, and a significantly improved broadcast range to compatible devices.

This screen displays when you select the **Mobile 3G** connection type.

Note: The Mobile 3G option and its sub-options only appear when you have a 3G USB device connected to the NBG4115.

Figure 58 Network > WAN > Internet Connection: Mobile 3G

The screenshot shows the 'Internet Connection' configuration page for 'Mobile 3G'. The page is divided into several sections:

- ISP Parameters for Internet Access:**
 - Connection Type: Mobile 3G (selected)
 - Pin Code: [Empty field]
 - APN Code: [Empty field]
 - Dial Number: [Empty field]
 - User Name: [Empty field]
 - Password: [Empty field]
 - ☐ Nailed-Up Connection
 - Idle Timeout: 0 (in minutes)
- DNS Servers:**
 - First DNS Server: From ISP (selected), 0.0.0.0
 - Second DNS Server: From ISP (selected), 0.0.0.0
- WAN MAC Address:**
 - ☒ Factory default
 - ☐ Clone the computer's MAC address - IP Address: 0.0.0.0
 - ☐ Set WAN MAC Address: 00:02:8F:5A:7C:82

At the bottom of the form are two buttons: 'Apply' and 'Reset'.

The following table describes the labels in this screen.

Table 39 Network > WAN > Internet Connection: Mobile 3G

LABEL	DESCRIPTION
ISP Parameters for Internet Access	
Connection Type	3G is . To configure a Mobile 3G client, you must configure the User Name and Password fields as well as PIN Code , APN Code , and Dial Number .
Internet Service Provider	Select your ISP from this list, if it is pre-configured.
PIN Code	Enter the 4-digit 3G account PIN code given to you by your ISP.
APN Code	Enter the Access Point Name (APN) given to you by your ISP.
Dial Number	Enter the phone number that must be dialed in order to login to your 3G account from the NBG4115.
User Name	Type the user name given to you by your ISP.
Password	Type the password associated with the User Name above.
Nailed-up Connection	Select Nailed-Up Connection if you do not want the connection to time out.
Idle Timeout	This value specifies the time in minutes that elapses before the NBG4115 automatically disconnects from the PPTP server.
DNS Servers	
First DNS Server Second DNS Server	Select From ISP if your ISP dynamically assigns DNS server information (and the NBG4115's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns. Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. If you chose User-Defined , but leave the IP address set to 0.0.0.0, User-Defined changes to None after you click Apply . If you set a second choice to User-Defined , and enter the same IP address, the second User-Defined changes to None after you click Apply . Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.
WAN MAC Address	The MAC address section allows users to configure the WAN port's MAC address by either using the NBG4115's MAC address, copying the MAC address from a computer on your LAN or manually entering a MAC address.
Factory default	Select Factory default to use the factory assigned default MAC Address.
Clone the computer's MAC address - IP Address	Select Clone the computer's MAC address - IP Address and enter the IP address of the computer on the LAN whose MAC you are cloning. Once it is successfully configured, the address will be copied to the rom file. It will not change unless you change the setting or upload a different ROM file.
Set WAN MAC Address	Select this option and enter the MAC address you want to use.

Table 39 Network > WAN > Internet Connection: Mobile 3G

LABEL	DESCRIPTION
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

8.4 Advanced

Use this screen to enable **Multicast**, allow **Windows Networking** and enable **Auto-bridge**.

Note: The three categories shown in this screen are independent of each other.

To change your NBG4115's advanced WAN settings, click **Network > WAN > Advanced**. The screen appears as shown.

Figure 59 Network > WAN > Advanced

The screenshot shows the 'Advanced' configuration screen for the WAN connection. It features three main sections: 'Multicast Setup', 'Windows Networking (NetBIOS over TCP/IP)', and 'Auto-bridge'. Each section contains one or more checkboxes. At the bottom right, there are 'Apply' and 'Reset' buttons.

The following table describes the labels in this screen.

Table 40 WAN > Advanced

LABEL	DESCRIPTION
Multicast Setup	
Multicast	Check this to enable multicasting. This applies to traffic routed from the WAN to the LAN. Leaving this blank may cause incoming traffic to be dropped or sent to all connected network devices.
Windows Networking (NetBIOS over TCP/IP)	


Table 40 WAN > Advanced

LABEL	DESCRIPTION
Allow between LAN and WAN	<p>Select this check box to forward NetBIOS packets from the LAN to the WAN and from the WAN to the LAN. If your firewall is enabled with the default policy set to block WAN to LAN traffic, you also need to enable the default WAN to LAN firewall rule that forwards NetBIOS traffic.</p> <p>Clear this check box to block all NetBIOS packets going from the LAN to the WAN and from the WAN to the LAN.</p>
Allow Trigger Dial	Select this option to allow NetBIOS packets to initiate calls.
Auto-bridge	
Enable Auto-bridge mode	Select this option to have the NBG4115 switch to bridge mode automatically when the NBG4115 gets a WAN IP address in the range of 192.168.x.y (where x and y are from zero to nine) no matter what the LAN IP address is.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

9.1 Overview

This chapter describes how to configure LAN settings.

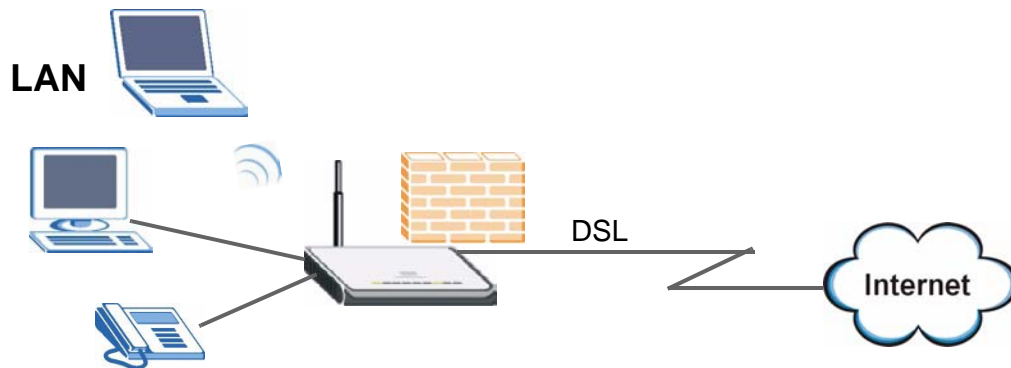A Local Area Network (LAN) is a shared communication system to which many computers are attached. A LAN is a computer network limited to the immediate area, usually the same building or floor of a building. The LAN screens can help you configure a LAN DHCP server, manage IP addresses, and partition your physical network into logical networks.



The LAN screens can help you configure a LAN DHCP server and manage IP addresses.

9.1.1 What You Can Do in this Chapter

Use the **IP** ([Section 9.3 on page 117](#)) screen to change your basic LAN settings.


9.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

LAN and WAN IP Addresses

The actual physical connection determines whether the NBG4115 ports are LAN or WAN ports. There are two separate IP networks, one inside the LAN network and the other outside the WAN network as shown next.

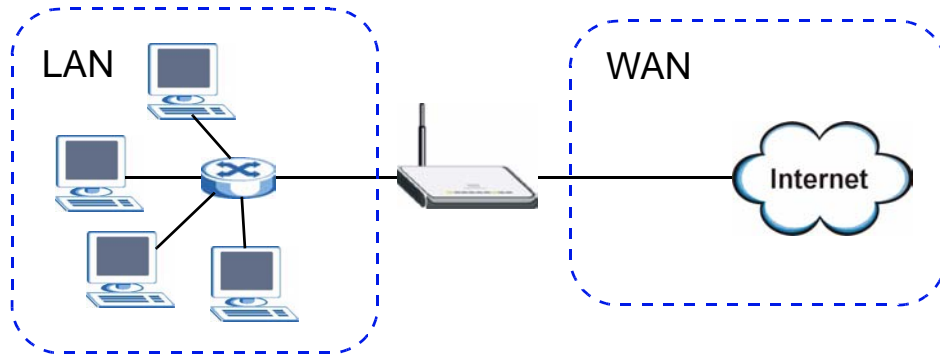Figure 60 LAN and WAN IP Addresses



The LAN parameters of the NBG4115 are preset in the factory with the following values:

- IP address of 192.168.1.1 with subnet mask of 255.255.255.0 (24 bits)
- DHCP server enabled with 32 client IP addresses starting from 192.168.1.33.

These parameters should work for the majority of installations. If your ISP gives you explicit DNS server address(es), read the embedded Web Configurator help regarding what fields need to be configured.

IP Pool Setup

The NBG4115 is pre-configured with a pool of 32 IP addresses starting from 192.168.1.33 to 192.168.1.64. This configuration leaves 31 IP addresses (excluding the NBG4115 itself) in the lower range (192.168.1.2 to 192.168.1.32) for other server computers, for instance, servers for mail, FTP, TFTP, web, etc., that you may have.

Refer to [Section 4.5.7 on page 50](#) for information on IP Address and Subnet Mask.

LAN TCP/IP

The NBG4115 has built-in DHCP server capability that assigns IP addresses and DNS servers to systems that support DHCP client capability.

Refer to the [Section 4.5.8 on page 50](#) section for information on System DNS Servers.

9.3 IP

Use this screen to change your basic LAN settings. Click **Network** > **LAN**.

Figure 61 Network > LAN > IP

The screenshot shows a web-based configuration interface. At the top, there's a blue navigation bar with the text 'IP'. Below this is a light blue section header 'LAN TCP/IP'. The main content area contains two rows of configuration fields. The first row is 'IP Address' with a text input field containing '192.168.1.1'. The second row is 'IP Subnet Mask' with a text input field containing '255.255.255.0'. At the bottom right of the form, there are two buttons: 'Apply' and 'Reset'.

The following table describes the labels in this screen.

Table 41 Network > LAN > IP

LABEL	DESCRIPTION
IP Address	Type the IP address of your NBG4115 in dotted decimal notation 192.168.1.1 (factory default).
IP Subnet Mask	The subnet mask specifies the network number portion of an IP address. Your NBG4115 will automatically calculate the subnet mask based on the IP address that you assign. Unless you are implementing subnetting, use the subnet mask computed by the NBG4115.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

DHCP Server

10.1 Overview

DHCP (Dynamic Host Configuration Protocol, RFC 2131 and RFC 2132) allows individual clients to obtain TCP/IP configuration at start-up from a server. You can configure the NBG4115's LAN as a DHCP server or disable it. When configured as a server, the NBG4115 provides the TCP/IP configuration for the clients. If DHCP service is disabled, you must have another DHCP server on your LAN, or else the computer must be manually configured.

10.1.1 What You Can Do in this Chapter

- Use the **General** ([Section 10.2 on page 120](#)) screen to enable the DHCP server.
- Use the **Advanced** ([Section 10.3 on page 121](#)) screen to assign IP addresses on the LAN to specific individual computers based on their MAC Addresses.
- Use the **Client List** ([Section 10.4 on page 122](#)) screen to view the current DHCP client information.

10.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

MAC Addresses

Every Ethernet device has a unique MAC (Media Access Control) address. The MAC address is assigned at the factory and consists of six pairs of hexadecimal characters, for example, 00:A0:C5:00:00:02. Find out the MAC addresses of your network devices if you intend to add them to the DHCP Client List screen.

Refer to [Section 4.5.7 on page 50](#) for information on IP Address and Subnet Mask.

Refer to the [Section 4.5.8 on page 50](#) section for information on System DNS Servers.

10.2 General

Use this screen to enable the DHCP server. Click **Network > DHCP Server**. The following screen displays.

Figure 62 Network > DHCP Server > General

The following table describes the labels in this screen.

Table 42 Network > DHCP Server > General

LABEL	DESCRIPTION
Enable DHCP Server	Enable or Disable DHCP for LAN. DHCP (Dynamic Host Configuration Protocol, RFC 2131 and RFC 2132) allows individual clients (computers) to obtain TCP/IP configuration at startup from a server. Leave the Enable DHCP Server check box selected unless your ISP instructs you to do otherwise. Clear it to disable the NBG4115 acting as a DHCP server. When configured as a server, the NBG4115 provides TCP/IP configuration for the clients. If not, DHCP service is disabled and you must have another DHCP server on your LAN, or else the computers must be manually configured. When set as a server, fill in the following four fields.
IP Pool Starting Address	This field specifies the first of the contiguous addresses in the IP address pool for LAN.
Pool Size	This field specifies the size, or count of the IP address pool for LAN.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

10.3 Advanced

This screen allows you to assign IP addresses on the LAN to specific individual computers based on their MAC addresses. You can also use this screen to configure the DNS server information that the NBG4115 sends to the DHCP clients.

To change your NBG4115's static DHCP settings, click **Network > DHCP Server > Advanced**. The following screen displays.

Figure 63 Network > DHCP Server > Advanced

#	MAC Address	IP Address
1	00:00:00:00:00:00	0.0.0.0
2	00:00:00:00:00:00	0.0.0.0
3	00:00:00:00:00:00	0.0.0.0
4	00:00:00:00:00:00	0.0.0.0
5	00:00:00:00:00:00	0.0.0.0
6	00:00:00:00:00:00	0.0.0.0
7	00:00:00:00:00:00	0.0.0.0
8	00:00:00:00:00:00	0.0.0.0

DNS Server

DNS Servers Assigned by DHCP Server

First DNS Server: From ISP []

Second DNS Server: From ISP []

Apply Reset

The following table describes the labels in this screen.

Table 43 Network > DHCP Server > Advanced

LABEL	DESCRIPTION
Static DHCP Table	
#	This is the index number of the static IP table entry (row).
MAC Address	Type the MAC address (with colons) of a computer on your LAN.
IP Address	Type the LAN IP address of a computer on your LAN.
DNS Server	
DNS Servers Assigned by DHCP Server	The NBG4115 passes a DNS (Domain Name System) server IP address (in the order you specify here) to the DHCP clients. The NBG4115 only passes this information to the LAN DHCP clients when you select the Enable DHCP Server check box. When you clear the Enable DHCP Server check box, DHCP service is disabled and you must have another DHCP sever on your LAN, or else the computers must have their DNS server addresses manually configured.

Table 43 Network > DHCP Server > Advanced

LABEL	DESCRIPTION
First DNS Server Second DNS Server	<p>Select From ISP if your ISP dynamically assigns DNS server information (and the NBG4115's WAN IP address). The field to the right displays the (read-only) DNS server IP address that the ISP assigns.</p> <p>Select User-Defined if you have the IP address of a DNS server. Enter the DNS server's IP address in the field to the right. If you chose User-Defined, but leave the IP address set to 0.0.0.0, User-Defined changes to None after you click Apply. If you set a second choice to User-Defined, and enter the same IP address, the second User-Defined changes to None after you click Apply.</p> <p>Select DNS Relay to have the NBG4115 act as a DNS proxy. The NBG4115's LAN IP address displays in the field to the right (read-only). The NBG4115 tells the DHCP clients on the LAN that the NBG4115 itself is the DNS server. When a computer on the LAN sends a DNS query to the NBG4115, the NBG4115 forwards the query to the NBG4115's system DNS server (configured in the WAN > Internet Connection screen) and relays the response back to the computer. You can only select DNS Relay for one of the three servers; if you select DNS Relay for a second or third DNS server, that choice changes to None after you click Apply.</p> <p>Select None if you do not want to configure DNS servers. If you do not configure a DNS server, you must know the IP address of a computer in order to access it.</p>
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

10.4 Client List

The DHCP table shows current DHCP client information (including **IP Address**, **Host Name** and **MAC Address**) of network clients using the NBG4115's DHCP servers.

Configure this screen to always assign an IP address to a MAC address (and host name). Click **Network > DHCP Server > Client List**.

Note: You can also view a read-only client list by clicking the **DHCP Table (Details...)** hyperlink in the **Status** screen.

The following screen displays.

Figure 64 Network > DHCP Server > Client List

#	IP Address	Host Name	MAC Address	Reserve
1	192.168.1.33	TWPC13262-01	00:1C:C4:84:E0:4B	<input type="checkbox"/>

Apply Refresh

The following table describes the labels in this screen.

Table 44 Network > DHCP Server > Client List

LABEL	DESCRIPTION
#	This is the index number of the host computer.
IP Address	This field displays the IP address relative to the # field listed above.
Host Name	This field displays the computer host name.
MAC Address	<p>The MAC (Media Access Control) or Ethernet address on a LAN (Local Area Network) is unique to your computer (six pairs of hexadecimal notation).</p> <p>A network interface card such as an Ethernet adapter has a hardwired address that is assigned at the factory. This address follows an industry standard that ensures no other adapter has a similar address.</p>
Reserve	Select this check box in the DHCP Setup section to have the NBG4115 always assign the IP address(es) to the MAC address(es) (and host name(s)). After you click Apply , the MAC address and IP address also display in the Advanced screen (where you can edit them).
Apply	Click Apply to save your settings.
Refresh	Click Refresh to reload the DHCP table.


11.1 Overview

NAT (Network Address Translation - NAT, RFC 1631) is the translation of the IP address of a host in a packet. For example, the source address of an outgoing packet, used within one network is changed to a different IP address known within another network.

The figure below is a simple illustration of a NAT network. You want to assign ports 21-25 to one FTP, Telnet and SMTP server (**A** in the example), port 80 to another (**B** in the example) and assign a default server IP address of 192.168.1.35 to a third (**C** in the example).

You assign the LAN IP addresses to the devices (**A** to **D**) connected to your NBG4115. The ISP assigns the WAN IP address. The NAT network appears as a single host on the Internet. All traffic coming from **A** to **D** going out to the Internet use the IP address of the NBG4115, which is 192.168.1.1.

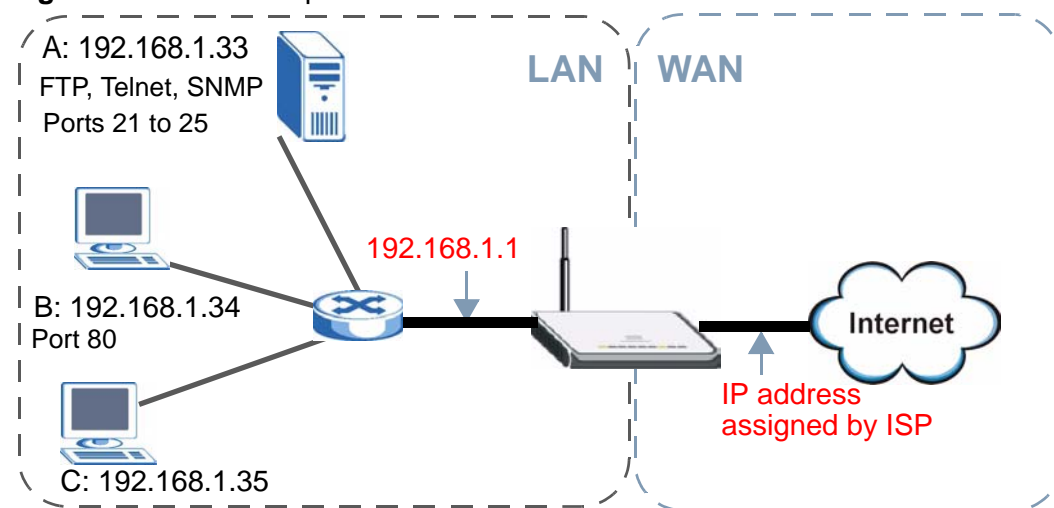Figure 65 NAT Example



This chapter discusses how to configure NAT on the NBG4115.

Note: You must create a firewall rule in addition to setting up NAT, to allow traffic from the WAN to be forwarded through the NBG4115.

11.1.1 What You Can Do in this Chapter

- Use the **General** ([Section 11.2 on page 128](#)) screen to enable NAT and set a default server.
- Use the **Application** ([Section 11.3 on page 129](#)) screen to change your NBG4115's port forwarding settings.
- Use the **Advanced** ([Section 11.5.3 on page 133](#)) screen to change your NBG4115's trigger port settings.

11.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

Inside/Outside

This denotes where a host is located relative to the NBG4115, for example, the computers of your subscribers are the inside hosts, while the web servers on the Internet are the outside hosts.

Global/Local

This denotes the IP address of a host in a packet as the packet traverses a router, for example, the local address refers to the IP address of a host when the packet is in the local network, while the global address refers to the IP address of the host when the same packet is traveling in the WAN side.

Note: Inside/outside refers to the location of a host, while global/local refers to the IP address of a host used in a packet.

An inside local address (ILA) is the IP address of an inside host in a packet when the packet is still in the local network, while an inside global address (IGA) is the IP address of the same inside host when the packet is on the WAN side. The following table summarizes this information.

Table 45 NAT Definitions

ITEM	DESCRIPTION
Inside	This refers to the host on the LAN.
Outside	This refers to the host on the WAN.
Local	This refers to the packet address (source or destination) as the packet travels on the LAN.
Global	This refers to the packet address (source or destination) as the packet travels on the WAN.

Note: NAT never changes the IP address (either local or global) of an outside host.

What NAT Does


In the simplest form, NAT changes the source IP address in a packet received from a subscriber (the inside local address) to another (the inside global address) before forwarding the packet to the WAN side. When the response comes back, NAT translates the destination address (the inside global address) back to the inside local address before forwarding it to the original inside host. Note that the IP address (either local or global) of an outside host is never changed.

The global IP addresses for the inside hosts can be either static or dynamically assigned by the ISP. In addition, you can designate servers, for example, a web server and a telnet server, on your local network and make them accessible to the outside world. If you do not define any servers, NAT offers the additional benefit of firewall protection. With no servers defined, your NBG4115 filters out all incoming inquiries, thus preventing intruders from probing your network. For more information on IP address translation, refer to *RFC 1631, The IP Network Address Translator (NAT)*.

How NAT Works

Each packet has two addresses – a source address and a destination address. For outgoing packets, the ILA (Inside Local Address) is the source address on the LAN, and the IGA (Inside Global Address) is the source address on the WAN. For incoming packets, the ILA is the destination address on the LAN, and the IGA is the destination address on the WAN. NAT maps private (local) IP addresses to globally unique ones required for communication with hosts on other networks. It replaces the original IP source address in each packet and then forwards it to the Internet. The NBG4115 keeps track of the original addresses and port numbers so incoming reply packets can have their original values restored. The following figure illustrates this.

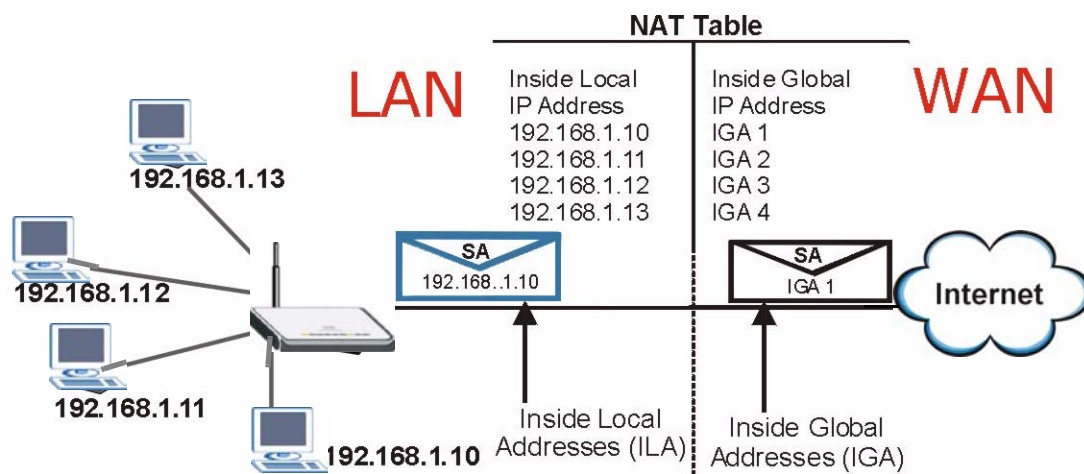Figure 66 How NAT Works



11.2 General

Use this screen to enable NAT and set a default server. Click **Network > NAT** to open the **General** screen.

Figure 67 Network > NAT > General

The following table describes the labels in this screen.

Table 46 Network > NAT > General

LABEL	DESCRIPTION
NAT Setup	
Enable Network Address Translation	Network Address Translation (NAT) allows the translation of an Internet protocol address used within one network (for example a private IP address used in a local network) to a different IP address known within another network (for example a public IP address used on the Internet). Select the check box to enable NAT.
Default Server Setup	
Server IP Address	In addition to the servers for specified services, NAT supports a default server. A default server receives packets from ports that are not specified in the Application screen. If you do not assign a Default Server IP address , the NBG4115 discards all packets received for ports that are not specified in the Application screen or remote management.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

11.3 Application

Port forwarding allows you to define the local servers to which the incoming services will be forwarded. To change your NBG4115's port forwarding settings, click **Network > NAT > Application**. The screen appears as shown.

Note: If you do not assign a **Default Server IP address** in the **NAT > General** screen, the NBG4115 discards all packets received for ports that are not specified in this screen or remote management.

Refer to [Appendix F on page 263](#) for port numbers commonly used for particular services.

Figure 68 Network > NAT > Application

#	Active	Name	Local		Public		Server IP Address	Modify
			Start Port	End Port	Start Port	End Port		
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								

The following table describes the labels in this screen.

Table 47 NAT Application

LABEL	DESCRIPTION
Add Application Rule	
Active	<p>Select the check box to enable this rule and the requested service can be forwarded to the host with a specified internal IP address.</p> <p>Clear the checkbox to disallow forwarding of these ports to an inside server without having to delete the entry.</p>
Service Name	Type a name (of up to 31 printable characters) to identify this rule in the first field next to Service Name . Otherwise, select a predefined service in the second field next to Service Name . The predefined service name and port number(s) will display in the Service Name and Port fields.

Table 47 NAT Application (continued)

LABEL	DESCRIPTION
Local Port Range Public Port Range	Enter the start and end port(s) to be forwarded.
Server IP Address	Type the inside IP address of the server that receives packets from the port(s) specified in the Port field.
Apply	Click Apply to save your changes to the Application Rules Summary table.
Reset	Click Reset to not save and return your new changes in the Service Name and Port fields to the previous one.
Application Rules Summary	
#	This is the number of an individual port forwarding server entry.
Active	This icon is turned on when the rule is enabled.
Name	This field displays a name to identify this rule.
Local Start/End Port Public Start/End Port	This field displays the port number(s).
Server IP Address	This field displays the inside IP address of the server.
Modify	Click the Edit icon to display and modify an existing rule setting in the fields under Add Application Rule . Click the Remove icon to delete a rule.

11.4 Advanced

To change your NBG4115's trigger port settings, click **Network > NAT > Advanced**. The screen appears as shown.

Note: Only one LAN computer can use a trigger port (range) at a time.

Figure 69 Network > NAT > Advanced

Port Triggering Rules					
#	Name	Incoming		Trigger	
		Start Port	End Port	Start Port	End Port
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

The following table describes the labels in this screen.

Table 48 Network > NAT > Advanced

LABEL	DESCRIPTION
#	This is the rule index number (read-only).
Name	Type a unique name (up to 15 characters) for identification purposes. All characters are permitted - including spaces.
Incoming	Incoming is a port (or a range of ports) that a server on the WAN uses when it sends out a particular service. The NBG4115 forwards the traffic with this port (or range of ports) to the client computer on the LAN that requested the service.
Start Port	Type a port number or the starting port number in a range of port numbers.
End Port	Type a port number or the ending port number in a range of port numbers.
Trigger	The trigger port is a port (or a range of ports) that causes (or triggers) the NBG4115 to record the IP address of the LAN computer that sent the traffic to a server on the WAN.
Start Port	Type a port number or the starting port number in a range of port numbers.
End Port	Type a port number or the ending port number in a range of port numbers.

Table 48 Network > NAT > Advanced

LABEL	DESCRIPTION
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

11.5 Technical Reference

The following section contains additional technical information about the NBG4115 features described in this chapter.

11.5.1 NATPort Forwarding: Services and Port Numbers

A port forwarding set is a list of inside (behind NAT on the LAN) servers, for example, web or FTP, that you can make accessible to the outside world even though NAT makes your whole inside network appear as a single machine to the outside world.

Use the **Application** screen to forward incoming service requests to the server(s) on your local network. You may enter a single port number or a range of port numbers to be forwarded, and the local IP address of the desired server. The port number identifies a service; for example, web service is on port 80 and FTP on port 21. In some cases, such as for unknown services or where one server can support more than one service (for example both FTP and web service), it might be better to specify a range of port numbers.

In addition to the servers for specified services, NAT supports a default server. A service request that does not have a server explicitly designated for it is forwarded to the default server. If the default is not defined, the service request is simply discarded.


Note: Many residential broadband ISP accounts do not allow you to run any server processes (such as a Web or FTP server) from your location. Your ISP may periodically check for servers and may suspend your account if it discovers any active services at your location. If you are unsure, refer to your ISP.

11.5.2 NAT Port Forwarding Example

Let's say you want to assign ports 21-25 to one FTP, Telnet and SMTP server (**A** in the example), port 80 to another (**B** in the example) and assign a default server IP address of 192.168.1.35 to a third (**C** in the example). You assign the LAN IP

addresses and the ISP assigns the WAN IP address. The NAT network appears as a single host on the Internet.

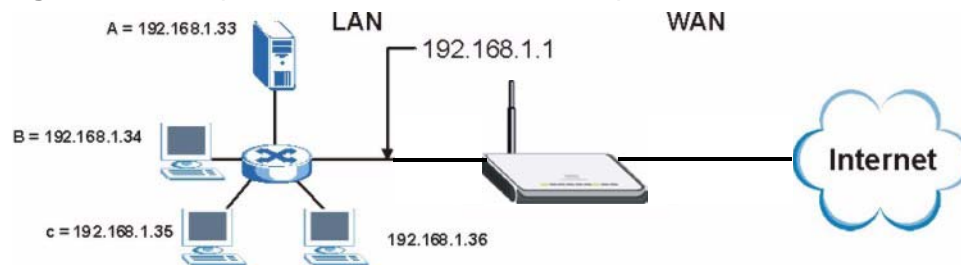Figure 70 Multiple Servers Behind NAT Example



11.5.3 Trigger Port Forwarding

Some services use a dedicated range of ports on the client side and a dedicated range of ports on the server side. With regular port forwarding you set a forwarding port in NAT to forward a service (coming in from the server on the WAN) to the IP address of a computer on the client side (LAN). The problem is that port forwarding only forwards a service to a single LAN IP address. In order to use the same service on a different LAN computer, you have to manually replace the LAN computer's IP address in the forwarding port with another LAN computer's IP address.

Trigger port forwarding solves this problem by allowing computers on the LAN to dynamically take turns using the service. The NBG4115 records the IP address of a LAN computer that sends traffic to the WAN to request a service with a specific port number and protocol (a "trigger" port). When the NBG4115's WAN port receives a response with a specific port number and protocol ("incoming" port), the NBG4115 forwards the traffic to the LAN IP address of the computer that sent the request. After that computer's connection for that service closes, another computer on the LAN can use the service in the same manner. This way you do not need to configure a new IP address each time you want a different LAN computer to use the application.

11.5.4 Trigger Port Forwarding Example

The following is an example of trigger port forwarding.

Figure 71 Trigger Port Forwarding Process: Example



- 1 Jane requests a file from the Real Audio server (port 7070).
- 2 Port 7070 is a "trigger" port and causes the NBG4115 to record Jane's computer IP address. The NBG4115 associates Jane's computer IP address with the "incoming" port range of 6970-7170.
- 3 The Real Audio server responds using a port number ranging between 6970-7170.
- 4 The NBG4115 forwards the traffic to Jane's computer IP address.
- 5 Only Jane can connect to the Real Audio server until the connection is closed or times out. The NBG4115 times out in three minutes with UDP (User Datagram Protocol), or two hours with TCP/IP (Transfer Control Protocol/Internet Protocol).

11.5.5 Two Points To Remember About Trigger Ports

- 1 Trigger events only happen on data that is going coming from inside the NBG4115 and going to the outside.
- 2 If an application needs a continuous data stream, that port (range) will be tied up so that another computer on the LAN can't trigger it.

12.1 Overview

DDNS services let you use a domain name with a dynamic IP address.

12.1.1 What You Can Do in this Chapter

Use the **DDNS** screen ([Section 12.2 on page 136](#)) to enable DDNS and configure the DDNS settings on the NBG4115.

12.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

What is DDNS?

DDNS, or Dynamic DNS, allows you to update your current dynamic IP address with one or many dynamic DNS services so that anyone can contact you (in NetMeeting, CU-SeeMe, etc.). You can also access your FTP server or Web site on your own computer using a domain name (for instance myhost.dhs.org, where myhost is a name of your choice) that will never change instead of using an IP address that changes each time you reconnect. Your friends or relatives will always be able to call you even if they don't know your IP address.

DynDNS Wildcard

Enabling the wildcard feature for your host causes *.yourhost.dyndns.org to be aliased to the same IP address as yourhost.dyndns.org. This feature is useful if you want to be able to use, for example, www.yourhost.dyndns.org and still reach your hostname.

Note: If you have a private WAN IP address, then you cannot use Dynamic DNS. You must have a public WAN IP address.

12.2 General

To change your NBG4115's DDNS, click **Network > DDNS**. The screen appears as shown.

Figure 72 Dynamic DNS

The following table describes the labels in this screen.

Table 49 Dynamic DNS

LABEL	DESCRIPTION
Dynamic DNS Setup	
Enable Dynamic DNS	Select this check box to use dynamic DNS.
Service Provider	Select the name of your Dynamic DNS service provider.
Dynamic DNS Type	Select the type of service that you are registered for from your Dynamic DNS service provider.
Host Name	Enter a host names in the field provided. You can specify up to two host names in the field separated by a comma (",").
User Name	Enter your user name.
Password	Enter the password assigned to you.
Token	Enter your client authorization key provided by the server to update DynDNS records. This field is configurable only when you select WWW.REGFISH.COM in the Service Provider field.
Enable Wildcard Option	Select the check box to enable DynDNS Wildcard.

Table 49 Dynamic DNS

LABEL	DESCRIPTION
Enable off line option	This option is available when CustomDNS is selected in the DDNS Type field. Check with your Dynamic DNS service provider to have traffic redirected to a URL (that you can specify) while you are off line.
IP Address Update Policy:	
Use WAN IP Address	Select this option to update the IP address of the host name(s) to the WAN IP address.
Dynamic DNS server auto detect IP Address	Select this option to update the IP address of the host name(s) automatically by the DDNS server. It is recommended that you select this option.
Use specified IP Address	Type the IP address of the host name(s). Use this if you have a static IP address.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

PART III

Security

Firewall (141)

Content Filtering (147)

Firewall

13.1 Overview


Use these screens to enable and configure the firewall that protects your NBG4115 and your LAN from unwanted or malicious traffic.

Enable the firewall to protect your LAN computers from attacks by hackers on the Internet and control access between the LAN and WAN. By default the firewall:

- allows traffic that originates from your LAN computers to go to all of the networks.
- blocks traffic that originates on the other networks from going to the LAN.

The following figure illustrates the default firewall action. User **A** can initiate an IM (Instant Messaging) session from the LAN to the WAN (1). Return traffic for this session is also allowed (2). However other traffic initiated from the WAN is blocked (3 and 4).

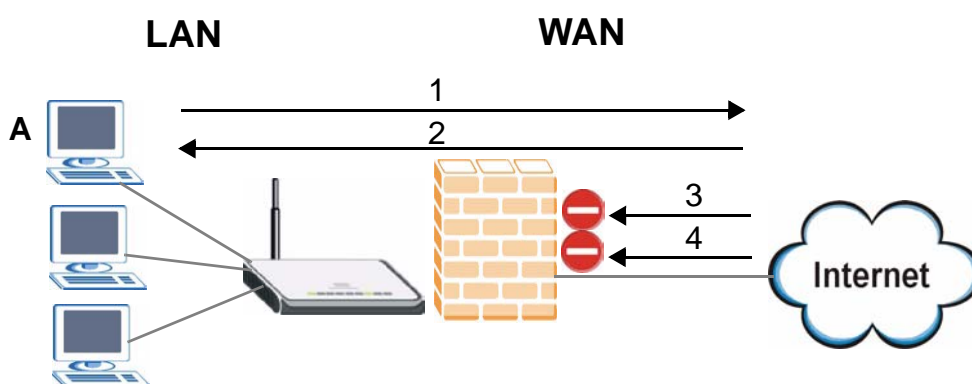Figure 73 Default Firewall Action



13.1.1 What You Can Do in this Chapter

- Use the **General** screen ([Section 13.2 on page 144](#)) to enable or disable the NBG4115's firewall.
- Use the **Services** screen ([Section 13.3 on page 144](#)) screen enable service blocking, enter/delete/modify the services you want to block and the date/time you want to block them.

13.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

What is a Firewall?

Originally, the term "firewall" referred to a construction technique designed to prevent the spread of fire from one room to another. The networking term "firewall" is a system or group of systems that enforces an access-control policy between two networks. It may also be defined as a mechanism used to protect a trusted network from a network that is not trusted. Of course, firewalls cannot solve every security problem. A firewall is one of the mechanisms used to establish a network security perimeter in support of a network security policy. It should never be the only mechanism or method employed. For a firewall to guard effectively, you must design and deploy it appropriately. This requires integrating the firewall into a broad information-security policy. In addition, specific policies must be implemented within the firewall itself.

Stateful Inspection Firewall

Stateful inspection firewalls restrict access by screening data packets against defined access rules. They make access control decisions based on IP address and protocol. They also "inspect" the session data to assure the integrity of the connection and to adapt to dynamic protocols. These firewalls generally provide the best speed and transparency; however, they may lack the granular application level access control or caching that some proxies support. Firewalls, of one type or another, have become an integral part of standard security solutions for enterprises.

About the NBG4115 Firewall

The NBG4115's firewall feature physically separates the LAN and the WAN and acts as a secure gateway for all data passing between the networks.

It is a stateful inspection firewall and is designed to protect against Denial of Service attacks when activated (click the **General** tab under **Firewall** and then click the **Enable Firewall** check box). The NBG4115's purpose is to allow a private Local Area Network (LAN) to be securely connected to the Internet. The NBG4115 can be used to prevent theft, destruction and modification of data, as well as log events, which may be important to the security of your network.

The NBG4115 is installed between the LAN and a broadband modem connecting to the Internet. This allows it to act as a secure gateway for all data passing between the Internet and the LAN.

The NBG4115 has one Ethernet WAN port and four Ethernet LAN ports, which are used to physically separate the network into two areas. The WAN (Wide Area Network) port attaches to the broadband (cable or DSL) modem to the Internet.

The LAN (Local Area Network) port attaches to a network of computers, which needs security from the outside world. These computers will have access to Internet services such as e-mail, FTP and the World Wide Web. However, "inbound access" is not allowed (by default) unless the remote host is authorized to use a specific service.


Guidelines For Enhancing Security With Your Firewall

- 1** Change the default password via Web Configurator.
- 2** Think about access control before you connect to the network in any way, including attaching a modem to the port.
- 3** Limit who can access your router.
- 4** Don't enable any local service (such as NTP) that you don't use. Any enabled service could present a potential security risk. A determined hacker might be able to find creative ways to misuse the enabled services to access the firewall or the network.
- 5** For local services that are enabled, protect against misuse. Protect by configuring the services to communicate only with specific peers, and protect by configuring rules to block packets for the services at specific interfaces.
- 6** Protect against IP spoofing by making sure the firewall is active.
- 7** Keep the firewall in a secured (locked) room.

13.2 General

Use this screen to enable or disable the NBG4115's firewall, and set up firewall logs. Click **Security** > **Firewall** to open the **General** screen.

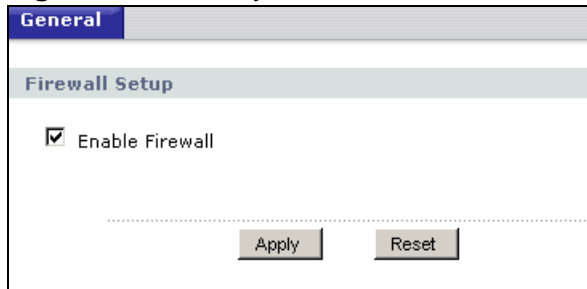Figure 74 Security > Firewall > General I



The following table describes the labels in this screen.

Table 50 Security > Firewall > General

LABEL	DESCRIPTION
Enable Firewall	Select this check box to activate the firewall. The NBG4115 performs access control and protects against Denial of Service (DoS) attacks when the firewall is activated.
Apply	Click Apply to save the settings.
Reset	Click Reset to start configuring this screen again.

13.3 Services

If an outside user attempts to probe an unsupported port on your NBG4115, an ICMP response packet is automatically returned. This allows the outside user to know the NBG4115 exists. Use this screen to prevent the ICMP response packet from being sent. This keeps outsiders from discovering your NBG4115 when unsupported ports are probed.

You can also use this screen to enable service blocking, enter/delete/modify the services you want to block and the date/time you want to block them.

Click **Security > Firewall > Services**. The screen appears as shown next.

Figure 75 Security > Firewall > Services I

The screenshot shows a configuration window with two tabs: 'General' and 'Services'. The 'Services' tab is selected. Under the 'ICMP' heading, there is a label 'Respond to Ping on' followed by a dropdown menu currently showing 'LAN'. Below this is a checked checkbox labeled 'Do not respond to requests for unauthorized services'. At the bottom of the window are two buttons: 'Apply' and 'Reset'.

The following table describes the labels in this screen.

Table 51 Security > Firewall > Services

LABEL	DESCRIPTION
ICMP	Internet Control Message Protocol is a message control and error-reporting protocol between a host server and a gateway to the Internet. ICMP uses Internet Protocol (IP) datagrams, but the messages are processed by the TCP/IP software and directly apparent to the application user.
Respond to Ping on	The NBG4115 will not respond to any incoming Ping requests when Disable is selected. Select LAN to reply to incoming LAN Ping requests. Select WAN to reply to incoming WAN Ping requests. Otherwise select LAN & WAN to reply to all incoming LAN and WAN Ping requests.
Do not respond to requests for unauthorized services	Select this option to prevent hackers from finding the NBG4115 by probing for unused ports. If you select this option, the NBG4115 will not respond to port request(s) for unused ports, thus leaving the unused ports and the NBG4115 unseen. By default this option is not selected and the NBG4115 will reply with an ICMP Port Unreachable packet for a port probe on its unused UDP ports, and a TCP Reset packet for a port probe on its unused TCP ports. Note that the probing packets must first traverse the NBG4115's firewall mechanism before reaching this anti-probing mechanism. Therefore if the firewall mechanism blocks a probing packet, the NBG4115 reacts based on the firewall policy, which by default, is to send a TCP reset packet for a blocked TCP packet. You can use the command "sys firewall tcrst rst [on off]" to change this policy. When the firewall mechanism blocks a UDP packet, it drops the packet without sending a response packet.
Apply	Click Apply to save the settings.
Reset	Click Reset to start configuring this screen again.

Content Filtering

14.1 Overview

This chapter provides a brief overview of content filtering using the embedded web GUI.

Internet content filtering allows you to create and enforce Internet access policies tailored to your needs. Content filtering is the ability to block certain web features or specific URL keywords.

14.1.1 What You Can Do in this Chapter

Use the **Filter** ([Section 14.2 on page 148](#)) screen to restrict web features, add keywords for blocking and designate a trusted computer.

14.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

Content Filtering Profiles

Content filtering allows you to block certain web features, such as cookies, and/or block access to specific web sites. For example, you can configure one policy that blocks John Doe's access to arts and entertainment web pages.

A content filtering profile conveniently stores your custom settings for the following features.

Keyword Blocking URL Checking

The NBG4115 checks the URL's domain name (or IP address) and file path separately when performing keyword blocking.

The URL's domain name or IP address is the characters that come before the first slash in the URL. For example, with the URL www.zyxel.com.tw/news/pressroom.php, the domain name is www.zyxel.com.tw.

The file path is the characters that come after the first slash in the URL. For example, with the URL www.zyxel.com.tw/news/pressroom.php, the file path is [news/pressroom.php](http://www.zyxel.com.tw/news/pressroom.php).

Since the NBG4115 checks the URL's domain name (or IP address) and file path separately, it will not find items that go across the two. For example, with the URL www.zyxel.com.tw/news/pressroom.php, the NBG4115 would find "tw" in the domain name (www.zyxel.com.tw). It would also find "news" in the file path ([news/pressroom.php](http://www.zyxel.com.tw/news/pressroom.php)) but it would not find "tw/news".

14.2 Filter

Use this screen to restrict web features, add keywords for blocking and designate a trusted computer. Click **Security** > **Content Filter** to open the **Filter** screen.

Figure 76 Security > Content Filter > Filter

The screenshot shows a web interface for configuring content filters. At the top is a tab labeled "Filter". Below it is a section titled "Keyword Blocking". Inside this section, there is a checkbox labeled "Enable URL Keyword Blocking". Below the checkbox is a text input field labeled "Keyword" and a button labeled "Add". Below the input field is a list box labeled "Keyword List (Maximum 20 records)". Below the list box are two buttons: "Delete" and "Clear All". At the bottom of the interface, separated by a dotted line, are two buttons: "Apply" and "Reset".

The following table describes the labels in this screen.

Table 52 Security > Content Filter > Filter

LABEL	DESCRIPTION
Enable URL Keyword Blocking	The NBG4115 can block Web sites with URLs that contain certain keywords in the domain name or IP address. For example, if the keyword "bad" was enabled, all sites containing this keyword in the domain name or IP address will be blocked, e.g., URL http://www.website.com/bad.html would be blocked. Select this check box to enable this feature.
Keyword	Type a keyword in this field. You may use any character (up to 64 characters). Wildcards are not allowed. You can also enter a numerical IP address.
Keyword List	This list displays the keywords already added.
Add	Click Add after you have typed a keyword. Repeat this procedure to add other keywords. Up to 64 keywords are allowed. When you try to access a web page containing a keyword, you will get a message telling you that the content filter is blocking this request.
Delete	Highlight a keyword in the lower box and click Delete to remove it. The keyword disappears from the text box after you click Apply .
Clear All	Click this button to remove all of the listed keywords.
Apply	Click Apply to save your changes.
Reset	Click Reset to begin configuring this screen afresh

14.3 Technical Reference

The following section contains additional technical information about the NBG4115 features described in this chapter.

14.3.1 Customizing Keyword Blocking URL Checking

You can use commands to set how much of a website's URL the content filter is to check for keyword blocking. See the appendices for information on how to access and use the command interpreter.

Domain Name or IP Address URL Checking

By default, the NBG4115 checks the URL's domain name or IP address when performing keyword blocking.

This means that the NBG4115 checks the characters that come before the first slash in the URL.

For example, with the URL www.zyxel.com.tw/news/pressroom.php, content filtering only searches for keywords within www.zyxel.com.tw.

Full Path URL Checking

Full path URL checking has the NBG4115 check the characters that come before the last slash in the URL.

For example, with the URL www.zyxel.com.tw/news/pressroom.php, full path URL checking searches for keywords within www.zyxel.com.tw/news/.

Use the `ip urlfilter customize actionFlags 6 [disable | enable]` command to extend (or not extend) the keyword blocking search to include the URL's full path.

File Name URL Checking

Filename URL checking has the NBG4115 check all of the characters in the URL.

For example, filename URL checking searches for keywords within the URL www.zyxel.com.tw/news/pressroom.php.

Use the `ip urlfilter customize actionFlags 8 [disable | enable]` command to extend (or not extend) the keyword blocking search to include the URL's complete filename.

PART IV

Management

[Static Route \(153\)](#)

[Bandwidth Management \(157\)](#)

[Remote Management \(165\)](#)

[UPnP \(169\)](#)

Static Route


15.1 Overview

This chapter shows you how to configure static routes for your NBG4115.

The NBG4115 usually uses the default gateway to route outbound traffic from computers on the LAN to the Internet. To have the NBG4115 send data to devices not reachable through the default gateway, use static routes.

For example, the next figure shows a computer (**A**) connected to the NBG4115's LAN interface. The NBG4115 routes most traffic from **A** to the Internet through the NBG4115's default gateway (**R1**). You create one static route to connect to services offered by your ISP behind router **R2**. You create another static route to communicate with a separate network behind a router **R3** connected to the LAN.

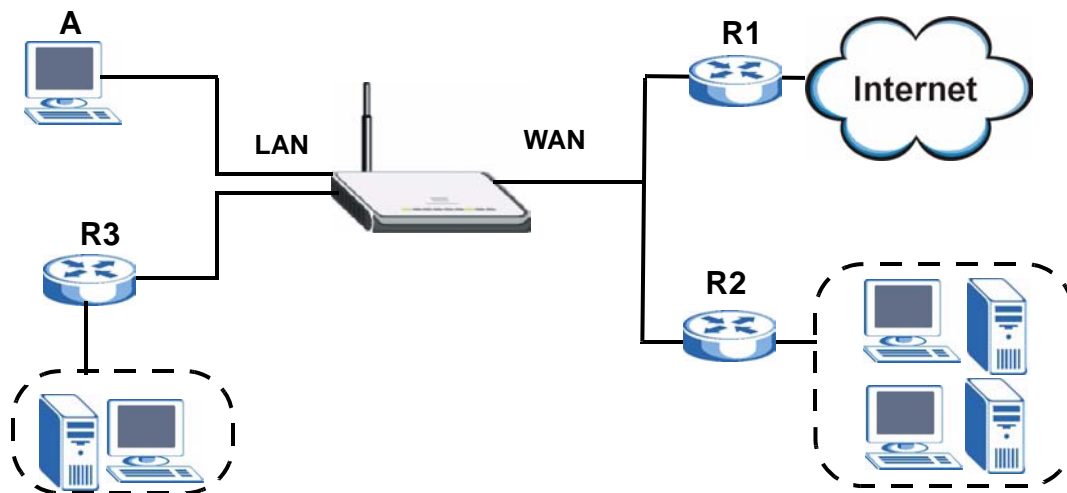Figure 77 Example of Static Routing Topology

























15.1.1 What You Can Do in this Chapter

- Use the **IP Static Route** screen ([Section 15.2 on page 154](#)) to view existing static route rules.
- Use the **Static Route Setup** screen ([Section 15.2.1 on page 155](#)) to add or edit a static route rule.

15.2 IP Static Route

Use this screen to view existing static route rules. Click **Management > Static Route** to open the **IP Static Route** screen. The following screen displays.

Figure 78 Management > Static Route > IP Static Route

IP Static Route					
Static Route Rules					
#	Name	Active	Destination	Gateway	Modify
1	default		0.0.0.0	172.23.37.254	
2					 
3					 
4					 
5					 
6					 
7					 
8					 

The following table describes the labels in this screen.

Table 53 Management > Static Route > IP Static Route

LABEL	DESCRIPTION
#	This is the index number of an individual static route. The first entry is for the default route and not editable.
Name	This is the name that describes or identifies this route.
Active	This icon is turned on when this static route is active. Click the Edit icon under Modify and select the Active checkbox in the Static Route Setup screen to enable the static route. Clear the checkbox to disable this static route without having to delete the entry.
Destination	This parameter specifies the IP network address of the final destination. Routing is always based on network number.
Gateway	This is the IP address of the gateway. The gateway is an immediate neighbor of your NBG4115 that will forward the packet to the destination. On the LAN, the gateway must be a router on the same segment as your NBG4115; over the WAN, the gateway must be the IP address of one of the remote nodes.
Modify	Click the Edit icon to open the static route setup screen. Modify a static route or create a new static route in the Static Route Setup screen. Click the Remove icon to delete a static route.

15.2.1 Static Route Setup Screen

To edit a static route, click the edit icon under **Modify**. The following screen displays. Fill in the required information for each static route.

Figure 79 Management > Static Route > IP Static Route: Static Route Setup

The screenshot shows the 'Static Route Setup' window. It includes a title bar, a 'Route Name' text field, an 'Active' checkbox, and five numeric text fields for 'Destination IP Address', 'IP Subnet Mask', 'Gateway IP Address', and 'Metric'. The 'Active' checkbox is currently unchecked. All IP address fields are pre-filled with '0.0.0.0', and the 'Metric' field is pre-filled with '0'. At the bottom right, there are 'Apply' and 'Cancel' buttons.

The following table describes the labels in this screen.

Table 54 Management > Static Route > IP Static Route: Static Route Setup

LABEL	DESCRIPTION
Route Name	Enter the name of the IP static route. Leave this field blank to delete this static route.
Active	This field allows you to activate/deactivate this static route.
Destination IP Address	This parameter specifies the IP network address of the final destination. Routing is always based on network number. If you need to specify a route to a single host, use a subnet mask of 255.255.255.255 in the subnet mask field to force the network number to be identical to the host ID.
IP Subnet Mask	Enter the IP subnet mask here.
Gateway IP Address	Enter the IP address of the gateway. The gateway is an immediate neighbor of your NBG4115 that will forward the packet to the destination. On the LAN, the gateway must be a router on the same segment as your NBG4115; over the WAN, the gateway must be the IP address of one of the Remote Nodes.
Metric	Metric represents the "cost" of transmission for routing purposes. IP routing uses hop count as the measurement of cost, with a minimum of 1 for directly connected networks. Enter a number that approximates the cost for this link. The number need not be precise, but it must be between 1 and 15. In practice, 2 or 3 is usually a good number.
Apply	Click Apply to save your changes back to the NBG4115.
Cancel	Click Cancel to return to the previous screen and not save your changes.

Bandwidth Management


16.1 Overview

This chapter contains information about configuring bandwidth management and editing rules.

ZyXEL's Bandwidth Management allows you to specify bandwidth management rules based on an application.

In the figure below, uplink traffic goes from the LAN device (**A**) to the WAN device (**B**). Bandwidth management is applied before sending the packets out to the WAN. Downlink traffic comes back from the WAN device (**B**) to the LAN device (**A**). Bandwidth management is applied before sending the traffic out to LAN.

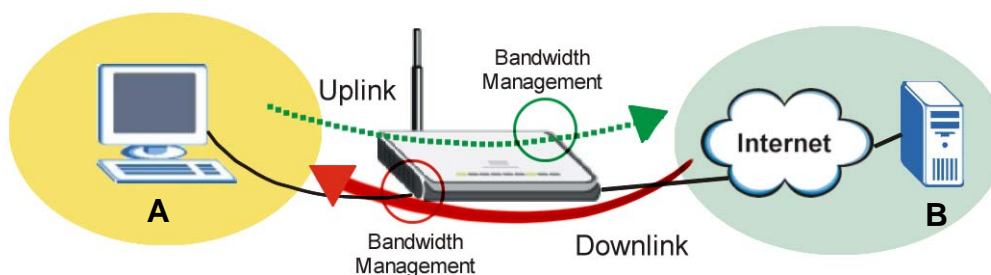Figure 80 Bandwidth Management



You can allocate specific amounts of bandwidth capacity (bandwidth budgets) to individual applications (like VoIP, Web, FTP, and E-mail for example).

16.1.1 What You Can Do in this Chapter

- Use the **General** screen ([Section 16.2 on page 158](#)) to enable bandwidth management and assign uplink/downlink limits.
- Use the **Advanced** screen ([Section 16.3 on page 159](#)) to configure bandwidth management rules for the pre-defined services and applications.

16.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

Bandwidth Limiting

You can limit an application's uplink or downlink bandwidth. This limit keeps the traffic from using up too much of the out-going interface's bandwidth. This way you can make sure there is bandwidth for other applications. Use the following guidelines:

- The sum of the bandwidth allotments that apply to the WAN interface (LAN to WAN, WLAN to WAN) must be less than or equal to the **Uplink** value that you configure in the **Bandwidth Management General** screen.
- The sum of the bandwidth allotments that apply to the LAN port (WAN to LAN, WAN to WLAN) must be less than or equal to the **Downlink** value that you configure in the **Bandwidth Management General** screen.

16.2 General

Use this screen to enable bandwidth management and assign uplink/downlink limits. You can use either one of the following types:

- **Priority Queue.** Enable bandwidth management to give uplink traffic that matches a bandwidth rule priority over traffic that does not match a bandwidth rule. (This type does not apply to downlink traffic.)
- **Bandwidth Allocation.** Enabling bandwidth management also allows you to control the maximum or minimum amounts of bandwidth that can be used by traffic that matches a bandwidth rule.

Note: You cannot apply both bandwidth management types at the same time.

Click **Management > Bandwidth MGMT** to open the bandwidth management **General** screen.

Figure 81 Management > Bandwidth MGMT > General

The screenshot shows the 'General' tab of the 'Bandwidth Management' screen. It includes a 'Service Management' section with a 'Bandwidth Management Type' dropdown set to 'Priority Queue'. Below this is a 'Total Bandwidth Setting' section with 'Uplink' and 'Downlink' dropdowns both set to '30M'. At the bottom are 'Apply' and 'Reset' buttons.

The following table describes the labels in this screen.

Table 55 Management > Bandwidth MGMT > General

LABEL	DESCRIPTION
Service Management	
Bandwidth Management Type	<p>This field allows you to have NBG4115 apply bandwidth management.</p> <p>Select Priority Queue or Bandwidth Allocation to enable bandwidth management.</p> <p>Select Priority Queue to allocate bandwidth based on the pre-defined priority assigned to an application. Refer to Section 16.3 on page 159.</p> <p>Select Bandwidth Allocation allocate specific amounts of bandwidth to specific protocols on an IP or IP range. Refer to Section 16.3 on page 159.</p> <p>Select Disable if you do not want to use this feature.</p>
Total Bandwidth Setting. The fields below appear when you enable Bandwidth Management.	
Uplink	<p>Select the total amount of bandwidth (from 64 Kilobits to 30 Megabits) that you want to dedicate to uplink traffic.</p> <p>This is traffic from LAN/WLAN to WAN.</p>
Downlink	<p>Select the total amount of bandwidth (from 64 Kilobits to 30 Megabits) that you want to dedicate to uplink traffic.</p> <p>This is traffic from WAN to LAN/WLAN.</p>
Apply	Click Apply to save your customized settings.
Reset	Click Reset to begin configuring this screen afresh.

16.3 Advanced

Use this screen to configure bandwidth managements rule for the pre-defined services or applications.

Use this screen to configure bandwidth managements rule for specific protocols on an IP or IP range.

Note: This screen contains the **Priority Queue** and **Bandwidth Allocation** tables. Though both tables are described in this section, you can only apply the rules in one table. Fill out the table of the **Bandwidth Management Type** you selected in [Section 16.2 on page 158](#)

Click **Management > Bandwidth MGMT > Advanced** to open the bandwidth management **Advanced** screen.

Figure 82 Management > Bandwidth MGMT > Advanced

General **Advanced**

Unlimited Priority Queue

Local IP Address

Note : The IP address will not be bounded in the QoS limitation

Priority Queue

#	Enable	Service	Priority	Specific Port
1	<input type="checkbox"/>	FTP	High	
2	<input type="checkbox"/>	WWW	High	
3	<input type="checkbox"/>	TELNET	High	
4	<input type="checkbox"/>	E-Mail	High	
5	<input type="checkbox"/>	VoIP (SIP)	High	
6	<input type="checkbox"/>	BitTorrent	High	
7	<input type="checkbox"/>	Gaming	High	
8	<input type="checkbox"/>	<input type="text"/>	High	Both <input type="text"/> ~ <input type="text"/>
9	<input type="checkbox"/>	<input type="text"/>	High	Both <input type="text"/> ~ <input type="text"/>
10	<input type="checkbox"/>	<input type="text"/>	High	Both <input type="text"/> ~ <input type="text"/>
11	<input type="checkbox"/>	<input type="text"/>	High	Both <input type="text"/> ~ <input type="text"/>
12	<input type="checkbox"/>	<input type="text"/>	High	Both <input type="text"/> ~ <input type="text"/>

Bandwidth Allocation

#	Enable	LAN IP Range	Direction	Port Range	Policy	Rate	Modify
1	<input type="checkbox"/>						
2	<input type="checkbox"/>						
3	<input type="checkbox"/>						
4	<input type="checkbox"/>						
5	<input type="checkbox"/>						
6	<input type="checkbox"/>						
7	<input type="checkbox"/>						
8	<input type="checkbox"/>						
9	<input type="checkbox"/>						
10	<input type="checkbox"/>						

The following table describes the labels in this screen.

Table 56 Management > Bandwidth MGMT > Advanced

LABEL	DESCRIPTION
Priority Queue	
Local IP Address	Enter the IP address of the computer to which bandwidth management does not apply.
Priority Queue	Use this table to allocate specific amounts of bandwidth based on the pre-defined service.
#	This is the number of an individual bandwidth management rule.
Enable	Select this check box to have the NBG4115 apply this bandwidth management rule.

Table 56 Management > Bandwidth MGMT > Advanced (continued)

LABEL	DESCRIPTION
Service	<p>This is the name of the service.</p> <p>You can also enter the name (up to 10 keyboard characters) of a service you want to add in the priority queue (for example, Messenger).</p>
Priority	Select a priority from the drop down list box. Choose High or Low .
Specific Port	<p>This displays the port/s assigned to the service.</p> <p>You can also specify the port/s to services to which you want to allocate bandwidth. Choose either Both, TCP or UDP in the drop-down menu and enter the port or range of ports in the provided boxes.</p> <p>Note: If you are entering a specific port and not a range of ports, you can either leave the second port field blank or enter the same port number again.</p>
Bandwidth Allocation	Use this table to allocate specific amounts of bandwidth to specific protocols on an IP or IP range.
#	This is the number of an individual bandwidth management rule.
Enable	Select this check box to have the NBG4115 apply this bandwidth management rule.
LAN IP Range	This displays the range of IP addresses for which the bandwidth management rule applies.
Direction	<p>These read-only labels represent uplink or downlink traffic.</p> <p>To LAN applies bandwidth management to traffic from WAN to LAN/WLAN (i.e., downlink).</p> <p>To WAN applies bandwidth management to traffic from LAN/WLAN to WAN (i.e., uplink).</p> <p>Both applies bandwidth management to traffic that the NBG4115 forwards to both the LAN and the WAN.</p>
Port Range	This displays the range of ports for which the bandwidth management rule applies.
Policy	This displays either Max (maximum) or Min (minimum) and refers to the maximum or minimum bandwidth allowed for the rule in kilobits per second in the field below.
Rate	This is the maximum or minimum bandwidth allowed (refer to the field above) for the rule in bits per second.
Modify	<p>Click the Edit icon to open the Rule Configuration screen. Modify an existing rule or create a new rule in the Rule Configuration screen. See Section 16.3.3 on page 162 for more information.</p> <p>Click the Remove icon to delete a rule.</p>
Apply	Click Apply to save your customized settings.
Reset	Click Reset to begin configuring this screen afresh.

16.3.1 Pre-Configured Gaming Ports

The following gaming ports are preconfigured on your NBG4115 and are enabled when you select the 'gaming' **Service** in this screen:

Table 57 Preconfigured Gaming Ports

APPLICATION	TCP PORTS	UDP PORTS
XBox 360	3074, 3390, 3932, 5555	1900, 3776, 7777, 88, 3074
Playstation	80, 443, 5223, 5223	3478, 3479, 3658, 4658
Battlenet	40, 6112, 4000, 6113-6119, 112	
MSN Game Zone	6667, 28800-29000	6667, 28800-29000

16.3.2 Priority Levels

Traffic with a higher priority gets through faster while traffic with a lower priority is dropped if the network is congested.

The following describes the priorities that you can apply to traffic that the NBG4115 forwards out through an interface.

- **High** - Typically used for voice traffic or video that is especially sensitive to jitter (jitter is the variations in delay).
- **Low** - This is typically used for all other traffic that are not time-sensitive.

16.3.3 User Defined Service Rule Configuration

If you want to edit a bandwidth management rule for specific protocols on an IP or IP range, click the **Edit** icon in the **Bandwidth Allocation** table of the **Advanced** screen. The following screen displays.

Figure 83 Management > Bandwidth MGMT > Advanced: Allocation Setup

The following table describes the labels in this screen.

Table 58 Management > Bandwidth MGMT > Advanced: Allocation Setup

LABEL	DESCRIPTION
Active	Select this check box to turn on this bandwidth management rule.
Direction	Enter whether you want to apply the rule to uplink or downlink traffic. To LAN applies bandwidth management to traffic from WAN to LAN/WLAN (i.e., downlink). To WAN applies bandwidth management to traffic from LAN/WLAN to WAN (i.e., uplink). Select Both applies bandwidth management to traffic that the NBG4115 forwards to both the LAN and the WAN.
LAN IP Range	Specify the range of IP addresses for which the bandwidth management rule applies.
Protocol	Select the protocol (TCP , UDP , SMTP , HTTP , POP3 , FTP or ALL) for which the bandwidth management rule applies.
Port Range	Enter the range of ports for which the bandwidth management rule applies.
Policy	Select Max or Min and specify the maximum or minimum bandwidth allowed for the rule in bits per second in the field below.
Rate (bps)	Select the maximum or minimum bandwidth allowed (refer to the field above) for the rule in bits per second.
Apply	Click Apply to save your customized settings.
Reset	Click Reset to begin configuring this screen afresh.

16.3.4 Predefined Bandwidth Management Services

The following is a description of the services that you can select and to which you can apply media bandwidth management in the **Management > Bandwidth MGMT > Advanced** screen.

Table 59 Media Bandwidth Management Setup: Services

SERVICE	DESCRIPTION
FTP	File Transfer Program enables fast transfer of files, including large files that may not be possible by e-mail. FTP uses port number 21.
WWW	The World Wide Web (WWW) is an Internet system to distribute graphical, hyper-linked information, based on Hyper Text Transfer Protocol (HTTP) - a client/server protocol for the World Wide Web. The Web is not synonymous with the Internet; rather, it is just one service on the Internet. Other services on the Internet include Internet Relay Chat and Newsgroups. The Web is accessed through use of a browser. WWW uses port 80.
Telnet	Telnet is the login and terminal emulation protocol common on the Internet and in UNIX environments. It operates over TCP/IP networks. Its primary function is to allow users to log into remote host systems. Telnet uses port 23.

Table 59 Media Bandwidth Management Setup: Services (continued)

SERVICE	DESCRIPTION
E-Mail	Electronic mail consists of messages sent through a computer network to specific groups or individuals. Here are some default ports for e-mail: POP3 - port 110 SMTP - port 25
VoIP (SIP)	Sending voice signals over the Internet is called Voice over IP or VoIP. Session Initiated Protocol (SIP) is an internationally recognized standard for implementing VoIP. SIP is an application-layer control (signaling) protocol that handles the setting up, altering and tearing down of voice and multimedia sessions over the Internet. SIP is transported primarily over UDP but can also be transported over TCP, using the default port number 5060.
BitTorrent	BitTorrent is a free P2P (peer-to-peer) sharing tool allowing you to distribute large software and media files using ports 6881 to 6889. BitTorrent requires you to search for a file with a searching engine yourself. It distributes files by corporation and trading, that is, the client downloads the file in small pieces and share the pieces with other peers to get other half of the file.
Gaming	Online gaming services lets you play multiplayer games on the Internet via broadband technology. One example is Microsoft's Xbox Live, which uses port 3074. As of this writing, your NBG4115 supports Xbox, Playstation, Battlenet and MSN Game Zone.

16.3.5 Services and Port Numbers

See [Appendix F on page 263](#) for commonly used services and port numbers.

Remote Management

17.1 Overview

This chapter provides information on the Remote Management screens.

Remote management allows you to determine which services/protocols can access which NBG4115 interface (if any) from which computers.

You may manage your NBG4115 from a remote location via:

- LAN only
- LAN and WAN

17.1.1 What You Can Do in this Chapter

Use the **WWW** screen ([Section 17.2 on page 166](#)) to change your NBG4115's World Wide Web settings.

17.1.2 What You Need To Know

The following terms and concepts may help as you read through this chapter.

Remote Management Limitations

Remote management over LAN or WAN will not work when:

- 1 You have disabled that service in one of the remote management screens.
- 2 The IP address in the **Secured Client IP Address** field does not match the client IP address. If it does not match, the NBG4115 will disconnect the session immediately.
- 3 There is already another remote management session with an equal or higher priority running. You may only have one remote management session running at one time.
- 4 There is a firewall rule that blocks it.

Remote Management and NAT

When NAT is enabled:

- Use the NBG4115's WAN IP address when configuring from the WAN.
- Use the NBG4115's LAN IP address when configuring from the LAN.

System Timeout

There is a default system management idle timeout of five minutes (three hundred seconds). The NBG4115 automatically logs you out if the management session remains idle for longer than this timeout period. The management session does not time out when a statistics screen is polling. You can change the timeout period in the **System** screen

17.2 WWW

To change your NBG4115's World Wide Web settings, click **Management > Remote MGMT** to display the **WWW** screen.

Figure 84 Management > Remote MGMT > WWW

The following table describes the labels in this screen.

Table 60 Management > Remote MGMT > WWW

LABEL	DESCRIPTION
Server Port	You may change the server port number for a service if needed, however you must use the same port number in order to use that service for remote management.
Server Access	Select the interface(s) through which a computer may access the NBG4115 using this service.

LABEL	DESCRIPTION
Secured Client IP Address	<p>A secured client is a “trusted” computer that is allowed to communicate with the NBG4115 using this service.</p> <p>Select All to allow any computer to access the NBG4115 using this service.</p> <p>Choose Selected to just allow the computer with the IP address that you specify to access the NBG4115 using this service.</p> <p>Note: This only applies on WAN IP.</p>
Apply	Click Apply to save your customized settings and exit this screen.
Reset	Click Reset to begin configuring this screen afresh.

18.1 Overview

This chapter introduces the UPnP feature in the Web Configurator.

Universal Plug and Play (UPnP) is a distributed, open networking standard that uses TCP/IP for simple peer-to-peer network connectivity between devices. A UPnP device can dynamically join a network, obtain an IP address, convey its capabilities and learn about other devices on the network. In turn, a device can leave a network smoothly and automatically when it is no longer in use.

18.1.1 What You Can Do in this Chapter

Use the **UPnP** screen ([Section 18.2 on page 170](#)) to enable UPnP on the NBG4115.

18.1.2 What You Need to Know

The following terms and concepts may help as you read through this chapter.

How do I know if I'm using UPnP?

UPnP hardware is identified as an icon in the Network Connections folder (Windows XP). Each UPnP compatible device installed on your network will appear as a separate icon. Selecting the icon of a UPnP device will allow you to access the information and properties of that device.

NAT Traversal

UPnP NAT traversal automates the process of allowing an application to operate through NAT. UPnP network devices can automatically configure network addressing, announce their presence in the network to other UPnP devices and enable exchange of simple product and service descriptions. NAT traversal allows the following:

- Dynamic port mapping

- Learning public IP addresses
- Assigning lease times to mappings

Windows Messenger is an example of an application that supports NAT traversal and UPnP.

See the NAT chapter for more information on NAT.

Cautions with UPnP

The automated nature of NAT traversal applications in establishing their own services and opening firewall ports may present network security issues. Network information and configuration may also be obtained and modified by users in some network environments.

When a UPnP device joins a network, it announces its presence with a multicast message. For security reasons, the NBG4115 allows multicast messages on the LAN only.

All UPnP-enabled devices may communicate freely with each other without additional configuration. Disable UPnP if this is not your intention.

18.2 General

Use this screen to enable UPnP. Click the **Management > UPnP** to open the following screen.

Figure 85 Management > UPnP > General

The screenshot shows a web interface for UPnP Setup. At the top, there is a tab labeled 'General'. Below the tab, the title 'UPnP Setup' is displayed. The main content area shows the 'Device Name' as 'ZyXEL NBG-417N Internet Sharing Gateway'. There are two checked checkboxes: 'Enable the Universal Plug and Play (UPnP) Feature' and 'Allow users to make port forwarding changes through UPnP'. Below these, a 'Note' section contains two instructions: '1. For UPnP to function normally, the HTTP service must be available for LAN computers using UPnP.' and '2. For WPS to function normally, the UPnP service must be available.' At the bottom of the form, there are two buttons: 'Apply' and 'Reset'.

The following table describes the labels in this screen.

Table 61 Management > UPnP > General

LABEL	DESCRIPTION
Enable the Universal Plug and Play (UPnP) Feature	Select this check box to activate UPnP. Be aware that anyone could use a UPnP application to open the Web Configurator's login screen without entering the NBG4115's IP address (although you must still enter the password to access the Web Configurator).
Allow users to make port forwarding changes through UPnP	Select this check box to allow UPnP-enabled applications to automatically configure the NBG4115 so that they can communicate through the NBG4115, for example by using NAT traversal, UPnP applications automatically reserve a NAT forwarding port in order to communicate with another UPnP enabled device; this eliminates the need to manually configure port forwarding for the UPnP enabled application.
Apply	Click Apply to save the setting to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

18.3 Technical Reference


The following section contains additional technical information about the NBG4115 features described in this chapter.

18.3.1 Installing UPnP in Windows XP

Follow the steps below to install the UPnP in Windows XP.


- 1 Click **Start** and **Control Panel**.
- 2 Double-click **Network Connections**.
- 3 In the **Network Connections** window, click **Advanced** in the main menu and select **Optional Networking Components**

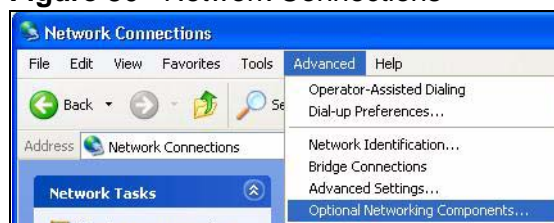Figure 86 Network Connections




- 4 The **Windows Optional Networking Components Wizard** window displays. Select **Networking Service** in the **Components** selection box and click **Details**.

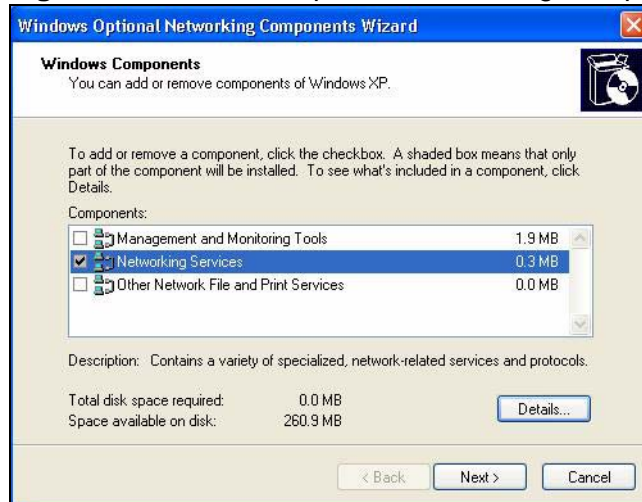Figure 87 Windows Optional Networking Components Wizard



- 5 In the **Networking Services** window, select the **Universal Plug and Play** check box.

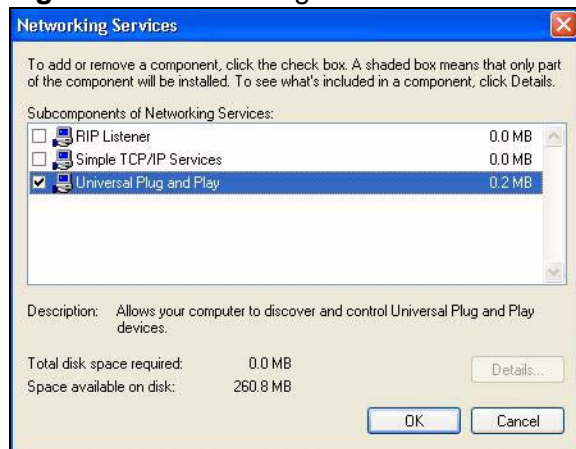Figure 88 Networking Services



- 6 Click **OK** to go back to the **Windows Optional Networking Component Wizard** window and click **Next**.

18.3.1.1 Using UPnP in Windows XP Example

This section shows you how to use the UPnP feature in Windows XP. You must already have UPnP installed in Windows XP and UPnP activated on the NBG4115.

Make sure the computer is connected to a LAN port of the NBG4115. Turn on your computer and the NBG4115.

Auto-discover Your UPnP-enabled Network Device

- 1 Click **Start** and **Control Panel**. Double-click **Network Connections**. An icon displays under Internet Gateway.
- 2 Right-click the icon and select **Properties**.

Figure 89 Network Connections



- 3 In the **Internet Connection Properties** window, click **Settings** to see the port mappings there were automatically created.

Figure 90 Internet Connection Properties



- 4 You may edit or delete the port mappings or click **Add** to manually add port mappings.

Figure 91 Internet Connection Properties: Advanced Settings


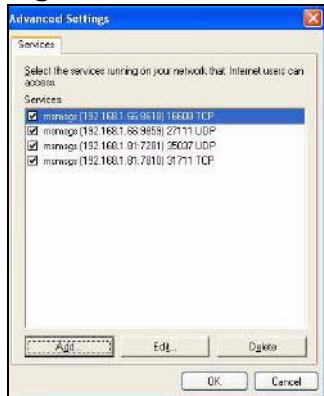


Figure 92 Internet Connection Properties: Advanced Settings: Add

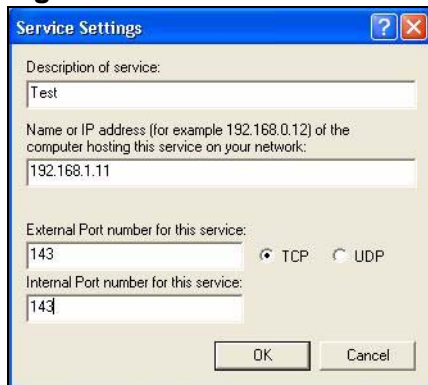

- 5 When the UPnP-enabled device is disconnected from your computer, all port mappings will be deleted automatically.
- 6 Select **Show icon in notification area when connected** option and click **OK**. An icon displays in the system tray.

Figure 93 System Tray Icon



- 7 Double-click on the icon to display your current Internet connection status.

Figure 94 Internet Connection Status



Web Configurator Easy Access


With UPnP, you can access the web-based configurator on the NBG4115 without finding out the IP address of the NBG4115 first. This comes helpful if you do not know the IP address of the NBG4115.

Follow the steps below to access the Web Configurator.

- 1 Click **Start** and then **Control Panel**.
- 2 Double-click **Network Connections**.


- 3 Select **My Network Places** under **Other Places**.

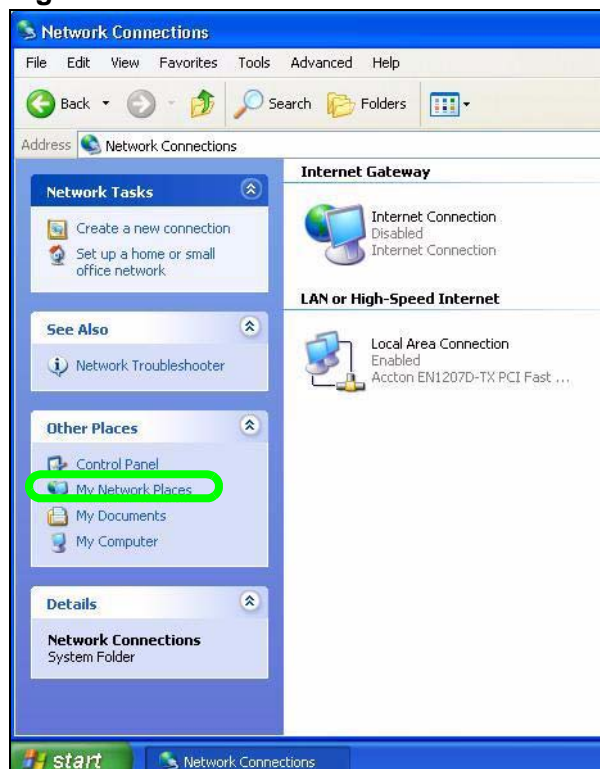Figure 95 Network Connections



- 4 An icon with the description for each UPnP-enabled device displays under **Local Network**.
- 5 Right-click on the icon for your NBG4115 and select **Invoke**. The Web Configurator login screen displays.

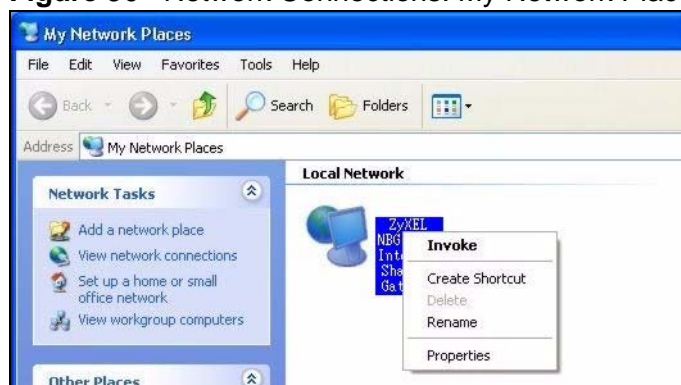Figure 96 Network Connections: My Network Places



- 6 Right-click on the icon for your NBG4115 and select **Properties**. A properties window displays with basic information about the NBG4115.

Figure 97 Network Connections: My Network Places: Properties: Example



PART V

Maintenance and Troubleshooting

[System \(181\)](#)

[Logs \(187\)](#)

[Tools \(189\)](#)

[Sys OP Mode \(195\)](#)

[Language \(199\)](#)

[Troubleshooting \(201\)](#)

System

19.1 Overview

This chapter provides information on the **System** screens.

See the chapter about wizard setup for more information on the next few screens.

19.1.1 What You Can Do in this Chapter

- Use the **General** screen ([Section 19.2 on page 181](#)) to enter a name to identify the NBG4115 in the network and set the password.
- Use the **Time Setting** screen ([Section 19.3 on page 183](#)) to change your NBG4115's time and date.

19.2 General

Use this screen to enter a name to identify the NBG4115 in the network and set the password. Click **Maintenance** > **System**. The following screen displays.

Figure 98 Maintenance > System > General

General		Time Setting
System Setup		
System Name	<input type="text" value="NBG-417N"/>	
Domain Name	<input type="text" value="zyxel.com"/>	
Administrator Inactivity Timer	<input type="text" value="0"/> (minutes, 0 means no timeout)	
Password Setup		
Old Password	<input type="password" value="****"/>	
New Password	<input type="password" value="****"/>	
Retype to Confirm	<input type="password" value="****"/>	
<div>Apply Reset</div>		

The following table describes the labels in this screen.

Table 62 Maintenance > System > General

LABEL	DESCRIPTION
System Setup	
System Name	<p>System Name is a unique name to identify the NBG4115 in an Ethernet network. It is recommended you enter your computer's "Computer name" in this field (see the chapter about wizard setup for how to find your computer's name).</p> <p>This name can be up to 30 alphanumeric characters long. Spaces are not allowed, but dashes "-" and underscores "_" are accepted.</p>
Domain Name	<p>Enter the domain name (if you know it) here. If you leave this field blank, the ISP may assign a domain name via DHCP.</p> <p>The domain name entered by you is given priority over the ISP assigned domain name.</p>
Administrator Inactivity Timer	Type how many minutes a management session can be left idle before the session times out. The default is 5 minutes. After it times out you have to log in with your password again. Very long idle timeouts may have security risks. A value of "0" means a management session never times out, no matter how long it has been left idle (not recommended).
Password Setup	Change your NBG4115's password (recommended) using the fields as shown.
Old Password	Type the default password or the existing password you use to access the system in this field.
New Password	Type your new system password (up to 30 characters). Note that as you type a password, the screen displays an asterisk (*) for each character you type.
Retype to Confirm	Type the new password again in this field.
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

19.3 Time Setting

To change your NBG4115's time and date, click **Maintenance > System > Time Setting**. The screen appears as shown. Use this screen to configure the NBG4115's time based on your local time zone.

Figure 99 Maintenance > System > Time Setting

The following table describes the labels in this screen.

Table 63 Maintenance > System > Time Setting

LABEL	DESCRIPTION
Current Time and Date	
Current Time	This field displays the time of your NBG4115. Each time you reload this page, the NBG4115 synchronizes the time with the time server.
Current Date	This field displays the date of your NBG4115. Each time you reload this page, the NBG4115 synchronizes the date with the time server.
Time and Date Setup	
Manual	Select this radio button to enter the time and date manually. If you configure a new time and date, Time Zone and Daylight Saving at the same time, the new time and date you entered has priority and the Time Zone and Daylight Saving settings do not affect it.

Table 63 Maintenance > System > Time Setting

LABEL	DESCRIPTION
New Time (hh:mm:ss)	This field displays the last updated time from the time server or the last time configured manually. When you set Time and Date Setup to Manual , enter the new time in this field and then click Apply .
New Date (yyyy/mm/dd)	This field displays the last updated date from the time server or the last date configured manually. When you set Time and Date Setup to Manual , enter the new date in this field and then click Apply .
Get from Time Server	Select this radio button to have the NBG4115 get the time and date from the time server you specified below.
Auto	Select Auto to have the NBG4115 automatically search for an available time server and synchronize the date and time with the time server after you click Apply .
User Defined Time Server Address	Select User Defined Time Server Address and enter the IP address or URL (up to 20 extended ASCII characters in length) of your time server. Check with your ISP/network administrator if you are unsure of this information.
Time Zone Setup	
Time Zone	Choose the time zone of your location. This will set the time difference between your time zone and Greenwich Mean Time (GMT).
Daylight Savings	Daylight saving is a period from late spring to early fall when many countries set their clocks ahead of normal local time by one hour to give more daytime light in the evening. Select this option if you use Daylight Saving Time.
Start Date	Configure the day and time when Daylight Saving Time starts if you selected Daylight Savings . The o'clock field uses the 24 hour format. Here are a couple of examples: Daylight Saving Time starts in most parts of the United States on the first Sunday of April. Each time zone in the United States starts using Daylight Saving Time at 2 A.M. local time. So in the United States you would select First, Sunday, April and type 2 in the o'clock field. Daylight Saving Time starts in the European Union on the last Sunday of March. All of the time zones in the European Union start using Daylight Saving Time at the same moment (1 A.M. GMT or UTC). So in the European Union you would select Last, Sunday, March . The time you type in the o'clock field depends on your time zone. In Germany for instance, you would type 2 because Germany's time zone is one hour ahead of GMT or UTC (GMT+1).

Table 63 Maintenance > System > Time Setting

LABEL	DESCRIPTION
End Date	<p>Configure the day and time when Daylight Saving Time ends if you selected Daylight Savings. The o'clock field uses the 24 hour format. Here are a couple of examples:</p> <p>Daylight Saving Time ends in the United States on the last Sunday of October. Each time zone in the United States stops using Daylight Saving Time at 2 A.M. local time. So in the United States you would select Last, Sunday, October and type 2 in the o'clock field.</p> <p>Daylight Saving Time ends in the European Union on the last Sunday of October. All of the time zones in the European Union stop using Daylight Saving Time at the same moment (1 A.M. GMT or UTC). So in the European Union you would select Last, Sunday, October. The time you type in the o'clock field depends on your time zone. In Germany for instance, you would type 2 because Germany's time zone is one hour ahead of GMT or UTC (GMT+1).</p>
Apply	Click Apply to save your changes back to the NBG4115.
Reset	Click Reset to begin configuring this screen afresh.

20.1 Overview

This chapter contains information about configuring general log settings and viewing the NBG4115's logs. Refer to the appendices for example log message explanations.

The Web Configurator allows you to look at all of the NBG4115's logs in one location.

20.1.1 What You Can Do in this Chapter

Use the **View Log** screen ([Section 20.2 on page 187](#)) to see the logs for the activity on your NBG4115.

20.2 View Log

Use the **View Log** screen to see the logged messages for the NBG4115.

The log wraps around and deletes the old entries after it fills. Click a column heading to sort it. A triangle indicates ascending or descending sort order.

Click **Maintenance > Logs** to open the **View Log** screen.

Figure 100 Maintenance > Logs > View Log

#	Time	Message
1	Dec 19 12:53:46	NTP, Local time=2008/12/19 12:53:46
2	Dec 19 12:53:46	NTP, Daylight saving status: Disable
3	Dec 19 12:53:46	NTP, Time zone = (GMT+08:00) Beijing, Hong Kong, Perth, Singapore, Taipei
4	Dec 19 11:53:43	NTP, Local time=2008/12/19 11:53:43
5	Dec 19 11:53:43	NTP, Daylight saving status: Disable
6	Dec 19 11:53:43	NTP, Time zone = (GMT+08:00) Beijing, Hong Kong, Perth, Singapore, Taipei
7	Dec 19 10:55:30	NET, start Firewall
8	Dec 19 10:55:30	NET, start NAT
9	Dec 19 10:55:30	NET, start

The following table describes the labels in this screen.

Table 64 Maintenance > Logs > View Log

LABEL	DESCRIPTION
Refresh	Click Refresh to renew the log screen.
Clear Log	Click Clear Log to delete all the logs.
#	This is the index number of the log entry.
Time	This field displays the time the log was recorded. See the chapter on system maintenance and information to configure the NBG4115's time and date.
Message	This field states the reason for the log.

21.1 Overview

This chapter shows you how to upload a new firmware, upload or save backup configuration files and restart the NBG4115.

21.1.1 What You Can Do in this Chapter

- Use the **Firmware** screen ([Section 21.2 on page 190](#)) to upload firmware to your NBG4115.
- Use the **Configuration** screen ([Section 21.3 on page 192](#)) to view information related to factory defaults, backup configuration, and restoring configuration.
- Use the **Restart** screen ([Section 21.4 on page 194](#)) to have the NBG4115 reboot.

21.2 Firmware

Find firmware at www.zyxel.com in a file that (usually) uses the system model name with a `*.bin` extension, e.g., `NBG4115.bin`. The upload process uses HTTP (Hypertext Transfer Protocol) and may take up to two minutes. After a successful upload, the system will reboot.

Click **Maintenance > Tools**. Follow the instructions in this screen to upload firmware to your NBG4115.

Figure 101 Maintenance > Tools > Firmware

Firmware Upgrade

To upgrade the internal router firmware, browse to the location of the binary (.bin) upgrade file and click **Upload**. Upgrade files can be downloaded from website. If the upgrade file is compressed (.ZIP file), you must first extract the binary (.bin) file. In some cases, you may need to reconfigure.

File Path: no file selected

The following table describes the labels in this screen.

Table 65 Maintenance > Tools > Firmware

LABEL	DESCRIPTION
File Path	Type in the location of the file you want to upload in this field or click Browse... to find it.
Choose File	Click Choose File to find the .bin file you want to upload. Remember that you must decompress compressed (.zip) files before you can upload them.
Upload	Click Upload to begin the upload process. This process may take up to two minutes.

Note: Do not turn off the NBG4115 while firmware upload is in progress!

After you see the **Firmware Upload In Process** screen, wait two minutes before logging into the NBG4115 again.

Figure 102 Upload Warning



The NBG4115 automatically restarts in this time causing a temporary network disconnect. In some operating systems, you may see the following icon on your desktop.

Figure 103 Network Temporarily Disconnected



After two minutes, log in again and check your new firmware version in the **Status** screen.

If the upload was not successful, the following screen will appear. Click **Return** to go back to the **Firmware** screen.

Figure 104 Upload Error Message



21.3 Configuration

Click **Maintenance > Tools > Configuration**. Information related to factory defaults, backup configuration, and restoring configuration appears as shown next.

Figure 105 Maintenance > Tools > Configuration

The screenshot shows a web interface with three tabs: 'Firmware', 'Configuration' (selected), and 'Restart'. The 'Configuration' tab contains three sections:

- Backup Configuration**: A text prompt 'Click **Backup** to save the current configuration of your system to your computer.' followed by a 'Backup' button.
- Restore Configuration**: A text prompt 'To restore a previously saved configuration file to your system, browse to the location of the configuration file and click **Upload**.' followed by a 'File Path:' label, a 'Choose File' button, the text 'no file selected', and an 'Upload' button.
- Back to Factory Defaults**: A text prompt 'Click **Reset** to clear all user-entered configuration information and return to factory defaults. After resetting, the' followed by a list of defaults:
 - Password will be 1234
 - LAN IP address will be 192.168.1.1
 - DHCP will be reset to serverand a 'Reset' button.

21.3.1 Backup Configuration

Backup configuration allows you to back up (save) the NBG4115's current configuration to a file on your computer. Once your NBG4115 is configured and functioning properly, it is highly recommended that you back up your configuration file before making configuration changes. The backup configuration file will be useful in case you need to return to your previous settings.

Click **Backup** to save the NBG4115's current configuration to your computer.

21.3.2 Restore Configuration

Restore configuration allows you to upload a new or previously saved configuration file from your computer to your NBG4115.

Table 66 Maintenance Restore Configuration

LABEL	DESCRIPTION
File Path	Type in the location of the file you want to upload in this field or click Browse... to find it.
Choose File	Click Choose File to find the .bin file you want to upload. Remember that you must decompress compressed (.zip) files before you can upload them.
Upload	Click Upload to begin the upload process.

Note: Do not turn off the NBG4115 while configuration file upload is in progress


After you see a “configuration upload successful” screen, you must then wait one minute before logging into the NBG4115 again.

Figure 106 Configuration Restore Successful



The NBG4115 automatically restarts in this time causing a temporary network disconnect. In some operating systems, you may see the following icon on your desktop.

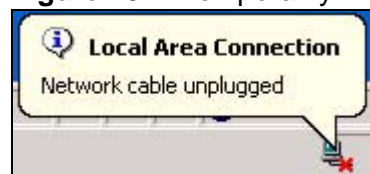Figure 107 Temporarily Disconnected



If you uploaded the default configuration file you may need to change the IP address of your computer to be in the same subnet as that of the default NBG4115 IP address (192.168.1.1). See [Appendix D on page 233](#) for details on how to set up your computer's IP address.

If the upload was not successful, the following screen will appear. Click **Return** to go back to the **Configuration** screen.

Figure 108 Configuration Restore Error



21.3.3 Back to Factory Defaults

Pressing the **Reset** button in this section clears all user-entered configuration information and returns the NBG4115 to its factory defaults.


You can also press the **RESET** button on the rear panel to reset the factory defaults of your NBG4115. Refer to the chapter about introducing the Web Configurator for more information on the **RESET** button.

21.4 Restart

System restart allows you to reboot the NBG4115 without turning the power off.

Click **Maintenance > Tools > Restart**. Click **Restart** to have the NBG4115 reboot. This does not affect the NBG4115's configuration.

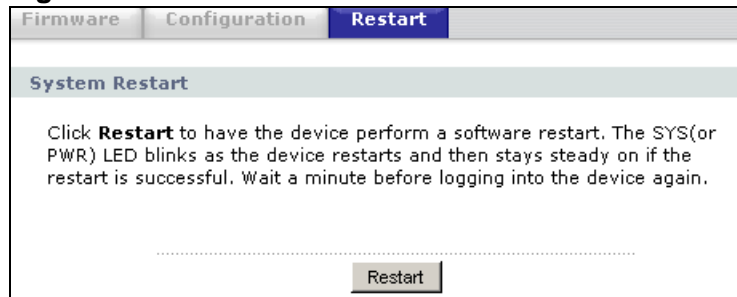Figure 109 Maintenance > Tools > Restart



Sys OP Mode

22.1 Overview

The **Sys OP Mode** (System Operation Mode) function lets you configure whether your NBG4115 is a router or AP. You can choose between **Router Mode** and **AP Mode** depending on your network topology and the features you require from your device. See [Section 1.1 on page 21](#) for more information on which mode to choose.

22.1.1 What You Can Do in this Chapter

Use the General screen ([Section 22.2 on page 196](#)) to select how you connect to the Internet.


22.1.2 What You Need to Know

The following terms and concepts may help as you read through this chapter.

Router

A router connects your local network with another network, such as the Internet. The router has two IP addresses, the LAN IP address and the WAN IP address.

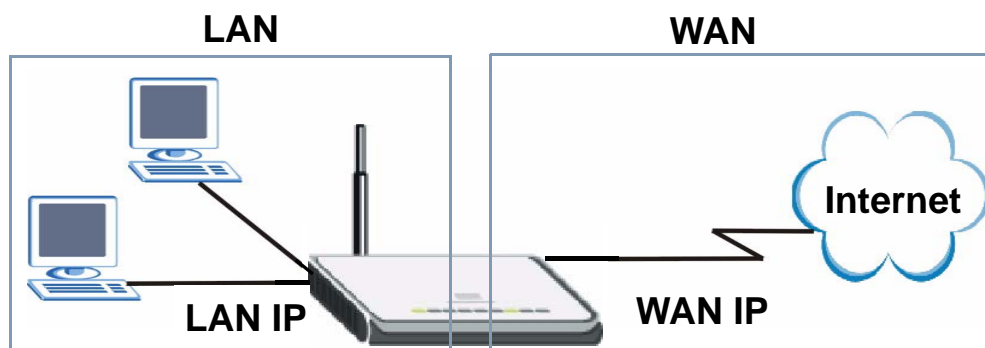
Figure 110 LAN and WAN IP Addresses in Router Mode



AP

An AP extends one network and so has just one IP address. All Ethernet ports on the AP have the same IP address. To connect to the Internet, another device, such as a router, is required.

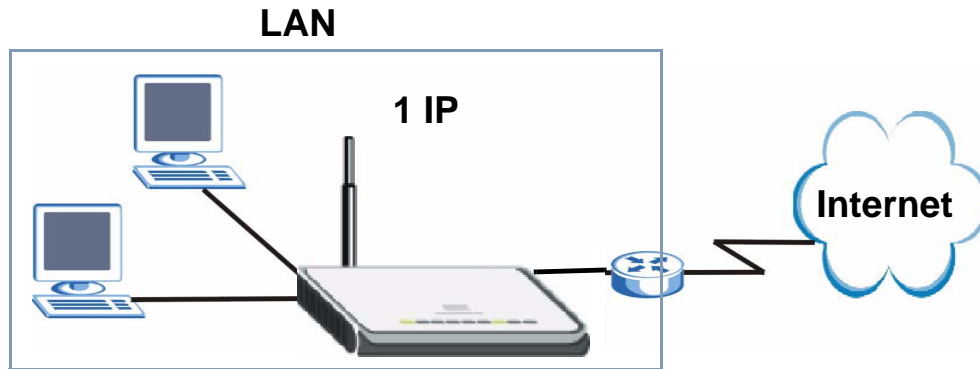
Figure 111 IP Address in AP Mode



22.2 General


Use this screen to select how you connect to the Internet.

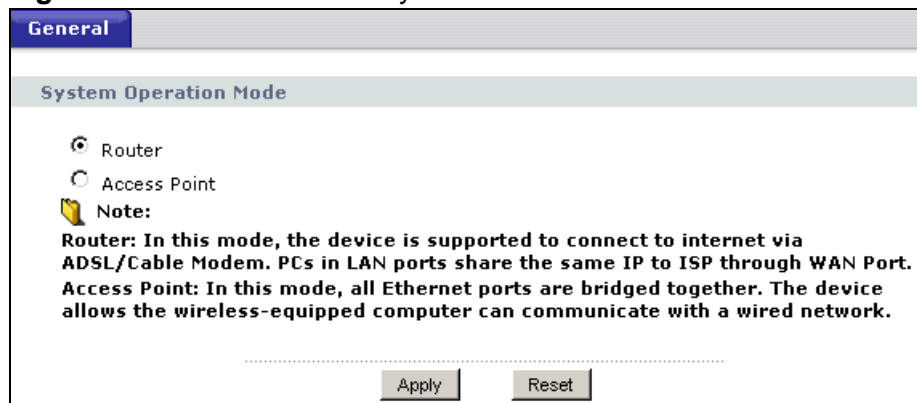Figure 112 Maintenance > Sys OP Mode > General



If you select Router Mode, the following pop-up message window appears.

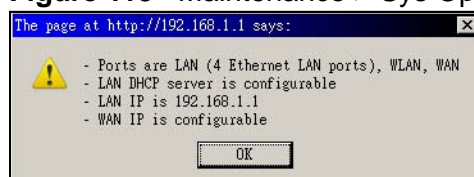
Figure 113 Maintenance > Sys Op Mode > General: Router



- In this mode there are both LAN and WAN ports. The LAN Ethernet and WAN Ethernet ports have different IP addresses.
- The DHCP server on your device is enabled and allocates IP addresses to other devices on your local network.
- The LAN IP address of the device on the local network is set to 192.168.1.1.
- You can configure the IP address settings on your WAN port. Contact your ISP or system administrator for more information on appropriate settings.

If you select Access Point the following pop-up message window appears.

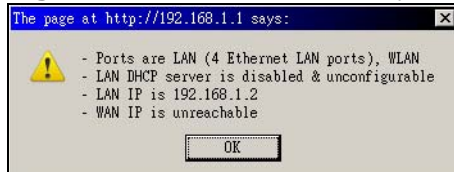Figure 114 Maintenance > Sys Op Mode > General: AP



- In **AP Mode** all Ethernet ports have the same IP address.
- All ports on the rear panel of the device are LAN ports, including the port labeled WAN. There is no WAN port.
- The DHCP server on your device is disabled. In AP mode there must be a device with a DHCP server on your network such as a router or gateway which can allocate IP addresses.

The IP address of the device on the local network is set to 192.168.1.2.

The following table describes the labels in the **General** screen.

Table 67 Maintenance > Sys OP Mode > General

LABEL	DESCRIPTION
System Operation Mode	
Router	Select Router if your device routes traffic between a local network and another network such as the Internet. This mode offers services such as a firewall or content filter.
Access Point	Select Access Point if your device bridges traffic between clients on the same network.
Apply	Click Apply to save your settings.
Reset	Click Reset to return your settings to the default (Router)

Note: If you select the incorrect System Operation Mode you cannot connect to the Internet.

Language

23.1 Overview

This chapter shows you how to change the Web Configurator's display language.

23.2 Language

Use this screen to change the language for the Web Configurator display.

Click the language you prefer. The Web Configurator language changes after a while without restarting the NBG4115.

Figure 115 Language



Troubleshooting

24.1 Overview

This chapter offers some suggestions to solve problems you might encounter. The potential problems are divided into the following categories.

- [Power, Hardware Connections, and LEDs](#)
- [NBG4115 Access and Login](#)
- [Internet Access](#)
- [Resetting the NBG4115 to Its Factory Defaults](#)
- [Wireless Router/AP Troubleshooting](#)

24.2 Power, Hardware Connections, and LEDs

The NBG4115 does not turn on. None of the LEDs turn on.

- 1 Make sure you are using the power adaptor or cord included with the NBG4115.
- 2 Make sure the power adaptor or cord is connected to the NBG4115 and plugged in to an appropriate power source. Make sure the power source is turned on.
- 3 Disconnect and re-connect the power adaptor or cord to the NBG4115.
- 4 If the problem continues, contact the vendor.

One of the LEDs does not behave as expected.

- 1 Make sure you understand the normal behavior of the LED. See [Section 1.5 on page 22](#).

- 2 Check the hardware connections. See the Quick Start Guide.
- 3 Inspect your cables for damage. Contact the vendor to replace any damaged cables.
- 4 Disconnect and re-connect the power adaptor to the NBG4115.
- 5 If the problem continues, contact the vendor.

24.3 NBG4115 Access and Login

I don't know the IP address of my NBG4115.

- 1 The default IP address is **192.168.1.1**.
- 2 If you changed the IP address and have forgotten it, you might get the IP address of the NBG4115 by looking up the IP address of the default gateway for your computer. To do this in most Windows computers, click **Start > Run**, enter **cmd**, and then enter **ipconfig**. The IP address of the **Default Gateway** might be the IP address of the NBG4115 (it depends on the network), so enter this IP address in your Internet browser. Set your device to **Router Mode**, login (see the Quick Start Guide for instructions) and go to the **Device Information** table in the **Status** screen. Your NBG4115's IP address is available in the **Device Information** table.
 - If the **DHCP** setting under **LAN information** is **None**, your device has a fixed IP address.
 - If the **DHCP** setting under **LAN information** is **Client**, then your device receives an IP address from a DHCP server on the network.
- 3 If your NBG4115 is a DHCP client, you can find your IP address from the DHCP server. This information is only available from the DHCP server which allocates IP addresses on your network. Find this information directly from the DHCP server or contact your system administrator for more information.
- 4 Reset your NBG4115 to change all settings back to their default. This means your current settings are lost. See [Section 24.5 on page 206](#) in the **Troubleshooting** for information on resetting your NBG4115.

I forgot the password.

- 1 The default password is **1234**.
- 2 If this does not work, you have to reset the device to its factory defaults. See [Section 24.5 on page 206](#).

I cannot see or access the **Login** screen in the Web Configurator.

- 1 Make sure you are using the correct IP address.
 - The default IP address is [192.168.1.1](#).
 - If you changed the IP address ([Section 7.3 on page 102](#)), use the new IP address.
 - If you changed the IP address and have forgotten it, see the troubleshooting suggestions for [I don't know the IP address of my NBG4115](#).
- 2 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide.
- 3 Make sure your Internet browser does not block pop-up windows and has JavaScripts and Java enabled. See [Appendix B on page 215](#).
- 4 Make sure your computer is in the same subnet as the NBG4115. (If you know that there are routers between your computer and the NBG4115, skip this step.)
 - If there is a DHCP server on your network, make sure your computer is using a dynamic IP address. See [Section 7.3 on page 102](#).
 - If there is no DHCP server on your network, make sure your computer's IP address is in the same subnet as the NBG4115. See [Section 7.3 on page 102](#).
- 5 Reset the device to its factory defaults, and try to access the NBG4115 with the default IP address. See [Section 7.3 on page 102](#).
- 6 If the problem continues, contact the network administrator or vendor, or try one of the advanced suggestions.

Advanced Suggestions

- Try to access the NBG4115 using another service, such as Telnet. If you can access the NBG4115, check the remote management settings and firewall rules to find out why the NBG4115 does not respond to HTTP.

- If your computer is connected to the **WAN** port or is connected wirelessly, use a computer that is connected to a **LAN/ETHERNET** port.

I can see the **Login** screen, but I cannot log in to the NBG4115.

- 1 Make sure you have entered the password correctly. The default password is **1234**. This field is case-sensitive, so make sure [Caps Lock] is not on.
- 2 You cannot log in to the Web Configurator while someone is using Telnet to access the NBG4115. Log out of the NBG4115 in the other session, or ask the person who is logged in to log out.
- 3 This can happen when you fail to log out properly from your last session. Try logging in again after 5 minutes.
- 4 Disconnect and re-connect the power adaptor or cord to the NBG4115.
- 5 If this does not work, you have to reset the device to its factory defaults. See [Section 24.5 on page 206](#).

24.4 Internet Access

I cannot access the Internet.

- 1 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide.
- 2 Make sure you entered your ISP account information correctly in the wizard. These fields are case-sensitive, so make sure [Caps Lock] is not on.
- 3 If you are trying to access the Internet wirelessly, make sure the wireless settings in the wireless client are the same as the settings in the AP.
 - Go to Network > Wireless LAN > General > WDS and check if the NBG4115 is set to bridge mode. Select **Disable** and try to connect to the Internet again.
- 4 Disconnect all the cables from your device, and follow the directions in the Quick Start Guide again.
- 5 Go to Maintenance > Sys OP Mode > General. Check your System Operation Mode setting.

- Select **Router** if your device routes traffic between a local network and another network such as the Internet.
- Select **Access Point** if your device bridges traffic between clients on the same network.

6 If the problem continues, contact your ISP.

I cannot access the Internet anymore. I had access to the Internet (with the NBG4115), but my Internet connection is not available anymore.

- 1 Check the hardware connections, and make sure the LEDs are behaving as expected. See the Quick Start Guide and [Section 1.5 on page 22](#).
- 2 Reboot the NBG4115.
- 3 If the problem continues, contact your ISP.

The Internet connection is slow or intermittent.

- 1 There might be a lot of traffic on the network. Look at the LEDs, and check [Section 1.5 on page 22](#). If the NBG4115 is sending or receiving a lot of information, try closing some programs that use the Internet, especially peer-to-peer applications.
- 2 Check the signal strength. If the signal strength is low, try moving the NBG4115 closer to the AP if possible, and look around to see if there are any devices that might be interfering with the wireless network (for example, microwaves, other wireless networks, and so on).
- 3 Reboot the NBG4115.
- 4 If the problem continues, contact the network administrator or vendor, or try one of the advanced suggestions.

Advanced Suggestion

- Check the settings for QoS. If it is disabled, you might consider activating it.

24.5 Resetting the NBG4115 to Its Factory Defaults

If you reset the NBG4115, you lose all of the changes you have made. The NBG4115 re-loads its default settings, and the password resets to **1234**. You have to make all of your changes again.

You will lose all of your changes when you push the **RESET** button.

To reset the NBG4115,

- 1 Make sure the power LED is on.
- 2 Press the **RESET** button for longer than 1 second to restart/reboot the NBG4115.
- 3 Press the **RESET** button for longer than five seconds to set the NBG4115 back to its factory-default configurations.

If the NBG4115 restarts automatically, wait for the NBG4115 to finish restarting, and log in to the Web Configurator. The password is "1234".

If the NBG4115 does not restart automatically, disconnect and reconnect the NBG4115's power. Then, follow the directions above again.

24.6 Wireless Router/AP Troubleshooting

I cannot access the NBG4115 or ping any computer from the WLAN (wireless AP or router).

- 1 Make sure the wireless LAN is enabled on the NBG4115
- 2 Make sure the wireless adapter on the wireless station is working properly.
- 3 Make sure the wireless adapter installed on your computer is IEEE 802.11 compatible and supports the same wireless standard as the NBG4115.
- 4 Make sure your computer (with a wireless adapter installed) is within the transmission range of the NBG4115.

- 5 Check that both the NBG4115 and your wireless station are using the same wireless and wireless security settings.
 - 6 Make sure traffic between the WLAN and the LAN is not blocked by the firewall on the NBG4115.
 - 7 Make sure you allow the NBG4115 to be remotely accessed through the WLAN interface. Check your remote management settings.
 - See the chapter on Wireless LAN in the User's Guide for more information.
- to select Router Mode.

I set up URL keyword blocking, but I can still access a website that should be blocked.

Make sure that you select the **Enable URL Keyword Blocking** check box in the Content Filtering screen. Make sure that the keywords that you type are listed in the **Keyword List**.

If a keyword that is listed in the **Keyword List** is not blocked when it is found in a URL, customize the keyword blocking using commands. See the Customizing Keyword Blocking URL Checking section in the Content Filter chapter.

I can access the Internet, but I cannot open my network folders.

In the Network > LAN > Advanced screen, make sure **Allow between LAN and WAN** is checked. This is not checked by default to keep the LAN secure.

If you still cannot access a network folder, make sure your account has access rights to the folder you are trying to open.

I can access the Web Configurator after I switched to AP mode.

When you change from router mode to AP mode, your computer must have an IP address in the range between "192.168.1.3" and "192.168.1.254".

Refer to [Appendix D on page 233](#) for instructions on how to change your computer's IP address.

PART VI

Appendices and Index

Product Specifications (211)

Pop-up Windows, JavaScripts and Java
Permissions (215)

IP Addresses and Subnetting (223)

Setting up Your Computer's IP Address
(233)

Wireless LANs (251)

Services (263)

Legal Information (267)

Index (275)

Product Specifications

The following tables summarize the NBG4115's hardware and firmware features.

Table 68 Hardware Features

Dimensions	140 mm (W) x 110 mm (D) x 30 mm (H)
Weight	190 g (without a 3G card installed)
SDRAM	32 MB
Flash Memory	4 MB
Power Specification	Input: 120~240 AC, 50~60 Hz Output: 12 V DC 1.25A
Ethernet ports	Auto-negotiating: 10 Mbps, 100 Mbps in either half-duplex or full-duplex mode. Auto-crossover: Use either crossover or straight-through Ethernet cables.
4-5 Port Switch	A combination of switch and router makes your NBG4115 a cost-effective and viable network solution. You can add up to four computers to the NBG4115 without the cost of a hub when connecting to the Internet through the WAN port. You can add up to five computers to the NBG4115 when you connect to the Internet in AP mode. Add more than four computers to your LAN by using a hub.
LEDs	PWR, LAN1-2, 3G, Internet, WAN, WLAN/WPS
Reset Button	The reset button is built into the rear panel. Use this button to restore the NBG4115 to its factory default settings. Press for 1 second to restart the device. Press for 5 seconds to restore to factory default settings.
WPS button	Press the WPS on two WPS enabled devices within 120 seconds for a security-enabled wireless connection.
Antenna	The NBG4115 is equipped with a 2dBi (2.4GHz) detachable antenna to provide clear radio transmission and reception on the wireless network.
USB Port	The NBG4115 has one built-in USB 2.0 type A for 3G connectivity. When a 3G card is plugged in and operational this port functions as a WAN port.
Operation Environment	Temperature: 0° C ~ 40° C / 32°F ~ 104°F Humidity: 20% ~ 90%
Storage Environment	Temperature: -30° C ~ 70° C / -22°F ~ 158°F Humidity: 20% ~ 95%

Table 69 Firmware Features

FEATURE	DESCRIPTION
Default LAN IP Address	192.168.1.1 (router) 192.168.1.2. (AP)
Default LAN Subnet Mask	255.255.255.0 (24 bits)
Default Password	1234
DHCP Pool	192.168.1.33 to 192.168.1.64
Wireless Interface	Wireless LAN
Default Wireless SSID	ZyXEL
Device Management	Use the Web Configurator to easily configure the rich range of features on the NBG4115.
Wireless Functionality	<p>Allows IEEE 802.11b and/or IEEE 802.11g wireless clients to connect to the NBG4115 wirelessly. Enable wireless security (WPA(2)-PSK) and/or MAC filtering to protect your wireless network.</p> <p>Note: The NBG4115 may be prone to RF (Radio Frequency) interference from other 2.4 GHz devices such as microwave ovens, wireless phones, Bluetooth enabled devices, and other wireless LANs.</p>
Firmware Upgrade	<p>Download new firmware (when available) from the ZyXEL web site and use the Web Configurator to put it on the NBG4115.</p> <p>Note: Only upload firmware for your specific model!</p>
Configuration Backup & Restoration	Make a copy of the NBG4115's configuration and put it back on the NBG4115 later if you decide you want to revert back to an earlier configuration.
Network Address Translation (NAT)	Each computer on your network must have its own unique IP address. Use NAT to convert a single public IP address to multiple private IP addresses for the computers on your network.
Firewall	You can configure firewall on the NBG4115 for secure Internet access. When the firewall is on, by default, all incoming traffic from the Internet to your network is blocked unless it is initiated from your network. This means that probes from the outside to your network are not allowed, but you can safely browse the Internet and download files for example.
Content Filter	<p>The NBG4115 blocks or allows access to web sites that you specify and blocks access to web sites with URLs that contain keywords that you specify. You can define time periods and days during which content filtering is enabled. You can also include or exclude particular computers on your network from content filtering.</p> <p>You can also subscribe to category-based content filtering that allows your NBG4115 to check web sites against an external database.</p>

Table 69 Firmware Features

FEATURE	DESCRIPTION
Bandwidth Management	You can efficiently manage traffic on your network by reserving bandwidth and giving priority to certain types of traffic and/or to particular computers.
Remote Management	This allows you to decide whether a service (HTTP or FTP traffic for example) from a computer on a network (LAN or WAN for example) can access the NBG4115.
Wireless LAN Scheduler	You can schedule the times the Wireless LAN is enabled/disabled.
Time and Date	Get the current time and date from an external server when you turn on your NBG4115. You can also set the time manually. These dates and times are then used in logs.
Port Forwarding	If you have a server (mail or web server for example) on your network, then use this feature to let people access it from the Internet.
DHCP (Dynamic Host Configuration Protocol)	Use this feature to have the NBG4115 assign IP addresses, an IP default gateway and DNS servers to computers on your network.
Dynamic DNS Support	With Dynamic DNS (Domain Name System) support, you can use a fixed URL, www.zyxel.com for example, with a dynamic IP address. You must register for this service with a Dynamic DNS service provider.
IP Multicast	IP Multicast is used to send traffic to a specific group of computers. The NBG4115 supports versions 1 and 2 of IGMP (Internet Group Management Protocol) used to join multicast groups (see RFC 2236).
Logging	Use logs for troubleshooting. You can view logs in the Web Configurator.
PPPoE	PPPoE mimics a dial-up Internet access connection.
PPTP Encapsulation	Point-to-Point Tunneling Protocol (PPTP) enables secure transfer of data through a Virtual Private Network (VPN). The NBG4115 supports one PPTP connection at a time.
Universal Plug and Play (UPnP)	The NBG4115 can communicate with other UPnP enabled devices in a network.

Pop-up Windows, JavaScripts and Java Permissions

In order to use the Web Configurator you need to allow:

- Web browser pop-up windows from your device.
- JavaScripts (enabled by default).
- Java permissions (enabled by default).

Note: Internet Explorer 6 screens are used here. Screens for other Internet Explorer versions may vary.

Internet Explorer Pop-up Blockers


You may have to disable pop-up blocking to log into your device.

Either disable pop-up blocking (enabled by default in Windows XP SP (Service Pack) 2) or allow pop-up blocking and create an exception for your device's IP address.

Disable pop-up Blockers

- 1 In Internet Explorer, select **Tools, Pop-up Blocker** and then select **Turn Off Pop-up Blocker**.

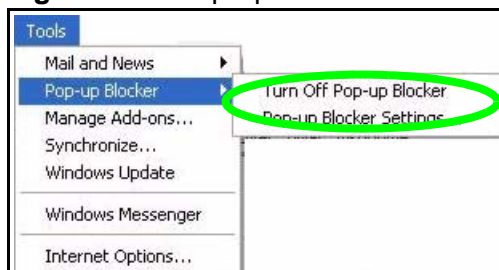Figure 116 Pop-up Blocker



You can also check if pop-up blocking is disabled in the **Pop-up Blocker** section in the **Privacy** tab.

- 1 In Internet Explorer, select **Tools, Internet Options, Privacy**.
- 2 Clear the **Block pop-ups** check box in the **Pop-up Blocker** section of the screen. This disables any web pop-up blockers you may have enabled.

Figure 117 Internet Options: Privacy



- 3 Click **Apply** to save this setting.


Enable pop-up Blockers with Exceptions

Alternatively, if you only want to allow pop-up windows from your device, see the following steps.

- 1 In Internet Explorer, select **Tools, Internet Options** and then the **Privacy** tab.

- 2 Select **Settings...** to open the **Pop-up Blocker Settings** screen.

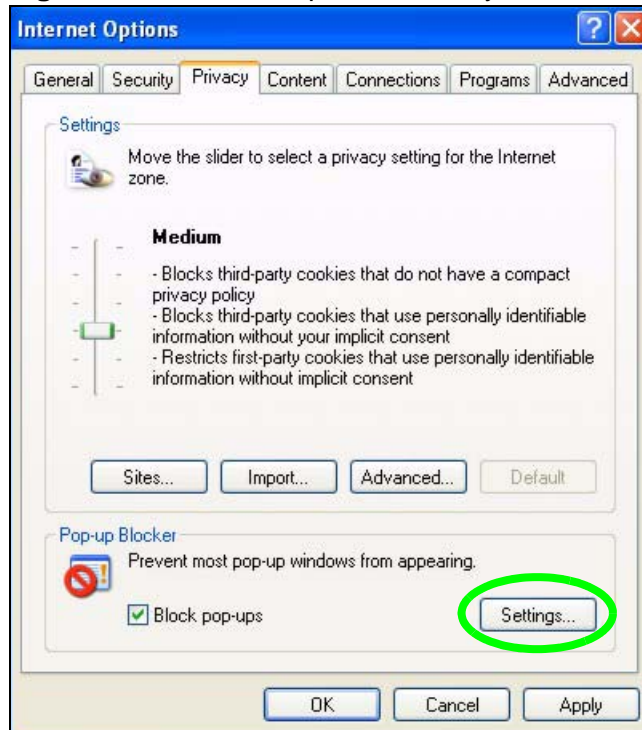
Figure 118 Internet Options: Privacy



- 3 Type the IP address of your device (the web page that you do not want to have blocked) with the prefix "http://". For example, http://192.168.167.1.

- 4 Click **Add** to move the IP address to the list of **Allowed sites**.

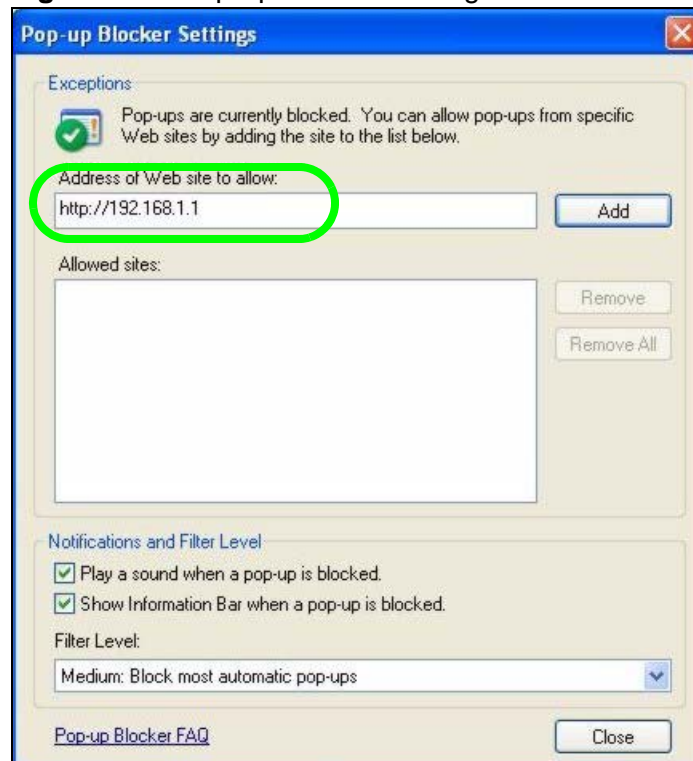Figure 119 Pop-up Blocker Settings




- 5 Click **Close** to return to the **Privacy** screen.
- 6 Click **Apply** to save this setting.

JavaScripts

If pages of the Web Configurator do not display properly in Internet Explorer, check that JavaScripts are allowed.

- 1 In Internet Explorer, click **Tools**, **Internet Options** and then the **Security** tab.

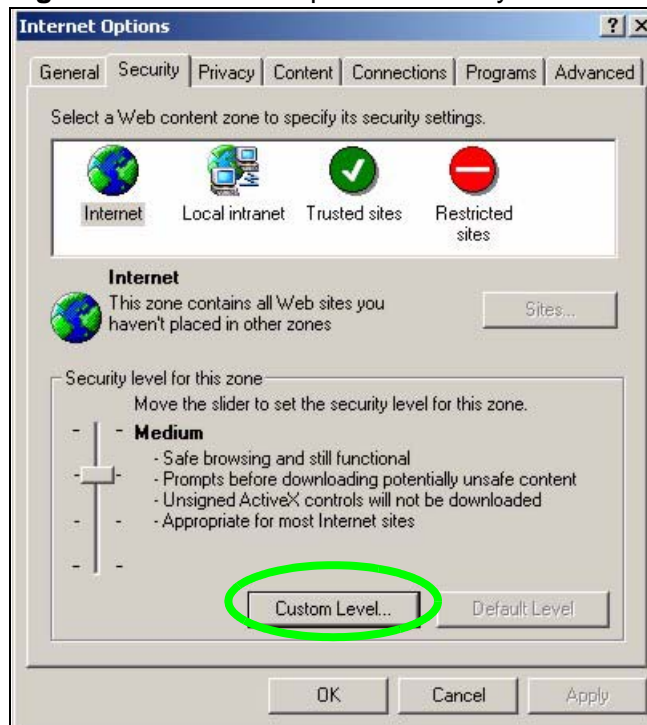
Figure 120 Internet Options: Security



- 2 Click the **Custom Level...** button.
- 3 Scroll down to **Scripting**.
- 4 Under **Active scripting** make sure that **Enable** is selected (the default).
- 5 Under **Scripting of Java applets** make sure that **Enable** is selected (the default).

- 6 Click **OK** to close the window.

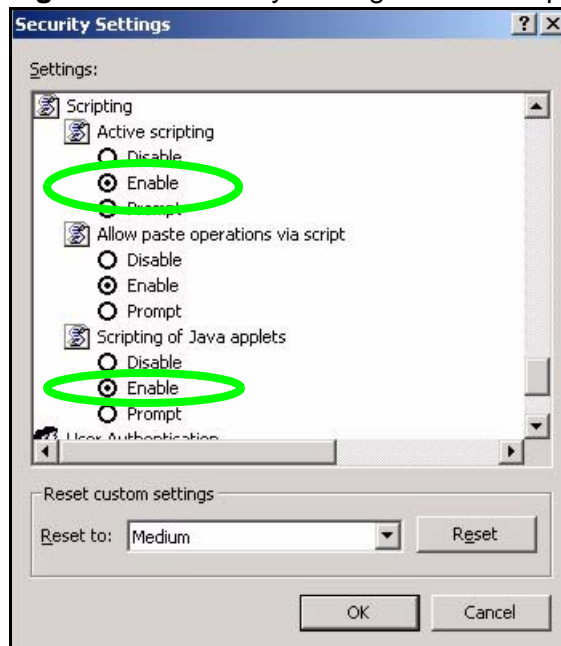Figure 121 Security Settings - Java Scripting




Java Permissions

- 1 From Internet Explorer, click **Tools, Internet Options** and then the **Security** tab.
- 2 Click the **Custom Level...** button.
- 3 Scroll down to **Microsoft VM**.
- 4 Under **Java permissions** make sure that a safety level is selected.

- 5 Click **OK** to close the window.

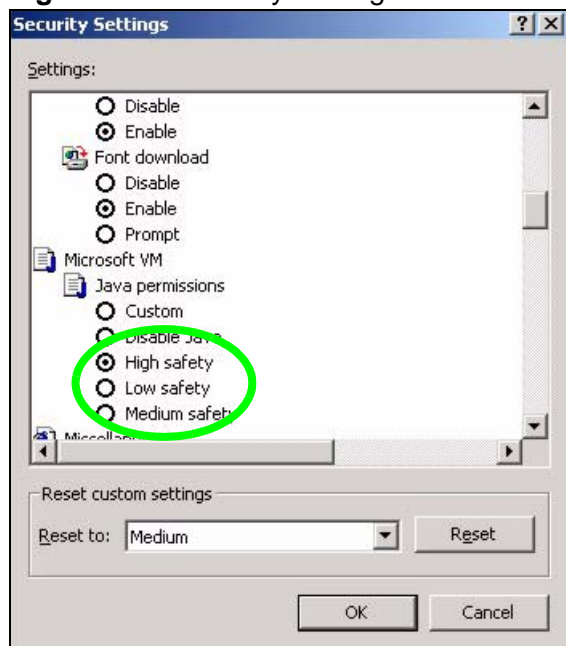Figure 122 Security Settings - Java




JAVA (Sun)

- 1 From Internet Explorer, click **Tools, Internet Options** and then the **Advanced** tab.
- 2 Make sure that **Use Java 2 for <applet>** under **Java (Sun)** is selected.

- 3 Click **OK** to close the window.

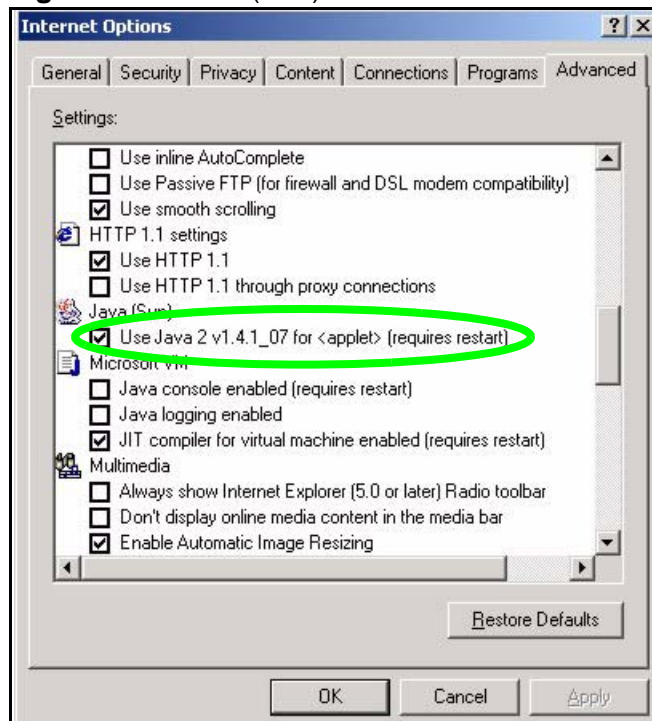Figure 123 Java (Sun)



IP Addresses and Subnetting

This appendix introduces IP addresses and subnet masks.

IP addresses identify individual devices on a network. Every networking device (including computers, servers, routers, printers, etc.) needs an IP address to communicate across the network. These networking devices are also known as hosts.

Subnet masks determine the maximum number of possible hosts on a network. You can also use subnet masks to divide one network into multiple sub-networks.

Introduction to IP Addresses

One part of the IP address is the network number, and the other part is the host ID. In the same way that houses on a street share a common street name, the hosts on a network share a common network number. Similarly, as each house has its own house number, each host on the network has its own unique identifying number - the host ID. Routers use the network number to send packets to the correct network, while the host ID determines to which host on the network the packets are delivered.


Structure

An IP address is made up of four parts, written in dotted decimal notation (for example, 192.168.1.1). Each of these four parts is known as an octet. An octet is an eight-digit binary number (for example 11000000, which is 192 in decimal notation).

Therefore, each octet has a possible range of 00000000 to 11111111 in binary, or 0 to 255 in decimal.

The following figure shows an example IP address in which the first three octets (192.168.1) are the network number, and the fourth octet (16) is the host ID.

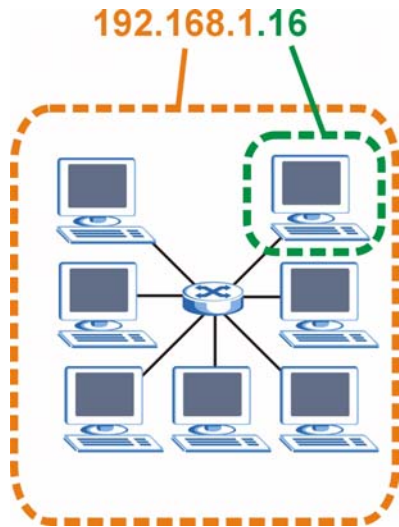Figure 124 Network Number and Host ID



How much of the IP address is the network number and how much is the host ID varies according to the subnet mask.

Subnet Masks

A subnet mask is used to determine which bits are part of the network number, and which bits are part of the host ID (using a logical AND operation). The term “subnet” is short for “sub-network”.

A subnet mask has 32 bits. If a bit in the subnet mask is a “1” then the corresponding bit in the IP address is part of the network number. If a bit in the subnet mask is “0” then the corresponding bit in the IP address is part of the host ID.

The following example shows a subnet mask identifying the network number (in bold text) and host ID of an IP address (192.168.1.2 in decimal).

Table 70 Subnet Mask - Identifying Network Number

	1ST OCTET: (192)	2ND OCTET: (168)	3RD OCTET: (1)	4TH OCTET (2)
IP Address (Binary)	11000000	10101000	00000001	00000010
Subnet Mask (Binary)	11111111	11111111	11111111	00000000

Table 70 Subnet Mask - Identifying Network Number

	1ST OCTET: (192)	2ND OCTET: (168)	3RD OCTET: (1)	4TH OCTET (2)
Network Number	11000000	10101000	00000001	
Host ID				00000010

By convention, subnet masks always consist of a continuous sequence of ones beginning from the leftmost bit of the mask, followed by a continuous sequence of zeros, for a total number of 32 bits.

Subnet masks can be referred to by the size of the network number part (the bits with a “1” value). For example, an “8-bit mask” means that the first 8 bits of the mask are ones and the remaining 24 bits are zeroes.

Subnet masks are expressed in dotted decimal notation just like IP addresses. The following examples show the binary and decimal notation for 8-bit, 16-bit, 24-bit and 29-bit subnet masks.

Table 71 Subnet Masks

	BINARY				DECIMAL
	1ST OCTET	2ND OCTET	3RD OCTET	4TH OCTET	
8-bit mask	11111111	00000000	00000000	00000000	255.0.0.0
16-bit mask	11111111	11111111	00000000	00000000	255.255.0.0
24-bit mask	11111111	11111111	11111111	00000000	255.255.255.0
29-bit mask	11111111	11111111	11111111	11111000	255.255.255.248

Network Size

The size of the network number determines the maximum number of possible hosts you can have on your network. The larger the number of network number bits, the smaller the number of remaining host ID bits.

An IP address with host IDs of all zeros is the IP address of the network (192.168.1.0 with a 24-bit subnet mask, for example). An IP address with host IDs of all ones is the broadcast address for that network (192.168.1.255 with a 24-bit subnet mask, for example).

As these two IP addresses cannot be used for individual hosts, calculate the maximum number of possible hosts in a network as follows:

Table 72 Maximum Host Numbers

SUBNET MASK		HOST ID SIZE		MAXIMUM NUMBER OF HOSTS
8 bits	255.0.0.0	24 bits	$2^{24} - 2$	16777214
16 bits	255.255.0.0	16 bits	$2^{16} - 2$	65534
24 bits	255.255.255.0	8 bits	$2^8 - 2$	254
29 bits	255.255.255.248	3 bits	$2^3 - 2$	6

Notation

Since the mask is always a continuous number of ones beginning from the left, followed by a continuous number of zeros for the remainder of the 32 bit mask, you can simply specify the number of ones instead of writing the value of each octet. This is usually specified by writing a "/" followed by the number of bits in the mask after the address.

For example, 192.1.1.0 /25 is equivalent to saying 192.1.1.0 with subnet mask 255.255.255.128.

The following table shows some possible subnet masks using both notations.

Table 73 Alternative Subnet Mask Notation

SUBNET MASK	ALTERNATIVE NOTATION	LAST OCTET (BINARY)	LAST OCTET (DECIMAL)
255.255.255.0	/24	0000 0000	0
255.255.255.128	/25	1000 0000	128
255.255.255.192	/26	1100 0000	192
255.255.255.224	/27	1110 0000	224
255.255.255.240	/28	1111 0000	240
255.255.255.248	/29	1111 1000	248
255.255.255.252	/30	1111 1100	252


Subnetting

You can use subnetting to divide one network into multiple sub-networks. In the following example a network administrator creates two sub-networks to isolate a group of servers from the rest of the company network for security reasons.

In this example, the company network address is 192.168.1.0. The first three octets of the address (192.168.1) are the network number, and the remaining octet is the host ID, allowing a maximum of $2^8 - 2$ or 254 possible hosts.

The following figure shows the company network before subnetting.

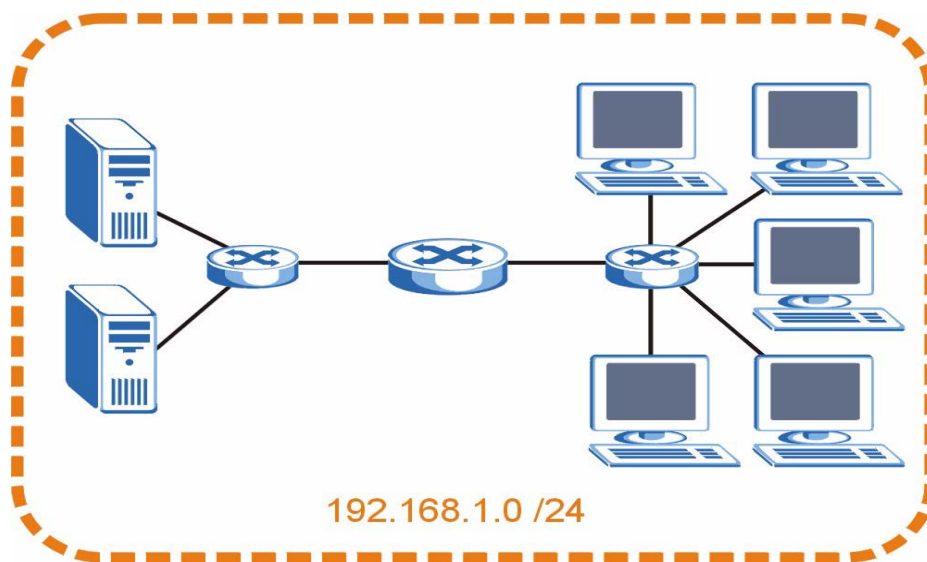Figure 125 Subnetting Example: Before Subnetting




You can “borrow” one of the host ID bits to divide the network 192.168.1.0 into two separate sub-networks. The subnet mask is now 25 bits (255.255.255.128 or /25).

The “borrowed” host ID bit can have a value of either 0 or 1, allowing two subnets; 192.168.1.0 /25 and 192.168.1.128 /25.

The following figure shows the company network after subnetting. There are now two sub-networks, **A** and **B**.

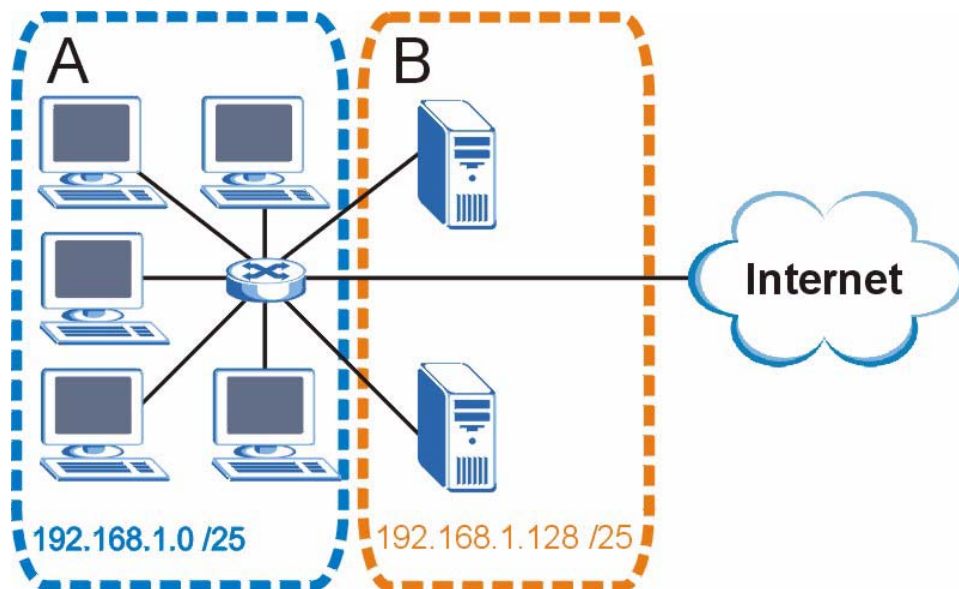Figure 126 Subnetting Example: After Subnetting



In a 25-bit subnet the host ID has 7 bits, so each sub-network has a maximum of $2^7 - 2$ or 126 possible hosts (a host ID of all zeroes is the subnet's address itself, all ones is the subnet's broadcast address).

192.168.1.0 with mask 255.255.255.128 is subnet **A** itself, and 192.168.1.127 with mask 255.255.255.128 is its broadcast address. Therefore, the lowest IP address that can be assigned to an actual host for subnet **A** is 192.168.1.1 and the highest is 192.168.1.126.

Similarly, the host ID range for subnet **B** is 192.168.1.129 to 192.168.1.254.

Example: Four Subnets

The previous example illustrated using a 25-bit subnet mask to divide a 24-bit address into two subnets. Similarly, to divide a 24-bit address into four subnets, you need to "borrow" two host ID bits to give four possible combinations (00, 01, 10 and 11). The subnet mask is 26 bits (11111111.11111111.11111111.11000000) or 255.255.255.192.

Each subnet contains 6 host ID bits, giving $2^6 - 2$ or 62 hosts for each subnet (a host ID of all zeroes is the subnet itself, all ones is the subnet's broadcast address).

Table 74 Subnet 1

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address (Decimal)	192.168.1.	0
IP Address (Binary)	11000000.10101000.00000001.	00000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.0	Lowest Host ID: 192.168.1.1	
Broadcast Address: 192.168.1.63	Highest Host ID: 192.168.1.62	

Table 75 Subnet 2

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	64
IP Address (Binary)	11000000.10101000.00000001.	01000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.64	Lowest Host ID: 192.168.1.65	
Broadcast Address: 192.168.1.127	Highest Host ID: 192.168.1.126	

Table 76 Subnet 3

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	128
IP Address (Binary)	11000000.10101000.00000001.	10000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000
Subnet Address: 192.168.1.128	Lowest Host ID: 192.168.1.129	
Broadcast Address: 192.168.1.191	Highest Host ID: 192.168.1.190	

Table 77 Subnet 4

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
IP Address	192.168.1.	192
IP Address (Binary)	11000000.10101000.00000001.	11000000
Subnet Mask (Binary)	11111111.11111111.11111111.	11000000

Table 77 Subnet 4 (continued)

IP/SUBNET MASK	NETWORK NUMBER	LAST OCTET BIT VALUE
Subnet Address: 192.168.1.192	Lowest Host ID: 192.168.1.193	
Broadcast Address: 192.168.1.255	Highest Host ID: 192.168.1.254	

Example: Eight Subnets

Similarly, use a 27-bit mask to create eight subnets (000, 001, 010, 011, 100, 101, 110 and 111).

The following table shows IP address last octet values for each subnet.

Table 78 Eight Subnets

SUBNET	SUBNET ADDRESS	FIRST ADDRESS	LAST ADDRESS	BROADCAST ADDRESS
1	0	1	30	31
2	32	33	62	63
3	64	65	94	95
4	96	97	126	127
5	128	129	158	159
6	160	161	190	191
7	192	193	222	223
8	224	225	254	255

Subnet Planning

The following table is a summary for subnet planning on a network with a 24-bit network number.

Table 79 24-bit Network Number Subnet Planning

NO. "BORROWED" HOST BITS	SUBNET MASK	NO. SUBNETS	NO. HOSTS PER SUBNET
1	255.255.255.128 (/25)	2	126
2	255.255.255.192 (/26)	4	62
3	255.255.255.224 (/27)	8	30
4	255.255.255.240 (/28)	16	14
5	255.255.255.248 (/29)	32	6
6	255.255.255.252 (/30)	64	2
7	255.255.255.254 (/31)	128	1

The following table is a summary for subnet planning on a network with a 16-bit network number.

Table 80 16-bit Network Number Subnet Planning

NO. "BORROWED" HOST BITS	SUBNET MASK	NO. SUBNETS	NO. HOSTS PER SUBNET
1	255.255.128.0 (/17)	2	32766
2	255.255.192.0 (/18)	4	16382
3	255.255.224.0 (/19)	8	8190
4	255.255.240.0 (/20)	16	4094
5	255.255.248.0 (/21)	32	2046
6	255.255.252.0 (/22)	64	1022
7	255.255.254.0 (/23)	128	510
8	255.255.255.0 (/24)	256	254
9	255.255.255.128 (/25)	512	126
10	255.255.255.192 (/26)	1024	62
11	255.255.255.224 (/27)	2048	30
12	255.255.255.240 (/28)	4096	14
13	255.255.255.248 (/29)	8192	6
14	255.255.255.252 (/30)	16384	2
15	255.255.255.254 (/31)	32768	1

Configuring IP Addresses

Where you obtain your network number depends on your particular situation. If the ISP or your network administrator assigns you a block of registered IP addresses, follow their instructions in selecting the IP addresses and the subnet mask.

If the ISP did not explicitly give you an IP network number, then most likely you have a single user account and the ISP will assign you a dynamic IP address when the connection is established. If this is the case, it is recommended that you select a network number from 192.168.0.0 to 192.168.255.0. The Internet Assigned Number Authority (IANA) reserved this block of addresses specifically for private use; please do not use any other number unless you are told otherwise. You must also enable Network Address Translation (NAT) on the NBG4115.

Once you have decided on the network number, pick an IP address for your NBG4115 that is easy to remember (for instance, 192.168.1.1) but make sure that no other device on your network is using that IP address.

The subnet mask specifies the network number portion of an IP address. Your NBG4115 will compute the subnet mask automatically based on the IP address

that you entered. You don't need to change the subnet mask computed by the NBG4115 unless you are instructed to do otherwise.

Private IP Addresses

Every machine on the Internet must have a unique address. If your networks are isolated from the Internet (running only between two branch offices, for example) you can assign any IP addresses to the hosts without problems. However, the Internet Assigned Numbers Authority (IANA) has reserved the following three blocks of IP addresses specifically for private networks:

- 10.0.0.0 — 10.255.255.255
- 172.16.0.0 — 172.31.255.255
- 192.168.0.0 — 192.168.255.255

You can obtain your IP address from the IANA, from an ISP, or it can be assigned from a private network. If you belong to a small organization and your Internet access is through an ISP, the ISP can provide you with the Internet addresses for your local networks. On the other hand, if you are part of a much larger organization, you should consult your network administrator for the appropriate IP addresses.

Regardless of your particular situation, do not create an arbitrary IP address; always follow the guidelines above. For more information on address assignment, please refer to RFC 1597, *Address Allocation for Private Internets* and RFC 1466, *Guidelines for Management of IP Address Space*.

Setting up Your Computer's IP Address

All computers must have a 10M or 100M Ethernet adapter card and TCP/IP installed.

Windows 95/98/Me/NT/2000/XP, Macintosh OS 7 and later operating systems and all versions of UNIX/LINUX include the software components you need to install and use TCP/IP on your computer. Windows 3.1 requires the purchase of a third-party TCP/IP application package.

TCP/IP should already be installed on computers using Windows NT/2000/XP, Macintosh OS 7 and later operating systems.


After the appropriate TCP/IP components are installed, configure the TCP/IP settings in order to "communicate" with your network.

If you manually assign IP information instead of using dynamic assignment, make sure that your computers have IP addresses that place them in the same subnet as the Prestige's LAN port.

Windows 95/98/Me

Click **Start, Settings, Control Panel** and double-click the **Network** icon to open the **Network** window.

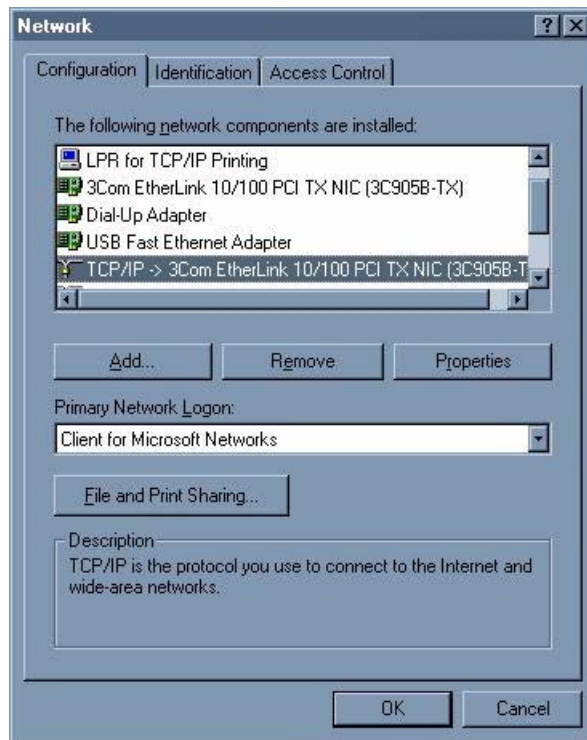Figure 127 WIndows 95/98/Me: Network: Configuration



Installing Components

The **Network** window **Configuration** tab displays a list of installed components. You need a network adapter, the TCP/IP protocol and Client for Microsoft Networks.

If you need the adapter:

- 1 In the **Network** window, click **Add**.
- 2 Select **Adapter** and then click **Add**.
- 3 Select the manufacturer and model of your network adapter and then click **OK**.

If you need TCP/IP:

- 1 In the **Network** window, click **Add**.
- 2 Select **Protocol** and then click **Add**.

- 3 Select **Microsoft** from the list of **manufacturers**.
- 4 Select **TCP/IP** from the list of network protocols and then click **OK**.


If you need Client for Microsoft Networks:

- 1 Click **Add**.
- 2 Select **Client** and then click **Add**.
- 3 Select **Microsoft** from the list of manufacturers.
- 4 Select **Client for Microsoft Networks** from the list of network clients and then click **OK**.
- 5 Restart your computer so the changes you made take effect.

Configuring


- 1 In the **Network** window **Configuration** tab, select your network adapter's TCP/IP entry and click **Properties**
- 2 Click the **IP Address** tab.
 - If your IP address is dynamic, select **Obtain an IP address automatically**.
 - If you have a static IP address, select **Specify an IP address** and type your information into the **IP Address** and **Subnet Mask** fields.

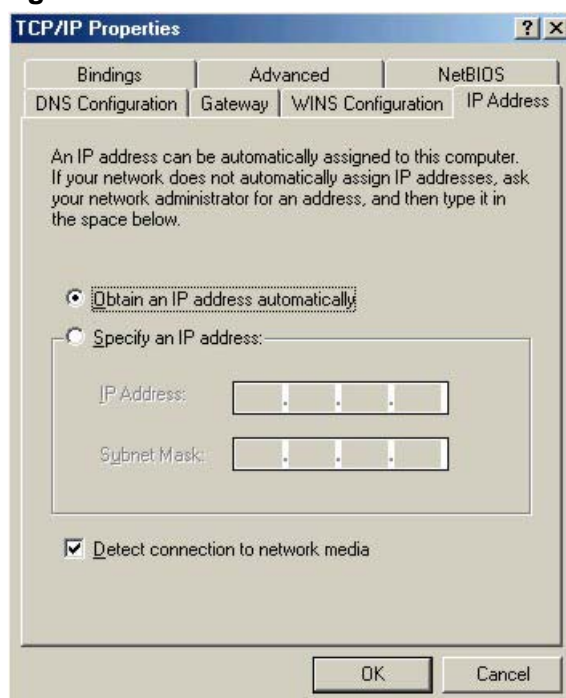Figure 128 Windows 95/98/Me: TCP/IP Properties: IP Address



- 3 Click the **DNS** Configuration tab.
 - If you do not know your DNS information, select **Disable DNS**.
 - If you know your DNS information, select **Enable DNS** and type the information in the fields below (you may not need to fill them all in).

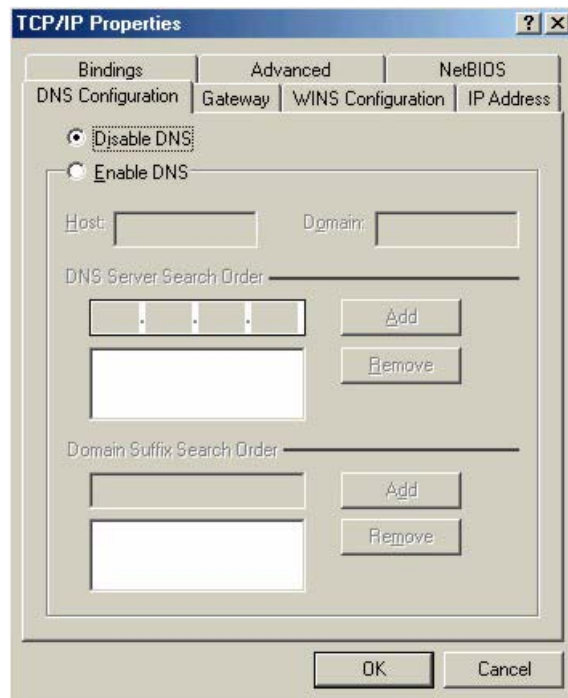Figure 129 Windows 95/98/Me: TCP/IP Properties: DNS Configuration



- 4 Click the **Gateway** tab.
 - If you do not know your gateway's IP address, remove previously installed gateways.
 - If you have a gateway IP address, type it in the **New gateway field** and click **Add**.
- 5 Click **OK** to save and close the **TCP/IP Properties** window.
- 6 Click **OK** to close the **Network** window. Insert the Windows CD if prompted.
- 7 Turn on your Prestige and restart your computer when prompted.

Verifying Settings

- 1 Click **Start** and then **Run**.
- 2 In the **Run** window, type "winipcfg" and then click **OK** to open the **IP Configuration** window.


- 3 Select your network adapter. You should see your computer's IP address, subnet mask and default gateway.

Windows 2000/NT/XP

The following example figures use the default Windows XP GUI theme.

- 1 Click **start** (**Start** in Windows 2000/NT), **Settings**, **Control Panel**.

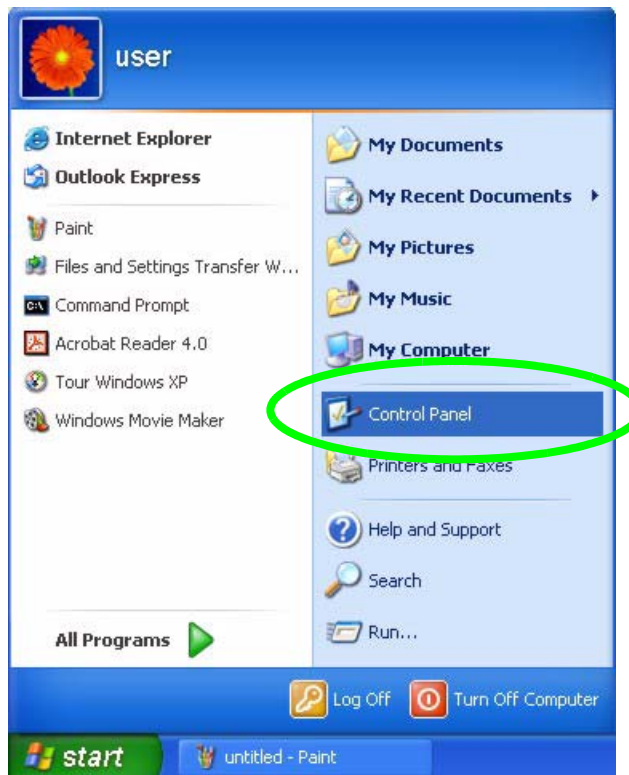Figure 130 Windows XP: Start Menu




- 2 In the **Control Panel**, double-click **Network Connections (Network and Dial-up Connections)** in Windows 2000/NT).

Figure 131 Windows XP: Control Panel




- 3 Right-click **Local Area Connection** and then click **Properties**.

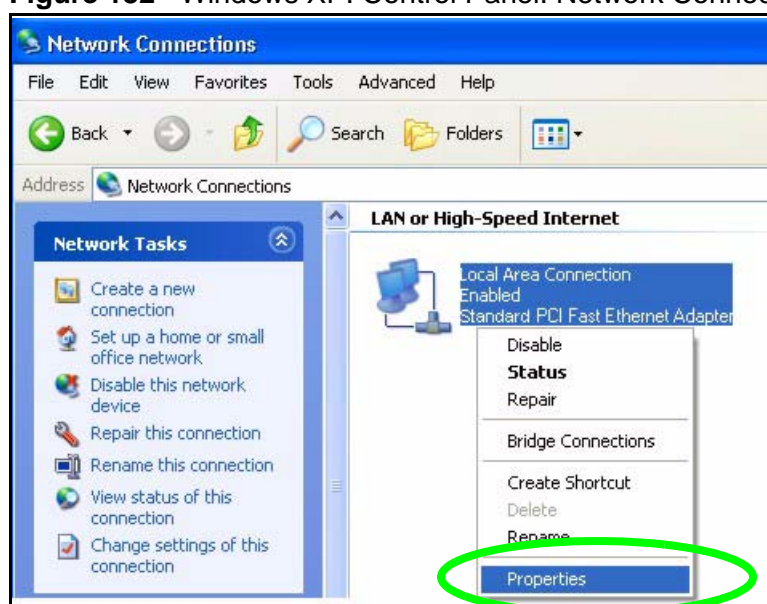Figure 132 Windows XP: Control Panel: Network Connections: Properties



- 4 Select **Internet Protocol (TCP/IP)** (under the **General** tab in Win XP) and then click **Properties**.

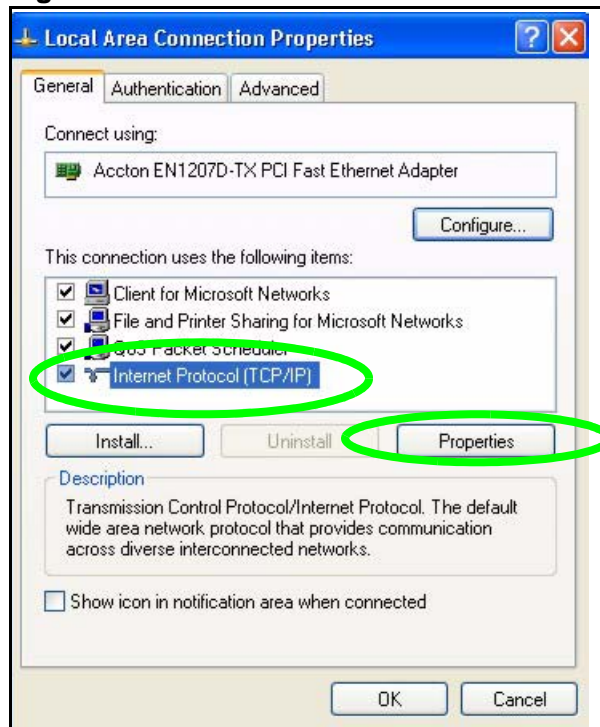
Figure 133 Windows XP: Local Area Connection Properties



- 5 The **Internet Protocol TCP/IP Properties** window opens (the **General** tab in Windows XP).
 - If you have a dynamic IP address click **Obtain an IP address automatically**.
 - If you have a static IP address click **Use the following IP Address** and fill in the **IP address**, **Subnet mask**, and **Default gateway** fields.

- Click **Advanced**.

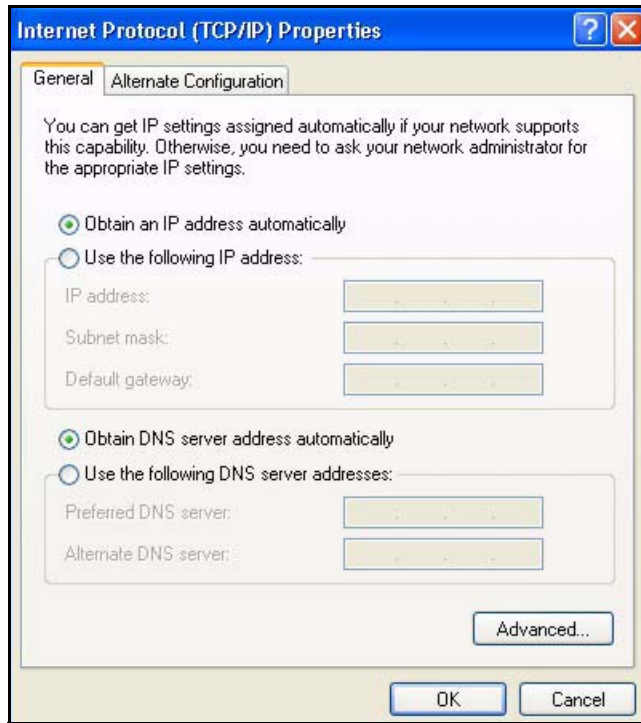Figure 134 Windows XP: Internet Protocol (TCP/IP) Properties




- 6 If you do not know your gateway's IP address, remove any previously installed gateways in the **IP Settings** tab and click **OK**.

Do one or more of the following if you want to configure additional IP addresses:

- In the **IP Settings** tab, in IP addresses, click **Add**.
- In **TCP/IP Address**, type an IP address in **IP address** and a subnet mask in **Subnet mask**, and then click **Add**.
- Repeat the above two steps for each IP address you want to add.
- Configure additional default gateways in the **IP Settings** tab by clicking **Add** in **Default gateways**.
- In **TCP/IP Gateway Address**, type the IP address of the default gateway in **Gateway**. To manually configure a default metric (the number of transmission hops), clear the **Automatic metric** check box and type a metric in **Metric**.
- Click **Add**.
- Repeat the previous three steps for each default gateway you want to add.

- Click **OK** when finished.

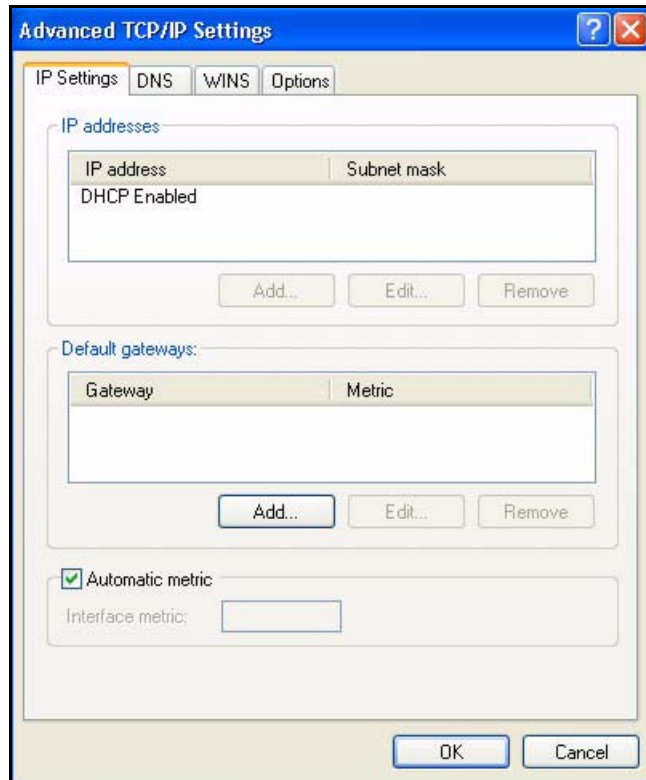Figure 135 Windows XP: Advanced TCP/IP Properties




7 In the **Internet Protocol TCP/IP Properties** window (the **General** tab in Windows XP):

- Click **Obtain DNS server address automatically** if you do not know your DNS server IP address(es).
- If you know your DNS server IP address(es), click **Use the following DNS server addresses**, and type them in the **Preferred DNS server** and **Alternate DNS server** fields.

If you have previously configured DNS servers, click **Advanced** and then the **DNS** tab to order them.

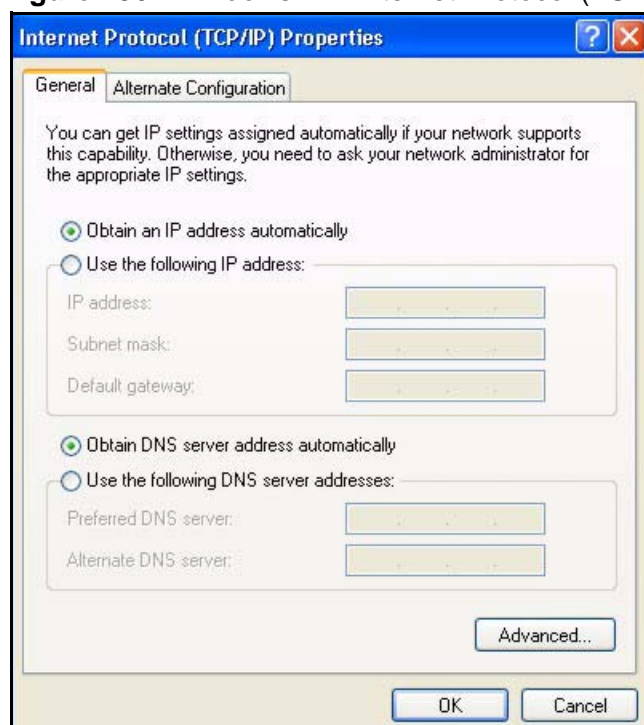Figure 136 Windows XP: Internet Protocol (TCP/IP) Properties



- 8 Click **OK** to close the **Internet Protocol (TCP/IP) Properties** window.
- 9 Click **Close** (**OK** in Windows 2000/NT) to close the **Local Area Connection Properties** window.
- 10 Close the **Network Connections** window (**Network and Dial-up Connections** in Windows 2000/NT).
- 11 Turn on your Prestige and restart your computer (if prompted).


Verifying Settings

- 1 Click **Start, All Programs, Accessories** and then **Command Prompt**.
- 2 In the **Command Prompt** window, type "ipconfig" and then press [ENTER]. You can also open **Network Connections**, right-click a network connection, click **Status** and then click the **Support** tab.

Macintosh OS 8/9


- 1 Click the **Apple** menu, **Control Panel** and double-click **TCP/IP** to open the **TCP/IP Control Panel**.

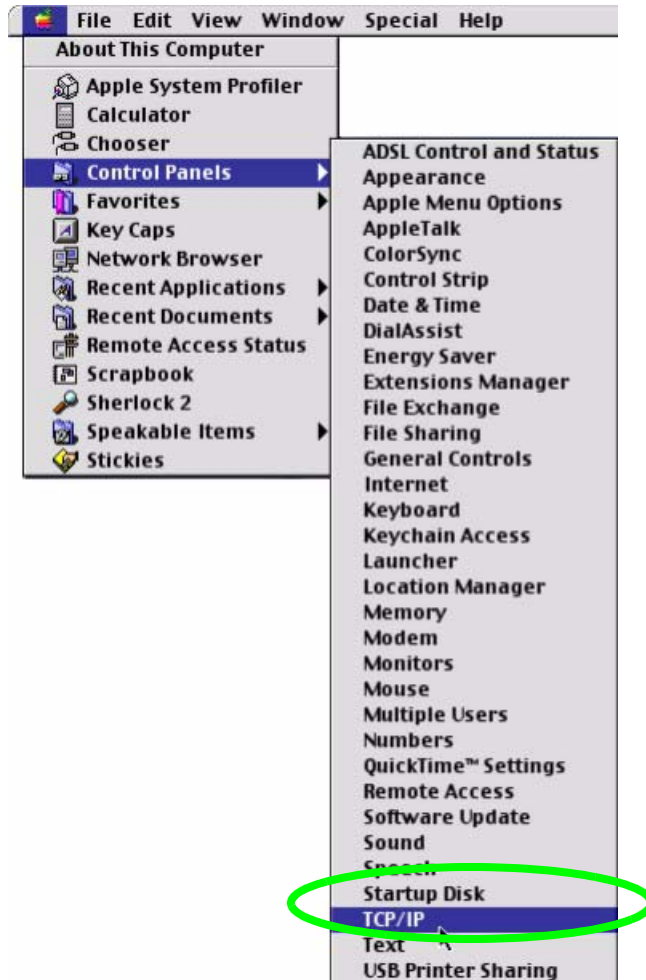Figure 137 Macintosh OS 8/9: Apple Menu



- 2 Select **Ethernet built-in** from the **Connect via** list.

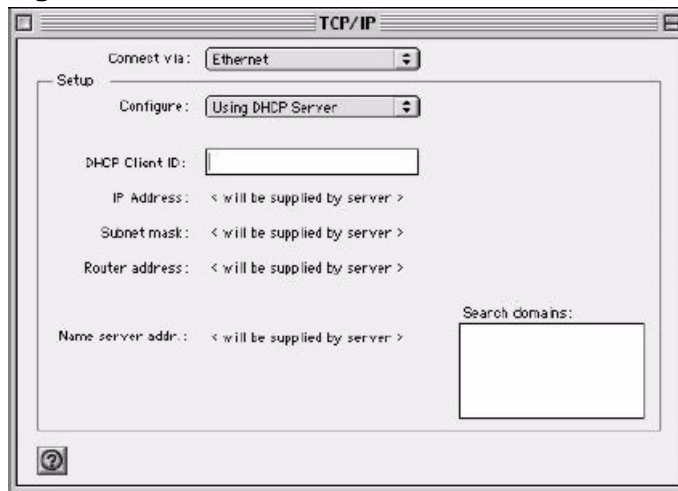Figure 138 Macintosh OS 8/9: TCP/IP



- 3 For dynamically assigned settings, select **Using DHCP Server** from the **Configure:** list.
- 4 For statically assigned settings, do the following:
 - From the **Configure** box, select **Manually**.
 - Type your IP address in the **IP Address** box.
 - Type your subnet mask in the **Subnet mask** box.
 - Type the IP address of your Prestige in the **Router address** box.
- 5 Close the **TCP/IP Control Panel**.
- 6 Click **Save** if prompted, to save changes to your configuration.
- 7 Turn on your Prestige and restart your computer (if prompted).


Verifying Settings

Check your TCP/IP properties in the **TCP/IP Control Panel** window.

Macintosh OS X


- 1 Click the **Apple** menu, and click **System Preferences** to open the **System Preferences** window.

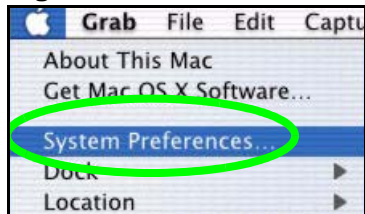Figure 139 Macintosh OS X: Apple Menu



- 2 Click **Network** in the icon bar.
 - Select **Automatic** from the **Location** list.
 - Select **Built-in Ethernet** from the **Show** list.
 - Click the **TCP/IP** tab.
- 3 For dynamically assigned settings, select **Using DHCP** from the **Configure** list.

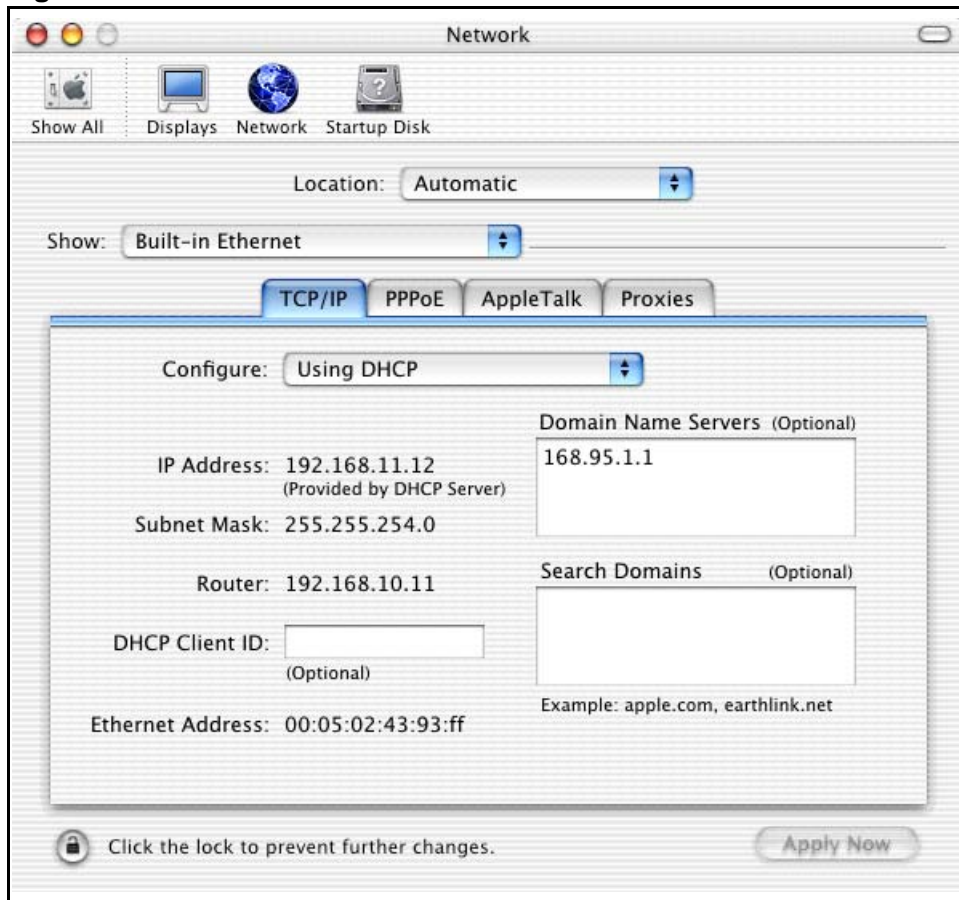Figure 140 Macintosh OS X: Network



- 4 For statically assigned settings, do the following:
 - From the **Configure** box, select **Manually**.
 - Type your IP address in the **IP Address** box.
 - Type your subnet mask in the **Subnet mask** box.
 - Type the IP address of your Prestige in the **Router address** box.
- 5 Click **Apply Now** and close the window.
- 6 Turn on your Prestige and restart your computer (if prompted).

Verifying Settings

Check your TCP/IP properties in the **Network** window.

Linux

This section shows you how to configure your computer's TCP/IP settings in Red Hat Linux 9.0. Procedure, screens and file location may vary depending on your Linux distribution and release version.


Note: Make sure you are logged in as the root administrator.

Using the K Desktop Environment (KDE)

Follow the steps below to configure your computer IP address using the KDE.

- 1 Click the Red Hat button (located on the bottom left corner), select **System Setting** and click **Network**.

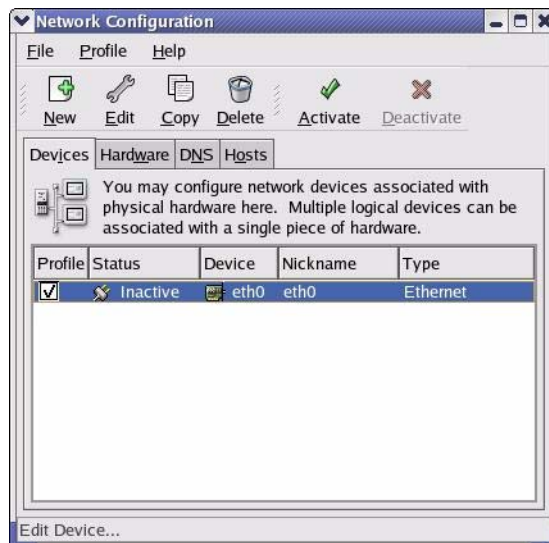Figure 141 Red Hat 9.0: KDE: Network Configuration: Devices




- 2 Double-click on the profile of the network card you wish to configure. The **Ethernet Device General** screen displays as shown.

Figure 142 Red Hat 9.0: KDE: Ethernet Device: General




- If you have a dynamic IP address click **Automatically obtain IP address settings with** and select **dhcp** from the drop down list.
 - If you have a static IP address click **Statically set IP Addresses** and fill in the **Address**, **Subnet mask**, and **Default Gateway Address** fields.
- 3 Click **OK** to save the changes and close the **Ethernet Device General** screen.
 - 4 If you know your DNS server IP address(es), click the **DNS** tab in the **Network Configuration** screen. Enter the DNS server information in the fields provided.

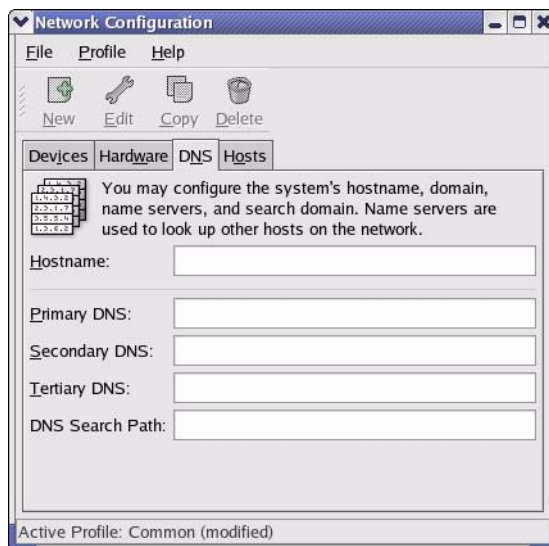Figure 143 Red Hat 9.0: KDE: Network Configuration: DNS



- 5 Click the **Devices** tab.
- 6 Click the **Activate** button to apply the changes. The following screen displays. Click **Yes to save the changes in all screens**.

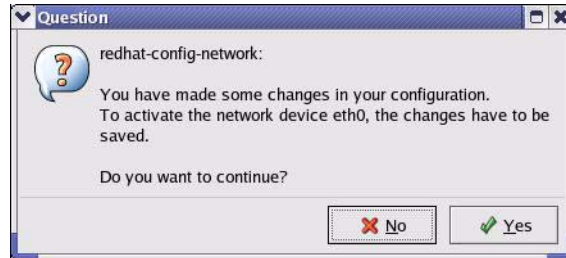Figure 144 Red Hat 9.0: KDE: Network Configuration: Activate



- 7 After the network card restart process is complete, make sure the **Status** is **Active** in the **Network Configuration** screen.

Using Configuration Files

Follow the steps below to edit the network configuration files and set your computer IP address.

- 1 Assuming that you have only one network card on the computer, locate the `ifconfig-eth0` configuration file (where `eth0` is the name of the Ethernet card). Open the configuration file with any plain text editor.
 - If you have a dynamic IP address, enter **dhcp** in the `BOOTPROTO=` field. The following figure shows an example.

Figure 145 Red Hat 9.0: Dynamic IP Address Setting in `ifconfig-eth0`

```
DEVICE=eth0
ONBOOT=yes
BOOTPROTO=dhcp
USERCTL=no
PEERDNS=yes
TYPE=Ethernet
```


- If you have a static IP address, enter **static** in the `BOOTPROTO=` field. Type `IPADDR=` followed by the IP address (in dotted decimal notation) and type `NETMASK=` followed by the subnet mask. The following example shows an example where the static IP address is 192.168.1.10 and the subnet mask is 255.255.255.0.

Figure 146 Red Hat 9.0: Static IP Address Setting in `ifconfig-eth0`

```
DEVICE=eth0
ONBOOT=yes
BOOTPROTO=static
IPADDR=192.168.1.10
NETMASK=255.255.255.0
USERCTL=no
PEERDNS=yes
TYPE=Ethernet
```

- 2 If you know your DNS server IP address(es), enter the DNS server information in the `resolv.conf` file in the `/etc` directory. The following figure shows an example where two DNS server IP addresses are specified.

Figure 147 Red Hat 9.0: DNS Settings in `resolv.conf`

```
nameserver 172.23.5.1
nameserver 172.23.5.2
```

- 3 After you edit and save the configuration files, you must restart the network card. Enter `./network restart` in the `/etc/rc.d/init.d` directory. The following figure shows an example.

Figure 148 Red Hat 9.0: Restart Ethernet Card

```
[root@localhost init.d]# network restart

Shutting down interface eth0:           [OK]
Shutting down loopback interface:       [OK]
Setting network parameters:            [OK]
Bringing up loopback interface:         [OK]
Bringing up interface eth0:            [OK]
```

24.6.1 Verifying Settings

Enter `ifconfig` in a terminal screen to check your TCP/IP properties.

Figure 149 Red Hat 9.0: Checking TCP/IP Properties

```
[root@localhost]# ifconfig
eth0      Link encap:Ethernet  HWaddr 00:50:BA:72:5B:44
          inet addr:172.23.19.129  Bcast:172.23.19.255  Mask:255.255.255.0
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:717 errors:0 dropped:0 overruns:0 frame:0
          TX packets:13 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:100
          RX bytes:730412 (713.2 Kb)  TX bytes:1570 (1.5 Kb)
          Interrupt:10 Base address:0x1000
[root@localhost]#
```

Wireless LANs


Wireless LAN Topologies

This section discusses ad-hoc and infrastructure wireless LAN topologies.

Ad-hoc Wireless LAN Configuration

The simplest WLAN configuration is an independent (Ad-hoc) WLAN that connects a set of computers with wireless stations (A, B, C). Any time two or more wireless adapters are within range of each other, they can set up an independent network, which is commonly referred to as an Ad-hoc network or Independent Basic Service Set (IBSS). The following diagram shows an example of notebook computers using wireless adapters to form an Ad-hoc wireless LAN.

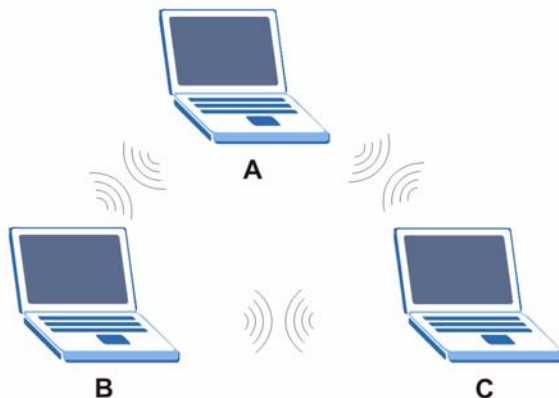Figure 150 Peer-to-Peer Communication in an Ad-hoc Network




BSS

A Basic Service Set (BSS) exists when all communications between wireless stations or between a wireless station and a wired network client go through one access point (AP).

Intra-BSS traffic is traffic between wireless stations in the BSS. When Intra-BSS is enabled, wireless station A and B can access the wired network and communicate

with each other. When Intra-BSS is disabled, wireless station A and B can still access the wired network but cannot communicate with each other.

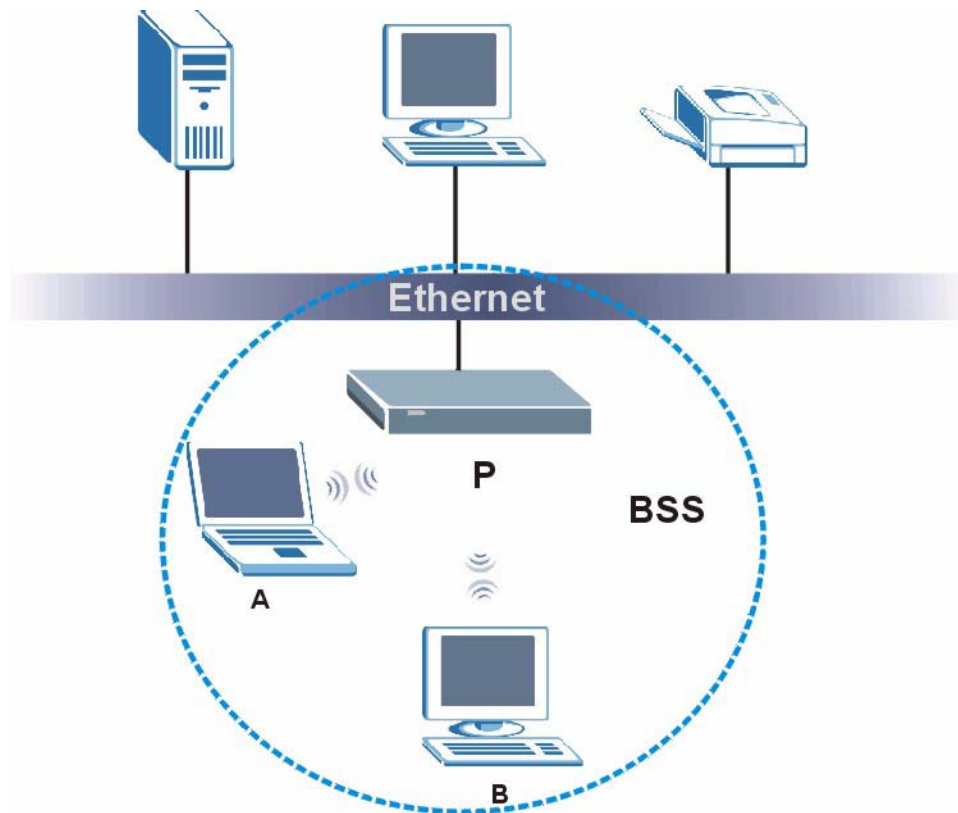Figure 151 Basic Service Set




ESS

An Extended Service Set (ESS) consists of a series of overlapping BSSs, each containing an access point, with each access point connected together by a wired network. This wired connection between APs is called a Distribution System (DS).

This type of wireless LAN topology is called an Infrastructure WLAN. The Access Points not only provide communication with the wired network but also mediate wireless network traffic in the immediate neighborhood.

An ESSID (ESS IDentification) uniquely identifies each ESS. All access points and their associated wireless stations within the same ESS must have the same ESSID in order to communicate.

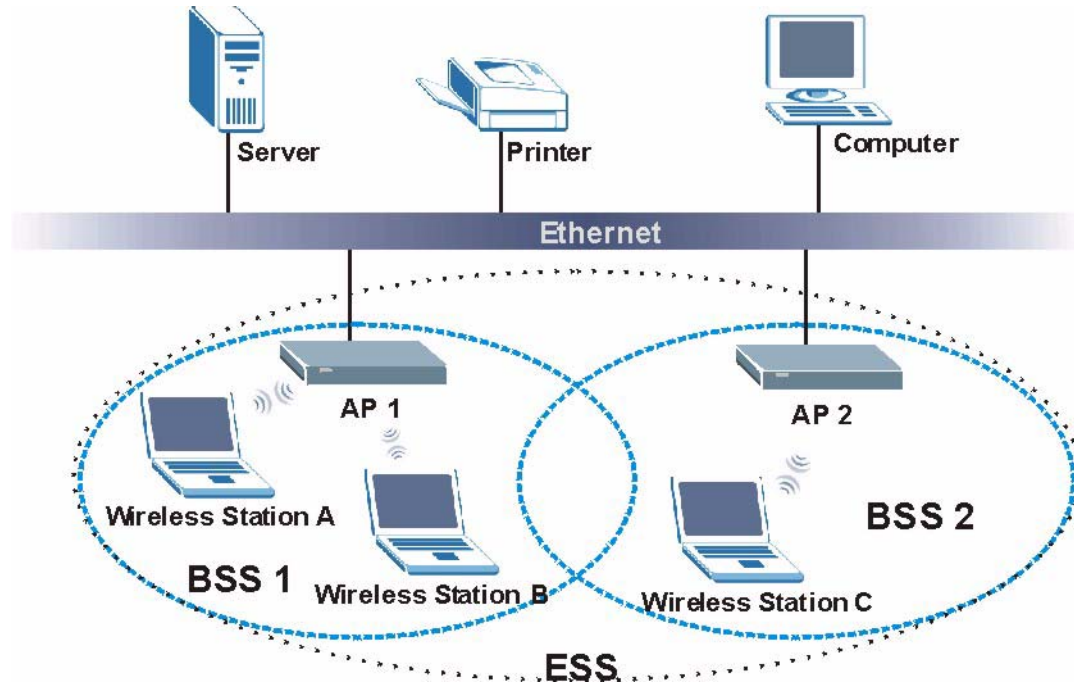Figure 152 Infrastructure WLAN



Channel

A channel is the radio frequency(ies) used by IEEE 802.11a/b/g wireless devices. Channels available depend on your geographical area. You may have a choice of channels (for your region) so you should use a different channel than an adjacent AP (access point) to reduce interference. Interference occurs when radio signals from different access points overlap causing interference and degrading performance.


Adjacent channels partially overlap however. To avoid interference due to overlap, your AP should be on a channel at least five channels away from a channel that an adjacent AP is using. For example, if your region has 11 channels and an adjacent AP is using channel 1, then you need to select a channel between 6 or 11.

RTS/CTS

A hidden node occurs when two stations are within range of the same access point, but are not within range of each other. The following figure illustrates a hidden node. Both stations (STA) are within range of the access point (AP) or

wireless gateway, but out-of-range of each other, so they cannot "hear" each other, that is they do not know if the channel is currently being used. Therefore, they are considered hidden from each other.

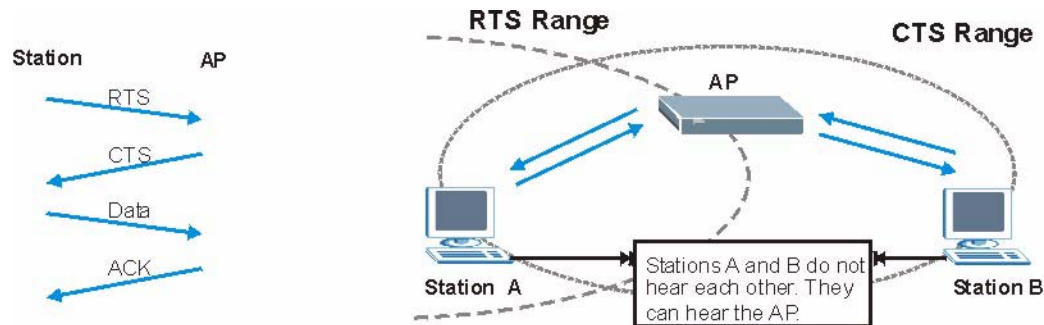Figure 153 RTS/CTS



When station A sends data to the AP, it might not know that the station B is already using the channel. If these two stations send data at the same time, collisions may occur when both sets of data arrive at the AP at the same time, resulting in a loss of messages for both stations.

RTS/CTS is designed to prevent collisions due to hidden nodes. An **RTS/CTS** defines the biggest size data frame you can send before an RTS (Request To Send)/CTS (Clear to Send) handshake is invoked.

When a data frame exceeds the **RTS/CTS** value you set (between 0 to 2432 bytes), the station that wants to transmit this frame must first send an RTS (Request To Send) message to the AP for permission to send it. The AP then responds with a CTS (Clear to Send) message to all other stations within its range to notify them to defer their transmission. It also reserves and confirms with the requesting station the time frame for the requested transmission.

Stations can send frames smaller than the specified **RTS/CTS** directly to the AP without the RTS (Request To Send)/CTS (Clear to Send) handshake.

You should only configure **RTS/CTS** if the possibility of hidden nodes exists on your network and the "cost" of resending large frames is more than the extra network overhead involved in the RTS (Request To Send)/CTS (Clear to Send) handshake.

If the **RTS/CTS** value is greater than the **Fragmentation Threshold** value (see next), then the RTS (Request To Send)/CTS (Clear to Send) handshake will never occur as data frames will be fragmented before they reach **RTS/CTS** size.

Note: Enabling the RTS Threshold causes redundant network overhead that could negatively affect the throughput performance instead of providing a remedy.

Fragmentation Threshold

A **Fragmentation Threshold** is the maximum data fragment size (between 256 and 2432 bytes) that can be sent in the wireless network before the AP will fragment the packet into smaller data frames.

A large **Fragmentation Threshold** is recommended for networks not prone to interference while you should set a smaller threshold for busy networks or networks that are prone to interference.

If the **Fragmentation Threshold** value is smaller than the **RTS/CTS** value (see previously) you set then the RTS (Request To Send)/CTS (Clear to Send) handshake will never occur as data frames will be fragmented before they reach **RTS/CTS** size.

Preamble Type

A preamble is used to synchronize the transmission timing in your wireless network. There are two preamble modes: **Long** and **Short**.

Short preamble takes less time to process and minimizes overhead, so it should be used in a good wireless network environment when all wireless stations support it.

Select **Long** if you have a 'noisy' network or are unsure of what preamble mode your wireless stations support as all IEEE 802.11b compliant wireless adapters must support long preamble. However, not all wireless adapters support short preamble. Use long preamble if you are unsure what preamble mode the wireless adapters support, to ensure interpretability between the AP and the wireless stations and to provide more reliable communication in 'noisy' networks.

Select **Dynamic** to have the AP automatically use short preamble when all wireless stations support it, otherwise the AP uses long preamble.

Note: The AP and the wireless stations **MUST** use the same preamble mode in order to communicate.

IEEE 802.11g Wireless LAN

IEEE 802.11g is fully compatible with the IEEE 802.11b standard. This means an IEEE 802.11b adapter can interface directly with an IEEE 802.11g access point (and vice versa) at 11 Mbps or lower depending on range. IEEE 802.11g has

several intermediate rate steps between the maximum and minimum data rates. The IEEE 802.11g data rate and modulation are as follows:

Table 81 IEEE 802.11g

DATA RATE (Mbps)	MODULATION
1	DBPSK (Differential Binary Phase Shift Keyed)
2	DQPSK (Differential Quadrature Phase Shift Keying)
5.5 / 11	CCK (Complementary Code Keying)
6/9/12/18/24/36/48/54	OFDM (Orthogonal Frequency Division Multiplexing)

IEEE 802.1x

In June 2001, the IEEE 802.1x standard was designed to extend the features of IEEE 802.11 to support extended authentication as well as providing additional accounting and control features. It is supported by Windows XP and a number of network devices. Some advantages of IEEE 802.1x are:

- User based identification that allows for roaming.
- Support for RADIUS (Remote Authentication Dial In User Service, RFC 2138, 2139) for centralized user profile and accounting management on a network RADIUS server.
- Support for EAP (Extensible Authentication Protocol, RFC 2486) that allows additional authentication methods to be deployed with no changes to the access point or the wireless stations.

RADIUS

RADIUS is based on a client-server model that supports authentication, authorization and accounting. The access point is the client and the server is the RADIUS server. The RADIUS server handles the following tasks:

- Authentication
Determines the identity of the users.
- Authorization
Determines the network services available to authenticated users once they are connected to the network.
- Accounting
Keeps track of the client's network activity.

RADIUS is a simple package exchange in which your AP acts as a message relay between the wireless station and the network RADIUS server.

Types of RADIUS Messages

The following types of RADIUS messages are exchanged between the access point and the RADIUS server for user authentication:

- **Access-Request**
Sent by an access point requesting authentication.
- **Access-Reject**
Sent by a RADIUS server rejecting access.
- **Access-Accept**
Sent by a RADIUS server allowing access.
- **Access-Challenge**
Sent by a RADIUS server requesting more information in order to allow access. The access point sends a proper response from the user and then sends another Access-Request message.

The following types of RADIUS messages are exchanged between the access point and the RADIUS server for user accounting:

- **Accounting-Request**
Sent by the access point requesting accounting.
- **Accounting-Response**
Sent by the RADIUS server to indicate that it has started or stopped accounting.

In order to ensure network security, the access point and the RADIUS server use a shared secret key, which is a password, they both know. The key is not sent over the network. In addition to the shared key, password information exchanged is also encrypted to protect the network from unauthorized access.

Types of Authentication

This appendix discusses some popular authentication types: **EAP-MD5**, **EAP-TLS**, **EAP-TTLS**, **PEAP** and **LEAP**.

The type of authentication you use depends on the RADIUS server or the AP. Consult your network administrator for more information.

EAP-MD5 (Message-Digest Algorithm 5)

MD5 authentication is the simplest one-way authentication method. The authentication server sends a challenge to the wireless station. The wireless station 'proves' that it knows the password by encrypting the password with the challenge and sends back the information. Password is not sent in plain text.

However, MD5 authentication has some weaknesses. Since the authentication server needs to get the plaintext passwords, the passwords must be stored. Thus someone other than the authentication server may access the password file. In addition, it is possible to impersonate an authentication server as MD5 authentication method does not perform mutual authentication. Finally, MD5 authentication method does not support data encryption with dynamic session key. You must configure WEP encryption keys for data encryption.

EAP-TLS (Transport Layer Security)

With EAP-TLS, digital certifications are needed by both the server and the wireless stations for mutual authentication. The server presents a certificate to the client. After validating the identity of the server, the client sends a different certificate to the server. The exchange of certificates is done in the open before a secured tunnel is created. This makes user identity vulnerable to passive attacks. A digital certificate is an electronic ID card that authenticates the sender's identity. However, to implement EAP-TLS, you need a Certificate Authority (CA) to handle certificates, which imposes a management overhead.

EAP-TTLS (Tunneled Transport Layer Service)

EAP-TTLS is an extension of the EAP-TLS authentication that uses certificates for only the server-side authentications to establish a secure connection. Client authentication is then done by sending username and password through the secure connection, thus client identity is protected. For client authentication, EAP-TTLS supports EAP methods and legacy authentication methods such as PAP, CHAP, MS-CHAP and MS-CHAP v2.

PEAP (Protected EAP)

Like EAP-TTLS, server-side certificate authentication is used to establish a secure connection, then use simple username and password methods through the secured connection to authenticate the clients, thus hiding client identity. However, PEAP only supports EAP methods, such as EAP-MD5, EAP-MSCHAPv2 and EAP-GTC (EAP-Generic Token Card), for client authentication. EAP-GTC is implemented only by Cisco.

LEAP

LEAP (Lightweight Extensible Authentication Protocol) is a Cisco implementation of IEEE 802.1x.

Dynamic WEP Key Exchange

The AP maps a unique key that is generated with the RADIUS server. This key expires when the wireless connection times out, disconnects or reauthentication times out. A new WEP key is generated each time reauthentication is performed.

If this feature is enabled, it is not necessary to configure a default encryption key in the Wireless screen. You may still configure and store keys here, but they will not be used while Dynamic WEP is enabled.

Note: EAP-MD5 cannot be used with dynamic WEP key exchange

For added security, certificate-based authentications (EAP-TLS, EAP-TTLS and PEAP) use dynamic keys for data encryption. They are often deployed in corporate environments, but for public deployment, a simple user name and password pair is more practical. The following table is a comparison of the features of authentication types.

Table 82 Comparison of EAP Authentication Types

	EAP-MD5	EAP-TLS	EAP-TTLS	PEAP	LEAP
Mutual Authentication	No	Yes	Yes	Yes	Yes
Certificate – Client	No	Yes	Optional	Optional	No
Certificate – Server	No	Yes	Yes	Yes	No
Dynamic Key Exchange	No	Yes	Yes	Yes	Yes
Credential Integrity	None	Strong	Strong	Strong	Moderate
Deployment Difficulty	Easy	Hard	Moderate	Moderate	Moderate
Client Identity Protection	No	No	Yes	Yes	No

WPA(2)

Wi-Fi Protected Access (WPA) is a subset of the IEEE 802.11i standard. WPA2 (IEEE 802.11i) is a wireless security standard that defines stronger encryption, authentication and key management than WPA.

Key differences between WPA(2) and WEP are improved data encryption and user authentication.

Encryption

Both WPA and WPA2 improve data encryption by using Temporal Key Integrity Protocol (TKIP), Message Integrity Check (MIC) and IEEE 802.1x. In addition to TKIP, WPA2 also uses Advanced Encryption Standard (AES) in the Counter mode with Cipher block chaining Message authentication code Protocol (CCMP) to offer stronger encryption.

Temporal Key Integrity Protocol (TKIP) uses 128-bit keys that are dynamically generated and distributed by the authentication server. It includes a per-packet key mixing function, a Message Integrity Check (MIC) named Michael, an extended initialization vector (IV) with sequencing rules, and a re-keying mechanism.

TKIP regularly changes and rotates the encryption keys so that the same encryption key is never used twice. The RADIUS server distributes a Pairwise Master Key (PMK) key to the AP that then sets up a key hierarchy and management system, using the pair-wise key to dynamically generate unique data encryption keys to encrypt every data packet that is wirelessly communicated between the AP and the wireless clients. This all happens in the background automatically.

WPA2 AES (Advanced Encryption Standard) is a block cipher that uses a 256-bit mathematical algorithm called Rijndael.

The Message Integrity Check (MIC) is designed to prevent an attacker from capturing data packets, altering them and resending them. The MIC provides a strong mathematical function in which the receiver and the transmitter each compute and then compare the MIC. If they do not match, it is assumed that the data has been tampered with and the packet is dropped.

By generating unique data encryption keys for every data packet and by creating an integrity checking mechanism (MIC), TKIP makes it much more difficult to decode data on a Wi-Fi network than WEP, making it difficult for an intruder to break into the network.

The encryption mechanisms used for WPA and WPA-PSK are the same. The only difference between the two is that WPA-PSK uses a simple common password, instead of user-specific credentials. The common-password approach makes WPA-PSK susceptible to brute-force password-guessing attacks but it's still an improvement over WEP as it employs an easier-to-use, consistent, single, alphanumeric password.

User Authentication

WPA or WPA2 applies IEEE 802.1x and Extensible Authentication Protocol (EAP) to authenticate wireless clients using an external RADIUS database.

If both an AP and the wireless clients support WPA2 and you have an external RADIUS server, use WPA2 for stronger data encryption. If you don't have an external RADIUS server, you should use WPA2 -PSK (WPA2 -Pre-Shared Key) that only requires a single (identical) password entered into each access point, wireless gateway and wireless client. As long as the passwords match, a wireless client will be granted access to a WLAN.

If the AP or the wireless clients do not support WPA2, just use WPA or WPA-PSK depending on whether you have an external RADIUS server or not.


Select WEP only when the AP and/or wireless clients do not support WPA or WPA2. WEP is less secure than WPA or WPA2.

24.6.2 WPA(2)-PSK Application Example

A WPA(2)-PSK application looks as follows.

- 1 First enter identical passwords into the AP and all wireless clients. The Pre-Shared Key (PSK) must consist of between 8 and 63 ASCII characters (including spaces and symbols).
- 2 The AP checks each wireless client's password and (only) allows it to join the network if the password matches.
- 3 The AP derives and distributes keys to the wireless clients.
- 4 The AP and wireless clients use the TKIP or AES encryption process to encrypt data exchanged between them.

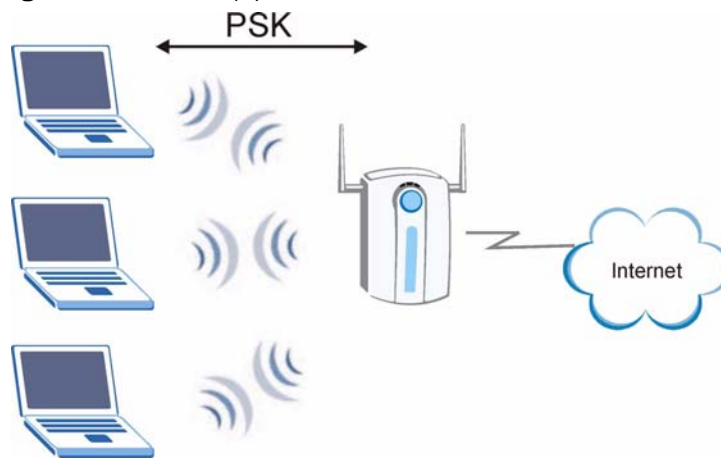Figure 154 WPA(2)-PSK Authentication



24.6.3 WPA(2) with RADIUS Application Example

You need the IP address of the RADIUS server, its port number (default is 1812), and the RADIUS shared secret. A WPA(2) application example with an external RADIUS server looks as follows. "A" is the RADIUS server. "DS" is the distribution system.

- 1 The AP passes the wireless client's authentication request to the RADIUS server.
- 2 The RADIUS server then checks the user's identification against its database and grants or denies network access accordingly.
- 3 The RADIUS server distributes a Pairwise Master Key (PMK) key to the AP that then sets up a key hierarchy and management system, using the pair-wise key to dynamically generate unique data encryption keys to encrypt every data packet that is wirelessly communicated between the AP and the wireless clients.

Security Parameters Summary

Refer to this table to see what other security parameters you should configure for each Authentication Method/ key management protocol type. MAC address filters are not dependent on how you configure these security features.

Table 83 Wireless Security Relational Matrix

AUTHENTICATION METHOD/ KEY MANAGEMENT PROTOCOL	ENCRYPTION METHOD	ENTER MANUAL KEY	IEEE 802.1X
Open	None	No	Disable
			Enable without Dynamic WEP Key
Open	WEP	No	Enable with Dynamic WEP Key
		Yes	Enable without Dynamic WEP Key
		Yes	Disable
Shared	WEP	No	Enable with Dynamic WEP Key
		Yes	Enable without Dynamic WEP Key
		Yes	Disable
WPA	TKIP	No	Enable
WPA-PSK	TKIP	Yes	Enable
WPA2	AES	No	Enable
WPA2-PSK	AES	Yes	Enable

Services

The following table lists some commonly-used services and their associated protocols and port numbers.

- **Name:** This is a short, descriptive name for the service. You can use this one or create a different one, if you like.
- **Protocol:** This is the type of IP protocol used by the service. If this is **TCP/UDP**, then the service uses the same port number with TCP and UDP. If this is **User-Defined**, the **Port(s)** is the IP protocol number, not the port number.
- **Port(s):** This value depends on the **Protocol**.
 - If the **Protocol** is **TCP, UDP, or TCP/UDP**, this is the IP port number.
 - If the **Protocol** is **USER**, this is the IP protocol number.
- **Description:** This is a brief explanation of the applications that use this service or the situations in which this service is used.

Table 84 Examples of Services

NAME	PROTOCOL	PORT(S)	DESCRIPTION
AH (IPSEC_TUNNEL)	User-Defined	51	The IPSEC AH (Authentication Header) tunneling protocol uses this service.
AIM	TCP	5190	AOL's Internet Messenger service.
AUTH	TCP	113	Authentication protocol used by some servers.
BGP	TCP	179	Border Gateway Protocol.
BOOTP_CLIENT	UDP	68	DHCP Client.
BOOTP_SERVER	UDP	67	DHCP Server.
CU-SEEME	TCP/UDP TCP/UDP	7648 24032	A popular videoconferencing solution from White Pines Software.
DNS	TCP/UDP	53	Domain Name Server, a service that matches web names (e.g. www.zyxel.com) to IP numbers.
ESP (IPSEC_TUNNEL)	User-Defined	50	The IPSEC ESP (Encapsulation Security Protocol) tunneling protocol uses this service.
FINGER	TCP	79	Finger is a UNIX or Internet related command that can be used to find out if a user is logged on.

Table 84 Examples of Services (continued)

NAME	PROTOCOL	PORT(S)	DESCRIPTION
FTP	TCP	20	File Transfer Program, a program to enable fast transfer of files, including large files that may not be possible by e-mail.
	TCP	21	
H.323	TCP	1720	NetMeeting uses this protocol.
HTTP	TCP	80	Hyper Text Transfer Protocol - a client/server protocol for the world wide web.
HTTPS	TCP	443	HTTPS is a secured http session often used in e-commerce.
ICMP	User-Defined	1	Internet Control Message Protocol is often used for diagnostic purposes.
ICQ	UDP	4000	This is a popular Internet chat program.
IGMP (MULTICAST)	User-Defined	2	Internet Group Multicast Protocol is used when sending packets to a specific group of hosts.
IKE	UDP	500	The Internet Key Exchange algorithm is used for key distribution and management.
IMAP4	TCP	143	The Internet Message Access Protocol is used for e-mail.
IMAP4S	TCP	993	This is a more secure version of IMAP4 that runs over SSL.
IRC	TCP/UDP	6667	This is another popular Internet chat program.
MSN Messenger	TCP	1863	Microsoft Networks' messenger service uses this protocol.
NetBIOS	TCP/UDP	137	The Network Basic Input/Output System is used for communication between computers in a LAN.
	TCP/UDP	138	
	TCP/UDP	139	
	TCP/UDP	445	
NEW-ICQ	TCP	5190	An Internet chat program.
NEWS	TCP	144	A protocol for news groups.
NFS	UDP	2049	Network File System - NFS is a client/server distributed file service that provides transparent file sharing for network environments.
NNTP	TCP	119	Network News Transport Protocol is the delivery mechanism for the USENET newsgroup service.
PING	User-Defined	1	Packet INternet Groper is a protocol that sends out ICMP echo requests to test whether or not a remote host is reachable.

Table 84 Examples of Services (continued)

NAME	PROTOCOL	PORT(S)	DESCRIPTION
POP3	TCP	110	Post Office Protocol version 3 lets a client computer get e-mail from a POP3 server through a temporary connection (TCP/IP or other).
POP3S	TCP	995	This is a more secure version of POP3 that runs over SSL.
PPTP	TCP	1723	Point-to-Point Tunneling Protocol enables secure transfer of data over public networks. This is the control channel.
PPTP_TUNNEL (GRE)	User-Defined	47	PPTP (Point-to-Point Tunneling Protocol) enables secure transfer of data over public networks. This is the data channel.
RCMD	TCP	512	Remote Command Service.
REAL_AUDIO	TCP	7070	A streaming audio service that enables real time sound over the web.
REXEC	TCP	514	Remote Execution Daemon.
RLOGIN	TCP	513	Remote Login.
ROADRUNNER	TCP/UDP	1026	This is an ISP that provides services mainly for cable modems.
RTELNET	TCP	107	Remote Telnet.
RTSP	TCP/UDP	554	The Real Time Streaming (media control) Protocol (RTSP) is a remote control for multimedia on the Internet.
SFTP	TCP	115	The Simple File Transfer Protocol is an old way of transferring files between computers.
SMTP	TCP	25	Simple Mail Transfer Protocol is the message-exchange standard for the Internet. SMTP enables you to move messages from one e-mail server to another.
SMTPS	TCP	465	This is a more secure version of SMTP that runs over SSL.
SNMP	TCP/UDP	161	Simple Network Management Program.
SNMP-TRAPS	TCP/UDP	162	Traps for use with the SNMP (RFC: 1215).
SQL-NET	TCP	1521	Structured Query Language is an interface to access data on many different types of database systems, including mainframes, midrange systems, UNIX systems and network servers.

Table 84 Examples of Services (continued)

NAME	PROTOCOL	PORT(S)	DESCRIPTION
SSDP	UDP	1900	The Simple Service Discovery Protocol supports Universal Plug-and-Play (UPnP).
SSH	TCP/UDP	22	Secure Shell Remote Login Program.
STRM WORKS	UDP	1558	Stream Works Protocol.
SYSLOG	UDP	514	Syslog allows you to send system logs to a UNIX server.
TACACS	UDP	49	Login Host Protocol used for (Terminal Access Controller Access Control System).
TELNET	TCP	23	Telnet is the login and terminal emulation protocol common on the Internet and in UNIX environments. It operates over TCP/IP networks. Its primary function is to allow users to log into remote host systems.
TFTP	UDP	69	Trivial File Transfer Protocol is an Internet file transfer protocol similar to FTP, but uses the UDP (User Datagram Protocol) rather than TCP (Transmission Control Protocol).
VDOLIVE	TCP UDP	7000 user- defined	A videoconferencing solution. The UDP port number is specified in the application.

Legal Information

Copyright

Copyright © 2009 by ZyXEL Communications Corporation.

The contents of this publication may not be reproduced in any part or as a whole, transcribed, stored in a retrieval system, translated into any language, or transmitted in any form or by any means, electronic, mechanical, magnetic, optical, chemical, photocopying, manual, or otherwise, without the prior written permission of ZyXEL Communications Corporation.

Published by ZyXEL Communications Corporation. All rights reserved.

Disclaimer

ZyXEL does not assume any liability arising out of the application or use of any products, or software described herein. Neither does it convey any license under its patent rights nor the patent rights of others. ZyXEL further reserves the right to make changes in any products described herein without notice. This publication is subject to change without notice.

Certifications

Federal Communications Commission (FCC) Interference Statement

The device complies with Part 15 of FCC rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operations.

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause

harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this device does cause harmful interference to radio/television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1 Reorient or relocate the receiving antenna.
- 2 Increase the separation between the equipment and the receiver.
- 3 Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4 Consult the dealer or an experienced radio/TV technician for help.



FCC Radiation Exposure Statement

- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- IEEE 802.11b or 802.11g operation of this product in the U.S.A. is firmware-limited to channels 1 through 11.
- To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.

Industry Canada Statement

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions:

- 1 this device may not cause interference and
- 2 this device must accept any interference, including interference that may cause undesired operation of the device

This device has been designed to operate with an antenna having a maximum gain of 2dBi.

Antenna having a higher gain is strictly prohibited per regulations of Industry Canada. The required antenna impedance is 50 ohms.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the EIRP is not more than required for successful communication.

IMPORTANT NOTE:

IC Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

注意！

依據 低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信規定作業之無線電信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

本機限在不干擾合法電臺與不受被干擾保障條件下於室內使用。
減少電磁波影響，請妥適使用。

Notices

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device has been designed for the WLAN 2.4 GHz network throughout the EC region and Switzerland, with restrictions in France.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Viewing Certifications

- 1 Go to <http://www.zyxel.com>.
- 2 Select your product on the ZyXEL home page to go to that product's page.
- 3 Select the certification you wish to view from this page.

ZyXEL Limited Warranty

ZyXEL warrants to the original end user (purchaser) that this product is free from any defects in materials or workmanship for a period of up to two years from the date of purchase. During the warranty period, and upon proof of purchase, should the product have indications of failure due to faulty workmanship and/or materials, ZyXEL will, at its discretion, repair or replace the defective products or components without charge for either parts or labor, and to whatever extent it shall deem necessary to restore the product or components to proper operating condition. Any replacement will consist of a new or re-manufactured functionally equivalent product of equal or higher value, and will be solely at the discretion of ZyXEL. This warranty shall not apply if the product has been modified, misused, tampered with, damaged by an act of God, or subjected to abnormal working conditions.

Note

Repair or replacement, as provided under this warranty, is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, express or implied, including any implied warranty of merchantability or fitness for a particular use or purpose. ZyXEL shall in no event be held liable for indirect or consequential damages of any kind to the purchaser.

To obtain the services of this warranty, contact your vendor. You may also refer to the warranty policy for the region in which you bought the device at http://www.zyxel.com/web/support_warranty_info.php.

Registration

Register your product online to receive e-mail notices of firmware upgrades and information at www.zyxel.com for global products, or at www.us.zyxel.com for North American products.

End-User License Agreement

WARNING: ZyXEL Communications Corp. IS WILLING TO LICENSE THE ENCLOSED SOFTWARE TO YOU ONLY UPON THE CONDITION THAT YOU ACCEPT ALL OF THE TERMS CONTAINED IN THIS LICENSE AGREEMENT. PLEASE READ THE TERMS CAREFULLY BEFORE COMPLETING THE INSTALLATION PROCESS AS INSTALLING THE SOFTWARE WILL INDICATE YOUR ASSENT TO THEM. IF YOU DO NOT AGREE TO THESE TERMS, THEN ZyXEL, INC. IS UNWILLING TO LICENSE THE SOFTWARE TO YOU, IN WHICH EVENT YOU SHOULD RETURN THE UNINSTALLED SOFTWARE AND PACKAGING TO THE PLACE FROM WHICH IT WAS ACQUIRED, AND YOUR MONEY WILL BE REFUNDED.

1 Grant of License for Personal Use

ZyXEL Communications Corp. ("ZyXEL") grants you a non-exclusive, non-sublicense, non-transferable license to use the program with which this license is distributed (the "Software"), including any documentation files accompanying the Software ("Documentation"), for internal business use only, for up to the number of users specified in sales order and invoice. You have the right to make one backup copy of the Software and Documentation solely for archival, back-up or disaster recovery purposes. You shall not exceed the scope of the license granted hereunder. Any rights not expressly granted by ZyXEL to you are reserved by ZyXEL, and all implied licenses are disclaimed.

2 Ownership

You have no ownership rights in the Software. Rather, you have a license to use the Software as long as this License Agreement remains in full force and effect. Ownership of the Software, Documentation and all intellectual property rights therein shall remain at all times with ZyXEL. Any other use of the Software by any other entity is strictly forbidden and is a violation of this License Agreement.

3 Copyright

The Software and Documentation contain material that is protected by United States Copyright Law and trade secret law, and by international treaty provisions. All rights not granted to you herein are expressly reserved by ZyXEL. You may not remove any proprietary notice of ZyXEL or any of its licensors from any copy of the Software or Documentation.

4 Restrictions

You may not publish, display, disclose, sell, rent, lease, modify, store, loan, distribute, or create derivative works of the Software, or any part thereof. You may not assign, sublicense, convey or otherwise transfer, pledge as security or otherwise encumber the rights and licenses granted hereunder with respect to the Software. Certain components of the Software, and third party open source programs included with the Software, have been or may be made available by ZyXEL on its Open Source web site (<ftp://opensource.zyxel.com>) (collectively the "Open-Sourced Components") You may modify or replace only these Open-Sourced Components; provided that you comply with the terms of this License and any applicable licensing terms governing use of the Open-Sourced Components. ZyXEL is not obligated to provide any maintenance, technical or other support for the resultant modified Software. You may not copy, reverse engineer, decompile, reverse compile, translate, adapt, or disassemble the Software, or any part thereof, nor shall you attempt to create the source code from the object code for the Software. Except as and only to the extent expressly permitted in this License, by applicable licensing terms governing use of the Open-Sourced Components, or by applicable law, you may not market, co-brand, private label or otherwise

permit third parties to link to the Software, or any part thereof. You may not use the Software, or any part thereof, in the operation of a service bureau or for the benefit of any other person or entity. You may not cause, assist or permit any third party to do any of the foregoing. Portions of the Software utilize or include third party software and other copyright material. Acknowledgements, licensing terms and disclaimers for such material are contained in the online electronic documentation for the Software (<ftp://opensource.zyxel.com>), and your use of such material is governed by their respective terms. ZyXEL has provided, as part of the Software package, access to certain third party software as a convenience. To the extent that the Software contains third party software, ZyXEL has no express or implied obligation to provide any technical or other support for such software. Please contact the appropriate software vendor or manufacturer directly for technical support and customer service related to its software and products.

5 Confidentiality

You acknowledge that the Software contains proprietary trade secrets of ZyXEL and you hereby agree to maintain the confidentiality of the Software using at least as great a degree of care as you use to maintain the confidentiality of your own most confidential information. You agree to reasonably communicate the terms and conditions of this License Agreement to those persons employed by you who come into contact with the Software, and to use reasonable best efforts to ensure their compliance with such terms and conditions, including, without limitation, not knowingly permitting such persons to use any portion of the Software for the purpose of deriving the source code of the Software.

6 No Warranty

THE SOFTWARE IS PROVIDED "AS IS." TO THE MAXIMUM EXTENT PERMITTED BY LAW, ZyXEL DISCLAIMS ALL WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ZyXEL DOES NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE SOFTWARE WILL MEET ANY REQUIREMENTS OR NEEDS YOU MAY HAVE, OR THAT THE SOFTWARE WILL OPERATE ERROR FREE, OR IN AN UNINTERRUPTED FASHION, OR THAT ANY DEFECTS OR ERRORS IN THE SOFTWARE WILL BE CORRECTED, OR THAT THE SOFTWARE IS COMPATIBLE WITH ANY PARTICULAR PLATFORM. SOME JURISDICTIONS DO NOT ALLOW THE WAIVER OR EXCLUSION OF IMPLIED WARRANTIES SO THEY MAY NOT APPLY TO YOU. IF THIS EXCLUSION IS HELD TO BE UNENFORCEABLE BY A COURT OF COMPETENT JURISDICTION, THEN ALL EXPRESS AND IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO A PERIOD OF THIRTY (30) DAYS FROM THE DATE OF PURCHASE OF THE SOFTWARE, AND NO WARRANTIES SHALL APPLY AFTER THAT PERIOD.

7 Limitation of Liability

IN NO EVENT WILL ZyXEL BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING, WITHOUT LIMITATION, INDIRECT, SPECIAL, PUNITIVE, OR EXEMPLARY DAMAGES FOR LOSS OF BUSINESS, LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF BUSINESS INFORMATION) ARISING OUT OF THE USE OF OR INABILITY TO USE THE PROGRAM, OR FOR ANY CLAIM BY ANY OTHER PARTY, EVEN IF ZyXEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. ZyXEL's AGGREGATE LIABILITY WITH RESPECT TO ITS OBLIGATIONS UNDER THIS AGREEMENT OR OTHERWISE WITH RESPECT TO THE SOFTWARE AND DOCUMENTATION OR OTHERWISE SHALL BE EQUAL TO THE PURCHASE PRICE, BUT SHALL IN NO EVENT EXCEED THE PRODUCT'S PRICE. BECAUSE SOME STATES/COUNTRIES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

8 Export Restrictions

THIS LICENSE AGREEMENT IS EXPRESSLY MADE SUBJECT TO ANY APPLICABLE LAWS, REGULATIONS, ORDERS, OR OTHER RESTRICTIONS ON THE EXPORT OF THE SOFTWARE OR INFORMATION ABOUT SUCH SOFTWARE WHICH MAY BE IMPOSED FROM TIME TO TIME. YOU SHALL NOT EXPORT THE SOFTWARE, DOCUMENTATION OR INFORMATION ABOUT THE SOFTWARE AND DOCUMENTATION WITHOUT COMPLYING WITH SUCH LAWS, REGULATIONS, ORDERS, OR OTHER RESTRICTIONS. YOU AGREE TO INDEMNIFY ZyXEL AGAINST ALL CLAIMS, LOSSES, DAMAGES, LIABILITIES, COSTS AND EXPENSES, INCLUDING REASONABLE ATTORNEYS' FEES, TO THE EXTENT SUCH CLAIMS ARISE OUT OF ANY BREACH OF THIS SECTION 8.

9 Audit Rights

ZyXEL SHALL HAVE THE RIGHT, AT ITS OWN EXPENSE, UPON REASONABLE PRIOR NOTICE, TO PERIODICALLY INSPECT AND AUDIT YOUR RECORDS TO ENSURE YOUR COMPLIANCE WITH THE TERMS AND CONDITIONS OF THIS LICENSE AGREEMENT.

10 Termination

This License Agreement is effective until it is terminated. You may terminate this License Agreement at any time by destroying or returning to ZyXEL all copies of the Software and Documentation in your possession or under your control. ZyXEL may terminate this License Agreement for any reason, including, but not limited to, if ZyXEL finds that you have violated any of the terms of this License Agreement. Upon notification of termination, you agree to destroy or return to ZyXEL all copies of the Software and Documentation and to certify in writing that all known copies, including backup copies, have been destroyed. All provisions relating to confidentiality, proprietary rights, and non-disclosure shall survive the termination of this Software License Agreement.

11 General

This License Agreement shall be construed, interpreted and governed by the laws of Republic of China without regard to conflicts of laws provisions thereof. The exclusive forum for any disputes arising out of or relating to this License Agreement shall be an appropriate court or Commercial Arbitration Association sitting in ROC, Taiwan. This License Agreement shall constitute the entire Agreement between the parties hereto. This License Agreement, the rights granted hereunder, the Software and Documentation shall not be assigned by you without the prior written consent of ZyXEL. Any waiver or modification of this License Agreement shall only be effective if it is in writing and signed by both parties hereto. If any part of this License Agreement is found invalid or unenforceable by a court of competent jurisdiction, the remainder of this License Agreement shall be interpreted so as to reasonably effect the intention of the parties.

Note: NOTE: Some components of the Vantage CNM 2.3 incorporate source code covered under the Apache License, GPL License, LGPL License, Sun License, and Castor License. To obtain the source code covered under those Licenses, please check <ftp://opensource.zyxel.com> to get it.

Index

A

Address Assignment [102](#)
alternative subnet mask notation [226](#)
AP [21](#)
AP (Access Point) [253](#)
AP Mode
 menu [58](#)
 overview [55](#)
 status screen [56](#)
AP+ Bridge [21](#)
Auto-bridge [114](#)

B

Backup configuration [192](#)
Bandwidth management
 overview [157](#)
 priority [162](#)
 services [163](#)
BitTorrent [164](#)
Bridge/Repeater [21](#)
BSS [251](#)

C

CA [258](#)
Certificate Authority [258](#)
certifications [267](#)
 notices [269](#)
 viewing [269](#)
Channel [31](#), [57](#), [253](#)
 Interference [253](#)
channel [82](#)
Configuration
 backup [192](#)
 reset the factory defaults [194](#)
 restore [193](#)

content filtering [147](#)
 by keyword (in URL) [147](#)
copyright [267](#)
CPU usage [31](#), [57](#)
CTS (Clear to Send) [254](#)

D

Daylight saving [184](#)
DDNS [135](#)
 see also Dynamic DNS
 service providers [136](#)
DHCP [34](#), [119](#)
 DHCP server
 see also Dynamic Host Configuration Protocol
DHCP client information [122](#)
DHCP client list [122](#)
DHCP server [116](#), [119](#)
DHCP table [34](#), [122](#)
 DHCP client information
 DHCP status
Dimensions [211](#)
disclaimer [267](#)
DNS [50](#), [121](#)
 DNS server
 see also Domain name system
DNS Server [102](#)
DNS server [121](#)
Domain name [41](#)
 vs host name. see also system name
Domain Name System [121](#)
Domain Name System. See DNS.
duplex setting [32](#), [58](#)
Dynamic DNS [135](#)
Dynamic Host Configuration Protocol [119](#)
Dynamic WEP Key Exchange [258](#)
DynDNS [136](#)
DynDNS see also DDNS [136](#)
DynDNS Wildcard [135](#)

E

EAP Authentication [257](#)
e-mail [96](#)
Encryption [259](#)
encryption [84](#)
 and local (user) database [84](#)
 key [85](#)
 WPA compatible [84](#)
ESS [252](#)
ESSID [206](#)
Extended Service Set [252](#)
Extended wireless security [43](#)

F

Factory LAN defaults [116, 119](#)
FCC interference statement [267](#)
File Transfer Program [163](#)
Firewall [142](#)
 Firewall overview
 guidelines [143](#)
 ICMP packets [144](#)
 network security
 Stateful inspection [142](#)
 ZyXEL device firewall [142](#)
firewall
 stateful inspection [141](#)
Firmware upload [190](#)
 file extension
 using HTTP
firmware version [31, 57](#)
Fragmentation Threshold [255](#)
FTP. see also File Transfer Program [163](#)

G

gateway [154](#)
General wireless LAN screen [85](#)

H

Hidden Node [253](#)
HTTP [163](#)
Hyper Text Transfer Protocol [163](#)

I

IANA [232](#)
IBSS [251](#)
IEEE 802.11g [255](#)
IGMP [103](#)
 see also Internet Group Multicast Protocol
 version
IGMP version [103](#)
Independent Basic Service Set [251](#)
Install UPnP
 Windows XP [171](#)
Internet Assigned Numbers Authority
 See IANA
Internet connection
 Ethernet
 PPPoE. see also PPP over Ethernet
 PPTP
 WAN connection
Internet connection wizard [43](#)
Internet Group Multicast Protocol [103](#)
IP Address [117, 128, 129](#)
IP address [50](#)
 dynamic
IP Pool [120](#)

L

LAN [115](#)
 IP pool setup [116](#)
LAN overview [115](#)
LAN setup [115](#)
LAN TCP/IP [116](#)
Language [199](#)
Link type [32, 57](#)
local (user) database [83](#)

and encryption [84](#)
Local Area Network [115](#)

M

MAC [90](#)
MAC address [83](#), [103](#)
 cloning [52](#), [103](#)
MAC address filter [83](#)
MAC address filtering [90](#)
MAC filter [90](#)
managing the device
 good habits [22](#)
 using the web configurator. See web configurator.
 using the WPS. See WPS.
MBSSID [21](#)
Media access control [90](#)
Memory usage [32](#), [57](#)
Metric [155](#)
mode [21](#)
Multicast [103](#)
 IGMP [103](#)

N

NAT [125](#), [128](#), [231](#)
 global [126](#)
 how it works [127](#)
 inside [126](#)
 local [126](#)
 outside [126](#)
 overview [125](#)
 port forwarding [132](#)
 see also Network Address Translation server [127](#)
 server sets [132](#)
NAT traversal [169](#)
Navigation Panel [32](#), [58](#)
navigation panel [32](#), [58](#)
NetBIOS [103](#)
 see also Network Basic Input/Output System [103](#)
Network Address Translation [125](#), [128](#)

O

Operating Channel [31](#), [57](#)
operating mode [21](#)

P

P2P [164](#)
peer-to-peer [164](#)
Point-to-Point Protocol over Ethernet [45](#), [106](#)
Point-to-Point Tunneling Protocol [46](#), [108](#)
Pool Size [120](#)
Port forwarding [129](#), [132](#)
 default server [132](#)
 example [132](#)
 local server [129](#)
 port numbers
 services
port speed [32](#), [58](#)
Power Specification [211](#)
PPPoE [45](#), [106](#)
 benefits [45](#)
 dial-up connection
 see also Point-to-Point Protocol over Ethernet [45](#)
PPTP [46](#), [108](#)
 see also Point-to-Point Tunneling Protocol [46](#)
Preamble Mode [255](#)
product registration [270](#)

Q

Quality of Service (QoS) [94](#)

R

RADIUS [256](#)
 Shared Secret Key [257](#)
RADIUS Message Types [257](#)
RADIUS Messages [257](#)
RADIUS server [83](#)

- registration
 - product [270](#)
- related documentation [3](#)
- Remote management [165](#)
 - and NAT [166](#)
 - limitations [165](#)
 - system timeout [166](#)
- Reset button [29, 194](#)
- Reset the device [29](#)
- Restore configuration [193](#)
- RF (Radio Frequency) [212](#)
- Roaming [92](#)
- RTS (Request To Send) [254](#)
- RTS Threshold [253, 254](#)
- RTS/CTS Threshold [82, 92](#)

S

- safety warnings [8](#)
- Scheduling [99](#)
- Security Parameters [262](#)
- Service and port numbers [164](#)
- Service Set [86](#)
- Service Set IDentification [86](#)
- Service Set IDentity. See SSID.
- services
 - and port numbers [263](#)
 - and protocols [263](#)
- Session Initiated Protocol [164](#)
- SIP [164](#)
- SSID [31, 57, 82, 86](#)
- stateful inspection firewall [141](#)
- Static DHCP [121](#)
- Static Route [154](#)
- Status [30](#)
- subnet [223](#)
- Subnet Mask [117](#)
- subnet mask [50, 224](#)
- subnetting [227](#)
- Summary
 - DHCP table [34](#)
 - Packet statistics [35](#)
 - Wireless station status [36](#)

- syntax conventions [6](#)
- Sys Op Mode [195](#)
- System General Setup [181](#)
- System Name [182](#)
- System name [40](#)
 - vs computer name
- System restart [194](#)

T

- TCP/IP configuration [119](#)
- Temperature [211](#)
- Time setting [183](#)
- trigger port [133](#)
- Trigger port forwarding [133](#)
 - example [134](#)
 - process [134](#)

U

- Universal Plug and Play [169](#)
 - application [170](#)
- UPnP [169](#)
 - security issues [170](#)
- URL Keyword Blocking [149](#)
- Use Authentication [260](#)
- user authentication [83](#)
 - local (user) database [83](#)
 - RADIUS server [83](#)
- User Name [136](#)

V

- VoIP [164](#)
- VPN [108](#)

W

- WAN
 - IP address assignment [49](#)

- WAN (Wide Area Network) [101](#)
 - WAN advanced [113](#)
 - WAN IP address [49](#)
 - WAN IP address assignment [51](#)
 - WAN MAC address [103](#)
 - warranty [270](#)
 - note [270](#)
 - Web Configurator
 - how to access [27](#)
 - Overview [27](#)
 - Web configurator
 - navigating [29](#)
 - web configurator [22](#)
 - WEP Encryption [88](#)
 - WEP encryption [87](#)
 - WEP key [87](#)
 - Wildcard [135](#)
 - Wireless association list [36](#)
 - wireless channel [206](#)
 - wireless LAN [206](#)
 - wireless LAN scheduling [99](#)
 - Wireless LAN wizard [42](#)
 - Wireless network
 - basic guidelines [82](#)
 - channel [82](#)
 - encryption [84](#)
 - example [81](#)
 - MAC address filter [83](#)
 - overview [81](#)
 - security [82](#)
 - SSID [82](#)
 - Wireless security [82](#)
 - overview [82](#)
 - type [82](#)
 - wireless security [206](#)
 - Wireless tutorial [55, 68](#)
 - Wizard setup [39](#)
 - complete [53](#)
 - Internet connection [43](#)
 - system information [40](#)
 - wireless LAN [42](#)
 - WLAN
 - Interference [253](#)
 - Security Parameters [262](#)
 - World Wide Web [163](#)
 - WPA compatible [84](#)
 - WPA, WPA2 [259](#)
 - WPS [22](#)
 - WWW [96, 163](#)
- ## X
- Xbox Live [164](#)

