

# EO, PO, MOV & MOH




Revised  
10/22/07

## 27, 30" Wide, Double, Discovery Wall Ovens

1/2

## PLANNING GUIDE

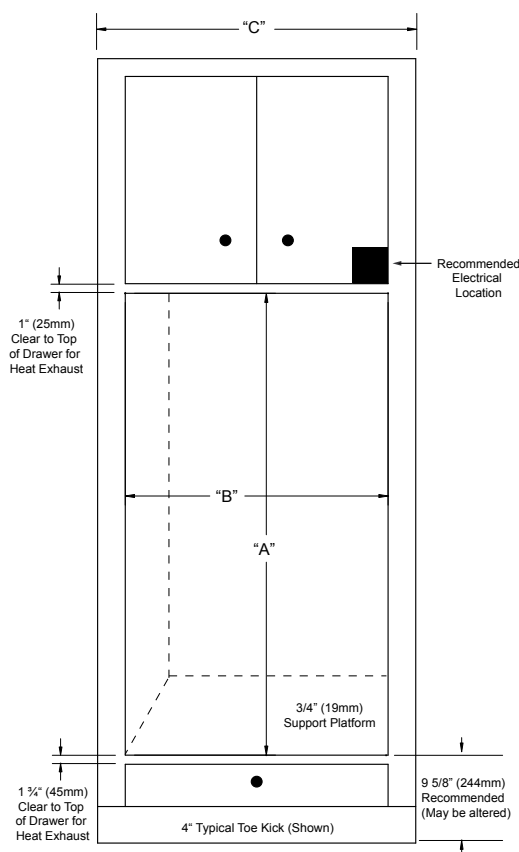

Model Number	Cutout Height "A"	Cutout Width "B"	Min. Cabinet Width "C"
EO227	50 9/16" (1284mm)	25 1/2" (648mm)	27" (686mm)
PO227			
MOV227			
MOH227			
EO230		28 1/2" (724mm)	30" (762mm)
PO230			
MOV230			
MOH230			

### CUTOUT DIMENSIONS



#### NOTES:

- 24" (610mm) minimum interior cabinet depth.  
Back of cabinet may need to be removed.
- 3/4" (19mm) support platform (flush with cutout).
- 1/8" (3mm) minimum clearance from appliance to adjacent cabinet doors/drawers.

# EO, PO, MOV & MOH





Revised  
10/23/07

## 27, 30" Wide, Double, Discovery Wall Ovens

2/2


## PLANNING GUIDE

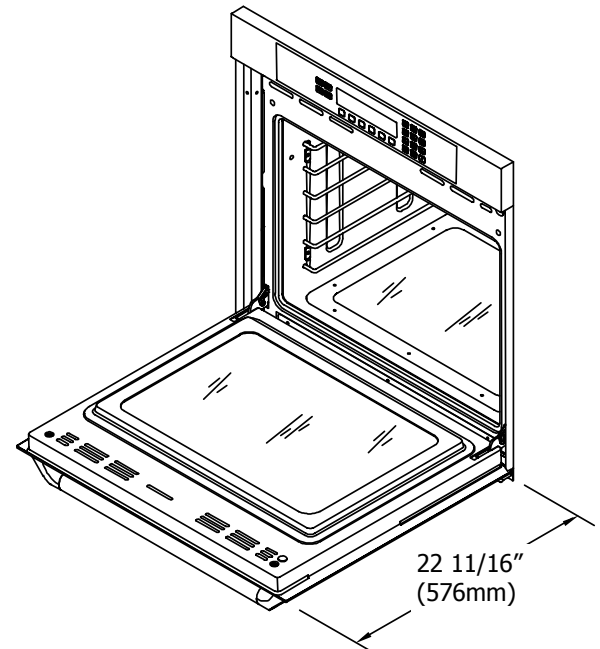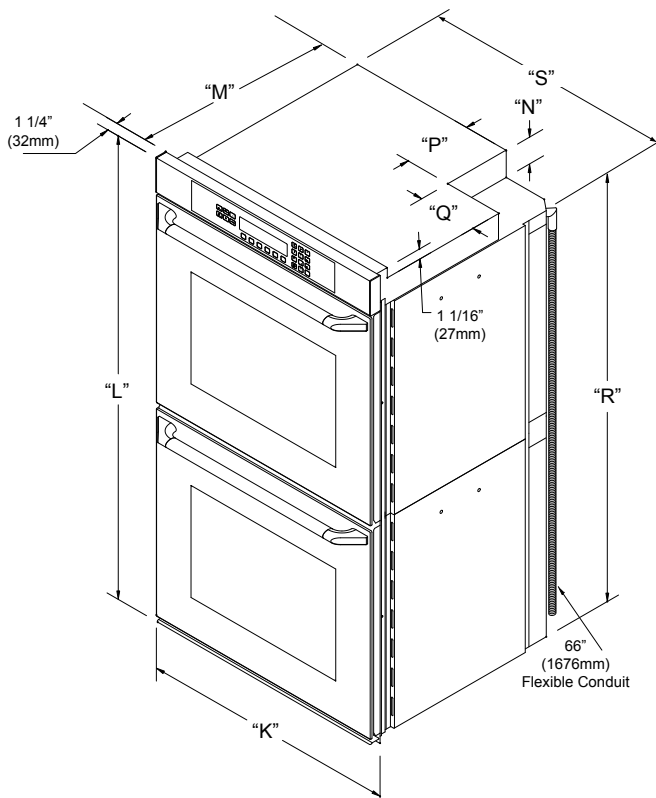

Model Number	Overall Width "K"	Overall Height "L"	Chassis Depth "M"	Recess Height "N"	Recess Depth "P"	Recess Width "Q"	Chassis Height "R"	Chassis Width "S"
EO227	27" (686mm)	51 3/32" (1298mm)	23 3/8" (594mm)	2 5/16" (59mm)	7 3/8" (187mm)	6 3/8" (162mm)	49 1/2" (1257mm)	25 3/8" (644mm)
PO227								
MOV227								
MOH227								
EO230	30" (762mm)	51 3/32" (1298mm)	23 3/8" (594mm)	2 5/16" (59mm)	7 3/8" (187mm)	6 3/8" (162mm)	49 1/2" (1257mm)	28 3/8" (721mm)
PO230								
MOV230								
MOH230								

### OVERALL DIMENSIONS

Dedicated Circuit Required	Total Connected Load	Approximate Shipping Weight
240VAC, 4-wire, 60Hz, 50A (Breaker)	9.25kW (38.9A)	415 lbs.

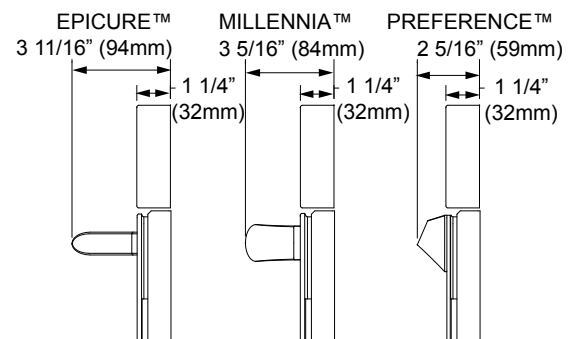

### SIDE VIEW HANDLE PROJECTIONS