MOEN

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal construction with a chrome plated finish.
- Includes shower arm, flange, non-metalic shower head and non-metallic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm \ 3^\circ$

FLOW

- Showerhead is limited to 1.75 gpm at 80 psi CARTRIDGE
- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material
 STANDARDS
- Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1016, ICC A117.1 and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



WATER-SAVING CHATEAU[°] POSI-TEMP[°] Single-Handle Tub/Shower Trim Kit

> Model: TL188 (Bulk Packed 12 per carton)

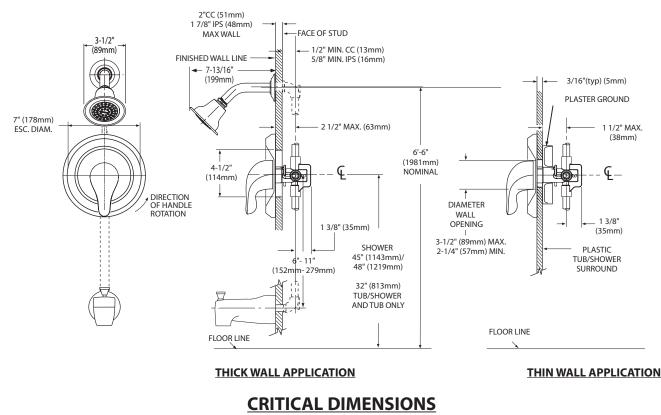

(DO NOT SCALE)