Panasonic

Operating Instructions

Memory Card Camera Recorder












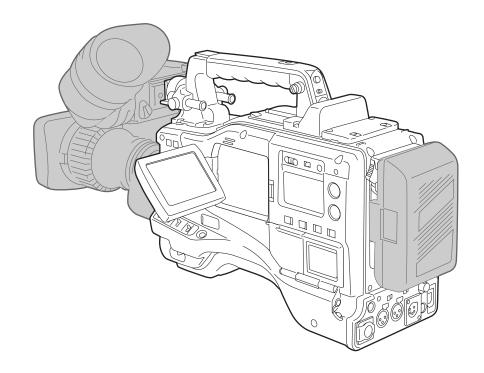



Before operating this product, please read the insructions carefully and save this manual for future use.



PLEASE NOTE:

- When preparing to record important images, always shoot some advance test footage, to verify that both pictures and sound are being recorded normally.
- Should video or audio recording fail due to a malfunction of this camera-recorder or the P2 cards used, we will not assume liability for such failure.

Software information for this product

1. Customer advisory: This product includes software licensed under the GNU General Public License (GPL) and GNU Lesser General Public License (LGPL); customers have the right to download, modify, and redistribute source code for this software.

Descriptions of the GPL and LGPL are stored on the installation CD included with this camera-recorder. See the folder named \LDOC. (The description is the original (written in English)). To download the relevant source code, visit http://panasonic.biz/sav/.

Please note that we cannot answer any questions you may have about the content, etc. of any source code you may obtain from the above Web site.

- 2. This product includes software licensed under the ICU License. A description of the ICU is stored on the installation CD included with this camera-recorder. See the folder named \LDOC. (The description is the original (written in English)).
- 3. This product includes software developed by the Apache Software Foundation (http://www.apche.org/). A description of the Apache is stored on the installation CD included with this camera-recorder. See the folder named \LDOC. (The description is the original (written in English)).

Unislot® is a registered trademark of Ikegami Tsushinki Co., Ltd.

■ DO NOT REMOVE PANEL COVER BY UNSCREWING.

To reduce the risk of electric shock, do not remove cover. No user serviceable parts inside.

Refer servicing to qualified service personnel.

CAUTION:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.

CAUTION:

TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, REFER MOUNTING OF THE OPTIONAL INTERFACE BOARD TO AUTHORIZED SERVICE PERSONNEL.

WARNING:

- TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIP-MENT TO RAIN OR MOISTURE.
- TO REDUCE THE RISK OF FIRE OR SHOCK HAZARD, KEEP THIS EQUIPMENT AWAY FROM ALL LIQUIDS-USE AND STORE ONLY IN LOCATIONS WHICH ARE NOT EXPOSED TO THE RISK OF DRIPPING OR SPLASHING LIQUIDS, AND DO NOT PLACE ANY LIQUID CONTAINERS ON TOP OF THE EQUIPMENT.

Lithium Battery

Warning

The lithium battery in this equipment must only be replaced by qualified personnel. When necessary, contact your local Panasonic supplier.

"The lithium battery is a critical component (type number CR2032 or BR2032 manufactured by Panasonic.)

It must never be subjected to excessive heat or discharge. It must therefore only be fitted in equipment designed specifically for its use.

Replacement batteries must be of the same type and manufacturer. They must be fitted in the same manner and location as the original battery, with the correct polarity connections observed.

Do not attempt to re-charge the old battery or reuse it for any other purpose. It should be disposed of in waste products destined for burial rather than incineration."

CAUTION

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the equipment manufacturer. Discard used batteries according to manufacturer's instructions.

VARNING

Explosionsfara vid felaktigt batteribyte. Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren. Kassera använt batteri enligt fabrikantens instruktion.

ADVARSEL!

Eksplosionsfare ved fejlagtig håndtering. Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.

VAROITUS

Paristo voi räjähtää, jos se on virheellisesti asennettu.

Vaihda paristo ainoastaan laitevalmistajan suosittelemaan tyypiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

indicates safety information.

Attention/Attentie

- Batteries are used for the main power source and memory back-up in the product.
 At the end of their useful life, you should not throw them away.
 Instead, hand them in as small chemical waste.
- Voor de primaire voeding en het reservegeheugen van het apparaat wordt gebruikgemaakt van een batterij.


Wanneer de batterij is uitgeput, mag u deze niet gewoon weggooien, maar dient u deze als klein chemisch afval weg te doen.




To remove the battery/Verwijderen van de batterij

Main Power Battery (Ni-Cd Battery) Batterij Voor Primaire Voeding (Nikkelcadmiumbatterij)

Battery/Batterij BP-90 type




Anton/Bauer Battery Anton/Bauer-Batterij



- If a battery made by any other manufacturer is to be used, check the Operating Instructions accompanying the battery.
- In geval u een batterij van een anden fabrikant zou gebruiken, gelieve dan eerst zorgvuldig de gebruiksaanwijzing van deze batterij te lezen.

Back-up Battery (Lithium Battery) Batterij Voor Reservegeheugen (Lithiumbatterij)

- For the removal of the battery for disposal at the end of its service life, please consult your dealer.
- Raadpleeg uw leverancier over de verwijdering van de batterij op het moment dat u het apparaat bij einde levensduur afdankt.



Back-up Battery (Lithium Battery)
Batterij Voor Reservegeheugen (Lithiumbatterij)

Contents

	ons for Use 3	4-4	Selecting Audio Input Signals and
Chapter			Adjusting Recording Levels
1-1	Camera Unit Features	4-4-1	Selecting Audio Input Signals
1-2	Recorder/player Features	4-4-2	Adjusting Recording Levels
1-3	System Configuration	4-4-3	CH3 and CH4 Recording Levels
Chapter 2-1		4-5	Setting Time Data
2-1	Power Supply and	4-5-1	Setting the User Bits
0.0	Accessory Mounting Section	4-5-2	Setting the Internal Clock's Date and Time38
2-2	Audio (input) Function Section12	4-5-3	Setting the Time Code
2-3	Audio (output) Function Section 13	4-5-4	Externally Locking the Time Code 39
2-4	Shooting and Recording/Playback	4-5-5	Providing an ID to the Camera 41
0.5	Functions Section	4-5-6	Setting UMID Information 41
2-5	Menu Operation Section	4-5-7	Mode Check Screen Displays
2-6	Time Code Section18		(MODE CHECK button function) 42
2-7	Warning and Status Display Functions 19	4-6	Menu Displays in the Viewfinder
2-8	Display Window Functions19		Screen
2-9	LCD Monitor	4-6-1	Menu Configuration42
2-10	Viewfinder	4-6-2	Setting Menu Options 43
Chapter		4-6-3	Selecting Options for USER MENU 44
3-1	P2 Cards	4-7	Viewfinder Screen Status Displays 45
3-2	Basic Procedures24	4-7-1	Lamps in the Viewfinder Screen 45
3-3	Normal Recording	4-7-2	Viewfinder Status Indication Layout 45
3-4	PRE-RECORDING function26	4-7-3	Selecting Viewfinder Display Information 45
3-5	Loop Recording	4-7-4	Display Modes and Setting
3-6	Recording Review Function27		Changes/adjustment Result Messages 51
3-7	Normal and Variable Speed Playback 28	4-7-5	Setting the Marker Displays
3-8	Voice Memo Function	4-7-6	Marker Check Screen Displays
3-9	Shot Mark Function		(MARKER SELECT button function)52
Chapter	4 Adjustments and	4-7-7	Checking Return Video Signal
-	Settings for Recording 30		in the Viewfinder
4-1	Adjusting the White balance and	4-8	Adjusting and setting the LCD monitor 53
	Black Balance30	4-9	Menu-driven Function Setup
4-1-1	Adjusting the White Balance30	4-9-1	Setting the Switchover of USER SW GAIN 54
4-1-2	Adjusting the Black Balance32	4-9-2	Selecting Video Output Signals
4-2	Setting the Electronic Shutter	4-9-3	Selecting Function for
4-2-1	Shutter Modes	+ 5 0	the FRONT AUDIO LEVEL Control 54
4-2-2	Setting the Shutter Mode and Speed33	4-9-4	Assigning Functions to USER MAIN, USER1
4-2-3	Placing the Camera-recorder	4-3-4	and USER2 Buttons55
	in SYNCHRO SCAN Mode34	405	
4-3	Selecting Recording Signals and	4-9-5	Setting Color Temperature Manually 55
	Recording System		
4-3-1	Selecting the Recording Signals34		
4-3-2	Selecting the Recording System		

4-10	Handling data56	6-13	Properties	83
4-10-1	Handling SD Cards56	6-13-1	Clip Property	83
4-10-2	Formatting, Writing and	6-13-2	P2 Card Status Display	84
	Reading an SD Card	Chapter	7 Maintenance and	
4-10-3	How to Use the User Data	•	Inspections	. 85
4-10-4	How to Use Scene File Data 61	7-1	Inspections Before Shooting	85
4-10-5	Resetting Menu Option Settings to Defaults63	7-1-1	Preparing for Inspections	85
4-10-6	Lens File Data63	7-1-2	Inspecting the Camera Unit	85
Chapter	5 Preparation	7-1-3	Inspecting the Memory Recording Functions	. 86
5-1	Power Supply64	7-2	Maintenance	87
5-1-1	Mounting the battery and	7-2-1	Cleaning Inside the Viewfinder	87
	setting the battery type64	7-2-2	Phenomenon Inherent to CCD Cameras	87
5-1-2	Using an AC Power Supply	7-2-3	Replacing the Backup Battery	87
5-2	Mounting the Viewfinder and	7-2-4	Connector Signals	88
	Adjusting its Position 67	7-3	Warning System	. 89
5-3	Mounting the lens and Performing	7-3-1	Warning Description Tables	89
	the Flange Back and White Shading	7-3-2	Error Codes	90
	Adjustments68	Chapter	8 Menu Description Tables .	. 91
5-4	Preparing for Audio Input72	8-1	Menu Configuration	91
5-4-1	When Using the Front Microphone72	8-2	SYSTEM SETTING	. 92
5-4-2	When Using a Wireless Receiver72	8-2-1	SYSTEM MODE	92
5-4-3	When Using Audio Devices	8-2-2	OPTION MODE	92
5-5	Mounting the Camera on a Tripod73	8-2-3	REC FUNCTION	93
5-6	Attaching the Shoulder Strap74	8-2-4	OUTPUT SEL	93
5-7	Attaching the Rain Cover74	8-2-5	LCD MONITOR	94
5-8	Connecting the AJ-EC3E	8-2-6	GENLOCK	94
	Extension Controller	8-3	PAINT	
5-9	Attaching the Front Audio Level	8-3-1	ROP	
	Control Knob	8-3-2	MATRIX	
Chapter	6 Manipulating Clips	8-3-3	COLOR CORRECTION	
	with Thumbnails 76	8-3-4	LOW SETTING	
6-1	Thumbnail Manipulations Overview76	8-3-5	MID SETTING	
6-2	Thumbnail Screen	8-3-6	HIGH SETTING	
6-3	Selecting Thumbnails78	8-3-7	ADDITIONAL DTL	
6-4	Playing Back Clips	8-3-8	SKIN TONE DTL	
6-5	Switching the Thumbnail Display79	8-3-9	KNEE/LEVEL	
6-6	Shot Mark79	8-3-10	GAMMA	
6-7	Voice Memo80	8-3-11	FLARE	
6-7-1	Playing Back Voice Memos	8-3-12	CAMERA SETTING	
6-7-2	Recording a Voice Memo80	8-4	VF	
6-7-3	Deleting Voice Memos	8-4-1	VF DISPLAY	
6-8	Deleting Clips81	8-4-2	VF MARKER	
6-9	Restoring Clips81	8-4-3	USER BOX	
6-10	Formatting a P2 Card82	8-4-4	VF INDICATOR1	
6-11	Formatting SD Cards82	8-4-5	VF INDICATOR2	
6-12	Setting the Thumbnail Display Mode83	8-4-6	MODE CHECK IND	
		8-4-7	!LED	. 102

8-5	CAM OPERATION	103
8-5-1	CAMERA ID	103
8-5-2	SHUTTER SPEED	103
8-5-3	SHUTTER SELECT	103
8-5-4	USER SW	104
8-5-5	SW MODE	104
8-5-6	WHITE BALANCE MODE	105
8-5-7	USER SW GAIN	105
8-5-8	IRIS	106
8-6	MAIN OPERATION	106
8-6-1	BATTERY/P2CARD	106
8-6-2	BATTERY SETTING1	107
8-6-3	BATTERY SETTING2	109
8-6-4	MIC/AUDIO1	110
8-6-5	MIC/AUDIO2	110
8-6-6	TC/UB	111
8-6-7	UMID SET/INFO	111
8-7	FILE	112
8-7-1	SD CARD READ/WRITE	112
8-7-2	SD CARD R/W SELECT	112
8-7-3	LENS FILE	112
8-7-4	SCENE	112
8-7-5	INITIALIZE	112
8-8	MAINTENANCE	113
8-8-1	SYSTEM CHECK	113
8-8-2	LENS ADJ	113
8-8-3	BLACK SHADING	113
8-8-4	WHITE SHADING	113
8-8-5	DIAGNOSTIC1	113
8-8-6	DIAGNOSTIC2	114
8-8-7	HOURS METER	114
8-9	OPTION MENU	114
8-9-1	OPTION	114
Chapter	9 Specifications	115

Chapter 1 Introduction

The AJ-SPX900E memory card camera-recorder integrates a camera unit equipped with three CCDs, incorporating a 2/3-inch onchip lens featuring progressive drive technology, and a video recorder/player (VTR) that supports DVCPRO50, DVCPRO and DV formats.

The camera offers a choice of interlaced scanning and progressive scanning modes. The AJ-SPX900E provides for a wide range of uses, with such features as film-like gamma correction capability for authoring, and storage-type gain-up capability for news picture shooting.

Utilising P2 cards, which require no mechanism, as media, your AJ-SPX900E offers greater responsibility, operability, and portability. It is highly resistant to shock and vibration during recording, and therefore ensures stable operation for capturing quality video images under the most adverse conditions.

1-1 Camera Unit Features

■ Three CCDs with a 2/3-inch on-chip lens that supports progressive scanning

The camera supports aspect ratios of 16:9 and 4:3. Operators can choose between interlaced scanning and progressive scanning modes, to handle a wide range of applications.

In progressive scan mode, signals from and to the recorder/ player are converted to interlaced signals.

Innovative 14-bit A/D Converted Digital Signal Processing Circuit

This model utilises new 14-bit linear A/D conversion technology to digitise video. The signal processor, operating at 36 MHz, provides finer reproduction of video, together with enhanced stability and reliability.

Storage-type Sensitivity Enhancement

The camera unit is equipped with a storage-type gain-up capability featuring progressive drive technology. This capability adds up to 20 dB to the standard gain increase.

Digital Zoom

The camera unit features progressive digital zoom. This is particularly effective when you want to zoom-in closer on the subject.

■ 12-axis Independent color Correction

Operating as a paint function, this capability independently corrects colors for each of the 12 axes. This feature helps to produce fine images.

Film-like Gamma Correction

This capability provides a choice of four gamma types. In addition to the standard mode, two types of film-like gammas are available to help enhance video expression in productions. The newly developed News Gamma accurately records changes in shadow areas and reduces whiteout in highlighted areas. This is particularly useful for on-site news shooting.

<Note>

While your AJ-SPX900E supports progressive scanning, constantly increasing the storage-type gain causes a slight degree of brightening at the upper left corner of the screen due to CCD characteristics. Note also that the dynamic range of video signals in progressive scanning mode is about half that in interlaced driving mode.

Auto White Balance with Automatic Tracking capability

The white balance is automatically adjusted in real time, according to the subject. This is effective for urgent recording, where you can't spare the time to make an adjustment through the auto white balance feature.

■ Data Management Capability

Your AJ-SPX900E has inbuilt data storage capacity for one user and four scene files. In addition, an SD card can be used as a setup card to store data for up to eight setups.

<Note>

The SD cards used on your video camera-recorder must conform to SD standards. The cards must be formatted using the AJ-SPX900E. However, SD cards formatted, according to SD standards with other devices, including PCs, are also recognised by the AJ-SPX900E.

SD cards with capacities of 8 MB or more are recommended.

■ Customisable USER Buttons and USER MENU

The camera unit has three USER buttons, operable by a single press, to which frequently used function may be assigned. The on-screen menu is also customisable. You can create an original user menu screen by selecting frequently used menu items. The menu thus created can be displayed with a single touch of the MENU button.

■ MARKER SELECT Button

Your video camera-recorder has a button on the front that allows you to view marker information on the viewfinder screen. This is useful for checking the view angle during shooting.

■ Support for ECU

Your video camera-recorder supports the extension control unit AJ-EC3E.

1-2 Recorder/player Features

Multiple Slots

The AJ-SPX900E is equipped with five slots for P2 cards. Up to five cards may be inserted in these slots for continuous recording. They also provide new recording capabilities specific to memory cards.

Hot-Swap recording

The Hot-Swap capability allows cards not in use to be replaced without interrupting recording. This facilitates continuous recording.

Loop recording

The AJ-SPX900E can retain a certain amount of previously recorded material by continuously loop-recording data into a specified recording area.

• PRE-RECORDING function

In standby status, the AJ-SPX900E always stores video and sound input to the camera for up to 15 seconds (for the DVCPRO format). This means that the PRE-RECORDING function, when turned on, records the video and sound for a preceding duration preset by the user. This feature recovers critical moments that you might have missed.

Data protection

Data on P2 cards will not be lost due to overwriting unless the files are deleted or the cards are initialised. Recordings are written only to free space.

■ Format User-switchable Between DVCPRO50, DVCPRO and DV

Recorded video is compressed through a component digital recording method that uses a state-of-the-art compression technology, and sound is recorded using the non-compression PCM recording method, which excels in such areas as S/N ratio, frequency bands, waveform properties and reproducibility of fine areas. These methods further enhance the quality of images and sound.

The format is user-selectable, according to your purpose: e.g., DVCPRO50 for higher image quality, or DVCPRO for cost efficiency. DV format is also supported.

<Note>

When the clip is played back in the format not selected on the menu, the picture may be disturbed until the format is detected.

4-channel Digital Audio Recording (all formats)

All formats - DVCPRO, DV and DVCPRO50 - support 4-channel digital audio recording with high-quality sound (48 kHz/16 bits).

Clip Thumbnailing

Automatic generation of thumbnails

The AJ-SPX900E automatically generates a thumbnail for each recording cut (clip). It is possible to make use of this on the camera-recorder as well as for non-linear editing purposes, and after uploading to a server.

• Thumbnail display on the LCD monitor

The 3.5-inch color LCD side of the your video camera-recorder can provide a multi-screen view of 12 clip thumbnails. You can choose a desired clip to playback instantly.

Seamless playback of selected clips

You can select more than one clip from the thumbnail view for continuous playback and output of seamless video.

<Note>

When the clips recorded in different format are played back continuously, seamless playback may not be available.

■ Voice Memos & Shot Marks

Each clip can incorporate comments, in the form of voice memos, associated with the time code, together with shot marks which, for example, can help you distinguish OK cuts from reject cuts.

Both voice memos and shot marks can be added to selected clips during and after a recording. This is helpful for editing recorded video.

■ Support for SDI Output (when AJ-YA902AG installed)

The AJ-SPX900E, when equipped with the extension board AJ-YA902AG, can output SDI signals from the VIDEO OUT connector.

■ Front-mounted Sound Level Control Mechanism

The AJ-SPX900E features a front-mounted control for fine adjustment of the sound recording level. This control is particularly effective for adjusting the sound level when you are shooting without a sound recordist. The control can be disabled.

■ Support for Built-in Unislot® Wireless Receive

The AJ-SPX900E is designed to support an optional slot-in wireless receiver.

■ Recording Review Capability

This capability automatically plays back the last 2 to 10 seconds of recorded video, allowing you to quickly check the recorded contents.

■ Built-in Time Code Generator/reader

A special-purpose secondary code track can be used to record and reproduce time code information.

■ Support for Metadata

The AJ-SPX900E is capable of recording positional information (latitudes, longitudes and altitudes), as UMID information (metadata), from the GPS unit AJ-GPS900G (optional accessory).

This information is also useful in managing information on P2 cards.


■ Recording Time

(Number of cards used: 1)

	Recordir	Recording Format		
Card #	DVCPRO (Audio 2ch)	DVCPRO50 (Audio 4ch)		
AJ-P2C002SG	Approx. 8 minutes	Approx. 4 minutes		
AJ-P2C004HG	Approx. 16 minutes	Approx. 8 minutes		

(For more information, see the instruction manual for the appropriate memory card.)


1-3 System Configuration

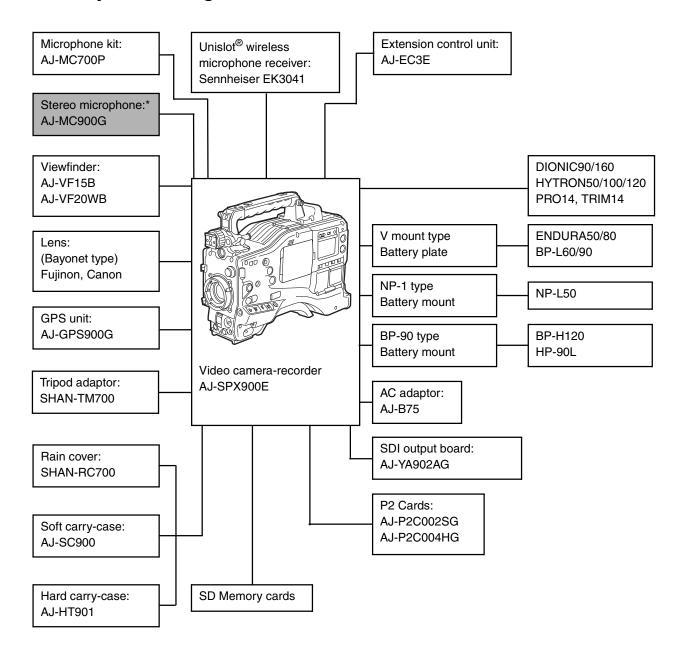

^{*} To install a stereo microphone, an extra modification is required. For more information, contact your distributor or designated service provider.

Chapter 2 Parts and their Functions

2-1 Power Supply and Accessory Mounting Section

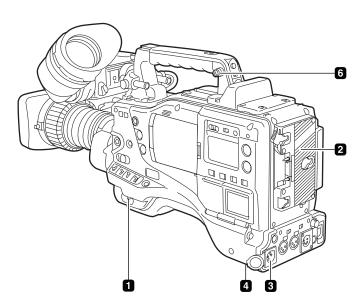

1 POWER switch

Used to turn on/off the power.

2 Battery mount

A battery pack from Anton/Bauer is mounted here.

3 DC IN (external power input) socket (XLR, 4P)

To operate your AJ-SPX900E on AC power, the AC adaptor AJ-B75 (optional accessory) must be connected to this socket.

4 BREAKER switch

When an excessive amount of current is fed through the video camera-recorder, due to any abnormal event, the breaker automatically turns off the power in order to protect the device.

After the interior of the video camera-recorder has been checked and/or repaired, this button must be depressed. If there is no unusual reaction, the unit can be powered-up.

5 GPS connector

This connects the optional GPS unit AJ-GPS900G.

6 Shoulder strap fittings

The shoulder strap is attached here.

Light shoe


A video light or similar accessory can be attached here.

8 Lens mount (bayonet type)

The lens is attached here.

9 Lens lever

Lower this lever to lock the lens to the lens mount.



10 Lens mount cap

To remove the cap, raise the **9** lens lever. When the lens is not mounted, replace the cap.

11 Lens cable/microphone cable clamp

This clamp secures the lens and microphone cables.


12 Tripod mount

When you want to mount the AJ-SPX900E on a tripod, the optional tripod adaptor (SHAN-TM700) is attached here.

13 LENS jack (12-pin)

The lens connection cord is connected here. For a detailed description of your lens, see the relevant manufacturer's instruction manual.

2-2 Audio (input) Function Section



1 MIC IN (microphone input) jack (XLR, 3-pin)

A microphone (optional accessory) is connected here. Power for the microphone comes from this jack.

A remote microphone may be connected. In this case, the power supply to the appropriate connector must be enabled through menu option FRONT MIC POWER or REAR MIC POWER.

These options are found in the <MIC/AUDIO2> screen on the MAIN OPERATION page.

A stereo microphone may be connected, but you will need to replace the connector. For more information, contact your distributor or designated service provider.

2 AUDIO LEVEL CH1/CH2 (audio channel 1 & 2 recording level adjustment) controls

With the **3** AUDIO SELECT CH1/CH2 switch positioned to [MAN], these controls can be used to adjust the recording levels for Audio Channels 1/2.

Note that the controls are designed to be locked. For adjustment, each control must be depressed while turning.

3 AUDIO SELECT CH1/CH2 (audio channel 1 & 2 automatic/ manual level adjustment selector) switch

Use this switch to select recording level control mode for Audio Channels 1 and 2.

AUTO: Recording level automatically controlled.

MAN: Recording level manually controlled.

4 AUDIO IN (audio input selector) switch


Use this switch to select the signals recorded through Audio Channels 1 - 4.

FRONT: Signal from the microphone connected to the
MIC IN jack is recorded.

W.L. (WIRELESS)

Signal from the slot-in wireless receiver is recorded.

REAR: Signal from the audio device connected to the **5** AUDIO IN CH1/CH2 connector is recorded.

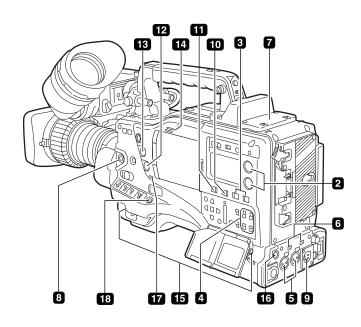

<Note>

When you use stereo microphone (AJ-MC900G optional), set both CH1 and CH2 to [FRONT]. The signal from L CH is recorded to CH1 and that from R CH to CH2.

5 AUDIO IN CH1/CH2 (audio input channel 1 & 2) connectors (XLR, 3-pin)

Audio devices or a microphone may be connected here.

6 LINE/MIC/+48V (line input/mic input/mic input + 48V) selector switch

Used to select the audio signal input from the **5** AUDIO IN CH1/CH2 connectors.

LINE: Audio signal line-input from the audio device is input.

MIC: Audio signal from a self-powered (active) microphone is input. (The main unit does not supply power to the remote microphone).

+ 48V: Audio signal from a passive microphone is input. (The unit supplies power to the remote microphone).

Wireless slot

A Unislot[®] wireless receiver (optional accessory) may be attached here.

FRONT AUDIO LEVEL (audio recording level adjustment) control

This control adjusts the recording levels for Audio Channels 1 and 2. Level adjustment does not depend on the position of the AUDIO SELECT switch.

The control can be enabled or disabled through the menu options FRONT VR CH1 or FRONT VR CH2. These options can be found in the <MIC/AUDIO1> screen on the MAIN OPERATION page.

2-3 Audio (output) Function Section

9 AUDIO OUT connector (XLR, 5-pin)

This connector outputs audio signals recorded on Channels 1/2 or 3/4.

Output signals are selected with the MONITOR SELECT CH1/2 / CH3/4 selector switch.

10 MONITOR SELECT (audio channel) CH1/2 / CH3/4 selector switch

Use this switch to select the audio channel whose signals are output to the speakers, earphones or AUDIO OUT connector.

CH1/2: Signals on Audio Channels 1 and 2 are output.CH3/4: Signals on Audio Channels 3 and 4 are output.

The channel indications on the display window and on the audio level meter in the viewfinder are synchronised with this selector switch.

When a voice memo is being played back, the recorded voice is output to the speakers and earphones, regardless of the switch position.

<Note>

Whenever two-channel recording is performed in the DVCPRO25 or DV format, the signals on Audio Channels 1 and 2 are output and indicated.

11 MONITOR SELECT (audio selection) CH1/3 / ST / CH2/4 selector switch

The MONITOR SELECT switch is synchronised with the audio signal output to the speakers and earphones, and from the AUDIO OUT connector.

CH1/3: Signal on Audio Channel 1 or 3 is output.

ST: Stereo audio signals on Audio Channels 1 and 2

or Audio Channels 3 or 4 are output. The stereo signals can be changed to mixed signals using a

menu option.

CH2/4: Signal on Audio Channel 2 or 4 is output.

Monitor	MONITOR SELECT switch		
switch	CH1/2	CH3/4	
CH1/3	Audio Channel 1	Audio Channel 3	
ST	Stereo signals from Audio Channels 1 and 2*	Stereo signals from Audio Channels 3 and 4*	
CH2/4	Audio Channel 2	Audio Channel 4	

^{*} You can select between stereo and mixed signal types using the menu option MONITOR SELECT. This menu option can be found in the <MIC/AUDIO2> screen on the MAIN OPERATION page.

12 MONITOR (volume) control

Used to control the volume of sound output from the monitor speakers and earphones.

13 ALARM (warning alarm volume adjustment)

Used to control the volume of the warning sound emitted from 14 speakers or earphones connected to the 15 PHONES lack.

If the control is minimised, no alarm is audible.

14 Speakers

The speakers output EE sound during recording, and reproduced sound during playback.

The speakers emit an alarm sound when the warning lamp blinks and/or the indicator activates.

When the 15 PHONES jack is connected with earphones, sound from the speaker is automatically muted.

15 PHONES (earphones) jack (mini jack)

This connector is designed for audio monitoring (stereo) earphones. When earphones are connected, sound from the speakers is automatically muted.

Both the front and rear connectors output the same sound.

16 DC OUT (DC power supply) output socket

This output socket is designed for 12-VDC. It provides a maximum current of 1 A.

17 Voice memo microphone


Used to record a voice memo.

For more information on voice memos, see [3-8 Voice Memo Function].

18 VOICE MEMO button

Used to record a voice memo during recording or playback, or recording or playback is paused. Another press of the button stops voice memo recording.

2-4 Shooting and Recording/Playback Functions Section

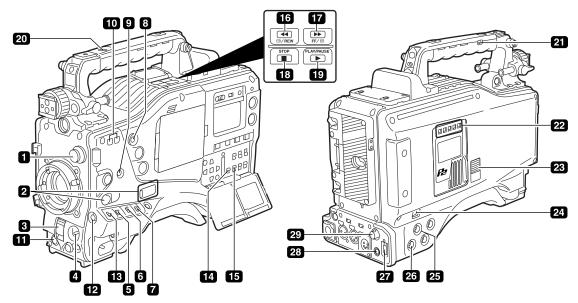

■ Shooting and Recording (camera unit)

1 CC FILTER/ND FILTER (filter selector) controls

Use this knob to select a filter depending on the luminance and color temperature of the subject.

CC FILTER knob (outside, large diameter)
A: Cross filter B: 3200 K
C: 4300 K D: 6300 K

ND FILTER knob (inside, small diameter)
1: CLEAR (transparent)
2: 1/4 ND
3: 1/16 ND
4: 1/64 ND

Examples of filter selection according to shooting conditions

Shooting conditions	CC FILTER	ND FILTER
Sunrise, sunset, studio	B (3200 K)	1 (CLEAR)
Clear outdoor environments	C (4300 K) or D (6300 K)	2 (1/4 ND) or 3 (1/16 ND)
Cloudy/rainy outdoor environments	D (6300 K)	1 (CLEAR) or 2 (1/4 ND)
Clear, bright scenes such as snowscape, high mountains, beaches, etc.	C (4300 K) or D (6300 K)	3 (1/16 ND) or 4 (1/64 ND)

2 USER MAIN, USER 1 and USER 2 buttons

These buttons can be assigned user-selected functions, using a menu option. Each button, when pressed, performs the assigned function.

For more information, see [4-9-4 Assigning Functions to USER MAIN, USER1 and USER2 Buttons.

3 SHUTTER switch

Used to enable or disable the electronic shutter.

OFF: Electronic shutter disabled.
ON: Electronic shutter enabled.

SEL: Used to change the speed of the electronic

shutter.

This dial switch returns to its original position. Each turn of the switch alters the shutter speed.

For more information, see [4-2 Setting the Electronic Shutter].

4 AUTO W/B (white/black) BAL switch

AWB: White balance is automatically adjusted.

When the WHITE BAL switch on the side is positioned at [A] or [B], the adjusted value is stored in the memory.

However, if "VAR" is selected for the menu options AWB A and AWB B, the value set through the menu options is used, and this function does not work. Menu options can be found in the <WHITE BALANCE MODE> screen on the CAM OPERATION page.

Note also that when the switch is positioned at PRST this function does not work.

ABB: Back balance is automatically adjusted.

To automatically correct black shading, the AUTO W/B BAL switch must be pressed toward [ABB] for longer than five seconds.

<Note>

To stop automatic adjustment of the white or black balance in progress, set the switch to either ([AWB] or [ABB]).

If automatic adjustment is canceled, the value in effect before automatic adjustment will be used.

5 Gain selector switch

Use this switch to select video amplifier gain, according to lighting conditions under which you are shooting.

The values for L, M, and H can be preset using menu options.

These are factory-set to 0 dB for L, 9 dB for M, and 18 dB for H.

6 OUTPUT/AUTO KNEE selector switch

Used to select the video signals sent from the camera unit to the memory, viewfinder and video monitor.

CAM. AUTO KNEE ON:

Video being recorded through the camera is sent with the auto knee circuit activated.

CAM. AUTO KNEE OFF:

Video being recorded through the camera is sent in manual knee mode.

BARS:

Color bar signal is output. The auto knee circuit does not work.

You can select between four types of color bar signal. For more information, see [8-5-5 SW MODE].

Auto Knee function

Usually, when you adjust levels to shoot people or scenery against a strongly lighted background, the background will be totally whited-out, with buildings and other objects blurred. In this case, the auto knee function reproduces the background clearly. This function is effective when:

- The subject is a person positioned in the shade under a clear sky.
- The subject is a person inside a car or building, and you also want to capture the background visible through a window.
- The subject is a high-contrast scene.

WHITE BAL (white balance memory selector) switch

Used to select the white balance adjustment method.

PRST: Use this when you have no time to adjust the white balance.

The value for the white balance is factory-set to 3200 K.

It can be changed to any color temperature using a menu option. For more information, see [4-9-5 Setting Color Temperature Manually].

A or B: Pressing the 4 AUTO W/B BAL Switch toward [AWB] automatically adjusts the white balance, saving the adjusted value in Memory A or B. For more information, see [4-1-1 Adjusting the White Balance].

Your video camera-recorder is factory-set to save the adjusted value. Through a menu option, the auto-tracking white balance (ATW) can be assigned to B, or desired color temperatures can be assigned to A and B.

For more information, see [4-1-1 Adjusting the White Balance].

8 MODE CHECK button

Each press of this button changes the screen type in the viewfinder in the following order: STATUS, !LED, FUNCTION. AUDIO.

This does not affect the signal output from the camera.

MARKER SELECT button

This button selects the marker information indicated on the viewfinder screen. It switches between two marker information indications, which can be selected using a menu option. Pressing this button once switches the indicated marker information from A (Marker A) to B (Marker B), and pressing again switches B to OFF (no marker). When the power is turned on, the last selected indication before power-down appears.

For more information, see [4-7-6 Marker Check Screen Displays (MARKER SELECT button function)].

10 SYNCHRO SCAN ADJUSTMENT buttons

These buttons are enabled when the 3 shutter switch is positioned at [ON] and synchro scan is selected.

They are used to adjust the speed of the synchro scan.

The - button decreases shutter speed; the + button increases shutter speed.

If you shoot a PC monitor, for example, you should adjust shutter speed so that the horizontal bars in the viewfinder will produce less noise.

■ Shooting and Recording/Playback Function Section (recording)

FII REC START/STOP button

Pressing this button starts recording, pressing again stops recording.

This button has the same function as the 20 REC button on the handle and the VTR button at the lens.

12 SHOT MARK button

Pressing this button while recording adds a shot mark to the thumbnail of that clip. This button also adds a shot mark to any thumbnail selected on the LCD monitor.

For more information on shot marks, see [3-9 Shot Mark Function].

13 SAVE ON/OFF switch

Used to select the power supply method for each output section.

ON: The output selected through the menu option

SAVE SW is power-saved. This option can be found on the OPTION MODE screen on the SYSTEM SETTINGS page.

OFF: Power saving is canceled.

<Note>

During recording, this switch produces no effect. The power supply method is switched after recording is finished.

14 VIDEO OUT CHARACTER switch

This switch controls the superimposition of characters onto the video output from the VIDEO OUT connector.

ON: Characters are superimposed.OFF: Characters are not superimposed.

For types of characters, see [4-9-2 Selecting Video Output Signals].

15 OUTPUT SEL (output signal selection) switch

Used to switch the signals output from the VIDEO OUT and MON OUT connectors.

MEM: In EE (recording) mode, video from the camera is output. In VV (playback) mode, playback signal

from a P2 card is output.

CAM: Video from the camera is output constantly.

OFF: Video is not output, and the video camera-

recorder operates in power-saving mode.

Note that the audio output is synchronised with the video. For types of video outputs, see [4-9-2 Selecting Video Output Signals].

16 REW (rewind) button and lamp

During pause, this button performs a fast-reverse playback with the lamp blinking.

During playback, it performs an approximately $4\times$ fast-reverse playback with the PLAY and REW lamps blinking. If this button is pressed when playback is paused, the start of the clip being played back is located in pause mode.

17 FF (fast forward) button and lamp

During pause, this button is used to perform fast playback with the lamp blinking.

During playback, it performs an approximately $4\times$ fast playback with the PLAY and FF lamps blinking.

If this button is pressed when playback is paused, the start of the next clip is located in pause mode.

18 STOP button

This button stops playback.

19 PLAY/PAUSE button

This button is used to view playback using the viewfinder screen or a color video monitor. The lamp comes on when playback starts.

In playback mode, this button pauses (PLAY PAUSE) playback with the lamp blinking.

20 REC button

Pressing this button starts recording, and pressing again stops recording.

This button has the same function as the **11** REC START/STOP button and the VTR button at the lens.

It may be disabled with the 21 recording protection button.

21 REC protection button

This button disables the 20 REC button on the handle.

ON: The REC button is enabled.
OFF: The REC button is disabled.

22 P2 CARD STATUS LED

This LED indicates the recording and playback status of each card.

23 Slide lock button

Used to open the slide-out door for inserting P2 cards. While depressing this button, slide the door to the left.

24 USB 2.0 connector

A USB 2.0 cable is connected here. (To be supported in the near future.)

25 GENLOCK IN connector

This connector is used to input a reference signal when the camera unit is gen-locked, or when the time code is externally locked. If VIDEO is selected for the menu option REC SIGNAL, the connector can be used to record actual signals. The menu option REC SIGNAL is found on the SYSTEM MODE screen on the SYSTEM SETTINGS page.

<Notes>

- The reference input signal must be a standard VBS (Video Burst Sync).
- If you need to synchronise the input signal with the AJ-SPX900E when "VIDEO" is selected for the REC SIGNAL, set the menu option GENLOCK to "EXT". The option GENLOCK is found on the GENLOCK screen, which is accessible from the SYSTEM SETTING page.

26 MON OUT (monitor output) connector

This connector outputs the video signal to the monitor. The video signals linked to the setting of the OUTPUT SEL switch are output from here. Through an internal menu option, the characters can be superimposed independently of the VIDEO OUT connector. For more information, see [4-9-2 Selecting Video Output Signals].

27 Connector cover

This cover must be removed in order to attach the optional connector 1394. For directions on attaching the connector, see the instruction manual for the optional connector 1394. (To be supported in the near future.)


28 ECU REMOTE (remote control) connector

The extension control unit AJ-EC3E (optional accessory) is connected here.

29 VIDEO OUT (video signal output) connector

This connector outputs video signals. The video signals linked to the setting of the OUTPUT SEL switch are output from here.

2-5 Menu Operation Section



1 MENU button

Used to turn on/off the menu.

2 JOG dial button

With the menu open, this button is used to navigate through menu pages, select options and specify values. For directions on manipulating the menu, see [4-6 Menu Displays in the Viewfinder Screen].

3 SD card insertion slot

An SD card (optional accessory) is inserted here.


4 BUSY (operation mode display) lamp

This lamp indicates the active status of the SD card. It stays illuminated when the card is active.

<Note>

While the lamp is on, do not insert or remove the card.

2-6 Time Code Section



GENLOCK IN connector (BNC)

This connector is used to input a reference signal before the camera unit is gen-locked, or before the time code is externally locked.

2 TC IN connector (BNC)

This connector is used to input a reference time code when you externally lock the time code.

3 TC OUT connector (BNC)

When you inter-lock the time code of the AJ-SPX900E with that of an external device this must be connected with the time code input (TC IN) connector of the external device.

4 HOLD button

Pressing this button freezes the time data indication on the counter. Note that time code generation continues. Pressing the button again reactivates the counter.

This function is used to ascertain the time code of a particular recorded scene.

RESET button

This button resets the time data on the counter to "00:00:00:00".


If this button is pressed when with the **7** TCG switch positioned at [SET], CTL* data, time code data, user bit data, and real-time data are reset to 0. Real-time data is also reset to the defaults.

6 DISPLAY (counter display selector) switch

Indications of the time code, CTL* and user bits on the counter of the display window depend on the positions of this switch and the **7** TCG switch.

Pressing the 4 HOLD button also displays Date/Time/Time Zone.

UB: User bits indicated.TC: Time code indicated.CTL*: CTL indicated.



TCG (time code selector) switch

This switch is used to specify the stepping mode for the built-in time code generator.

F-RUN: Select this position to continuously advance the time code independently of the P2 card recording

status.

Use this mode to synchronise the time code with the time of day, or to externally lock the time code.

SET: Select this position to set the time code and/or

user bits.

R-RUN: Select this position to advance the time code only

during recording.

For spliced scenes recorded on P2 cards, the sequence of time codes is unbroken.

8 CURSOR and SET buttons


Use these buttons to set the time code and user bits.

The four triangular buttons are the CURSOR buttons, and the center rectangular one is the SET button.

For guidance in setting the time code and user's bit, see [4-5 Setting Time Data].

^{*} CTL will be supported in the near future.

2-7 Warning and Status Display Functions



1 Back tally lamp

When the **2** BACK TALLY switch is set to [ON], the lamp behaves in the same way as the front tally lamp at the viewfinder.

2 BACK TALLY switch

This switch controls the action of the **1** back and **6** rear tally lamps.

ON: Back and rear tally lamps enabled.
OFF: Back and rear tally lamps disabled.

3 WARNING lamp

This lamp starts blinking or lights up if something unusual occurs in the memory.

4 LIGHT button

Use this button to control illumination of the display window. Alternately pressing this button toggles illumination of the display window on or off.

5 Display window

This window displays warnings, battery-remaining level, sound volume, time data, and other information.

6 Rear tally lamp


When the 2 BACK TALLY switch is set on [ON], the rear tally lamp behaves in the same way as the back tally lamp.

2-8 Display Window Functions P2 card/battery-remaining level indications

Media-remaining space indication bar

The bar indicates the remaining free space on each P2 card, using a seven-segment display.

Each segment can represent either three or five minutes of remaining free space, depending on the value set through the menu option CARD REMAIN/■. According to the set value, the segments disappear one-by-one. The menu option CARD REMAIN /■ can be found in the <BATTERY/P2CARD> screen on the MAIN OPERATION page.



Battery-remaining level indication bar


For a battery with a digital indicator (percentage indication), if the remaining level of the battery is higher than 70%, all seven segments up to the "F" position are lighted.

When the remaining level falls below 70%, the segments go out one-by-one for each drop of 10%. All seven segments can be set to light up when the battery-remaining balance is 100%. To do so select "100%" for the menu option BATT REMAIN FULL in the P2CARD> screen of the MAIN OPERATION page.

Audio channel level meter

When the MONITOR SELECT CH1/2 / CH3/4 switch is set to [CH1/2], the meter indicates 1 and 2 as the audio channel numbers, together with their audio levels. When the switch is set to [CH3/4], the meter indicates 3 and 4 as the audio channel numbers, together with their audio levels.

Memory action status indication Error Code Indication (for more information, see [7-3 Warning System])



Information indication

LOOP: Stays illuminated in LOOP REC mode. For information about the LOOP REC mode, see [4-5 Setting Time Data].

DRIVE: Stays illuminated when the menu option USB is set to "ON". The menu option USB can be found in the <SYSTEM MODE> screen on the SYSTEM SETTING

page. (To be supported in the near future.)

OP-SLOT: Stays illuminated when the optional slot is available. (To be supported in the near future.)

Mode indication

W: Stays illuminated in 16:9 mode.

DV: Stays illuminated when the recording/playback format is

DV.

GPS: Stays illuminated when radio waves are not received

during GPS operation.

GPSY: Stays illuminated when radio waves are received during


Stays murimate

GPS operation.

P-REC: Stavs illuminated when PRE RECORDING is not set to 0

Stays illuminated when PRE RECORDING is not set to 0 seconds, and blinks when recording is continued after the

recording tally lamp has gone out.



Time code indication

SLAVE: Stays illuminated when the time code is externally locked.

HOLD: Stays illuminated when the time code generator/reader

value is frozen.

CTL*: Stays illuminated when the DISPLAY switch is positioned

at [CTL] to display the CTL count.

TCG: Stays illuminated when the DISPLAY switch is positioned

at [TC] (or [UB]) to display the TC (or UB) generator value.

TC: Stays illuminated when the DISPLAY switch is positioned at [TC] (or [UB]) to display the TC (or UB) reader value.

VTCG: Stays illuminated when the DISPLAY switch is positioned

at [UB] to display the VIUB generator value.

VTC: Stays illuminated when the DISPLAY switch is positioned

at [UB] to display the VIUB reader value.

TIME: Stays illuminated when the DISPLAY switch is positioned at [UB] to display the real-time hour, minute and second.

DATE: Stays illuminated when the DISPLAY switch is positioned

at [UB] to display the real-time date.

No Indication:

The CTL, VTGC, TIME, and DATE stay off when the DISPLAY switch is positioned at [UB] to display real time, time zone, hour and minute.

Time count indication:


The time code, CTL*, user bits and real time are shown.

* CTL will be supported in the near future.

<Note>

When the DISPLAY switch is positioned at UB, each press of the HOLD button changes the indication through VTCG (VTC) \rightarrow DATE \rightarrow TIME \rightarrow No Indication (Time Zone) \rightarrow TCG (TC), in that order.

2-9 LCD Monitor



1 LCD monitor

The LCD monitor displays the video in the viewfinder. Alternatively, it can show clips on the P2 card in a thumbnail format.

In thumbnail display mode, clips can be edited or deleted, or P2 cards can be formatted using the 4 MENU BAR button and 5 CURSOR and SET buttons.

OPEN button

Used to open the LCD monitor.

3 THUMBNAIL button

This button switches the content on the **1** LCD monitor from the video in the viewfinder to clip thumbnails. Another press switches them back to the video from the viewfinder. Note that this switchover is not performed during a recording or playback.

4 MENU BAR button


In thumbnail display mode, this button allows you to manipulate the menu bar (e.g., to delete clips).

CURSOR and SET buttons

The four triangular buttons are the CURSOR buttons, and the center rectangular one is the SET button.

They are used to select a thumbnail and manipulate the menu bar. For more information, see [Chapter 6 Manipulating Clips with Thumbnails].

2-10 Viewfinder



1 Viewfinder (optional accessory)

During recording or playback, the viewfinder displays the video image in monochrome. It also displays warnings, messages, zebra patterns, markers (safety zone and center markers), etc.

2 ZEBRA (zebra pattern) switch

This switch is used to display the zebra pattern in the viewfinder.

ON: Zebra pattern displayed.OFF: No zebra pattern displayed.

3 TALLY switch

Used to control the 7 front tally lamp.

HIGH: Front tally lamp brightly illuminated.

OFF: Front tally lamp stays off.

LOW: Front tally lamp dimly illuminated.

PEAKING control

Used to adjust the outlines of the video image in the viewfinder for easier focusing. This does not affect the signal output from the camera.

CONTRAST control

Used to adjust the contrast of the video image in the viewfinder. This does not affect the signal output from the camera.

6 BRIGHT control

Used to adjust the brightness of the video image in the viewfinder. This does not affect the signal output from the camera.

Front tally lamp

This lamp is activated when the 3 TALLY switch is positioned at [HIGH] or [LOW], and stays on during recording. It also blinks in synchronisation with the REC lamp in the viewfinder, and provides alerts.

Use the TALLY switch to change the intensity of the lamp to ([HIGH] or [LOW]).

8 Back tally lamp

This lamp stays illuminated during shooting. It also blinks in synchronisation with the REC lamp in the viewfinder, and provides alerts.

When the lever is positioned at [OFF], the back tally lamp is hidden.

9 Eyepiece

10 Diopter adjustment ring

Use this to make adjustments in line with your diopter, in order to obtain optimum clarity in the viewfinder image.


111 Connecting plug

12 Locking ring

13 Microphone holder

14 Viewfinder stopper

Used to attach or remove the viewfinder.

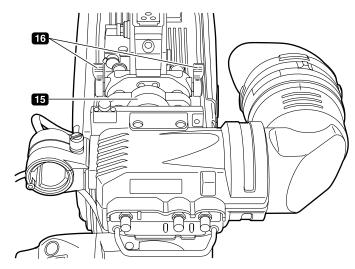

15 Viewfinder left-right position anchoring ring

Used to adjust the side-to-side position of the viewfinder.

16 Viewfinder front-back position anchoring lever

Used to adjust the fore-and-aft position of the viewfinder.

<Note>

For more information, see the instruction manual for the viewfinder.

Chapter 3 Recording and Playback


3-1 P2 Cards

Inserting P2 Cards


<Note>

When using the camera-recorder for the first time, be sure to set the time data beforehand. On how the time data is set, see [4-5 Setting Time Data].


 $m{1}$ Turn on the POWER switch.




2 While pressing down the slide lock button, slide the slide-out door to the left. The door opens.



Insert a P2 card into the P2 card slot until the EJECT button pops up.



4 Tilt up the popped-up EJECT button, to lock-in the P2 card.



Insert a P2 card into the AJ-SPX900E. The P2 CARD ACCESS LED for the appropriate slot indicates the status of the P2 card.

For how the P2 card status is indicated, see [P2 CARD STATUS LED and status of P2 cards] on the next page.


6 Close the slide-out door.


<Note>


Do not leave the slide-out door open when moving the AJ-SPX900E.

Removing P2 Cards

- While pressing down the slide lock button, move the slideout door to the left. The door opens.
- $oldsymbol{2}$ Tilt down the EJECT button.
- Then, depress the EJECT button to release the P2 card so that you can remove it.







Depress the tilted-down EJECT button to release the P2 card.

<Notes>

- When a P2 card is being accessed or it is being recognised after insertion (P2 CARD ACCESS LED blinks in orange), do not remove the P2 card.
 - If your AJ-SPX900E is not set to turn on the P2 CARD ACCESS LED, before removing the card ensure that prerecording and/or voice memo recording have finished (the P-REC indication has stopped blinking and the V mark or VOICE REC indication on the viewfinder screen has turned off) after stopping recording or playback.
- If a P2 card being accessed is removed, the viewfinder displays "TURN POWER OFF" and the AJ-SPX900E gives a warning using an alarm and the WARNING LED. In addition, all P2 CARD ACCESS LEDs blink rapidly in green. If this is the case, turn the power off. For more information on warning indications, see "7-3 Warning System".
- If a P2 card is removed while being accessed, clips on it may become irregular although the data will not be corrupted. Check the clips and restore them if required. For more information about how to restore clips, see "6-9 Restoring Clips".
- If a P2 card being formatted is removed, it may be not be formatted properly. In this case, the viewfinder displays "TURN POWER OFF". If this message appears, turn off the power, then restart the AJ-SPX900E to reformat the card.
- If a P2 card is inserted while another P2 card is being played back, the inserted P2 card is not recognised and the P2 CARD ACCESS LED for that card does not come on. Card recognition starts when the playback ends.

<For Your Information>


The P2 CARD ACCESS LEDs may be set to stay off using the menu option ACESS LED. This option can be found on the <SYSTEM MODE> screen, which is accessible from the SYSTEM SETTING page.

To Prevent Accidental Erasure of P2 Card Content

To prevent the content of a P2 card being accidentally erased, position the write-protect switch on the P2 card at [Pprotect].

<Note>

Write-protect switchover can be performed while the card is being accessed (during recording or playback), but does not take effect until access to the card ceases.



P2 CARD STATUS LED and status of P2 cards

P2 CARD STATUS LED	MODE CHECK indication*	Status of P2 Card
Stays on in green	ACTIVE	Writing and reading enabled
orange ACTIVE		Writing and reading enabled. The card is recordable (loop recording also enabled).
Stays on in orange or green	ACTIVE!	Writing and reading enabled. However, some clips recorded on the P2 card may not be able to be read successfully.
Blinks in orange	ACCESSING	Writing or reading being performed.
Quickly blinks in green	INFO READING	The P2 card is being recognised.
	FULL	The P2 card has no free space. Only reading is enabled.
Blinks in green	PROTECTED	The write-protect switch on the P2 card is positioned at [PROTECT]. Only reading is enabled.
	NOT SUPPORTED	The card is not supported by your AJ-SPX900E. Replace the card.
Stays off	FORMAT ERROR	The P2 card is not properly formatted. Reformat the card.
	NO CARD	No P2 card is inserted.

^{*} The mode check indication is shown in the viewfinder. For more information, see [4-7-2 Viewfinder Status Indication Layout].

3-2 Basic Procedures

This section describes the basic procedure for shooting and recording.

Before you embark on a shoot, pre-inspect your system to ensure that it works properly.

* For directions on inspecting your video camera-recorder, see [7-1 Inspections Before Shooting].


Battery Set-up to P2 card Insertion

- Insert a charged battery pack.
- Turn on the POWER switch and ensure that more than four segments of the battery-remaining amount indication bar are illuminated.
 - If the number of illuminated segments is fewer than five, first check the battery placement. If placement is not the problem, replace the battery with a fully charged one.
- Insert a P2 card and ensure that the P2 CARD STATUS LED stays on in orange or green. Then, close the slide-out door.

When more than one P2 card slot contains a P2 card, the card in the slot with the lowest number is used first. However, regardless of slot number, a P2 card inserted later will not be accessed until the other cards have been used.

Example:


If all five slots contain P2 cards, the cards are used in order of slot numbers $1 \rightarrow 2 \rightarrow 3 \rightarrow 4 \rightarrow 5$. However, if the P2 card in Slot 1 is removed and then re-inserted, the cards will be used in the following order: $2 \rightarrow 3 \rightarrow 4 \rightarrow 5 \rightarrow 1$.

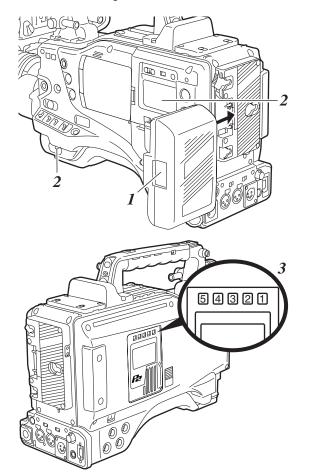

Note that the recording order is retained even if the power is turned off. When the power is next turned on, the last card written before powering-down will be the target card.

Switch Setting

When a battery and P2 cards are installed, set the switches as detailed below, before starting to use your AJ-SPX900E.

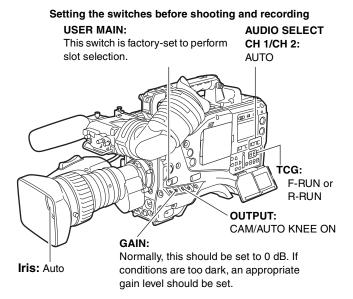

<Note>

The USER MAIN button is factory-set to perform the slot selection function, which selects the target card from among several P2 cards.

When a new target P2 card is selected, the appropriate slot number appears on the P2 card remaining amount indicator in the viewfinder.

For more information about the indications in the viewfinder, see [4-7-2 Viewfinder Status Indication Layout].

Shooting

White/Black Balance Adjustment to Recording Completion

For shooting, follow the steps below.

 ${\it 1}$ Select a filter according to light conditions.

2A When the white balance is saved:

Position the WHITE BAL switch to [A] or [B].

2B When the white or black balance is not saved and you have no time to adjust the white balance:

Position the WHITE BAL switch to [PRST].

This adjusts the white balance against the filter according to the position of the FILTER control.

2C If the white balance is adjusted on the spot:

Select a filter according to light conditions. Then, position the WHITE BAL switch to [A] or [B] and shoot a white test subject so that it appears at the center of the screen. Then, follow the steps below to adjust the white balance.

- 1. Press the AUTO W/B BAL switch toward [AWB] to adjust the white balance.
- 2. Press the AUTO W/B BAL switch toward [ABB] to adjust the black balance.
- Press the AUTO W/B BAL switch toward [AWB] to adjust the white balance again.

For directions on making adjustments, see [4-1-1 Adjusting the White Balance] and [4-1-2 Adjusting the Black Balance].


- ${f 3}$ Point the camera at your subject to adjust the focus, and zoom.
- 4 To use the electronic shutter, set the shutter speed and operation mode.

For more information, see [4-2 Setting the Electronic Shutter].

- Press either the REC START/STOP button, REC button on the handle or VTR button at the lens to start recording. During recording, the REC lamp in the viewfinder stays illuminated.
- To stop recording, press either the REC START/STOP button, REC button on the handle or VTR button at the lens. The REC lamp in the viewfinder goes out.

Operation Buttons

During recording, all operation buttons (REW, FF, PLAY/PAUSE, STOP) are disabled.



3-3 Normal Recording


Pressing either the REC START/STOP button, REC button on the handle or VTR button at the lens starts recording of video and sound on the P2 card.

A cluster of data that consists of video and sound generated through a shooting action, together with such added information as a voice memo, is called a "clip".

<Note>

Even if a P2 card has just been inserted, or the power has been just turned on, you can start recording using the internal memory of the AJ-SPX900E. In this case, recording cannot be stopped until the P2 card is recognised.

However, if the AJ-SPX900E determines that the inserted P2 card is non-recordable, the data in the internal memory will be deleted, with the message "CANNOT REC" appearing on the viewfinder screen. In this case, press the MODE CHECK button to check the status of the P2 CARD via the P2 CARD STATUS indication on the viewfinder screen.



3-4 PRE-RECORDING function

The internal memory of your AJ-SPS800 is capable of storing several seconds of video and sound data coming from the camera. This capability can be used to record video and sound several seconds before either the REC START/STOP button, REC button on the handle or VTR button at the lens is pressed to start recording.

To use this capability, the storage duration of the internal memory must be set through the menu option PRE REC TIME. This option can be found in the <REC FUNCTION> screen on the SYSTEM SETTING page.


These are the options for PRE REC TIME.

0-15 SEC (for DVCPRO 25M or DV) 0-8 SEC (for DVCPRO 50M):

Specify the duration for which data may be recorded before either the REC START/STOP button, REC button on the handle or VTR button at the lens is pressed.

<Notes>


- Immediately after the power is turned on, the menu option PRE REC TIME is selected and/or the storage duration is changed, the content in internal memory will be undefined. In these situations, the video or sound will not be recorded for the duration specified, even if either the REC START/STOP button, REC button on the handle or VTR button at the lens is pressed to start recording.
- A P2 card that has been just inserted takes some time to recognise. In this situation, video or sound may not be recorded for the duration specified, even if either the REC START/STOP button, REC button on the handle, or VTR button at the lens is pressed to start a recording.
- The internal memory does not store video or sound when a playback or recording review is being performed. For this reason, no video or sound can be recorded during such operation.
- When recording starts, the time code indication (TCG) may be shown as "HOLD" until the P2 card has been recognised.



3-5 Loop Recording

When two or more P2 card slots contain cards, this function allows the target P2 card to be switched in order. Even when the free space of a P2 card is used up, this function continues recording while erasing existing data.

To use this function, the menu option LOOP REC MODE must be set to "ON" The option LOOP REC MODE can be found in the <REC FUNCTION< screen on the SYSTEM SETTINGS page.



The data is recorded in the free space of each P2 card (in order of A \rightarrow B \rightarrow C). When the free space is used up, the content on A is erased to perform a new recording on D.

<Note>

- When the loop recording capability is used, each P2 card must have at least one minute of free space.
- During loop recording, the P2 CARD ACCESS LEDs for all target P2 cards illuminate in orange. Note that if any of the target P2 card is removed, loop recording stops.
- When the menu option LOOP REC MODE is set to ON, the viewfinder and display window both show "LOOP". However, when only one card is inserted, or when each card has less than one minute of free space, the loop recording capability does not work, even if the option LOOP REC MODE is set to ON. If this is the case, the indication "LOOP" flashes in the viewfinder and on the display window.

Terminating the Loop Recording Mode

You can terminate the loop recording mode by either:

- Turning off the POWER switch of the AJ-SPX900E; or
- Setting the menu option LOOP REC MODE to "OFF".

3-6 Recording Review Function

When recording is paused, pressing the RET button automatically locates the last two seconds of video just recorded, and the viewfinder provides video playback.

After playback, the video camera-recorder is again ready to start recording.

The picture location/playback duration can be increased to up to 10 seconds by continuously pressing the RET button. For short clips, however, when the start of a clip is located, continuously pressing the RET button does not play back any clips before that clip.


The function of the RET button may be assigned to a desired user button by using one of the menu options USER MAIN SW, USER1 SW or USER2 SW. These options can be found in the <USER SW> screen on the CAM OPERATION page.

When recording is paused, pressing the PLAY/PAUSE button plays back the last recorded clip, from the beginning. After completion of playback, the camera-recorder enters the stopped state.

<Note>

When the OUTPUT SEL switch on the side panel is positioned at [MEM], the video for REC REVIEW is output from the video output connectors (VIDEO OUT and MON OUT connectors), and also to the viewfinder.

Note that when a backup device is connected to back up the video the pictures for REC REVIEW are backed up.



3-7 Normal and Variable Speed Playback

The PLAY/PAUSE button provides monochrome playback through the viewfinder and color playback on the LCD monitor. A color video monitor connected to the VIDEO OUT or MON OUT connector of the AJ-SPX900E also provides color playback. When the extension board AJ-YA902AG is attached, the VIDEO OUT connector outputs an SDI playback (to view the playback, the OUTPUT SEL switch on the side panel must be positioned to [MEM]).

Variable speed playback

The FF and REW buttons provide 32 \times and 4 \times fast playbacks and fast reverse playbacks.

When playback is paused, the FF button locates the beginning of the next clip while maintaining the pause mode.

When playback is paused, the REW button locates the beginning of the current clip while maintaining the pause mode.

<Notes>

- When a P2 card has been just removed or inserted, or when the power has been just turned on for playback, it may take some time for the AJ-SPX900E to read clip information. If this is the case, the viewfinder displays "UPDATING".
- If a P2 card is inserted while another P2 card is being played back, the clips on the inserted P2 card will not be played back.
 A P2 card inserted during playback will be recognised after playback ends.
- If you perform variable speed playback on a clip split across more than one P2 card, sound may disappear for a moment.
 This is not a fault.

3-8 Voice Memo Function

A voice memo is voice data which can be added to a clip independently of the normal sound data recorded in the clip. Voice memos may recorded during recording or playback, or when recording or playback is paused. They can be played back in thumbnail display mode.


<Note>

Each clip can accommodate up to 100 voice memos.

If the menu option VOICE MEMO RESERVE is set to "ON", you can record at least 10 minutes of voice memos for each P2 card while clip recording is paused or after recording ends.

Recording a Voice Memo

To add a voice memo to a clip during recording or playback, or when recording or playback is paused, press the VOICE MEMO button. A voice memo may be recorded using the voice memo microphone. Another press of the button stops recording of the voice memo.




<Notes>

- Voice memos can also be recorded when the LCD monitor is in thumbnail mode. For more information, see [6-7-2 Recording a Voice Memo].
- Voice memos cannot be recorded when color bars are being output, video input through the GENLOCK IN connector is being recorded, or loop recording is being performed.
- During voice memo recording, turn down the speaker volume to prevent the voice memo microphone from picking up sound from the speakers of the AJ-SPX900E.
- When voice memo recording is performed during recording/ playback of a clip, the voice memo recording also automatically ends when recording/playback of the clip ends. Also, when voice memo recording is performed during playback of a clip, playback of the clip also automatically ends when the voice memo recording is ended by pressing the VOICE MEMO button.

Associating Voice Memos with a Clip

The portion of the clip with which a voice memo is associated depends on when the voice memo is recorded.

A voice memo recorded during recording or playback is associated with the picture in view at the time the VOICE MEMO button is pressed. A voice memo recorded when recording is paused is associated with the beginning picture of the immediately preceding clip. A voice memo recorded when playback is paused is associated with the still picture in view at the time the VOICE MEMO button is pressed.

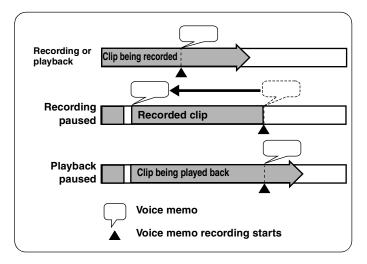

<Note>

When, with PRE RECORDING executed, a voice memo is recorded, the voice memo may be associated with a picture in view prior to point when the VOICE MEMO button is pressed.

Playing Back and Deleting Voice Memos


For information on how to play back and delete voice memos, see [6-7-1 Playing Back Voice Memos] and [6-7-3 Deleting Voice Memos].

3-9 Shot Mark Function

A shot mark is added to the thumbnail of a clip to distinguish that clip from others. With the LCD monitor, only clips that have shot marks can be viewed and/or played back.

Adding Shot Marks

To add a shot mark during recording, press the SHOT MARK button. The viewfinder displays "MARK ON" and adds a shot mark to the thumbnail of the appropriate clip. Another press of the button erases the shot mark.



Shot marks may also be added or erased using clip thumbnails. For more information, see [6-6 Shot Mark].

<Note>

Shot marks cannot be added or deleted when color bars are being output, or when video input through the GENLOCK IN connector is being recorded.

Chapter 4 Adjustments and Settings for Recording

To record high-quality video with the AJ-SPX900E, the black and white balances must be adjusted according to conditions.

For higher quality, it is recommended that the adjustments should be made in this order AWB (white balance adjustment) \rightarrow ABB (black balance adjustment) \rightarrow AWB (white balance adjustment).

4-1 Adjusting the White balance and Black Balance


4-1-1 Adjusting the White Balance

Whenever light conditions change, the white balance must be readjusted.

To adjust the white balance, follow the steps below.

 $m{1}$ Set the switches as illustrated below.

CC FILTER/ND FILTER controls



Adjust the CC FILTER/ND FILTER controls according to the light conditions.

<Note>

For examples of CC FILTER/ND FILTER adjustments, see [2-4 Shooting and Recording/Playback Functions Section].


Place a white pattern at a point where the light conditions match those for the light source of the subject. Then zoomin on the white pattern so that white color appears in the screen. A white object (cloth or wall) may be used instead of a white pattern.

The illustration below shows the required size for the white space.

<Note>

- Do not include a high-intensity spot in the screen.
- The white object must appear at the center of the screen.

1/4 or more of the screen in width



- $m{4}$ Adjust the lens iris.
- Flip up the AUTO W/B BAL switch so that it is positioned at [AWB], then release it.

The switch returns to the central position with the white balance automatically adjusted.

<Notes>

To cancel automatic white balance adjustment in process (the viewfinder displays "AWB ACTIVE"), re-position the AUTO W/B BAL switch at [AWB].

If automatic adjustment is canceled, the value in effect before automatic adjustment will be used.

6 During an adjustment, the viewfinder displays the following message:

AWB ACTIVE

7 The adjustment will take effect in a few seconds, and the following message will appear:

The adjusted value is automatically stored in the memory specified in Step I ([A] or [B]).

AWB A OK 3. 2K


For the 3200K CC filter, if the subject's color temperature is lower than 2300K or higher than 9900K the following message appears:

If the arrow points down (\downarrow) the actual color temperature is lower than the temperature indicated. If the arrow points up (\uparrow) the actual temperature is higher than the temperature indicated.

AWB A OK 2. 3K \downarrow

Detection area for the white balance

The detection area for the white balance is selectable between 90%, 50% and 25%, using the menu option AWB AREA. This option can be found in the <WHITE BALANCE MODE> screen, which is accessible from the CAM OPERATION page. The detection area is factory-set to 25%.



When you have no time to adjust the white balance:

Position the WHITE BAL switch at [PRST].

This adjusts the white balance for the filter according to the position of the FILTER control (outer).

When the white balance has not been automatically adjusted:

When the white balance has not been successfully adjusted, the viewfinder displays an error message.

If one of the error messages listed below appears, take the appropriate steps, then adjust the white balance again.

If the error message appears after repeated readjustments, the interior of the unit must be inspected. For more information, contact a service center or your distributor.

Error message	Description	Remedies
COLOR TEMP. HIGH	The color temperature is too high.	Select an appropriate filter.
COLOR TEMP. LOW	The color temperature is too low.	Select an appropriate filter.
LOW LIGHT	There is insufficient light.	Increase the light level or gain.
LEVEL OVER	There is too much light.	Decrease the light level or gain.
CHECK FILTER	The FILTER control is displaced.	Check the FILTER control.
TIME OVER	AWB was not completed within the time allowed.	Shooting conditions may be unstable. If flicker occurs, press the shutter and readjust the AWB under stable conditions.

Retaining white balances

Each value in memory is retained even if the video camerarecorder is turned off; it will not be lost until the white balance is re-adjusted. White balances are stored in either of two systems: A or B.

When the menu option FILTER INH is set to "ON" (default), each system stores only one value. If this is the case, the values are not synchronised with the CC filter.

This option can be found in the <WHITE BALANCE MODE> screen, which is accessible from the CAM OPERATION page.

When the menu option FILTER INH is set to "OFF", the adjusted value for each CC filter can be automatically stored in the memory that corresponds to the position of the WHITE BAL switch (A or B). Your AJ-SPX900E has four built-in CC filters; it stores eight (4×2) adjusted values.

Note that, when the menu options AWB A and AWB B are set to "VAR", the color temperatures specified through COLOR TEMP A and COLOR TEMP B are used, meaning that the white balances cannot be adjusted with the AWB switch. The menu options are found in the <WHITE BALANCE MODE> screen, which is accessible from the CAM OPERATION page.

Setting the auto-tracking white balance (ATW)


The AJ-SPX900E has an auto-tracking white balance (ATW) feature that automatically tracks the white balance for pictures according to lighting conditions.

The ATW feature can be assigned to Position [B] of the WHITE BAL switch. To do so, the menu option AWB B must be set to "ATW". This option can be found in the <WHITE BALANCE MODE CAM> screen, which is accessible from the CAM OPERATION page.

The ATW feature may be assigned to the USER MAIN, USER1, or USER2 button. For more information, see [4-9-4 Assigning Functions to USER MAIN, USER1 and USER2 Buttons].

To cancel the auto-tracking white balance:

Press the user button that has the ATW feature assigned, or change the position of the WHITE BAL switch. Note that, when the ATW feature is assigned to [B] of the WHITE BAL switch, the auto-tracking white balance cannot be canceled with a user button.



<Note>

This function does not guarantee 100% accuracy of the white balance.

When using the AJ-SPX900E, remember that there will be some allowance in the trackability of changes in lighting conditions and pull-in accuracy of white balances.


Viewfinder displays related to white balance

See [4-7 Viewfinder Screen Status Displays].

4-1-2 Adjusting the Black Balance

The black balance must be adjusted when:

- You use your AJ-SPX900E the first time;
- Your AJ-SPX900E has not been used for some time;
- The ambient temperature has changed substantially;
- The gain switchover value has been changed; or
- S.GAIN (super gain) has been set with the USER MAIN/ USER1/USER2 button.
- $oldsymbol{1}$ Set the switches as illustrated below.



2 Tilt the AUTO W/B BAL switch so that it is positioned at [ABB], then release it.

The switch returns to the central position with the black balance automatically adjusted.

3 During adjustment, the viewfinder displays the following message:



<Note>

During adjustment, the lens iris automatically becomes CLOSE.

4 The adjustment will take effect in a few seconds and the following message will appear:



The adjusted value is automatically stored in the memory.

<Notes>

- Ensure that the lens connector is connected and the lens iris is CLOSE.
- During a black balance adjustment, light is automatically cut off.
- During a black balance adjustment, the gain switchover circuit is automatically switched.
- The viewfinder screen may flicker and/or display noise; this is not a failure.
- If you find the black shading annoying after performing an auto black balance adjustment, adjust the black shading. To do so, go to the menu option DETECTION, move the cursor (→), then press the JOG dial button. The menu option DETECTION can be found in the <BLACK SHADING> screen, which is accessible from the MAINTENANCE page.

Note that pressing the ABB switch for longer than five seconds automatically performs an auto black balance adjustment, followed by an automatic black shading adjustment. (For more information, see the menu option SHD. ABB SW CTL in [8-5-5 SW MODE].)

 To cancel the automatic black balance adjustment in process (the viewfinder displays "ABB ACTIVE"), flip the AUTO W/B BAL switch down to [ABB] again.
 If automatic adjustment is canceled, the value in effect

before automatic adjustment will be used.

Retaining black balances

Each value in memory is retained even if the video camerarecorder is turned off.

4-2 Setting the Electronic Shutter

This section provides a description of the electronic shutter, together with setting and handling directions.

4-2-1 Shutter Modes

The table below shows the shutter modes and speeds for the electronic shutter provided in your AJ-SPX900E.

Mode	Shutter speed	Application
Normal	POSISTIONS 1-6	Used to capture clear images of a fast-moving subject
SYNCHRO SCAN	Range of 50.4 Hz to 248.0 Hz (50i) Range of 25.0 Hz to 248.0 Hz (25P)	Used to reduce the effect of horizontal lines when shooting a monitor screen that has a vertical scanning frequency of more than 50 Hz
SUPER V		Used to enhance vertical resolution

<Notes>

- In any mode, the higher the shutter speed the lower the sensitivity of the camera.
- When the iris is automatically adjusted, the higher the shutter speed the larger the iris, and the shorter the depth of focus.

4-2-2 Setting the Shutter Mode and Speed

The shutter speed in any shutter mode is set using the SHUTTER switch.


In SYNCHRO SCAN mode, shutter speed can be switched easily, using the synchro-scan adjustment switches (+/-) on the side panel.

Note that the range of selectable shutter speeds may be predefined; whether or not to use the SYNCHRO SCAN and SUPER V modes may be determined through the <SHUTTER SPEED> and <SHUTTER SELECT> screens. These screens are accessible through the menu on the CAM OPERATION page.


The selected shutter speed is retained even if the AJ-SPX900E is turned off.

```
→ < SHUTTER SPEED >

SYNCHRO SCAN : ON
SUPER V : OFF
POSITION1 : ON
POSITION2 : ON
POSITION3 : ON
POSITION4 : ON
POSITION5 : ON
POSITION5 : ON
POSITION6 : ON
```




 $m{I}$ Press the SHUTTER switch, positioned at [ON], towards [SEL].



Once more, press the SHUTTER switch towards [SEL]. Repeat this switchover until the desired mode or speed appears in the viewfinder screen.

If all modes and speeds are available, the display changes in the following order:



<Note>

Your AJ-SPX900E is not factory-set to display the SUPER V mode on the viewfinder screen. To display this mode, set the menu option SUPER V found in the <SHUTTER SPEED> screen, which is accessible from the CAM OPERATION page, to "ON".

Viewfinder displays relating to the shutter


See [4-7 Viewfinder Screen Status Displays].

4-2-3 Placing the Camera-recorder in SYNCHRO SCAN Mode

To place the camera-recorder in SYNCHRO SCAN mode, follow the steps below.

Press the SHUTTER switch positioned at [ON] towards [SEL], to place the camera-recorder in SYNCHRO SCAN

SYNCHRO SCAN ADJUSTMENT buttons (+/-)




In SYNCHRO SCAN mode, the speed can be switched seamlessly between 1/50.4 and 1/248.0 seconds, using the SYNCHRO SCAN ADJUSTMENT buttons (+/-). (Speed switchover is enabled in 50i mode.)

Selecting Recording Signals 4-3 and Recording System

The AJ-SPX900E is capable of utilising user-selected recording signals and format.

4-3-1 Selecting the Recording Signals.

Signals to be recorded are selected through the menu options REC SIGNAL and CAMERA MODE. These options are found in the <SYSYTEM MODE> screen, which is accessible from the SYSTEM SETTING page.



Setting options and usage

The option REC SIGNAL is used to select signals to be recorded.

CAM: Signals from the camera are recorded.

Signals from the GENLOCK IN connector are VIDEO:

recorded.

Signals from the DVCPRO/DV connector are 1394:

recorded. (when the optional board 1394 is

attached).

The option CAMERA MODE is used to specify the operation mode of the camera. (effective when the menu option REC SIGNAL is set to "CAM").

50i: AJ-SPX900E camera unit operates in 50i mode. 25P: AJ-SPX900E camera unit operates in 25P mode.

To operate the camera in 25P mode, the vertical resolution mode must be selected through the menu option V.RES (25P). (effective when the menu option REC SIGNAL is set to "CAM").

INTRLCE: Line-mixed, natural video is recorded. This option is used to handle material that uses a standard

interlaced signal.

PROG.: Non line-mixed, fully progressive, segmentedframe video is recorded. This option is used when

HD conversion is performed, or when an editor

and/or display output progressive signals.

Note that in progressive (25P) mode signals recorded on P2 cards are also converted from progressive scan (25P) to interlaced scan (50i).

<Note>

- When "VIDEO" is selected for the menu option REC SIGNAL, non-standard signals output from the GENLOCK IN connector, may degrade video quality.
- When "PROG." is specified for the menu option V.RES (25P), segmented-frame video is recorded, allowing you to perform completely progressive editing. However, adding vertical details (V.DTL) can makes the video appear unnatural. For these reasons, it is recommended that V.DTL be set to 0.
- In progressive mode, 50 percent shutter is forcibly added to produce more film-like motion video. To cancel this shutter, go to the <OPTION> screen from the OPTION menu and set the option P HALF SHUT to "OFF".

4-3-2 Selecting the Recording System

The recording format is selected through the option menu REC MODE.

The aspect ratio is selected through the menu option ASPECT. These options are found in the <SYSYTEM MODE> screen, which is accessible from the SYSTEM SETTING page.

Details of the option REC MODE

50M: Video is recorded in the DVCPRO50 format (50

Mbps).

25M: Video is recorded in the DVCPRO format (25

Mbps).

DV: Video is recorded in the DV format.

Details of the option ASPECT

16:9: Video is recorded with an aspect ratio of 16:9. **4:3:** Video is recorded with an aspect ratio of 4:3.


4-4 Selecting Audio Input Signals and Adjusting Recording Levels

In any format (DVCPRO50, DVCPRO or DV), the AJ-SPX900E supports independent four-channel audio recording.

When the AUDIO SELECT CH1/CH2 switch is positioned at [AUTO], the recording levels for Audio Channels 1 and 2 are automatically adjusted. To manually adjust the recording levels, position the switch at [MAN]. Note that the recording levels for Audio Channels 3 and 4 are selected through a menu option.

4-4-1 Selecting Audio Input Signals

The input signals to be recorded on Audio Channels 1, 2, 3, and 4 are selected with the AUDIO IN switch. For more information, see [2-2 Audio (input) Function Section].

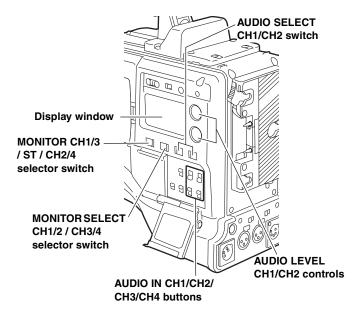

Your AJ-SPX900E is factory-set to perform no recording on Audio Channels 3 and 4 in the DVCPRO and DV formats. To enable four-channel recording, the menu option 25M REC CH SEL must be set to "4CH".

The following table shows audio signals recorded on Audio Channels 3 and 4 that depend on the settings for menu options REC CH3/4 and 25M REC CH SEL.

These options are found in the MIC/AUDIO1 screen, which is accessible from the MAIN OPERATION page:

REC CH3/4	25M REC	Recording on CH3/4		
options	CH SEL DVCPRO50 format		DVCPRO or DV format	
	2CH	Audio signals selected with the	No recording is performed.	
sw	4CH	AUDIO IN CH3/ CH4 switch are recorded.	Audio signals selected with the AUDIO IN CH3/CH4 switch are recorded.	
	2CH	Signals for Audio Channel 1 are also	No recording is performed.	
CH1/2	4CH	recorded on Audio Channel 3, and signals for Audio Channel 4 are also recorded on Audio Channel 2.	Signals for Audio Channel 1 are also recorded on Audio Channel 3, and signals for Audio Channel 4 are also recorded on Audio Channel 2.	

<Note>

- Audio Channels 1 and 2 always receive the signals selected with the AUDIO IN CH1 and CH2 switches.
- When the extension board AJ-YA902AG (optional accessory) is attached, 4-channel recorded audio signals are SDI-output, as is.

Specific audio settings are performed through the <MIC/AUDIO1> and <MIC/AUDIO2> screens, which are accessible from the MAIN OPERATION page.

For more information, see [8-6 MAIN OPERATION].

```
→ < MIC/AUDIO1 >
   FRONT VR CH1
  FRONT VR CH2
MIC LOWCUT CH1
                             OFF
                             : OF F
   MIC LOWCUT CH2
  MIC LOWCUT CH3
                             ·OFF
                             : OF F
   LIMITER CH1
   LIMITER CH2
                             ·OFF
   AUTO LEVEL CH3
                             : ON
   AUTO LEVEL CH4
                             ON
  REC CH3/CH4
25M REC CH SEL
                             SW
                             : 2CH
   TEST TONE
                             : NORMAL
```

```
→ < MIC/AUDIO2 >
   FRONT MIC POWER
                              : ON
   REAR MIC POWER
                              : ON
   AUDIO OUT
MONITOR SELECT
                              · 0N
                              :STEREO
   FRONT MIC LEVEL
   REAR MIC CH1 LEVEL REAR MIC CH2 LEVEL
                              · - 6 0 dB
                              : -60dB
   REAR LINE IN LVL
                               +4dB
   AUDIO OUT LVL
                              · + 4 dB
   HEADROOM
                              18dB
   WIRELESS WARN
                              :OFF
```

4-4-2 Adjusting Recording Levels

To adjust the recording levels for Audio Channels 1 and 2, follow the steps below.

Position the MONITOR SELECT CH1/2 / CH3/4-selector switch at CH1/2 so that the audio level meter on the display window will provide CH1 and CH2 indications. Ensure that the channel indications displayed in the window are 1 and 2.

Whether to enable or disable the FRONT AUDIO LEVEL control must be preset through menu options FRONT VR CH1 and FRONT VR CH2. Note that this control is factory-disabled.


The menu options are found in the MIC/AUDIO1 screen, which is accessible from the MAIN OPERATION page.

2 Position the AUDIO SELECT CH1/CH2 switch at [MAN].

While checking the audio channel level meter in the display window or the audio level meter in the viewfinder, adjust the AUDIO LEVEL CH1/CH2 control.

Note that if the level exceeds the top bar (0 dB), the word OVER illuminates to show that the input level is excessive. The adjustment made in such a way that the maximum level will not reach the 0 dB bar.

Audio level meter on the display window



Audio level meter in the viewfinder



When operating the AJ-SPX900E without a sound recordist, it is recommended that the FRONT AUDIO LEVEL control should be used to adjust the audio level.

In advance, check the level meter in the viewfinder screen and use the AUDIO LEVEL control to adjust the appropriate audio channel so that no excessive audio signals will be admitted.

4-4-3 CH3 and CH4 Recording Levels

The following table shows the effects on the recording level for Audio Channels 3 and 4 that depend on the settings and input levels specified through the menu options AUTO LEVEL CH3 and AUTO LEVEL CH4. Note that the recording level cannot be adjusted manually.


These options are found in the <MIC/AUDIO1> screen, which is accessible from the MAIN OPERATION page.

AUTO LEVEL	Input level	
CH3/CH4	LINE	MIC
ON	AGC ON	AGC ON
OFF	AGC/LIMITER OFF	LIMITER ON

4-5 Setting Time Data

4-5-1 Setting the User Bits

The user bits allow information, including memos that use up to eight-digit base 16 numbers (date and time), to be recorded in the secondary code area.



- $m{1}$ Position the DISPLAY switch at [UB].
- Position the TCG switch at [SET].
 When the left digit starts blinking you can change the value.
- 3 Use CURSOR buttons to set the user bits.
 - button: Shifts the target (blinking) digit to the right.
 - □ button: Shifts the target (blinking) digit to the left.
 - △ button: Advances the blinking number by one digit.
 - ∇ button: Winds back the blinking number by one digit.
- 4 Position the TCG at [F-RUN] or [R-RUN].
- Go to the <TC/UB> screen from the MAIN OPERATION page, and set the menu option UB MODE to "USER".

<Note>

When the TCG switch is positioned at [SET], thumbnails cannot be manipulated.

Retaining the user bits

The data set for the user bits are automatically saved and retained even if the video camera-recorder is turned off.


Card continuity provided by the user's bit


If the menu option UB MODE is set to "REGEN", the AJ-SPX900E reads the user bits in the last frame of the last clip recorded on a P2 card (clip with the most recent recording date and time), and records that bit onto the next card. Note that settings for the user bits are not recorded.

The menu option UB MODE can be found in the <TC/UB> screen, which is accessible from the MAIN OPERATION page.

<Note>

The AJ-SPX900E also records the time code and user bits in the VIDEO AUX area. The value for the time code (VITC) is the same as that of the time code (LTC) in the secondary code area. The user bits (of VITC) also records special information, including the shoting frame rate.





4-5-2 Setting the Internal Clock's Date and Time

- $m{I}$ Position the DISPLAY switch at [UB].
- Press the HOLD button to display a date in the display window.
- $oldsymbol{3}$ Position the TCG switch at [SET].
- 4 Use the CURSOR and SET buttons to set the year, month and day (Y/M/D).

Note that any later than 2030 cannot be set.

- 5 Press the HOLD button to display a time in the display window.
- 6 Use the CURSOR buttons to set the hour, minute and second (h/min/s).
- Position the TCG switch at [F-RUN] or [R-RUN]. The internal clock starts at the moment the switch position is changed.
- Press the HOLD button to display a time zone (time difference between local time and Greenwich Mean Time) in the display window.
- 9 Position the TCG switch at [SET].
- 10 Use the \triangle and ∇ buttons to set the desired hours and minutes ahead of (no sign) or behind (- sign) the Greenwich Mean Time).

Example: If the local time is five hours behind Greenwich Mean Time.

set the time zone to "5:00 -".

The time zone is always recorded, together with the date and time, as metadata.

See the table at right to set the time zone according to your local time.

11 Position the TCG switch at [F-RUN] or [R-RUN] to accept the time zone.

<Notes>

- When using the camera-recorder for the first time, be sure to perform this setting beforehand. Do not change the setting during use of the camera-recorder.
- When the TCG switch is positioned at [SET], thumbnails cannot be manipulated.

Time difference Area difference Area difference	T!		T:	
- 01:00 Azores Islands	Time difference	Area	Time difference	Area
- 02:00 Mid-Atlantic	00:00	Greenwich	- 00:30	
- 03:00 Buenos Aires	- 01:00	Azores Islands	- 01:30	
- 04:00 Halifax - 04:30 - 05:00 New York - 05:30 - 06:00 Chicago - 06:30 - 07:00 Denver - 07:30 - 08:00 Los Angeles - 08:30 - 09:00 Alaska - 09:30 Marquesas Islands - 10:00 Hawaii - 10:30 - 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 11:00 Solomon Islands + 09:30 Darwin + 11:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 02:00	Mid-Atlantic	- 02:30	
- 05:00 New York - 05:30 - 06:00 Chicago - 06:30 - 07:00 Denver - 07:30 - 08:00 Los Angeles - 08:30 - 09:00 Alaska - 09:30 Marquesas Islands - 10:00 Hawaii - 10:30 - 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 03:00	Buenos Aires	- 03:30	Newfoundland Island
- 06:00 Chicago	- 04:00	Halifax	- 04:30	
- 07:00 Denver - 07:30 - 08:00 Los Angeles - 08:30 - 09:00 Alaska - 09:30 Marquesas Islands - 10:00 Hawaii - 10:30 - 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 05:00	New York	- 05:30	
- 08:00 Los Angeles - 08:30 - 09:00 Alaska - 09:30 Marquesas Islands - 10:00 Hawaii - 10:30 - 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 06:00	Chicago	- 06:30	
- 09:00 Alaska - 09:30 Marquesas Islands - 10:00 Hawaii - 10:30 - 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 07:00	Denver	- 07:30	
- 10:00 Hawaii	- 08:00	Los Angeles	- 08:30	
- 11:00 Midway Island 11:30 - 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 09:00	Alaska	- 09:30	Marquesas Islands
- 12:00 Kwajalein + 11:30 Norfolk Island + 13:00 + 10:30 Lord Howe Island + 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 10:00	Hawaii	- 10:30	
+ 13:00	- 11:00	Midway Island	11:30	
+ 12:00 New Zealand + 09:30 Darwin + 11:00 Solomon Islands + 08:30 + 10:00 Guam + 07:30 + 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	- 12:00	Kwajalein	+ 11:30	Norfolk Island
+ 11:00 Solomon Islands	+ 13:00		+ 10:30	Lord Howe Island
+ 10:00 Guam	+ 12:00	New Zealand	+ 09:30	Darwin
+ 09:00 Tokyo + 06:30 Rangoon + 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 11:00	Solomon Islands	+ 08:30	
+ 08:00 Beijing + 05:30 Bombay + 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 10:00	Guam	+ 07:30	
+ 07:00 Bangkok + 04:30 Kabul + 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 09:00	Tokyo	+ 06:30	Rangoon
+ 06:00 Dacca + 03:30 Tehran + 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 08:00	Beijing	+ 05:30	Bombay
+ 05:00 Islamabad + 02:30 + 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 07:00	Bangkok	+ 04:30	Kabul
+ 04:00 Abu Dhabi + 01:30 + 03:00 Moscow + 00:30	+ 06:00	Dacca	+ 03:30	Tehran
+ 03:00 Moscow + 00:30	+ 05:00	Islamabad	+ 02:30	
	+ 04:00	Abu Dhabi	+ 01:30	
+ 02:00 Eastern Europe + 12:45 Chatham Islands	+ 03:00	Moscow	+ 00:30	
	+ 02:00	Eastern Europe	+ 12:45	Chatham Islands
+ 01:00 Central Europe	+ 01:00	Central Europe		_

<Notes>

- In Step 4, if the TCG switch is positioned at [F-RUN] or [R-RUN], this also activate the internal clock.
 - To cancel date, time and time zone settings in process, hold down the SET button and position the TCG switch at [F-RUN] or [R-RUN].
- Clock accuracy fluctuates between about ± 30 seconds per month when the power is turned off. If more accurate timekeeping is required, check the time when the power is turned on and, if necessary, reset the clock.

When the GPS unit AJ-GPS900G is installed, and if it successfully receives time information, the internal clock keeps accurate (local) time based on the received time (Greenwich Mean Time) and the time zone. If the date and time differ from the actual local time, the time zone may not be set correctly. Check again, to see if the time zone is set correctly. (The date and time need not be set again.)

4-5-3 Setting the Time Code

- $m{I}$ Position the DISPLAY switch at [TC].
- 2 Position the TCG switch at [SET].
- 3 Use the CURSOR buttons to set the time code. The time code setting range extends from 00:00:00:00 to 23:59:59:24.

 $\,\triangleright\,$ button: Shifts the target (blinking) digit to the right.

- △ **button:** Advances the blinking number by one digit.
- ∇ button: Winds back the blinking number by one digit.

Change the position of the TCG switch. [F-RUN] steps the time code in free run mode, and [R-RUN] set it in recording run mode.

<Note>

When the TCG switch is positioned at [SET], thumbnails cannot be manipulated.

Regeneration of Time Code

When the menu option FIRST REC TC is set to "REGEN", the AJ-SPX900E reads the time code recorded in the last frame on the last recorded clip (with the most recent recording date and time) to maintain and record that value. The menu option FIRST REC TC can be found on the <TC/UB> screen, which is accessible from the MAIN OPERATION page.

<Note>

However, when a P2 card is inserted or removed or when the recording target P2 card is changed using the SLOT SEL function of the USER button, the time code for the last recorded clip is recorded on the new recording target P2 card. When there is no recorded clip, the time code is recorded on the new recording target P2 card, from the value generated by the TC generator built into the camera-recorder

Time code function during battery replacement.

Even during battery replacement the backup mechanism keeps the time code generator functioning for a considerable time (about one year).

<Note>

When the POWER switch has been switched ON \rightarrow OFF \rightarrow ON, the backup accuracy of the time code in free run mode is about \pm 2 frames.


4-5-4 Externally Locking the Time Code

The time code generator built into your AJ-SPX900E may be locked with an external generator. It is also possible to lock an external time code generator with the internal generator.


Connections for externally locking the time code (examples)

As illustrated, both the reference video signals and the time code must be input.

Example 1: Locking the time code with external signals

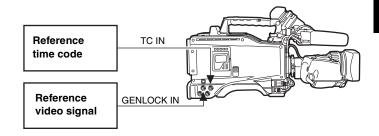

Example 2: Connecting two or more AJ-SPX900Es with one another, with one being used as the reference device.

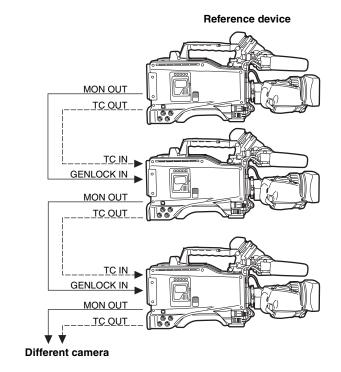

To externally lock the time code:

Follow the steps below.

 $m{I}$ Turn on the POWER switch.

2 Position the TCG switch at [F-RUN].

 $oldsymbol{3}$ Position the DISPLAY switch at [TC].

4 Set the menu option GENLOCK to "EXT". This option can be found in the <GENLOCK> screen, which is accessible from the SYSTEM SETTING page.

Supply a phase-relationship reference time code (that conforms to the time code requirements) and reference video signals to the TC IN and GENLOCK IN connectors, respectively.

Now the built-in time code generator is locked with the reference time code.

From about 10 seconds after locking the time code generator stays locked even if the supply of external reference time code is discontinued.

<Note>

When the time code generator is externally locked, the time code instantly becomes locked with the external time code, and the counter displays the external time code value. Do not put the AJ-SPX900E in recording mode before the sync generator stabilises.

Setting the user bits when the time code is externally locked

When the time code is externally locked only time data is locked with the time data of the external time code.

This means that the user bits may be set separately for each camera-recorder.

When "EXT" is specified for the menu option UB MODE, the user bits is also locked with the user bits of the external time code.

The menu option UB MODE can be found in the <TC/UB> screen, which is accessible from the MAIN OPERATION page.

To unlock the externally locked time code:

Discontinue external time code supply, then position the TCG switch at [R-RUN].

Cautions in switching the power source from battery to external power supply

Connect the DC IN socket with the external power supply before removing the battery pack, in order to keep the time code generator energised. If the battery pack is removed first, there is no guarantee that the time code will stay externally locked.

External synchronisation of the camera when the time code is externally locked

When the time code is externally locked, the reference video signals input through the GENLOCK IN connector gen-lock the camera.

<Notes>

- To externally lock the AJ-SPX900E, as the master device, with more than one unit, the mode must be the same as that of the camera. Note that in a system using both interlaced and progressive scanning, there may be breaks in the video and time code.
- When using the MON OUT connector to output reference signals, position the OUTPUT SEL switch on the side panel at [CAM].

4-5-5 Providing an ID to the Camera

The camera ID is specified through the <CAMERA ID> screen. The ID can include up to 10 alphanumeric characters, symbols, and/or spaces.

<Note>

When the settings menu is displayed, outputting color bar signals does not indicate the camera ID.

1 Go to the <CAMERA ID> screen from the CAM OPERATION page.

→ < CAMERA ID >

ID1 : ABCDEFGHIJ

ID2 : ABCDEFGHIJ

ID3 : ABCDEFGHIJ

- Turn the JOG dial button to move the cursor to options [ID1:] [ID3:].
- 3 Press the JOG dial button. The cursor moves to the ID entry area, allowing you to enter an ID.
- 4 Turn the JOG dial button until a desired character appears. The characters that appear are switched in the following order:

Space:

↓

Alphabetical characters: A to Z

↓

Numerals:
↓

Symbols: ', >, <, /, -

- **5** Press the JOG dial button to accept a desired character.
- **6** Turn the JOG dial button to move cursor to the next digit (clockwise), and repeat Steps 4 5 to set characters.
- When all the characters are set, turn the JOG dial button to move the cursor to [:].
- Pressing the JOG dial button brings the cursor back to the options [ID1:] [ID3:].
- To exit the menu, press the MENU button. The settings menu disappears and the status of the AJ-SPX900E is indicated at the top and bottom of the viewfinder screen.

<Note>


When the menu option CAMERA ID is set to "BAR", the camera ID is recorded together with color bar signals. This menu option is accessible from the <VF INDICATOR1> screen, which is accessible from the VF page.

4-5-6 Setting UMID Information


The AJ-SPX900E supports UMID metadata. You need to specify as UMID information the country where you live (using up to three characters), organisation or company (up to four characters) and user name (up to four characters). For the country name, you must use abbreviations prescribed in the ISO3166 Country Code*1.

Here are some examples of the correct method for specifying a user name:

*1 Examples: China CHN U.S.A. USA Canada CAN Japan JPN



- 1 Go to the <UMID SET/ INFO> screen from the MAIN OPERATION page.
- Turn the JOG dial button to move the cursor to the option [USER].
- 3 Press the JOG dial button. The cursor moves to the user entry area, allowing you to enter a user name.
- 4 Turn the JOG dial button until a desired character appears.
 The characters appear in the following order:



<Note>

The COUNTRY entry can only include alphabetical characters and spaces.

- 5 Press the JOG dial button to accept a desired character.
- **6** Turn the JOG dial button to move the cursor to the next digit (clockwise), and repeat Steps **4** to **5** to set characters.
- When the last character is set, press the JOG dial button to bring the cursor back to the option [USER].
- **8** To exit the menu, press the MENU button.

Mode Check Screen Displays 4-5-7 (MODE CHECK button function)

The viewfinder can display a screen that allows you to check the settings and status of the AJ-SPX900E.

Each press of the MODE CHECK button switches the screen as follows:

STATUS screen \rightarrow !LED screen \rightarrow FUNCTION screen \rightarrow AUDIO screen → No indication

Each screen is displayed for about three seconds. A press of the MODE CHECK button switches the current screen.

Whether or not to display each screen is specified through the <MODE CHECK IND> screen, which is accessible from the VF page.

```
→ < MODE CHECK IND >
   STATUS
                     : ON
   FUNCTION
                     : ON
   AUDIO
                     : ON
  P. ON IND
```

Menu Displays in the 4-6 Viewfinder Screen

4-6-1 **Menu Configuration**

USER MENU: USER MENU is factory-set. The menu can be configured to suit your preferences by specifying each option according to your purposes and frequency of use, through the <USER MENU SELECT> screen, which is accessible from the MAIN MENU page.

For more information, see [4-6-3 Selecting

Options for USER MENU].

To display USER MENU, press the MENU button.

MAIN MENU: Allows you to set all options on the settings menu.

This menu has a category-by-category structure, layered according to purposes and frequency of

To display MAIN MENU, press the MENU button

for three seconds or longer.

OPTION MENU: Provides options which may be needed if


functions are added in the future.

To display OPTION MENU, hold down the LIGHT

button and press the MENU button.

For more information, contact your local service

center or distributor.



4-6-2 Setting Menu Options

The menu options are set with the MENU and JOG dial buttons. The menu comprises main menu, sub-menus and options menus.

The data specified through menu options are written and saved in the internal memory of the AJ-SPX900E.

This section describes how to set options in MAIN MENU. The other menus can be configured in the same manner (the method of displaying the menu screen depends on the particular menu).

<Note>

When the AJ-SPX900E is in thumbnail mode, the viewfinder displays "THUMBNAIL OPEN", disabling navigation through the menu

Press the MENU button for three seconds or longer.
The MAIN MENU screen appears, together with its options.

```
SYSTEM SETTING
PAINT
VF
CAM OPERATION
MAIN OPERATION
FILE
MAINTENANCE
USER MENU SELECT
```

SYSTEM SETTING:

This option is used to specify recording signal, recording system, etc.

PAINT:

This option is used to fine-adjust images while monitoring the output waveform of the camera, using the waveform monitor. Normally, this adjustment requires assistance from a video engineer.

This menu option may be set with an external remote controller, and is useful when using the AJ-SPX900E without a sound recordist.

VF: Used to select the information items to be displayed in the viewfinder screen.

CAM OPERATION:

Used to change settings according to the conditions for the subject.

MAIN OPERATION:

Used to specify recording-related items, such as audio settings, time code, battery and P2 card remaining amounts.

FILE: Used to specify file-related items such as SD card reading/writing and lens file settings.

MAINTENANCE:

Used to specify maintenance-related items.

USER MENU SELECT:

Used to edit USER MENU.

Turn the JOG dial button to move the mark (→) to a desired menu option. Then, press the JOG dial button to display the sub-menu screen.

```
SYSTEM SETTING
PAINT
VF
→ CAM OPERATION
MAIN OPERATION
FILE
MAINTENANCE
USER MENU SELECT
```

3 Turn the JOG dial button to move the mark (→) to a desired menu option. Then, press the JOG dial button to display the options screen.

```
< CAM OPERATION >

CAMERA ID
SHUTTER SPEED
SHUTTER SELECT

→ USER SW
SW MODE
WHITE BALANCE MODE
USER SW GAIN
IRIS
```

4 Turn the JOG dial button to move the mark (→) to a desired option. Then, press the JOG dial button. The value starts blinking.

```
    USER SW >
    USER MAIN SW USER1 SW USER2 SW : DS. GAIN
```

5 Turn the JOG dial button to change the value.

To increase the value:

Turn the JOG dial button clockwise, as seen from the front of the camera.

To decrease the value:

Turn the JOG dial button anti-clockwise, as seen from the front of the camera.

Each turn of the dial switches the value by one step. A quick turn changes the value rapidly; a slow turn makes a fine adjustment.

To turn an option on or off:

To select ON, turn the JOG dial button clockwise, as seen from the front of the camera.

To select OFF, turn the JOG dial button anti-clockwise, as seen from the front of the camera.

- 6 Press the JOG dial button. The value stops blinking and is accepted.
- 7 To change the settings for other options on the same page, repeat Steps 4 6.
- When the settings are finalised, press the MENU button. This terminates the menu option setting mode and returns the AJ-SPX900E to normal operation mode.

4-6-3 Selecting Options for USER MENU

Go to the USER MENU SELECT page from MAIN MENU. Then, open relevant options menu screens to select options to add to USER MENU.

Only the selected options are displayed as options in USER MENU.

For information about how to navigate this menu, see [4-6-2 Setting Menu Options].


<Note>

Options with [*] are effective. The number of options that can be added to USER MENU is 14 \times 3 = 42 (three pages of options) for camera-related options, and 14 (one page of options) for memory-related options.

4-7 Viewfinder Screen Status Displays

In addition to video images, the viewfinder displays lamps and text that indicate the settings and operating status of the AJ-SPX900E, together with messages, a center marker, a safety zone marker and the camera ID.

4-7-1 Lamps in the Viewfinder Screen



The above viewfinder is the AJ-VF20WB (for further information on your optional viewfinder model, see the relevant instruction manual).

1 TALLY/REC (recording) Lamp

This lamp stays illuminated during recording, and starts blinking if any abnormal action occurs.

For more information, see [7-3 Warning System].

2 Abnormal Operating Status Warning Lamp

This lamp comes on when the AJ-SPX900E is in any of the abnormal operating statuses specified through the menu sub-option !LED.

For statuses that activate the lamp, see the options in the <!LED> screen in [8-4-7 !LED].

2 BATT (battery) Lamp

This lamp starts blinking a few minutes before the battery charge starts to run out, and stays illuminated after the battery is completely flat. The battery should be replaced before it is nearly flat, so that operation will not be interrupted.

For more information, see [7-3 Warning System].

4 SAVE Lamp

In the normal setting:

The lamp stays on when the SAVE switch is positioned at [ON] and the output of video and audio is power-saved.

When the menu option SAVE LED is set to "P2 CARD":

The lamp comes on when the P2 card remaining free space is getting low.

The menu option SAVE LED can be found in the <VF INDICATOR2>, which is accessible from the VF page.


5 50 (50-Mbps recording/playback) Lamp

This lamp stays illuminated when the AJ-SPX900E is set to the DVCPRO50 (50 Mbps) format, and when playback is being performed in the DVCPRO50 format.

Note that the lamp is factory-disabled. For more information, see the relevant section of the menu option 50M INDICATOR in [8-4-1 VF DISPLAY].

4-7-2 Viewfinder Status Indication Layout

The indications are arranged as illustrated below.

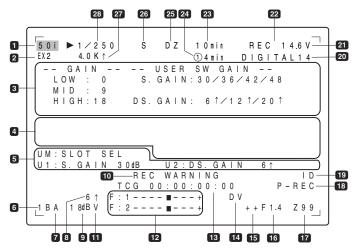



For more information, see the following pages:

4-7-3 Selecting Viewfinder Display Information

To select the information items you want to have displayed in the viewfinder screen, go to the <VF INDICATOR1> and <VF INDICATOR2> screens from the VF page, and turn on or off the appropriate options, or specify desired values.

For directions on setting the options, see [4-6-2 Setting Menu Options].





Information Item	Indication	Status
1 Camera Shooting Mode	50i, 25P	Camera shooting mode (progressive or interlaced)
2 Extender	EX2	Lens extender used.
MODE CHECK Indication Area (STATUS: Master gain, USER SW GAIN)	LOW/MID/HIGH -3 to 30 S.GAIN 30/36/42/48 DS.GAIN 6 ↑ /12 ↑ /20 ↑	Value set for the master gain Example: LOW: 0 Gain value to which S.GAIN and DS.GAIN are assigned
(Cause of !LED illumination: displayed full-screen) ■ Indications selected through the menu option !LED are marked with [!]. ■ Indications which may activate the !LED are marked with [GAIN (0 dB) GAIN (-3 dB) DS.GAIN SHUTTER WHITE PRE. EXTENDER BLACK STR. MATRIX COLOR COR. FILTER SUPER V 50M/25M/DV ATW D.ZOOM	Gain status Gain status DS. GAIN value Shutter status White balance status Extender status (EX2 or OFF) Black stretch status (ON or OFF) MATRIX status (A, B, or OFF) Color correction status (ON or OFF) Filter status SUPER V status (ON or OFF) Recording mode (50M, 25M, or DV) ATW status (ON or OFF) Digital zoom status (ON or OFF)
(FUNCTION: VIDEO OUT)	SW: MEM/CAM/OFF SELECT: VBS/VF/Y/SDI CHAR: ON/OFF	Position of OUTPUT SEL switch. Setting for menu option VIDEO OUT SEL. This option can be found in the <output sel=""> screen, which is accessible from the SYSTEM SETTING page. Position of VIDEO OUT CHARACTER switch</output>
(FUNCTION: MONI OUT)	SW: MEM/CAM/OFF CHAR: ON/OFF	Position of OUTPUT SEL switch. The setting for menu option MONITOR OUT CHAR. This option can be found in the <output sel=""> screen, which is accessible from the SYSTEM SETTING page.</output>
(FUNCTION: P2CARD STATUS)	TOTAL SLOT1/SLOT2/SLOT3/SLOT4/ SLOT5	Total remaining free space/capacities of the P2 cards loaded in P2 Card Slots 1 - 5 Remaining free space/capacity of each card. The numbers denote the P2 card slot numbers. The card status is indicated as: ACTIVE/ACTIVE!/ACCESSING/INFO READING/FULL/PROTECTED/ NOT SUPPORTED/FORMAT ERROR/NO CARD For details of statuses, see [P2 CARD STATUS LED and status of P2 cards].
(AUDIO: Enabling or disabling the FRONT AUDIO LEVEL control)	CH1: ON/OFF CH2: ON/OFF	If the FRONT AUDIO LEVEL control is in effect for Channel 1, then ON is indicated. If not, OFF is indicated. If the FRONT AUDIO LEVEL control is in effect for Channel 2, then ON is indicated. If not, OFF is indicated.
(AUDIO: Power status for the microphone)	FRONT: ON/OFF REAR: ON/OFF	Power status of the front microphone Power status of the rear microphone For more information, see [8-6-5 MIC/AUDIO2].
(AUDIO: Input signal and level for each channel)	FRNT/W.L./REAR/1394/OFF CH1/2/3/4	Input signal and level for each channel

Information Item	Indication	Status
Camera Warning and Report Area	AWB B ACTIVE	AWB being performed on Ch A. AWB being performed on Ch B.
(related to AWB, ABB	AWB A OK *.*K	AWB successful on Ch A. AWB successful on Ch B.
and switch settings)	AWB BREAK *.*K	AWB action aborted by user.
	AWB NG	AWB action failed. The second line indicates the status.
	COLOR TEMP LOW	Color temperature too low.
	COLOR TEMP HIGH	Color temperature too high.
	LEVEL OVER LOW LIGHT	Brightness too high. Brightness too low.
	TIME OVER	Action timed-out.
	AWB PRESET *.*K	AWB cannot proceed because the AWB switch is positioned at [PRE].
	ATW MODE	AWB cannot proceed during ATW.
	CHECK FILTER	Make sure the FILTER control is positioned correctly.
	AWB A VAR *.*K AWB B VAR *.*K	AWB cannot proceed because [A] is set to "VAR". AWB cannot proceed because [B] is set to "VAR".
	ABB ACTIVE	ABB being performed.
	ABB OK	ABB action successful.
	ABB BREAK	ABB action aborted by user.
	ABB NG W-SHD ACTIVE	ABB action failed. White shading being adjusted.
	W-SHD OK	White shading has been adjusted.
	W-SHD BREAK	White shading action aborted by user.
	W-SHD NG	White shading adjustment failed due to excessive brightness.
	LVL OVER	
	B-SHD READY B-SHD ACTIVE	Black shading accepted (by holding down the ABB switch during ABB adjustment Black shading being adjusted.
	B-SHD OK	Black shading adjustment successful.
	B-SHD BREAK	Black shading adjustment aborted by user.
	B-SHD NG	Black shading adjustment failed.
(Switch changeover	WHITE: # *.*K	The WHITE BAL switch has been switched. # is replaced with A, B or PRE. Wher
indication)		[A] and [B] are set to "VAR", then it is indicated as VAR $*.*$ K. When [B] is
	ALITO KNIEE, ON/OFF	assigned ATW, then it is indicated as ATW MODE.
	AUTO KNEE: ON/OFF GAIN:**dB	AUTO KNEE switch has been switched to ON or OFF. Gain has been switched with the GAIN selector switch or a user button.
	SS: 1/***	When the shutter speed has been switched, the shutter speed is indicated.
	SS: ► 1/****	Shutter speed is in SYNCRO SCAN mode.
	SS: SUPER V	Shutter speed is in SUPER V mode.
	CC: **** K	Indicated when the CC filters are switched.
	ND: * EXTENDER: ON/OFF	Indicated when the ND filters are switched. Lens extender has been turned on or off.
	IRIS: ** F *.*	Indicated when the iris override correction value is to be changed.
(Low light warning)	LOW LIGHT	Brightness too low.
(Y GET value)	***.*%	When the Y GET function is being carried out (the output brightness level near the
(center marker is being measured for about three seconds: the level is represented
		as a percentage), the output brightness level near the center marker is indicated a
		a percentage.
(MARKER indication)	MKR: A/B/OFF	Current marker type
5 User button	INH	User buttons disabled.
functions	S.GAIN **dB/OFF	Selected S.GAIN
UM: USER MAIN	DS.GAIN **↑/OFF S.IRIS ON/OFF	Selected DS.GAIN Whether S.IRIS is ON or OFF.
button	I.OVR ON/OFF	Iris override can be set (the IRIS OVERRIDE setting is ON).
U1: USER1 button	S.BLK -**/OFF	Status of SUPER BLACK (ON or OFF). When it is ON, the set value is also
U2: USER2 button	D 07D 01/077	indicated.
	B.STR ON/OFF	Status of BLACK STRETCH (shade correction for the black level): ON or OFF
	AUDIO CH1 AUDIO CH2	Input signal to be recorded on Audio Channel 1 has been switched. Input signal to be recorded on Audio Channel 2 has been switched.
	REC SW	USER button acts as REC switch (only in MODE CHECK mode).
	Y GET ON	Y GET function ON.
	RET SW	USER button acts as RET switch (only in MODE CHECK).
	ATW ON/OFF	ATW being performed.
	D.ZOOM ON/OFF NEWS-G ON/OFF	Status of the digital zoom (ON or OFF) Status of News Gamma (ON or OFF)
	SLOT SEL	Switch that changes the target card is set.
C Files	1 - 4	Position of the ND filter.
6 Filter positions	A - D	Position of the CC filter.
	-	Filter not positioned correctly.
7 WHITE BAL switch	A	WHITE BAL switch positioned at [A].
position	В	WHITE BAL switch positioned at [F].
ρυσιτιστι	P	WHITE BAL switch positioned at [PRE].
	T	ATW mode active. When brightness and color are outside operating limits, the
	0.4 /4.0.4 /00.4	indication blinks.
8 Stored gain	6 ↑ /12 ↑ /20 ↑	Storage gain (DS.GAIN) value (when active)
indication		

Information Item	Indication	Status
9 Gain value	**dB	Current gain value.
10 System information and warnings	SYSTEM ERROR-**	Something abnormal is happening to the internal computer communications or reference signal. No further recording or playback can be performed. ** is
	TURN POWER OFF	replaced with an error code.For more information, see [7-3-2 Error Codes]. P2 card has been removed while being accessed (recorded, played back, or formatted), and subsequent operation is disabled.
	REC WARNING	Something abnormal is happening to video and/or audio being recorded. This indication stays on until the next recording starts.
	BACKUP BATT EMPTY WIRELESS-RF	Backup battery needs replacing. RF signal from the wireless receiver is degraded.
	EOM	P2 card has no free space.
	BOS	Playback position is at the start of all the clips.
	CANNOT REC	Playback position is at the end of all the clips. The P2 card is not recordable. Detailed information is provided on the FUNCTION
	CANNOT PLAY	screen of MODE CHECK 3. See the relevant section of the MODE CHECK area. Clip cannot be played back perhaps because no P2 card is loaded, or the P2 card contains no clips.
	VOICE CANNOT REC	Voice memos cannot be recorded, possibly perhaps because the P2 card has no free space, or 100 voice memos are already recorded on one clip.
	VOICE REC	Voice memo being recorded.
	VOICE OFF VOICE PLAY	Recording of voice memo stopped. Voice memo being played back.
	MARK ON/OFF	Shot mark been added or deleted. For information on shot marks, see [3-9 Shot
	UPDATING	Mark Function].
	USB DRIVE	Clip information is being updated. Playback operation disabled. AJ-SPX900E is in USB mode. When communication is disabled, the indication
		blinks. (To be supported in the near future.)
	THUMBNAIL OPEN	Thumbnail is being manipulated.
11 Voice memo indication	V	Voice memo being recorded. When the free space for voice memos is less than one minute, the indication blinks.
12 Audio input channel	+	Selected channel together with its audio level.
and level meter	F W	AUDIO IN switch is positioned at FRONT. AUDIO IN switch is positioned at WIRELESS.
	R	AUDIO IN switch is positioned at REAR.
13 Time code indication	TCG 12:59:59:20	TCG (time code generator value)
	TCR 12:59:59:20 (V)UBG AB CD EF 00	TCR (time code reader value) UBG VUBG
	(V)UBR 12 34 56 78	UBR VUBR.
14 DV format indication	DV	DV format specified and playback being performed in the DV format.
15 Iris override	++	Correction phase of the iris override (when active)
indication	+ (No indication)	++ : On the open side by 1 +: On the open side by 0.5 : On the closed side by 1 -: On the closed side by 0.5
	-	No indication: Standard status
16 Iris, F value	NC	Lens cable is not connected.
	0PEN F1.7 - F16	Lens iris is at maximum. Lens iris value
	CLOSE	Lens iris closed.
		<note></note>
		These indications are provided when the lens is capable of indicating the iris value. When the iris is being overridden, they blink.
17 Zoom indication	Z00 - Z99	Zoom degree is indicated. This indication is not provided for a lens that does not return the zoom position, even if the indication is set to ON.
18 PRE RECORDING indication	P-REC (blink)	Indicated while pre-recorded video and audio are being recorded on the P2 card.
19 ID record indication	ID	The ID is set to be superimposed on the video from the camera.
20 Battery type	PRO14 - AC_ADPT	Battery type, selected through a menu option. When the AC adapter is connected, it is indicated as AC_ADPT.
21 Battery remaining	**.*V	Battery remaining level in tenths of a volt
level/voltage	***% EMP	Digital battery remaining level, as a percentage Digital battery empty.
	MAX	Digital battery empty. Digital battery fully charged.
22 Camera-recorder	REC	Recording status of the camera-recorder represented as characters when 1394 is
REC indication		connected. The indication stays illuminated during recording, or blinks when a warning is given.

Information Item	Indication	Status
P2 card remaining free space	***min END WP LOOP INFO P2 */*	The indication "***min" stays illuminated under normal conditions or blinks when the remaining level is near zero. When the card space is used up, "END" comes on. The P2 card is write-protected. The camera-recorder is in LOOP REC mode. When loop recording cannot be performed, for example because the P2 card has no free space, the indication blinks. P2 card being recognised. Total free space/capacities of the P2 cards (when MODE CHECK is being performed). <note> When the menu option P2 CARD REMAIN is set to "ONE CARD", the number of the P2 card slot that contains the target card is indicated, together with the remaining space. For more information, see [P2 Card Remaining Free Space/capacity Indication] on the next page.</note>
P2 card remaining free space (when MODE CHECK is being performed)	①***min	The number of the P2 card slot that contains the target card and the remaining free space (when MODE CHECK is being performed) are indicated. In LOOP REC mode, the minimum guaranteed recording time is indicated. This indication also appears when the target P2 card has been switched with a user button. The minimum guaranteed recording time refers to the sum, at the time loop recording is stopped, of the remaining free space of available P2 cards, except for the card with the largest remaining free space. Example: If three P2 cards are available, with remaining space of eight minutes, five minutes and two minutes respectively, then the minimum guaranteed recording time is seven minutes.
25 D.ZOOM	DZ	Camera-recorder in digital zoom mode. Note that the indication blinks while the camera-recorder is in FOCUS mode.
26 Super iris ON/super black ON	S B SB	Super iris ON. Super black ON. Super iris and super black both ON.
27 Color temperature	*.* K	Color temperature assigned to A, B, and PRE of the WHITE BAL switch (this is a value stored at AWB performance or a value set through the menu option). The indication is not provided in ATW mode.
28 Shutter speed/mode	▶1/**.* 1/60 - 1/2000 SUPER V	Shutter speed set to SYNCHRO SCAN. Shutter speed fixed. Shutter speed set to SUPER V (high vertical resolution mode).

P2 Card Remaining Free Space/capacity Indication

Status of AJ-SPX900E	Recording status	Menu option P2 CARD REMAIN*	23 P2 card remaining free space indication	24 P2 card remaining free space indication (during MODE CHECK)
Under normal conditions	Other than LOOP REC mode	TOTAL	The total remaining free space of all P2 cards loaded in the P2 card slots is indicated in minutes. Example: 30min	Not provided
		ONE CARD	The number of the P2 card slot holding the target P2 card, together with that card's remaining free space indicated in minutes. Example: 18min	Not provided
		OFF	Not provided	Not provided
	LOOP REC mode	TOTAL/ONE CARD	Indicated as [LOOP]	Not provided
		OFF	Not provided	Not provided
During MODE CHECK	Other than LOOP REC mode	TOTAL/ONE CARD/ OFF	The total remaining free space and capacities of all P2 cards loaded in the P2 card slots are indicated in minutes. Example: 20/40	The number of the P2 card slot holding the target P2 card, together with that card's remaining free space, indicated in minutes. Example: 18min
	LOOP REC mode		Indicated as [LOOP]	The minimum guaranteed recording time is indicated in minutes. Example: 7min

^{*}The menu option P2CARD REMAIN can be found in the <VF INDICATOR2> screen, which is accessible from the MAIN OPERATION page.

Indications Available in the Viewfinder Screen

	Selectable between on and off through menu options	Provided when the appropriate status is encountered.	Provided during MODE CHECK*1	Selectable	Provided during playback
Camera shooting mode	0	-	•	0	_
2 Extender	0	0	•	0	_
MODE CHECK indication area	_	_	0	0	_
Camera warning and report area	_	0	0	0	_
5 User button functions	_	0	0	0	_
6 Filter position	0	_	•	0	_
WHITE BAL switch position	0	_	•	0	_
8 Stored gain indication	0	-	•	0	_
9 Gain value	0	_	•	0	_
10 System information and warnings	0	0	•	0	0
11 Voice memo indication	0	0	•	0	0
12 Audio input channel and level meter	0	_	All 4ch input information	0	-
13 Time code indication	0	_	•	0	0
14 DV format indication	0	0	•	0	0
15 Iris override indication	0	0	•	0	_
16 Iris, F value	0	_	•	0	_
17 Zoom indication	0	_	•	0	_
18 Pre-recording indication	_	0	•	-	_
19 ID record indication	_	0	•	-	_
20 Battery type	_	_	•	0	_
21 Battery remaining level/voltage	0	_	•	0	_
22 Camera-recorder REC indication	0	0	•	0	_
23 P2 card remaining free space	0	_	•	0	_
P2 card remaining free space (MODE CHECK)	_	-	•	0	_
25 D.ZOOM	_	0	•	0	_
26 Super iris ON/super black ON	0	0	•	0	_
27 Color temperature	0	0	•	0	_
28 Shutter speed/mode	0	0	•	0	_

^{*1} O: Not provided when the menu option STATUS is set to OFF, which can be found in the <MODE CHK IND> screen, accessible from the : VF

^{•:} Provided regardless of the menu option setting.

4-7-4 Display Modes and Setting Changes/adjustment Result Messages

The messages that appear on the viewfinder screen to indicate changes to settings and adjustment results may be limited, or set not to appear, through the menu option DISP MODE. This menu option can be found in the <VF DISPLAY> screen, which is accessible from the VF page.

For directions on navigating the menu, see [4-6-2 Setting Menu Options].

DISP CONDITION	: NORMAL	
DISP MODE	: 3	
VF OUT	: Y	
VF DTL	: 3	
ZEBRA1 DETECT	: 070%	
ZEBRA2 DETECT	: 0 8 5 %	
ZEBRA2	:SPOT	
LOW LIGHT LVL	: 35%	
ECU MENU DISP.	:OFF	
50M INDICATOR	:OFF	
MARKER/CHAR LVL	: 5 0%	

Settings Change/adjustment Result Messages and DISP MODE Settings

Message appears when:			SP MC etting		
		1	2	3	
CC/ND filter changed.	CC: n (n=1, 2, 3, 4) or ND: m (m=A, B, C, D)	×	×	0	
Gain changed.	GAIN: n dB (n=-3, 0, 3, 6, 9, 12, 15, 18, 21, 24, 27, 30)	×	×	0	
WHITE BAL switch re-positioned.	WHITE: n (n=A, B, PRE)	×	×	0	
OUTPUT/AUTO KNEE switch positioned at [AUTO KNEE] or [OFF].	AUTO KNEE: ON (or OFF)	×	0	0	
Shutter speed/mode changed.	SS: 1/60 (or 1/120, 1/250, 1/500, 1/1000, 1/2000, ▶1/**.*)	×	0	0	
White balance adjusted (AWB performed).	Example: AWB A OK 3.2 K	×	0	0	
Black balance adjusted (ABB performed).	Example: ABB OK	×	0	0	
Extender selected.	Example: EXTENDER ON	×	×	0	
USER button selected.	Example: UM: S.GAIN 30 dB		0	0	
MARKER SELECT button selected.	Example: MKR: A		×	0	
Iris being overridden.	Example: ++ F 5.6		0	0	

O: Message appears.

^{×:} Message does not appear.

4-7-5 Setting the Marker Displays

The center, safety zone, safety zone area and frame markers may be set to ON or OFF, along with specifications of the marker types. To set and select markers, go to the <VF MARKER> screen from the VF page and select the appropriate options. For directions on navigating the menu, see [4-6-2 Setting Menu Options].

```
→ < VF MARKER >

TABLE :A
CENTER MARK :1
SAFETY ZONE :2
SAFETY AREA :90%
FRAME SIG :4:3
FRAME MARK :OFF
FLAME LVL :15
```

<Note>

The indication MKR:A at the upper right of the screen shows the current indication status. To view TABLE B, press the MARKER SELECT button. This changes the indication to MKR:B, allowing you to view the settings.


4-7-6 Marker Check Screen Displays (MARKER SELECT button function)

The viewfinder can display a screen that allows you to view the marker settings of the AJ-SPX900E.


Pressing the MARKER SELECT button on the camera-recorder switches the marker indication as follows.

Marker $A \rightarrow Marker B \rightarrow No marker$

If the menu option FRAME SIG is set to 16:9 as the information of Marker A and 4:3 as the information of Marker B, then the 16:9 and 4:3 view angles can easily be checked with the button, as required.



Markers




The view angle specified through the menu option FRAME SIG is displayed.

4-7-7 Checking Return Video Signal in the Viewfinder

The viewfinder displays the return video signal input to the GENLOCK IN connector while the RET button at the lens is held down.


To enable this capability, select CAM RET for the menu option RET SW. This option can be found in the <SW MODE> screen, which is accessible from the CAM OPERATION page.



4-8 Adjusting and setting the LCD monitor

Using the LCD Monitor

- $m{1}$ Turn on the POWER switch of the AJ-SPX900E.
- Slide the OPEN button in the arrow ① direction to open the LCD monitor.




3 Adjust the angle of the LCD monitor for most convenient viewing.


The monitor can turn up to 180 degrees towards the lens and up to 90 degrees towards you.

<Note>

To prevent camera-recorder failure, do not allow undue force to be applied to the monitor (when it is open).

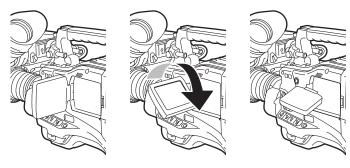


The options BRIGHTNESS, COLOR LEVEL, and CONTRAST show respectively the brightness, color level and contrast of the screen. These options can be found in the <LCD MONITOR> screen, which is accessible from the SYSTEM SETTING page.



Through the menu option LCD MON CHAR, specify whether or not the LCD should display the same characters as the viewfinder.

This menu option can be found in the <OUTPUT SEL> screen, which is accessible from the SYSTEM SETTING page.



<Notes>

- When closing the LCD monitor make sure that it is shut tight.
- In an environment with sudden temperature changes, condensation may form on the liquid crystal surface of the monitor. If this happens, wipe off the moisture with a soft, dry cloth.
- When the camera-recorder is very cold, the video image in the LCD monitor will appear slightly darker immediately after the power is turned on. Once the interior of the camera-recorder warms up, the LCD monitor delivers normal brightness.

Self-portrait Shooting

When shooting with the LCD display angled 180 degrees towards the lens, you can set the menu option SELF SHOOT to "MIRROR", to horizontally flip the video image on the LCD display, and allow you to view a mirror image while shooting.

Note that only the video image on the LCD monitor is horizontally flipped, not the actual video being recorded.

The menu option SELF SHOOT can be found in the <LCD MONITOR> screen, which is accessible from the SYSTEM SETTING page.

<Note>

When the LCD monitor is angled 180 degrees towards you with the menu option SELF SHOOT to "MIRROR", the LCD monitor does not provide the same status indication as the viewfinder, regardless of the setting for the menu option LCD MON CHAR.

4-9 Menu-driven Function Setup

Each function is set up using the menu system.

4-9-1 Setting the Switchover of USER SW

In addition to the standard L/M/H gain mode, the AJ-SPX900E supports S.GAIN (super gain) mode, featuring greater than 30-dB analog gain-up, together with DS.GAIN (digital super gain) mode, storage-type gain-up based on progressive drive technology.

To make use of this feature, you need to specify desired gains through the menu options S.GAIN and DS.GAIN.

For example, if the S.GAIN and DS.GAIN features are assigned to either the USER MAIN, USER1 or USER2 buttons, three different gain-up modes are available through button-mode combinations.

The menu options can be found in the <USER SW GAIN> screen, which is accessible from the CAM OPERATION page.

1) To increase the gain without increasing noise:

Combine the L/M/H gain and DS.GAIN features.

To increase the normal analog gain: (noise is increased)

Use the S.GAIN feature alone.

3) To achieve ultra-high sensitivity:

Combine the S.GAIN and DS.GAIN features.(Gain increased by up to 68 dB.)

However, you should be extra careful when using this combination. With moving subjects, the greater the increase in DS.GAIN the more annoying the after-images will be. In this case, limit the increase to $+12dB \uparrow (1/12)$.

Note that the DS.GAIN feature is disabled when the AJ-SPX900E is in progressive mode.

```
→ < USER SW GAIN >

S. GAIN

*304B
*364B
*424B
*424B

*484B

DS. GAIN

*64B↑(1/25)
*124B↑(1/12)
*204B↑(1/5)
```

Settings Options and Usage

S.GAIN: Analog gain-ups with * marks enabled.

Analog gain-ups without * marks disabled. Storage-type gain-ups with * marks enabled.

DS.GAIN: Storage-type gain-ups with * marks enabled. Storage-type gain-ups without * marks disabled.

4-9-2 Selecting Video Output Signals

You need to select the signals to be output from the VIDEO OUT and MON OUT connectors.

When the extension board AJ-YA902AG (optional accessory) is attached, an SDI signal can be output from the VIDEO OUT connector.

For more information, see [8-2-4 OUTPUT SEL].

```
→ <OUTPUT SEL>

VIDEO OUT SEL :VBS
OUTPUT CHAR :MENU ONLY
MONITOR OUT CHAR:OFF
LCD MON CHAR :ON
VF MODE :EE_PB
THUMBNAIL OUT :OFF
```

4-9-3 Selecting Function for the FRONT AUDIO LEVEL Control

The FRONT AUDIO LEVEL control can be assigned the function of adjusting the recording level.

To specify whether or not the FRONT AUDIO LEVEL control is effective on the channels set to accept input signals, use the menu options FRONT VR CH1 and FRONT VR CH2. These options can be found in the <MIC/AUDIO1> screen, which is accessible from the MAIN OPERATION page.


For more information, see [8-6-4 MIC/AUDIO1].

```
→ < MIC/AUDIO1 >
   FRONT VR CH1
FRONT VR CH2
MIC LOWCUT CH1
                             : OF F
   MIC LOWCUT CH2
                              OFF
   MIC LOWCUT CH3
                             ·OFF
   MIC LOWCUT CH4
                             : OF F
   LIMITER CH1
                              OFF
   LIMITER CH2
                             : OF F
   AUTO LEVEL CH3
                             : ON
                              ON
   REC CH3/CH4
                             : SW
   25M REC CH SEL
                              2CH
   TEST TONE
                             : NORMAL
```

4-9-4 Assigning Functions to USER MAIN, USER1 and USER2 Buttons

The USER MAIN, USER1, and USER2 buttons can be assigned user-selected functions.

To select desired functions, use the menu options USER MAIN SW, USER1 SW and USER2 SW. These options can be found in the <USER SW> screen, which is accessible from the CAM OPERATION page.



Selectable Functions

INH: No function assigned.
 S.GAIN: S.GAIN function assigned.
 DS.GAIN: DS.GAIN function assigned.
 S.IRIS: Super Iris function assigned.

This is useful for backlight compensation.

I.OVR: Iris Override function assigned.

The target (reference) value in Auto Iris mode must be changed.

To change the target value, put the AJ-SPX900E into this mode and press the JOG dial button. Turn the JOG dial button clockwise or anti-clockwise to change the value. The iris indication section of the viewfinder screen displays "+", "+ +", "-", or "--". When the desired value is displayed, stop turning the JOG dial button. Then, press the dial button to

Note that once the mode is canceled or the power is turned off the original reference value will be used again.

+: Iris opens up by 0.5. + +: Iris opens up by 1. -: Iris closes down by 0.5. - -: Iris closes down by 1.

No indication: The reference value is used.

S.BLK: Super Black function assigned.

accept that value.

This function lowers the black level to the pedestal

level or below.

B.STR: Black Stretch function assigned.

This function emphasises the black shades.

D.ZOOM: Doubles the view angle, both horizontally and

vertically.

<Note>

When the camera is set to the 50i operation mode, this function forcibly switches the operation

mode to 25P.

ATW: Auto-tracking white balance function assigned.

Y GET: Function of indicating the brightness level of the

center marker assigned.

NEWS-G: Function of switching on and off News Gamma assigned.

<Note>

News Gamma is capable of reproducing shades without whiteout or blackout. This is useful for such operations as news shooting.

To turn on/off News Gamma using the USER button which is assigned NEWS-G, the menu option GAMMA MODE SEL must be set to "STD". This option can be found in the <GAMMA> screen, which is accessible from the PAINT page.

AUDIO CH1: Function of switching the input signal source for Audio Channel 1 assigned.

Pressing the button switches the input signal in the following order: FRONT \rightarrow W.L. \rightarrow REAR. Note that the AUDIO IN switch can also be used to change the input signal: later specification takes precedence.

AUDIO CH2: Function of switching the input signal source for

Audio Channel 2 assigned.

Pressing the button switches the input signal in the following order: FRONT \rightarrow W.L. \rightarrow REAR. Note that the AUDIO IN switch can also be used to change the input signal: later specification takes precedence.

REC SW: Function of the REC START/STOP button

assigned.

RET SW: Function of the RET button at the lens assigned.

SLOT SEL: Function of switching the target P2 card among

multiple cards assigned.

4-9-5 Setting Color Temperature Manually

The white balance can be manually adjusted by setting the color temperature. Manual color temperature settings can be performed for each of the WHITE BAL switch positions: PRST, A and B.

To enable manual color temperature setting, the menu options AWB A and AWB B must be set to VAR.

The color temperature is set using the menu options COLOR TEMP PRE, COLOR TEMP A, and COLOR TEMP B.

These options can be found in the <WHITE BALANCE MODE> screen, which is accessible from the CAM OPERATION page.

→ < WHITE BALANCE MODE > FILTER INH : NORMAL AWB AREA AWB&ABB OFFSET :OFF COLOR TEMP PRE · 3200K MEM AWB A COLOR TEMP A 3200K AWR R ·MFM COLOR TEMP B 3200K ATW SPEED NORMAL

4-10 Handling data

Setting Data Using an SD Card


An SD card (optional accessory) can be used as a setup card that stores up to eight files of settings menu specifications. This data allows you to quickly reproduce an optimum state.

4-10-1 Handling SD Cards

An SD card may be inserted or removed, either before or after the power is turned on.

To insert an SD card:

Open the lid of the switch cover, and insert an SD card (optional accessory) into the SD card slot with the notch upward. Close the lid.



<Note>

An SD card must be inserted with the right side facing the slot. If the card is hard to insert, it may be reversed or upside down. Do not force it into the slot. Check the card before re-inserting it.

To remove the SD card:

Open the lid of the switch cover, and ensure that the BUSY lamp is not illuminated. Then, further depress the SD card towards the main unit. This releases the SD card from the insertion slot. Take hold of the SD card and remove it. Close the lid.

SD cards must not be used or stored in an environment where they may be:

- Exposed to high temperatures/humidities;
- Exposed to water droplets; or
- Electrically charged.

For storage, the SD card must be kept inserted into the AJ-SPX900E with the lid closed.

4-10-2 Formatting, Writing and Reading an SD Card

To format an SD card, write settings data or read data on an SD card, navigate the menu to the <SD CARD READ/ WRITE> screen from the FILE page.

For an SD card formatted with a device that does not support SD standards, the message "FORMAT ERROR" appears at the upper right of the screen. In this case, reformat the card as follows. Note that the indication "FORMAT ERROR" does not disappear if the SD card is replaced with this menu page open. When the SD card is replaced, perform TITLE READ.

To format an SD card:

<Note>

SD cards may be formatted via the thumbnail screen. For more information, see [6-11 Formatting SD Cards].


- ${\it 1}$ Navigate the menu to the <SD CARD READ/WRITE> screen.
- Turn the JOG dial button to move the cursor to the menu option CARD CONFIG.
- **3** Press the JOG dial button to display the following message:

```
CONFIG?

∴YEŞ

→ `NO.:
```

To format the SD card, turn the JOG dial button to move the cursor to YES. Then, press the dial button. When the SD card has been formatted, the following message appears:



The card will not be formatted if the following message appears when the JOG dial button is pressed:

Error message	Remedy
CONFIG NG NO CARD (No SD card inserted.)	Insert an SD card.
CONFIG NG ERROR (SD card cannot be formatted.)	The card may be defective. Replace the card.
CONFIG NG WRITE PROTECT (SD card is write-protected.)	Remove the card and cancel the protect.
CONFIG NG CANNOT ACCCESS (SD card not accessible).	Example: The SD card is not accessible because it is being played back. After the operation in process, format the card.

To exit the menu, press the MENU button. The settings menu disappears and the status of the AJ-SPX900E is indicated at the top and bottom of the viewfinder screen.

<Note>

If an SD card is inserted or removed with the <SD CARD READ/WRITE> screen open, the data title cannot be edited.

Move the cursor to the option TITLE READ and press the JOG dial button.

Edit the data title.

To write set data on an SD card:

 ${m 1}$ Navigate the menu to the <SD CARD READ/WRITE> screen.

To select a file number:

Turn the JOG dial button to move the cursor to the option [W. SELECT]. Then, press the dial button.

3 Turn the JOG dial button to select a desired number (1 - 8). Then, press the dial button.

To give the selected file a title:

4 Turn the JOG dial button to move the cursor to the option [TITLE:].

5 Press the JOG dial button. This moves the cursor to the entry area, putting the AJ-SPX900E in entry mode.

Turn the JOG dial button until a desired character appears. The characters that appear are switched in the following order:

Space:

↓

Alphabetical characters: A to Z

↓

Numerals:
↓

Symbols: ', >, <, /, -

7 Press the JOG dial button to accept a desired character.

Turn the JOG dial button to move the cursor to the next digit (clockwise), and repeat Steps 6 - 7 to set characters (up to eight characters).

To write data on a selected file:

When the title is set, turn the JOG dial button to move the cursor to [:].

- 10 Press the JOG dial button to return the cursor to the option [TITLE:].
- 11 Turn the JOG dial button to move the cursor to the option [WRITE].
- 12 Press the JOG dial button to display the following message:

```
WRITE?

→ 'NES'


TITLE:
```

The data will not be written if any of the following messages appears when the JOG dial button is pressed:

Error message	Remedy
WRITE NG NO CARD (No SD card inserted.)	Insert an SD card.
WRITE NG FORMAT ERROR (SD card not properly formatted.)	The card has not been formatted using the AJ-SPX900E. Replace the card.
WRITE NG ERROR (SD card not writable.)	The card may be defective. Replace the card.
WRITE NG WRITE PROTECT (SD card write-protected.)	Remove the card and disable the protect.
WRITE NG CANNOT ACCCESS (SD card not accessible).	Example: The SD card is not accessible because it is being played back. After the operation in process, format the card.
WRITENG CARD FULL (SD card has no free space.)	The card is not writable because it has no free space. Delete unwanted files or replace the card with a new one.

13 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

When the data has been written, the following message appears:



 $14\,$ To exit the menu, press the MENU button.

The settings menu disappears and the status of the AJ-SPX900E is indicated at the top and bottom of the viewfinder screen.

To read data on an SD card:

1 Turn the JOG dial button to move the cursor to the option [SD CARD READ/WRITE]. Then, press the dial button.

To select a file number:

Turn the JOG dial button to move the cursor to the menu option [R. SELECT]. Then, press the dial button.

```
< SD CARD READ WRITE >

→ R. SELECT
READ
W. SELECT
WRITE
CARD CONFIG
TITLE READ


TITLE:
1: 5:
2: 6:
3: 7:
4: 8:
```

3 Turn the JOG dial button to select a desired number (1 - 8).
Then, press the dial button.

To read data on a selected file:

Turn the JOG dial button to move the cursor to the option [READ].


5 Press the JOG dial button to display the following message:



Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

When the data has been read, the following message

When the data has been read, the following message appears:



The data will not be read if any of the following messages appears when the JOG dial button is pressed:

Error message	Remedy
READ NG NO CARD (No SD card inserted.)	Insert an SD card.
READ NG FORMAT ERROR (SD card not properly formatted.)	The card has not been formatted using the AJ-SPX900E. Replace the card.
READ NG NO FILE (No file found.)	Write file data.
READ NG ERROR (SD card not readable.)	Only data written with the AJ- SPX900E is readable.
READ NG CANNOT ACCCESS (SD card not accessible).	Example: The SD card is not accessible because it is being played back. After the operation in process, read data.

7 To exit the menu, press the MENU button. The settings menu will be replaced by status indications for the AJ-SPX900E.

4-10-3 How to Use the User Data

It is possible to transfer settings and other data to the user area of the internal memory of the AJ-SPX900E.

This data allows you to quickly reproduce an optimum setup state.

To write data, go to the <INITIALIZE> screen from the FILE page. To read the written user data, go to the <SCENE> screen from the FILE page.

```
→ < INITIALIZE >

READ FACTORY DATA
WRITE USER DATA
RESET LENS FILES
```

```
→ < SCENE >

READ USER DATA
SCENE SEL :1
READ
WRITE
RESET

TITLE1 : ****

TITLE2 : ****

TITLE3 : ****

TITLE4 : *****
```

To write settings data in the user area:

- ${\it 1}$ Navigate the menu to the <INITIALIZE> screen.
- Turn the JOG dial button to move the cursor to the option WRITE USER DATA.

 $oldsymbol{3}$ Press the JOG dial button to display the following message:



- 4 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.
 - This writes the settings data into the user area of the internal memory of the AJ-SPX900E.
- **5** To exit the menu, press the MENU button.

To read written user data:


- ${f 1}$ Navigate the menu to the <SCENE> screen.
- 2 Turn the JOG dial button to move the cursor to the option READ USER DATA.
- **3** Press the JOG dial button to display the following message:



- 4 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.
 - The data written in the user area of the internal memory of the AJ-SPX900E is read to complete the setting.
- 5 To exit the menu, press the MENU button.

The set user data may be also read without navigating the menu.

- $m{1}$ Turn off the POWER switch.
- 2 Position the WHITE BAL switch at [PRST].



- 3 With the AUTO W/B BAL switch flipped up, turn on the POWER switch.
 - This resets all settings for USER menu options to their defaults.

4-10-4 How to Use Scene File Data

It is possible to write the settings data into the scene file area of the internal memory of the AJ-SPX900E, or to read data written in this area. Four types of scene files are available. This data allows you to quickly reproduce an optimum setup state.

TITLES 1 - 3 are factory-assigned the defaults for the AJ-SPX900E; TITLE 4 is assigned the parameter for FILMLIKE. The setting for TITLE 4 can be changed.

To change the settings, go to the <SCENE> screen from the FILE page.

To write settings data for scene files:

- $m{I}$ Navigate the menu to the SCENE screen.
- Turn the JOG dial button to move the cursor to the SCENE SEL option.
- 3 Press the JOG dial button to blink scene file numbers. Then, turn the dial button to select a desired scene file number.

- 4 Press the JOG dial button to accept the scene file.
- Turn the JOG dial button to return the cursor to the option WRITE.

```
< SCENE >

READ USER DATA
SCENE SEL :1
READ

WRITE
RESET

TITLE1 : ****

TITLE2 : ****

TITLE3 : ****

TITLE4 : *****
```

 $m{6}$ Press the JOG dial button to display the following message:



- Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

 This writes the setting data into the scene file area of the AJ-SPX900E internal memory.
- $oldsymbol{\delta}$ To exit the menu, press the MENU button.

To read settings data for scene files:

- $m{I}$ Navigate the menu to the <SCENE> screen.
- Turn the JOG dial button to move the cursor to the option SCENE SEL.
- 3 Press the JOG dial button to blink scene file numbers. Then, turn the dial button to select a desired scene file number.

```
< SCENE >

READ USER DATA

→ SCENE SEL :1
READ
WRITE
RESET

TITLE1 : '''


TITLE2 : '''

TITLE3 : ''''

TITLE4 : ''''
```

- $m{4}$ Press the JOG dial button to accept the scene file.
- 5 Turn the JOG dial button to move the cursor to the READ option.

6 Press the JOG dial button to display the following message:



7 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

The data stored in the scene file area of the internal memory of the AJ-SPX900E is read to complete the setting.

 $oldsymbol{\delta}$ To exit the menu, press the MENU button.

To return data for scene files to their defaults:

- $m{I}$ Navigate the menu to the <SCENE> screen.
- Turn the JOG dial button to move the cursor to the option SCENE SEL.
- 3 Press the JOG dial button to blink scene file numbers. Then, turn the dial button to select the scene file that you want to reset.

```
< SCENE >

READ USER DATA

→ SCENE SEL :1
READ
WRITE
RESET

TITLE1 : '''

TITLE2 : '''

TITLE3 : '''

TITLE4 : ''''
```

- 4 Press the JOG dial button to accept the scene file.
- 5 Turn the JOG dial button to move the cursor to the option [RESET].

```
< SCENE >

READ USER DATA
SCENE SEL :1
READ
WRITE
→ RESET

TITLE1 : ......

TITLE2 : .....

TITLE3 : ......

TITLE4 : ......
```

6 Press the JOG dial button to display the following message:



7 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

The data stored in the scene file area of the internal memory of the AJ-SPX900E is reset to the defaults.

 $oldsymbol{\delta}$ To exit the menu, press the MENU button.

To title settings data for scene files:

- $m{I}$ Navigate the menu to the <SCENE> screen.
- Turn the JOG dial button to move the cursor to the option [TITLEs 1 4] for the appropriate scene file.


```
< SCENE >

READ USER DATA
SCENE SEL :1
READ
WRITE
RESET

→ TITLE1: ****
TITLE2: ****
TITLE3: ****
TITLE4: *****
```

3 Press the JOG dial button to move the cursor to the title entry area, putting the AJ-SPX900E in entry mode.

4 Turn the JOG dial button until a desired character appears. The characters that appear are switched in the following order:



- 5 Press the JOG dial button to accept a desired character.
- Turn the JOG dial button to move the cursor to the next digit (clockwise), and repeat Steps 4 - 5 to set characters (up to eight characters).
- When the title is set, turn the JOG dial button to move the cursor to [:].
- Press the JOG dial button to return the cursor to the options TITLEs 1 - 4.
- 9 Turn the JOG dial button to return the cursor to the option WRITE.

10 Press the JOG dial button to display the following message:



11 Turn the JOG dial button to move the cursor to YES. Then, press the dial button.

This writes the title into the scene file area of the AJ-SPX900E internal memory.

12 To exit the menu, press the MENU button.

4-10-5 Resetting Menu Option Settings to Defaults

The menu settings can be reset to their defaults.

To reset the settings to their defaults, select the menu option READ FACTORY DATA in the <INITIALIZE> screen, which is accessible from the FILE page.

All settings will be reset to their defaults.

<Note>

If an SD card is inserted or removed with the <SD CARD READ/ WRITE> screen open, the data title cannot be edited.

4-10-6 Lens File Data

The AJ-SPX900E is capable of correcting the lens white shading. This lens white shading correction may be stored as lens file data (maximum number of data sets is eight). Lens file data allows you to quickly perform a proper white shading adjustment, even when the lens is replaced.

For more information on reading/writing data, see [5-3 Mounting the lens and Performing the Flange Back and White Shading Adjustments].

5-1 Power Supply

A battery pack or AC power can be used as the power supply for the camera-recorder.


Using a Battery Pack

Battery packs from the following manufacturers can be used:

- Panasonic
- Anton/Bauer
- IDX
- PACO
- Sony

<Notes>


- Other batteries may be used by changing the menu setting, but system compatibility is not guaranteed.
- Charge the battery pack with the battery charger before using it. (Please refer to the battery charger's instruction manual for information about charging.)



5-1-1 Mounting the battery and setting the battery type

Using an Anton/Bauer Battery Pack


 $m{I}$ Mount the Anton/Bauer battery pack.



<For your information>

The Anton/Bauer battery holder includes both a power supply output connector for lighting and a lighting control switch, which are convenient when attaching a light. Please contact Anton/Bauer for information about the lighting system.

2 Insert the battery and slide it in the direction of the arrow.



<For your information> Removing the battery pack

Completely push down and hold the release lever on the battery holder. Then, slide the battery pack in the opposite direction to the arrow while holding the lever down.

 $\boldsymbol{3}$ Setting the battery type.

Select the battery type listed under BATTERY SELECT. Select BATTERY SELECT from the <BATTERY/P2CARD> screen in the MAIN OPERATION page.

Please refer to [8-6-2 BATTERY SETTING1] for more information.

The following Anton/Bauer batteries can be used:


- PRO14
- TRIM14
- HYTRON50
- HYTRON100
- HYTRON120
- DIONIC90
- DIONIC160

<Note>

To use DIONIC, please set it as DIONIC90.

When using a BP-90 type battery pack.

 $m{1}$ Remove the battery holder.




- 2 Attaching the battery case to the camera-recorder.
 - ① Connect the cable on the camera-recorder to the cable on the battery case (BP-90 type).
 - ② Using a screwdriver, secure the battery case (BP-90 type) to the camera-recorder.


Open the cover and lift the rubber cap so that the screw tightening hole is visible. Tighten the screws to secure the battery case to the camera-recorder. Be sure to fully tighten the screws.

<Notes>

- Do not use excess force when lifting the rubber caps forcibly.
- Take special care not to pinch the cable.

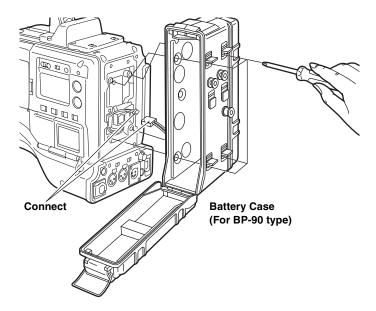

3 Connect the battery pack plug to the socket inside the battery case, and insert the battery pack into the case.



<Note>

Make sure you turn OFF the camera-recorder power before connecting or disconnecting the plug.

4 Setting the battery type.

Select the battery type listed under BATTERY SELECT. Select BATTERY SELECT from the <BATTERY/P2CARD> screen on the MAIN OPERATION page.

Please refer to [8-6-2 BATTERY SETTING1] for more information.

Using an NP-1 type battery pack.


 $m{1}$ Remove the battery holder.

2 Mount the NP-1 type battery case on the camera-recorder.

- 1) Tighten the mounting screws.
- 2 Tighten the power contact screws.
- ③ Insert the upper part of the removed cover in the direction of the arrow.
- 4 Align the holes in the bottom part (metal part) of the cover with the holes in the case, and secure the cover with the screw.

<Note>


When mounting the battery holder, take care not to pinch the connection cord.

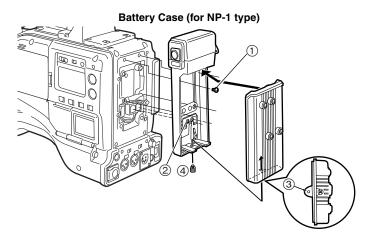

When using a V-mount type battery pack

Mount the V-mount adapter plate.

Insert the plate and slide it in the direction of the arrow.

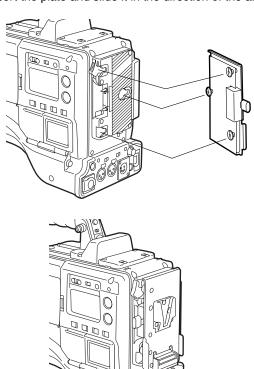

 $\boldsymbol{3}$ Setting the battery type.

Select the battery type listed under BATTERY SELECT. Select BATTERY SELECT from the <BATTERY/P2CARD> screen on the MAIN OPERATION page.

When using a battery not listed under BATTERY SELECT: If it is a NiCD battery, select "NiCd14(14V)", "NiCd13(13V)", or "NiCd12(12V)", depending on the battery voltage. Set the other items according to the battery properties. If it is not a NiCd battery, select TYPE A or TYPE B and set the other items according to the battery properties.

Please refer to [8-6-3 BATTERY SETTING2] for more information.


<Note>

For information about the V-mount adapter plate, please contact the store where you purchased the camera-recorder.

5-1-2 **Using an AC Power Supply**

When using the Panasonic AJ-B75 AC adapter

Plug the AJ-B75 DC OUT connector into the camerarecorder's external DC input socket.

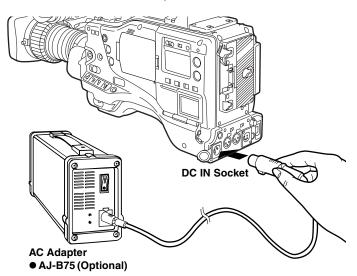

- Turn the AC adapter power ON.
- Turn the camera-recorder power switch ON.

When using an external power supply other than the AC adapter AJ-B75, check the DC IN socket pin information to ensure correct polarity. If a +12V power supply is accidentally connected to the GND terminal, this could cause a fire or personal injury.



Pin No.	Signal
1	GND
2, 3	_
4	+12V

DC IN Socket

<Notes>

- When both the battery pack and AC adapter are connected, power is supplied from the AC adapter. The battery can be removed or mounted while using the AC adapter.
- When using the AC adapter, make sure you turn ON the AC adapter power before turning ON the camerarecorder's power switch. If this sequence is reversed, the camera-recorder may malfunction due to slow rising of the AC adapter output voltage.
- When connecting a battery to the DC IN socket, select the battery type listed under EXT DC IN SELECT. Select EXT DC IN SELECT from the <BATTERY/P2CARD> screen on the MAIN OPERATION page. In this case, however, the % display is disabled, even when using a digital battery.

Mounting the Viewfinder and 5-2 **Adjusting its Position**


Please refer to the viewfinder instruction manual. Note: A slide rail is required to mount any viewfinder other than models AJ-VF15B or AJ-VF20WB.

• If you need to buy a slide rail, please contact the store where you purchased the camera-recorder and tell them that the slide rail is a "repair part".


Slide rail (VFC3995) Screws (XBS3+8VZ)

Mounting the Slide Rail

Undo the upper two screws for AJ-VF15 or AJ-VF20W, and remove the mounting unit. Leave the screws attached to the mounting unit.




Mount the slide rail, then tighten the two screws.




Mounting the lens and 5-3 **Performing the Flange Back** and White Shading **Adjustments**

Mounting the Lens


Raise the lens clamping lever and remove the mount cap.




To mount the lens, align the indentation at the top center of the lens mount with the center mark of the lens.



Lower the lens clamping lever to clamp the lens.



Secure the cable through the cable clamp, and plug it into the LENS connector.



Adjust the lens flange back.

<Notes>

- Please refer to the lens instruction manual for guidance on lens handling.
- When the lens is removed, install the mount cap to protect the device.


Adjusting the Lens Flange Back

If images are not clearly focused at both telephoto and wideangle positions during zoom operations, adjust the flange back (distance from the lens mounting surface to the image formation

Once adjusted, the flange back does not need to be re-adjusted as long as the same lens is mounted on the camera.

Please also refer to the lens instruction manual for directions on adjustment and locations of individual lens parts.

- Mount the lens on the camera. Make sure you connect the lens cable.
- Set the lens iris to manual, and fully open the iris.



- Place the flange back adjustment chart about 3 m from the lens and adjust the lighting on the chart to obtain an appropriate video output level.
 - If the video level is too high, use the filters or the shutter.
- Loosen the F.f (Flange focus) ring clamping screw.

<Note>

F.b (Flange back) may be indicated on some lenses.

- Set the zoom ring to the telephoto position, either manually or by electric drive.
- Aim the lens at the flange back adjustment chart and turn the distance ring to bring the chart into focus.
- Set the zoom ring to the wide-angle position and turn the F.f ring to bring the chart into focus.
 - While focusing, take care not to move the distance ring.
- Repeat Steps 5 to 7 until the lens is in focus at both the telephoto and wide-angle positions.
- Firmly tighten the F.f ring clamping screw.

Adjusting the Lens White Shading

Take the following steps to adjust the white shading:

<Note>

Vertical coloring may occur near the open position of the lens iris, even after adjusting the white shading. This phenomenon, however, is a characteristic of the lens or optical system. It does not indicate a malfunction.

- Mount the lens on the camera.
 Be sure to connect the lens cable.
- Set the electronic shutter to [OFF], the gain to [L (0dB)], and the ASPECT option to "16:9". Select the ASPECT option from the SYSTEM MODE screen on the SYSTEM SETTING page.
- $oldsymbol{3}$ If the lens has an extender, disable the extender feature.
- Operate the MENU and go to the PAINT page to open the <GAMMA> screen. Confirm that the GAMMA MODE SEL is set to STD. From the VF page, open the <VF DISPLAY> screen to confirm that ZEBRA1 DETECT, ZEBRA2 DETECT, and ZEBRA2 are set as shown in the diagram below. If they are not, correct the settings and then close the MENU screen.

DISP CONDITION DISP MODE VF OUT VF DTL ZEBRA1 DETECT ZEBRA2 DETECT ZEBRA2 LOW LIGHT LVL ECU MENU DISP. 50M INDICATOR. MARKER/CHAR LVL	: NORMAL : 3 : Y : 3 : 0 7 0% : 0 8 5% : SPOT : 35% : OFF : OFF
---	--

- 5 Set the Viewfinder ZEBRA switch to ON.
- 6 Aim the lens at a sheet of white paper that has no color shading.

<Note>


Flickering naturally occurs when fluorescent, mercury or other such lamps are used for lighting. Therefore, use a light source that does not flicker, such as sunlight or halogen lamps.

Set the lens iris to manual and adjust the lens iris so that the ZEBRA pattern covers the entire screen. Make sure that the lens iris is set between F4 and F11.


<Notes>

- The ZEBRA pattern will not cover the entire screen if the lighting is uneven. In this case, adjust the lighting (e.g., change the position of the light source).
- Even if the lens iris is not set between F4 and F11, adjust the lighting (e.g., change the position of the light source).
- Make sure that the electronic shutter is set to OFF.

- ① Set the WHITE BAL selector switch to A or B, and execute Auto White Balance (AWB) with the AUTO W/B BAL switch.
- ② Next, execute Auto Black Balance (ABB) with the AUTO W/B BAL switch.
- ③ Repeat Auto White Balance (ABB) with the AUTO W/B BAL switch.
- **9** Repeat the adjustment described in Step 7.
- 10 Activate the MENU and go to the MAINTENANCE page to open the <WHITE SHADING> screen.
- Turn the JOG Dial button to move the cursor to DETECTION (V.SAW). Then, press the JOG Dial button to execute white shading compensation.



12 Press the JOG Dial button and the following message appears.



13 Turn the JOG Dial button to move the cursor to [YES]. Then press the JOG Dial button.

[ACTIVE] appears on the screen to indicate that the white shading automatic adjustment is running.

[W-SHD OK] appears when the adjustment is completed.

<Note>

This compensation may not be possible when [LEVEL OVER] is displayed, depending on the KNEE setting. In this case, first narrow the lens iris or set the OUTPUT switch AUTO KNEE to OFF. Next, activate the MENU to open the PAINT screen. From the PAINT screen, open the <KNEE/LEVEL> screen and set MANUAL KNEE to OFF. Then repeat Steps 4 to 9.

After [W-SHD OK] is displayed, re-set MANUAL KNEE back to ON.

14 If the lens has an extender or a ratio converter, enable the feature and repeat Steps 7 to 13 for each feature.
Three patterns of compensation values (with an extender, with a ratio converter, and without any features) will be

stored as one set of lens file data in the camera-recorder.

This completes the white shading adjustment.

The compensation values are stored in the non-volatile internal memory. Therefore, re-adjusting the white shading is not required, even after the camera-recorder power has been turned off.

Storing the Lens File Data

The white shading compensation values can be stored in the internal memory as lens file data.

Selecting the File number

- Activate the MENU and go to the FILE page to open the <LENS> screen. Turn the JOG Dial to move the cursor to the item FILE NO.
- Press the JOG Dial button and FILE NO. will start blinking. Turn the JOG Dial button to select the desired lens file (1-8) to be stored.

```
< LENS FILE >

→ FILE NO.
    READ
    WRITE

TITLE:

1:    5:
    2:    6:
    3:    7:
    4:    8:
```

3 Press the JOG Dial button to confirm the lens file.

Adding a Title to the Selected File No.

4 Turn the JOG Dial button to move the cursor to [TITLE:].

5 Press the JOG Dial button. The cursor moves to the title input field, and input mode is enabled.

```
< LENS FILE >

FILE NO. :1
READ
WRITE

TITLE:

1: 5:
2: 6:
3: 7:
4: 8:
```

6 Press the JOG Dial button again and turn it until a desired letter for the title appears.

Turning the JOG Dial button changes the letter displayed in the following sequence:

Space:

↓


Alphabetical characters: A to Z

↓

Numerals:
↓

Symbols: ', >, <, /, -

- 7 Press the JOG Dial button to confirm the letter.
- 8 Turn the JOG Dial button to move the cursor to the next position (to the right), and repeat Steps 6 to 7 to set the letters for the title. (Up to 12 letters)
- **9** When the title input is completed, turn the JOG Dial button to move the cursor to the [:] position.
- 10 Press the JOG Dial button. The cursor returns to [TITLE:].
- 11 Turn the JOG Dial button to move the cursor to [WRITE:].
- $12\,\mathrm{Press}$ the JOG Dial button and the following message appears.




13 Turn the JOG Dial button to move the cursor to [YES]. Then, press the JOG Dial button.

[WRITE OK] will appear after writing is completed, indicating that the set data and the title have been stored in the lens file area of the camera's internal memory.

14 Press the MENU button to exit the menu operation.

Reading out the Lens File Data

- I Select the lens file No. to read out by following Steps I to 3 in the [Storing the Lens File Data] section.
- 2 Turn the JOG Dial button to move the cursor to [READ:].
- 3 Press the JOG Dial button and the following message appears.




- Turn the JOG Dial button to move the cursor to [YES]. Then, press the JOG Dial button. [READ OK] will be displayed after the stored lens file data has been read out.
- **5** Press the MENU button to exit the menu operation.


Resetting Lens File Data to Factory Standard Settings

The lens file data can be reset to the standard setting values that were set when the camera was shipped from the factory. From the FILE page, open the <INITIALISE> screen.

 $m{I}$ From the INITIALIZE screen, select [RESET LENS FILES].



When the JOG Dial button is pressed, the message shown below appears.



Jurn the JOG Dial button to move the cursor to [YES], then press the JOG Dial button.
[OK] is displayed, resetting the lens file data to the factory default values.


5-4 Preparing for Audio Input

Take the following steps to prepare the camera for connecting audio input devices.


5-4-1 When Using the Front Microphone

The AJ-MC700P microphone kit (optional) includes a microphone that can be mounted on the camera.


 $m{I}$ Open the microphone holder.




2 Mount the microphone and tighten the clamping screw.



3 Connect the microphone cable to the MIC IN jack on the camera.



4 Set the AUDIO IN switch to [FRONT] depending on the audio channel to be recorded.




5-4-2 When Using a Wireless Receiver

Using an External Wireless Receiver

Mount a wireless receiver when using a wireless system.

- $m{I}$ Mount the wireless receiver on the camera attachment.
- Align the grooves in the camera attachment with the pins on the unit (e.g., the battery case), and mount the wireless receiver.

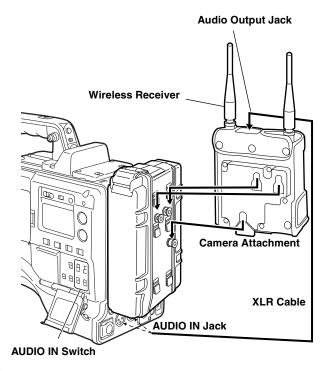

- 3 Connect the wireless receiver to the AUDIO IN jack with the XLR cable.
- 4 Set the AUDIO IN switch to [REAR] for the channel to which the XLR cable is connected.
- 5 Set the LINE/MIC/+48V selector switch on the rear panel to [MIC].


To remove the wireless receiver, raise the lever on the bottom of the camera attachment.

<Note>

Please refer to the wireless receiver's instruction manual for such information as operation of the wireless receiver.

When Using the Unislot® Wireless Receiver


I Remove the cover to insert the wireless receiver and secure it with the screws.

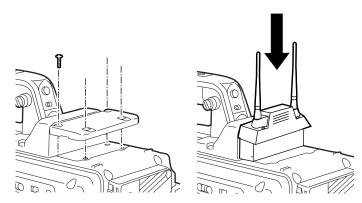

2 Set the AUDIO IN switch to [W.L.] depending on the audio channel to be recorded.

5-4-3 When Using Audio Devices


- ${f 1}$ Connect the audio device to the AUDIO IN jack with the XLR cable.
- 2 Set the AUDIO IN switch to [REAR] for the channel to which the XLR cable is connected.
- 3 Set the LINE/MIC/+48V selector switch on the rear panel to [LINE].



5-5 Mounting the Camera on a Tripod

When mounting the camera on a tripod, use the optional tripod attachment.

 $m{1}$ Mount the tripod attachment on the tripod.




<Note>


Select an appropriate hole in the attachment, taking into account the center of gravity of the camera and tripod attachment combined.

Also, make sure that the diameter of the selected hole matches the diameter of the pan head screw.

Mount the camera on the tripod attachment.
Slide the camera forward along the grooves until you hear a "click".



Removing the Camera from the Tripod Attachment




While holding the red lever down, move the black lever in the direction of the arrow, and slide the camera backward to remove it.

<Note>

If the tripod attachment pin does not return to its original position after the camera has been removed, hold the red lever down and move the black lever in the direction of the arrow again, in order to return the pin to its original position.

Please note that the camera cannot be mounted if the pin remains in the center.

5-6 Attaching the Shoulder Strap




To detach the shoulder strap, first open the hooks, then detach the strap.


<Note>

Make sure that the shoulder strap is securely attached.

5-7 Attaching the Rain Cover


When using the SHAN-RC700 Rain Cover





5-8 Connecting the AJ-EC3E Extension Controller

Some functions can be remote-controlled when the AJ-EC3E extension control unit (optional) is connected to the camera. When the AJ-EC3E is connected, the camera automatically enters remote control mode after the power switches of both the camera and the AJ-EC3E are turned ON.



<Notes>

- Be sure to turn OFF both the camera and the AJ-EC3E power switches before connecting or disconnecting the controller cable.
- If ECU DATA SAVE is set to OFF, the camera-related setting values, which have been adjusted or set using the AJ-EC3E, will be canceled when the camera power switch is turned OFF. Also, the setting values cannot be written to an SD card. However, the menu settings performed using the AJ-EC3E can be written to an SD card. Next time the AJ-EC3E is connected, the setting values will return to the AJ-EC3E settings.


ECU DATA SAVE can be selected from the <SW MODE> screen on the CAM OPERATION page.

- If ECU DATA SAVE is set to ON, the values adjusted or set using the AJ-EC3E are retained, even after the camera power switch is turned OFF.
- The USER switch on the camera does not function when the AJ-EC3E is connected.
- When controlling the shutter from the AJ-EC3E, the shutter speeds correspond to the speeds set by the menu on the camera, not the speeds written on the AJ-EC3E. The shutter speeds correspond as follows:

AJ-EC3E Shutter Speed Indication	Camera Shutter Speeds
100 (60)	POSITION1
120	POSITION2
250	POSITION3
500	POSITION4
1000	POSITION5
2000	POSITION6

5-9 Attaching the Front Audio Level Control Knob

If you use the Front Audio Level control frequently, attach the accessory knob so that it can be easily operated.

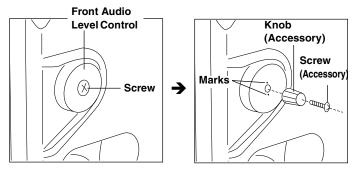

Remove the screw in the center of the Front Audio Level control, and attach the accessory knob using the screw (included). When attaching the knob, be sure to align the marks on the control with the marks on the knob.

Chapter 6 Manipulating Clips with Thumbnails


A clip is a data group that includes the images and voices created from one shooting session, together with additional information such as voice memos and meta data.

The following manipulations can be performed using the cursor and SET buttons, while checking the images displayed on the LCD monitor:

- Playback, delete or restore the clip.
- Add a voice memo to the clip.
- Add or delete a shot mark on the clip thumbnail.
- Format P2 cards and SD cards.

6-1 Thumbnail Manipulations Overview

Thumbnail screens are configured as follows:

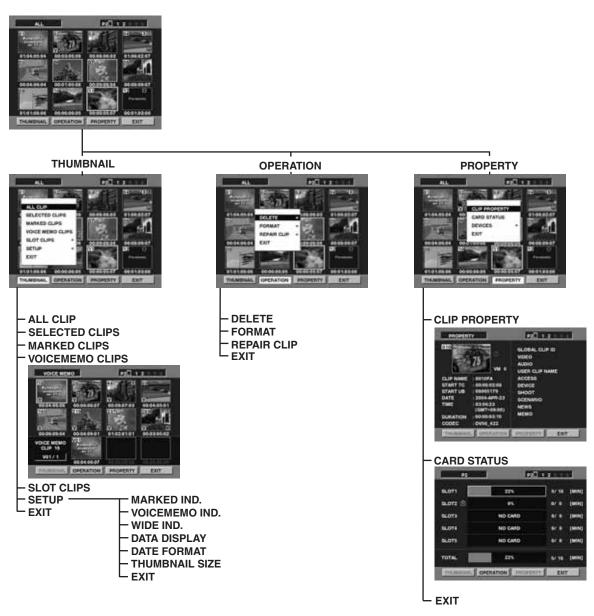

6-2 Thumbnail Screen

Press the THUMBNAIL button to display the thumbnail screen on the LCD monitor. Pressing the THUMBNAIL button again returns the display to the regular display. When switching is done from the regular screen display to the thumbnail screen display, all the clips will be displayed on the thumbnail screen.

Also, pressing the MENU BAR button in the thumbnail screen moves the pointer to the menu bar and enables thumbnail menu manipulation.

<Note>

With the TCG switch positioned at [SET], when the time code or user bits are set or when camera menus are being manipulated, thumbnails cannot be manipulated.



Thumbnail Screen

1 Display Mode

Indicates the thumbnail types displayed on the screen.

ALL: Display all clips.

SELECTED:

Display randomly selected clips.

MARKED: Display clips with shot marks.

VOICE MEMO:

Display clips with voice memo data.

SLOT: Display clips in the specified P2 card.

Please refer to [6-5 Switching the Thumbnail Display] for more information.

Slot Number

Indicates the P2 card in which the clip under the pointer is recorded. The slot number of the P2 card that contains the clip is displayed in yellow.

If the clip is recorded across multiple P2 cards, all the slot numbers of the P2 cards that contain the clip are displayed. The slot numbers of the other P2 cards, if inserted, are displayed in white.

3 Clip Number

The numbers set by the camera for all the clips recognised correctly by the P2 card. These numbers are allocated in chronological order, by shooting dates and times.

4 Thumbnail

The image captured immediately after you start shooting is displayed as a thumbnail.

5 Time Display

You can set this to display the time code at the start of clip recording, the user bits at the start of clip recording, the shooting time, the shooting date or the shooting and date. Please refer to [6-12 Setting the Thumbnail Display Mode] for more information.

The factory setting is the time code at the start of clip recording.

6 Menu Bar

The Menu Bar includes menus for manipulating clips and switching/setting the thumbnail display.

Press the MENU BAR button on the thumbnail screen to manipulate the menu bar. Use the cursor ($\lhd \triangleright$) and SET buttons to select the menu.

THUMBNAIL:

To switch the thumbnail display and set the display mode.

OPERATION:

To delete clips and format a P2 card.

PROPERTY:

To display clip properties and P2 card status.

EXIT:

To return the pointer to the thumbnail.

Incomplete Clip Indicator

Indicates that although a clip is recorded across multiple P2 cards, one of these cards is not inserted into a P2 card slot.

8 Voice Memo Indicator

This marker is displayed for a clip with a voice memo attached. Please refer to [6-7 Voice Memo] for more information about voice memos.

W Wide Clip Indicator

This marker is displayed for clips recorded with the 16:9 aspect ratio.

10 M Shot Mark Indicator

This marker is displayed for a clip with a shot mark attached. Please refer to [6-6 Shot Mark] for more information about shot marks.

111 X Defective Clip Indicator

This marker is displayed for defective clips, which may result from a variety of causes, e.g., powering-down during recording.

A clip displayed with a yellow corrupt marker can be restored. Please refer to [6-9 Restoring Clips] for more information.


A clip displayed with a red corrupt marker cannot be restored and must be deleted. If the clip cannot be deleted, format the P2 card.

6-3 Selecting Thumbnails

Multiple thumbnails can be randomly selected in the thumbnail screen.

- 1 Use the cursor buttons to move the pointer (yellow frame) to the desired clip and press the SET button. The frame around the selected thumbnail changes to a blue frame. Press the SET button again to deselect the clip.
- 2 Additional clips can be selected by repeating Step I.

It is possible to display only the selected thumbnails in the thumbnail screen for playback. Please refer to [6-5 Switching the Thumbnail Display] for more information.



6-4 Playing Back Clips

- Press the THUMBNAIL button. The thumbnail screen appears on the LCD monitor.
- 2 Use the cursor buttons to move the pointer over the desired clip.
- Press the PLAY/PAUSE button, and the clip under the pointer will be played back on the LCD monitor. After playback of the clip under the pointer, subsequent clips are played back in order, according to when they were shot. The thumbnail screen returns after the last clip has been played back.

<Note>

When playing back clips, it is not necessary to "select" the clips (blue frames around the thumbnails).

- During playback, pressing the REW button starts 4× speed reverse playback, and the FF button starts 4× speed fast playback. Press the PLAY/PAUSE button to return to normal playback.
- During clip playback, pressing the PLAY/PAUSE button will temporarily stop (pause) the process.

 During a pause, pressing the REW button changes the pause position to the beginning of the previous clip, and the FF button changes the pause position to the beginning of the next clip.
- **6** Pressing the STOP button during clip playback stops the playback and returns the display to the thumbnail screen.


<Note>

When playback is stopped, the position of the pointer remains on the clip that was being played back, regardless of where the playback started. However, when the THUMBNAIL button is pressed to close the thumbnail screen, the pointer will move to the starting clip (i.e., the clip with the earliest recording date and time), not the clip on which the pointer was last positioned.


6-5 Switching the Thumbnail Display

The display can be switched so that only those clips matching the specified conditions are displayed in the thumbnail screen.

- Press the THUMBNAIL button. The thumbnail screen appears on the LCD monitor.
- Press the MENU BAR button. The pointer moves to the menu bar.



Move the pointer over THUMBNAIL and press the SET button to select it. A sub-menu appears. Switch the thumbnail display by selecting one of the following items:



ALL CLIPS:

Display all clips.

SELECTED CLIPS:

Display randomly selected clips.

MARKED CLIPS:

Display clips with shot marks attached.

VOICE MEMO CLIPS:

Display clips with voice memo data attached.

SLOT CLIPS:

Display clips recorded in the P2 card inserted in the specified slot.

When this item is selected, SLOT1 to SLOT5 are displayed as a sub-menu. Select the desired slot to display the clips.

SET UP

Please refer to [6-12 Setting the Thumbnail Display Mode] for information about this item.


EXIT:

Close the sub-menu.

6-6 Shot Mark

A shot mark can be added to a clip thumbnail to distinguish this clip from the others.

- Press the THUMBNAIL button. The thumbnail screen appears on the LCD monitor.
- Use the cursor buttons to move the pointer over the clip to which you want to attach a shot mark.
- $oldsymbol{3}$ Press the Shot Mark button.



A shot mark will be attached to the clip thumbnail under the pointer.

To delete a shot mark, reposition the pointer over the clip and press the Shot Mark button.

<Notes>

- A shot mark can be attached during recording. Please refer to [3-9 Shot Mark Function] for more information.
- When adding a shot mark to (or deleting the shot mark from) a clip recorded across multiple P2 cards, do this with all these P2 cards inserted into P2 card slots.

6-7 Voice Memo

A voice memo is audio data that can be attached to the clip separately from the voice recorded during shooting.


<Note:

A voice memo can be attached during recording. Please refer to [3-8 Voice Memo Function] for more information.

6-7-1 Playing Back Voice Memos

- Press the THUMBNAIL button. The thumbnail screen appears on the LCD monitor.
- Press the MENU BAR button. The pointer moves to the menu bar.
- 3 From the MENU BAR, select THUMBNAIL ightarrow VOICE MEMO CLIPS.

The clip thumbnails with voice memos attached are displayed in the upper section of the LCD monitor. The lower section of the LCD monitor shows information about the voice memo on the clip selected by the pointer.



Shows the total number of voice memos attached to the clip.

4 Move the pointer over the clip that contains the desired voice memo to playback and press the SET button. The pointer moves to the lower part of the LCD monitor.



The pointer moves down.

- Press the left/right cursor buttons (⟨□⟩) to move the pointer over the still image that is related to the voice memo you wish to play back. Then, press the SET button.
- The voice memo will be played back. During voice memo playback, the still image related to the voice memo is displayed on the LCD monitor and the viewfinder. The video output signal is also the still image. To stop the voice memo playback, press the STOP button.
- 7 To return the pointer to the thumbnail display after playback of a voice memo, press the MENU BAR button to move the pointer to the menu bar, and then select EXIT.

<Note>

The voice memo playback signal is emitted through the speaker and the PHONES jack on the camera. This signal is not emitted from the AUDIO OUT jack.


6-7-2 Recording a Voice Memo

During thumbnail display, voice memos can be added to the clip on which the pointer is positioned.

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Use the cursor buttons to move the pointer over the clip to which you want to attach a voice memo.
- 3 Press the Voice Memo button and record the voice memo through the Voice Memo Microphone.
 "VOICE REC" is displayed at the top of the screen.

<Notes>

- When a voice memo is attached during thumbnail display, the voice memo is related to the first still image of the clip. Please refer to [3-8 Voice Memo Function] for more information.
- When the power is abruptly turned off while a voice memo is being recorded during playback of a clip, the clip will not be affected by this, but the voice memo will not be recorded.



Press the Voice Memo button or the stop button again to stop recording.

6-7-3 Deleting Voice Memos

- Perform Steps 1 to 4 in the [6-7-1 Playing Back Voice Memos] section to select the voice memo in the clip.
- Move the pointer over the clip you want to delete, and press the MENU BAR button. The pointer moves to the menu bar.
- From the menu bar, select OPERATION → DELETE. YES and NO appear to confirm deletion. Use the cursor buttons and the SET button to select YES. The voice memo is deleted.

6-8 Deleting Clips

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Use the cursor buttons to move the pointer over the clip you want to delete.
 Press the SET button to select the clip.
- ${f 3}$ Press the MENU BAR button and select OPERATION ightarrow DELETE from the menu bar.
- 4 The following screen appears. Use the cursor buttons and the SET button to select YES.



5 The clip is deleted. All selected clips (in blue-green frames) are deleted by this operation.

6-9 Restoring Clips

Restores clips that are defective as a result of sudden poweringdown during recording, or removal of the P2 card being accessed.

<Note>

Only those clips with yellow corrupt clip markers can be restored. Delete the clips with red corrupt clip markers. If the clip cannot be deleted, format the P2 card.

During restoration of the clips, however, the defective-clip indicator may change from yellow to red, resulting in inability to restore the clips.

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Use the cursor buttons to move the pointer over the clip you want to restore (defective clips are indicated by corrupt clip marks).

Press the SET button to select the clip.

- Press the MENU BAR button, and select OPERATION → REPAIR CLIP from the menu bar.
- The confirmation window appears. Use the cursor buttons and the SET button to select YES.

6-10 Formatting a P2 Card

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Press the MENU BAR button. The pointer moves to the menu bar.
- From the menu bar, select OPERATION → FORMAT. The following screen appears. Select the slot number for the P2 card you want to format. Select EXIT if formatting is not required.



The following screen appears. Use the cursor buttons and the SET button to select YES.



5 The selected P2 card is formatted.

6-11 Formatting SD Cards

SD cards can also be formatted from the thumbnail screen. With an SD card inserted into the camera-recorder, perform the following operation:

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Press the MENU BAR button. The pointer moves to the menu bar.
- From the menu bar, select OPERATION → FORMAT. The following screen appears. Select "SD-CARD". Select "EXIT" if formatting is not required.



4 The following screen appears. Use the cursor buttons and the SET button to select YES.



5 The SD card is formatted.

<Note>

SD cards can also be formatted from the menu screen. For more information, see [4-10-2 Formatting, Writing and Reading an SD Card].

6-12 Setting the Thumbnail Display Mode

The thumbnail display mode can be customised to suit your preferences.

- Press the THUMBNAIL button.
 The thumbnail screen appears on the LCD monitor.
- Press the MENU BAR button. The pointer moves to the menu bar.
- From the menu bar, select THUMBNAIL \rightarrow SETUP. The following screen appears.



MARKER IND.:

Switches the shot mark marker between indication and no indication (ON/OFF). The factory setting is ON (indication).

VOICE MEMO IND.:

Switches the voice memo marker between indication and no indication (ON/OFF). The factory setting is ON (indication).

WIDE IND.:

Switches the wide marker between indication and no indication (ON/OFF). The factory setting is ON (indication).

DATA DISPLAY:

The time display field of the clip offers a choice of Time Code (TC), User Bits (UB), Shooting Time (TIME) or Shooting Date (DATE)/Shooting Time and Date (Time DATE). The factory setting is Time Code.

DATE FORMAT:

You can specify the display order for the shooting date as either Year/Month/Day (YMD), Month/Day/Year (MDY) or Day/Month/Year (DMY). The factory setting is Year/Month/Day.

This setting is reflected in the recording date shown in the clip property and the shooting date shown when DATE is selected under the item DATA DISPLAY.

THUMBNAIL SIZE:

For the size of thumbnails displayed on one screen, either LARGE (3 \times 2 thumbnails displayed) or NORMAL (4 \times 3 thumbnails displayed) can be selected. The factory default value is NORMAL.

EXIT:

Returns to the previous menu.

6-13 Properties

The clip's properties and the P2 card's status are displayed.

6-13-1 Clip Property

From the menu bar, select PROPERTY \rightarrow CLIP PROPERTY. The following screen appears.



- Clip Number
- 2 Thumbnail

3 Slip Information

Displays the number of markers and voice memos attached to the clip.

The mark appears if the clip is recorded on a write-protected P2 card.

4 Slot Number

6 Clip Information

Displays detailed information about the clip.

START TC:

The time code value at the start of the recording.

START UB:

The user bit value at the start of the recording.

TIME: The time at the start of the recording.

DATE: The date of the recording.

DURATION:

The time length of the clip.

CODEC: The recording format of the clip.

6 Clip Meta Data

Displays more detailed data about the clip. Use the cursor buttons to move the pointer, and press the SET button to check the detailed content. The underlined items are automatically set during shooting. Other items can be input on your personal computer, etc.

GLOBAL CLIP ID:

Displays the global clip ID indicating the shooting conditions of the clip.

VIDEO: Displays [FRAME RATE] (clip frame rate), [PULL DOWN] (pulldown method), and [ASPECT RATIO] (aspect ratio).

AUDIO: Displays [SAMPLING RATE] (sampling frequency of recorded voice) and [BITS PER SAMPLE] (quantifying bit number of recorded voice).

USER CLIP NAME:

Displays the user-set clip name. The initial value is the global clip ID.

ACCESS: Displays [CREATOR] (name of the person who recorded the clip), [CREATION DATE] (date and time the clip was recorded), and [LAST UPDATE PERSON] (the last person who updated the clip).

DEVICE: Displays [MANUFACTURER] (name of the manufacturer of the recording equipment), [SERIAL NO.] (serial number of the recording equipment), and [MODEL NAME] (model name of the recording equipment).

SHOOT: Displays [SHOOTER] (name of the shooter), [START_DATE] (shooting start date and time), [END_DATE] (shooting end date and time), and [LOCATION] ALTITUDE/LONGITUDE/LATITUDE/SOURCE/PLACE NAME (shooting location's latitude/longitude/altitude/source of the information/name).

SCENARIO:

Displays [PROGRAM NAME] (program name), [SCENE NO.] (scene number), and [TAKE NO.] (take number).

NEWS: Displays [REPORTER] (reporter name), [PURPOSE] (purpose of coverage), and [OBJECT] (coverage target).

MEMO: Displays [PERSON] (person who records the text memo added to the clip) and [TEXT] (content of the text memo). Two or more text memos can be recorded for a single clip, but this camera-recorder can only recognise the first text memo.

<Note>

This camera-recorder can only display printable ASCII characters.

6-13-2 P2 Card Status Display

From the menu bar, select PROPERTY \rightarrow CARD STATUS. The following screen appears.



1 Write-protect Mark

The mark appears if the P2 card is write-protected.

2 P2 Card Status

The remaining memory capacity of the P2 card is indicated by a bar graph and percentage.

The following indications may appear, depending on the card status:

FORMAT ERROR:

An unformatted P2 card is inserted.

NOT SUPPORTED:

An unsupported card is inserted in the camera.

NO CARD:

P2 cards are not inserted.

3 P2 Card Remaining Capacity/Total Capacity

Displays the P2 card remaining capacity and total capacity in minutes. The total of the remaining memory capacity for each P2 card that is displayed may not match the actual total remaining memory capacity for the P2 cards because only the figure in minute is displayed.

4 Slots Total

Displays the total capacity of the 5 slots.

Please note that the remaining capacity of a write-protected P2 card is not included in the total remaining capacity.


Chapter 7 Maintenance and Inspections

7-1 Inspections Before Shooting

Make sure you check that the system is operating normally before embarking on a shoot. We recommend using a color video monitor to check the image.

7-1-1 Preparing for Inspections

- Mount a charged battery pack.
- Turn the power switch ON and check that 5 or more BATT indication marks appear.
 - If fewer than 5 BATT indication marks appear, replace the battery with a fully-charged battery.



Insert a P2 card into the card slot and close the slide cover. Confirm that the P2 card access LED for the inserted card slot lights up in orange. If P2 cards are inserted into multiple card slots, only the P2 card access LED for the first-inserted P2 card lights up in orange. Then, the other P2 card access LEDs light up in green when P2 cards are inserted.

If the access LED for the P2 card slot in which a P2 card is inserted keeps blinking in green, or if there is no display, recording is not possible on that particular P2 card.



7-1-2 Inspecting the Camera Unit

- ${\it 1}$ Set the zoom to electric zoom mode and check the zoom operation.
 - Check that the image changes to telephoto and wide angle.
- 2 Set the zoom to manual zoom mode and check the zoom operation.
 - Turn the manual zoom lever to check that the image changes to telephoto and wide angle.
- 3 Set the iris to automatic adjustment mode and aim the lens at objects with different degrees of brightness, to check that the automatic iris adjustment operates normally.
- 4 Set the iris to manual adjustment mode and turn the iris ring, to check the manual iris adjustment.
- While holding down the instant iris automatic adjustment button, aim the lens at objects with different degrees of brightness, to check that the instant iris automatic adjustment operates properly.
- **6** Return the iris to automatic adjustment mode and change the GAIN switch setting to L, M, and H, to check the following items:
 - The iris is adjusted for objects with the same brightness according to the switch setting.
 - The gain value displayed on the viewfinder screen changes according to the switch setting.
- When a lens with an extender is mounted, set the extender to the operating position to check that the extender operates properly.

7-1-3 Inspecting the Memory Recording Functions

Make sure you successively carry out the inspections from [1. Inspecting the P2 Card Recording] to [4. Inspecting the Earphone and Speaker].

1. Inspecting the P2 Card Recording

- Check on the display inside the viewfinder that the remaining P2 card recording capacity is sufficient. Please refer to [P2 Card Remaining Free Space/capacity Indication] for information about P2 card remaining recording capacity.
- 2 Set the TCG switch to [R-RUN].
- $oldsymbol{3}$ Set the DISPLAY switch to [TC].
- Press the camera's REC START/STOP button to check the following items:
 - The P2 access LED blinks in orange.
 - The REC lamp inside the viewfinder lights up.
 - System warnings do not appear inside the viewfinder.
- Press the camera's REC START/STOP button again. This step confirms that the P2 access LED is on and showing orange, and the REC lamp in the viewfinder is turned off.
- Using the REC button on the handle, repeat Steps 4 to 5 to check the same operation. Check the VTR button on the lens in the same way.
- Press the LIGHT button to check that the screen brightness in the display window increases.
- Press the PLAY button to check that the clip that has just been shot is played back from the beginning.

 Check that recording and playback operate properly.
- When multiple P2 cards are inserted into the P2 card slots, press the USER MAIN button to select the P2 card used for recording.

Repeat the operations in Steps 4 to 5 and 8 to check that recording and playback operate properly.

2. Inspecting the Audio Level Automatic Adjustment

- $m{1}$ Set the AUDIO SELECT CH1 and CH2 switches to [AUTO].
- 2 Set the AUDIO IN CH1 and CH2 switches to [FRONT].
- 3 Aim the microphone connected to the MIC IN jack at an appropriate sound source. Then, check that the level displays for both CH1 and CH2 change according to the sound level.

3. Inspecting the Audio Level Manual Adjustment

- $m{I}$ Set the AUDIO IN CH1 and CH2 switches to [FRONT].
- 2 Set the AUDIO SELECT CH1 and CH2 switches to [MAN].
- 3 Turn the AUDIO LEVEL CH1 and CH2 controls. Check that the level display increases when the controls are turned to the right.

4. Inspecting the Earphone and Speaker

- 1 Turn the MONITOR control to check that the speaker volume changes.
- Connect an earphone to the PHONES jack. Check that the speaker is turned off and the microphone sound can be heard from the earphone.
- ${\it 3}$ Turn the MONITOR control to check that the earphone volume changes.

5. Inspection for Using an External Microphone

- 1 Connect an external microphone to the AUDIO IN CH1 and CH2 connectors.
- 2 Set the AUDIO IN CH1 and CH2 switches to [REAR].
- 3 Set the LINE/MIC/+48V selector switches on the rear panel to [MIC] or [+48V], depending on the power supply type of the external microphone.

MIC: For a microphone with internal power supply.+48V: For a microphone with external power supply.

4 Aim the microphone at a sound source. Then check that the audio level meter in the display window and the audio level display inside the viewfinder change according to the sound level.

The channels can also be checked separately by connecting a single microphone to each channel.

6. Inspection of the clock, time code, and user bits

- 1 Set the user's bit as required. Please refer to [4-5-1 Setting the User Bits] for the setting procedures.
- 2 Set the time code. Please refer to [4-5-3 Setting the Time Code] for the setting procedures.
- 3 Set the TCG switch to [R-RUN].
- 4 Press the REC START/STOP button. Check that the counter display number changes as recording progresses.
- 5 Press the REC START/STOP button again. Check that recording stops and the counter display number stops changing.
- 6 Set the TCG switch to [F-RUN]. Check that the counter display number changes regardless of recording status.
- / Set the DISPLAY switch to [UB]. Each time the HOLD button is pressed, make sure that the displayed value changes in the following sequence: VTCG → DATE → TIME → No display (time zone) → TCG; and also verify that the displayed value is correct.

If DATE, TIME, or time zone is not correct, refer to [4-5-2 Setting the Internal Clock's Date and Time] for guidance on setting the correct values.

<Note>

Note that date and time data set for DATE, TIME, and time zone is recorded in clips, and affects the playback sequence, etc. at the time of thumbnail manipulations.

7-2 Maintenance

7-2-1 Cleaning Inside the Viewfinder

- Do not use thinner or other solvents to remove dirt from the viewfinder.
- Wipe the lens with a commercially available lens cleaner.
- DO NOT wipe the mirror. If dirt or rubbish is sticking on the mirror, remove it with a commercially available air blower.

7-2-2 Phenomenon Inherent to CCD Cameras

Smears

Smears may appear when shooting an object with very high brightness.

This phenomenon may appear more frequently as the electronic shutter speed increases.

7-2-3 Replacing the Backup Battery

The camera is shipped from the factory with a backup battery already mounted.

When the battery runs out, the [BACK UP BATT EMPTY] display appears on the viewfinder screen for 3 seconds after the power switch is turned ON.

The internal clock stops operating when the battery runs out. Also, the TCG time code value returns to [00:00:00:00], and the time code backup is disabled. The battery must be replaced.

Please consult your nearest service center for replacement with a new battery (CR2032).

The backup battery is visible when the panel on the LCD monitor side is removed (right side when viewed from the front).


<Note>

Please contact the store where you purchased the camera or an authorised service provider when replacing the battery.

7-2-4 Connector Signals

DC IN	
1	GND
2	NC
3	NC
4	+12V

Panasonic Part No. K1AA104H0024 Manufacturer Part No. HA16RX-4P(SW1) (Hirose Electric Co.)




<Note>

Confirm correct polarity when using an external power supply.


FRONT MIC IN	
1	GND
2	AUDIO IN (H)
3	AUDIO IN (C)

Panasonic Part No. K1AB103B0013 Manufacturer Part No. K23FBH2 (Eye-Trek)



AUDIO IN	
1	GND
2	AUDIO IN (H)
3	AUDIO IN (C)

Panasonic Part No. K1AB103A0007 Manufacturer Part No. HA16PRM-3SG (Hirose Electric Co.)



GPS	
1	GPS TXA
2	GPS RXA
3	GPS VBAT
4	START
5	GPS VCC
6	GPS GND

Panasonic Part No. K1AB106J0010 Manufacturer Part No. HR10A-7R-6SC (Hirose Electric Co.)




<Note>

The camera's REC START/STOP is allocated to pin No. 4.

AUDIO OUT	
1	GND
2	L CH OUT (H)
3	L CH OUT (C)
4	R CH OUT (H)
5	R CH OUT (C)

Panasonic Part No. K1AA105H0007 Manufacturer Part No. HA16RD-5P (Hirose Electric Co.)



ECU	
1	CAM CONT
2	CAM DATA
3	NC
4	ECU ON
5	UNREG 12V
6	GND

Panasonic Part No. K1AB106J0010 Manufacturer Part No. HR10A-7R-6SC (Hirose Electric Co.)



DC OUT	
1	GND
2	NC
3	NC
4	+12V

Panasonic Part No. VJS3824A004 Manufacturer Part No. HR10A-7R-4SC (Hirose Electric Co.)



7-3 Warning System

7-3-1 Warning Description Tables

If a problem is detected immediately after the power is turned on, or during operation, this will be indicated by the WARNING lamp, lamps inside the viewfinder and a warning tone.

<Note>

The WARNING lamp has the highest priority, followed by the tally lamp, and then the warning tone. When multiple errors occur simultaneously a higher priority indication will be triggered. The [WIRELESS RF], however, may not be indicated, depending on the menu setting.

1. System Errors

Display window indication	The error code lights up.
WARNING lamp	Blinks 4 times per second.
Tally lamp	Blinks 4 times per second.
Viewfinder	The SYSTEM ERROR indication and the error code light up.
Warning tone	Beeps continuously.
Warning description	An error in the reference signal or the communication.
Recording/ playback operation	The operation stops.
Countermeasures	Please confirm [7-3-2 Error Codes] and consult your nearest service center.

3. Battery Empty

Display window indication	All 7 bar indicators for battery remaining capacity start blinking.
WARNING lamp	Lights up.
Tally lamp	Blinks once per second.
Viewfinder	The BATT LED lights up.
Warning tone	Beeps continuously.
Warning description	The battery has run out.
Recording/ playback operation	The operation stops.
Countermeasures	Replace the battery.

2. Card removal error

Display window indication	Error code E-30 appears.
WARNING lamp	Blinks 4 times per second.
Tally lamp	Blinks 4 times per second.
Viewfinder	The "TURN POWER OFF" indicator blinks.
Warning tone	Continues to beep.
Warning description	The P2 card being accessed has been removed, resulting in an error in the internal memory of the camera-recorder.
Recording/ playback operation	Cannot be performed.
Countermeasures	Turn off the power to the camera-recorder. If there is an error in a clip on the removed P2 card, repair the clip.

4. Write-protect

Display window indication	All 7 bar indicators for remaining MEDIA capacity start blinking.
WARNING lamp	Continues to light up until an operation is performed.
Tally lamp	Continues to blink 4 times per second until an operation is performed.
Viewfinder	The WP indicator blinks.
Warning tone	Continues to beep until an operation is performed.
Warning description	The inserted P2 cards are write-protected.
Recording/ playback operation	Recording is disabled.
Countermeasures	Disable the write-protect or replace the P2 card.

5. P2 Card Fully Recorded

Display window indication	All 7 bar indicators for remaining MEDIA capacity start blinking.				
WARNING lamp	Continues to light up until an operation is performed.				
Tally lamp	Continues to blink 4 times per second until an operation is performed.				
Viewfinder	The END indicator blinks.				
Warning tone	Continues to beep until an operation is performed.				
Warning description	The P2 cards are recorded to maximum capacity.				
Recording/ playback operation	The recording stops.				
Countermeasures	Delete the clips in the P2 card or insert a new P2 card.				

6. Recording Error

Display window indication	"00:00:00:11" appears in the time code display field.			
WARNING lamp	Blinks 4 times per second while recording continues.			
Tally lamp	Blinks 4 times per second while recording continues.			
Viewfinder	The REC WARNING indicator lights up. Even after recording is stopped, this display continues to light up until the next operation is performed.			
Warning tone	Beeps 4 times per second while recording continues.			
Warning description	Recording signal processing error.			
Recording/ playback operation	Recording stops.			
Countermeasures	Restart recording. Or, turn the power OFF and turn it ON again, before starting recording.			

7. Low Wireless Signal Reception

Display window indication	No display.			
WARNING lamp	Blinks 4 times per second. (During pause and recording)			
Tally lamp	Blinks 4 times per second while recording continues.			
Viewfinder	The WIRELESS RF indicator lights up while recording continues.			
Warning tone	Beeps 4 times per second while recording continues.			
Warning description	This error indicates poor wireless audio reception conditions.			
Recording/ playback operation	Continues to operate without receiving the wireless microphone signal.			
Countermeasures	Check the microphone power supply and the reception status of the wireless receiver.			

8. Battery Nearly Empty

Display window indication	One of the bars in the battery remaining indicator starts blinking.	
WARNING lamp	Blinks once per second.	
Tally lamp	Blinks once per second.	
Viewfinder	The BATT LED blinks.	
Warning tone	Beeps 4 times per second.	
Warning description	The battery is about to run out.	
Recording/ playback operation	Continues to operate.	
Countermeasures	Replace the battery as required.	

9. P2 Card Nearly Full

Display window indication	One of the bars for remaining MEDIA capacity starts blinking.			
WARNING lamp	Blinks once per second while recording continues.			
Tally lamp	Blinks once per second while recording continues.			
Viewfinder	The P2 card remaining capacity indicator blinks.			
Warning tone	Beeps once per second while recording continues.			
Warning description	The total remaining capacity of all the P2 cards is two minutes or less.			
Recording/ playback operation	Continues to operate.			
Countermeasures	Replace the cards. If there is an empty card slot, insert a new card.			


7-3-2 Error Codes

The following error codes are displayed in the display window if an error occurs in the camera:

Code No.	Description	
E-11	Video initialisation error	
E-27	Recording control error	
E-30	P2 card removal error	
E-38	P2 streaming microcontroller error	
E-3F	Microprocessor error in the camera control circuit.	
E-6F	Reference signal error.	

Chapter 8 Menu Description Tables

8-1 Menu Configuration

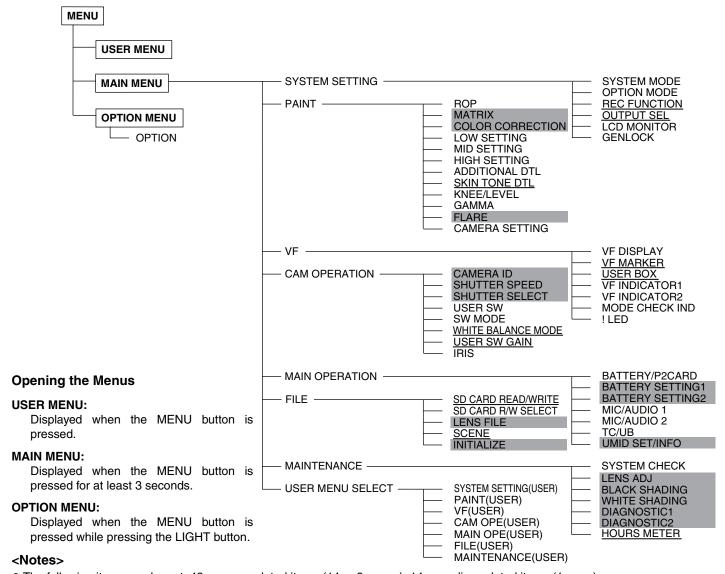

- ullet The following items can be set: 42 camera-related items (14 imes 3 pages), 14 recording-related items (1 page).
- The items highlighted in grey cannot be selected by <USER MENU SELECT>.
- The underlined items can only be selected as one whole page (with all sub-items). Individual sub-items cannot be selected separately.

About Menu Description Tables

The following letters indicate whether the modified menu data is saved to Items/ Adiustabl Remarks or read out from the memory. **Data Saved** e Range The - indicates that the data cannot be saved or read. Select video input signals.

CAM: Record the signal from the camera **REC SIGNAL** CAM S = Can be saved and read as scene data file. VIDEO Can be saved or read using CARD READ/WRITESD. VIDEO: Record the signal from the GENLOCK C = 1394 Can be saved and read as user data. U= IN terminal Please refer to [8-7-4 SCENE] and [8-7-5 INITIALISE]. Record the signal from the 1394 input F = Can be read using READ FACTORY DATA. terminal. (When the optional unit is Please refer to [8-7-5 INITIALISE]. attached.) -|C|U|F|E **E** = Can be saved using ECU DATA SAVE Please refer to [5-8 Connecting the AJ-EC3E Extension Controller]. This section shows the About the settings available for this adjustable range of the set value, and available options for this item.

8-2 SYSTEM SETTING

8-2-1 SYSTEM MODE

Items/ Data Saved	Adjustable Range	Remarks
REC SIGNAL	CAM VIDEO 1394	Select video input signals. CAM: Record the signal from the camera VIDEO: Record the signal from the GENLOCK IN terminal 1394: Record the signal from the 1394 input terminal (when the optional unit is attached. *To be supported in the near future.) <notes> After the power has been turned OFF, this setting defaults to CAM when the power is turned ON again. With VIDEO selected, to synchronise this camera-recorder to the video signal (VBS) that is input to the GENLOCK IN terminal, the GENLOCK item in [8-2-6 GENLOCK] must be set to EXT.</notes>
CAMERA MODE SCUFE	<u>501</u> 25P	Switch the operating mode of the camera. 50i: Camera operates in 50i mode. 25P: Camera operates in 25P mode.
V.RES (25P)	INTRLCE PROG.	Set the vertical resolution when the 25P mode is selected. INTRLCE: Lines are mixed. Natural images can be obtained. PROG.: Lines are not mixed. Complete progressive images can be obtained when images are edited after shooting. <note> When PROG. is selected, images are recorded as progressive segmented frame images, which enables complete progressive editing. However, adding Vertical Detail (V.DTL) produces unnatural images. Therefore, we recommend using the camera with V.DTL set to 0. (Sufficient vertical response is maintained in the images after the progressive editing even when V.DTL is set to 0.)</note>
ASPECT - C U F E	16:9 4:3	Select the aspect ratio for recording. 16:9: Record in <16:9> aspect ratio. 4:3: Record in <4:3> aspect ratio.
REC MODE	50M 25M DV	Select the recording mode. 50M: Record in DVCPRO50 format. 25M: Record in DVCPRO format. DV: Record in DV format.
REC TALLY	RED GREEN CHAR	Select the method of displaying the recording status of the camera-recorder when controlling the equipment connected to 1394 (scheduled to be supported soon). The recording status of the connected equipment is displayed by the red tally lamp on the camera-recorder. RED: The red tally lamp lights up. GREEN: The green tally lamp lights up. CHAR: The VF displays [REC] in characters.
ACCESS LED	<u>ON</u> OFF	Select whether or not to enable illumination of the P2 card access LEDs. ON: Enable the P2 card access LEDs to light up for card status indications. OFF: LEDs remain off.

8-2-2 OPTION MODE

Items/ Data Saved	Adjustable Range	Remarks
P.OFF GPS DATA	HOLD CLEAR	Select whether or not to hold the UMID GPS position information while the power is turned off, thereby keeping this information as status data holding the previous value until the power is turned on again, which enables a new measurement to start. HOLD: Hold and save the data. CLEAR: Clear the data when the power is turned off, and save zero (No-Info) from the next power-on until a new measurement is completed.
SDI METADATA	ON OFF	Select whether or not to output metadata (UMID) to the SDI (when the optional AJ-YA902AG is attached).
SDI EDH	<u>ON</u> OFF	Select whether or not to add an error detection flag to the SDI output (when the optional AJ-YA902AG is attached).
OUT) - C U F -	<u>ON</u> OFF	Select whether or not to forcibly disable the audio output when the SAVE ON/OFF switch is set to [ON]. ON: Disable audio output. OFF: Enable audio output.
SAVE SW (LCD)	<u>ON</u> OFF	Select whether or not to automatically turn off the LCD monitor when the SAVE ON/ OFF switch is set to [ON]. ON: Turn off LCD monitor. OFF: Do not turn off LCD monitor.
SAVE SW (SDI)	ON <u>OFF</u>	Select whether or not to automatically disable the SDI output when the SAVE ON/ OFF switch is set to [ON]. ON: Disable SDI output. OFF: Enable SDI output.

The $\underline{\hspace{1cm}}$ in the Adjustable Range column indicates the preset mode.

8-2-3 REC FUNCTION

Items/	Adjustable	
Data Saved	Range	Remarks
PRE REC TIME	0SEC	Set PRE RECORDING.
	: 15SEC	0-15SEC:
	13320	Set the length of time that can be retrospectively recorded before the
		REC START button is pressed.
		<note></note>
		The maximum selectable range is 8 seconds
		when the REC MODE in the <system mode=""> screen is set to 50M (DVCPRO50).</system>
- C U F -		INIODE > Screen is set to solid (DVCF NOSo).
LOOP REC	ON	Select whether or not to enable LOOP REC.
MODE	<u>OFF</u>	This setting can be used with PRE RECORDING features.
		ON: Enable LOOP REC.
		OFF: Disable LOOP REC.
		<note></note>
		After the power is turned off, this item will default to OFF the next time the power is
		turned on.
- - F -		
VOICE MEMO	ON	Set the available memory space for voice
RESERV	OFF	memos in P2 cards. ON: Reserve a voice memo area of 10
		minutes or longer separately from the
		video recording capacity. The voice
		memo area can be used even when FULL is displayed for the recording
		capacity of the P2 card.
		OFF: Do not reserve any voice memo
		space. <note></note>
		Even when this item is set to OFF, and FULL
		is displayed for the P2 card's recording
		capacity, it may be possible to record voice
- CUF-		memos depending on the status of the P2 card.
REC START	ALL	Select operating modes that allow recording
I LO OIAIII	NORMAL	to start.
		ALL: Allow recording to start during stop,
		recording pause, and playback.
		Allow recording to start during stop
		and recording pause.
- C U F -		<u> </u>

8-2-4 OUTPUT SEL

H/	A alia.t.a.lb.la	
Items/ Data Saved	Adjustable Range	Remarks
VIDEO OUT SEL	VBS VF Y SDI	Select the output signal on the VIDEO OUT terminal. VBS: Output a regular composite signal. VF: Output a VF Y signal. The status display is also superimposed. Y: Output a component Y signal. SDI: Output an SDI signal. Only selectable when the optional AJ-YA902AG extension board is attached.
OUTPUT CHAR	TC STATUS MENU ONLY	Set the character contents superimposed onto the output signals for the VIDEO OUT terminal (Analog or SDI) and MON OUT terminal. TC: Display the time code. (Displays the menu when menu characters are superimposed.) <note> The TC display position moves up and down depending on the camera ID position. STATUS: Display the same characters superimposed on the VF signal. (Displays the menu when menu characters are superimposed.) MENU ONLY: Displays only when the menu characters are superimposed. No display appears when other characters are superimposed.</note>
MONITOR OUT CHAR	ON OFF	Select whether or not to superimpose characters on the MON OUT terminal signal independently of the camera's VIDEO OUT CHARACTER switch. (The character content is the same as the video output signal.) ON: Enable superimpose. OFF: Disable superimpose.
LCD MON CHAR	<u>ON</u> OFF	Select whether or not to superimpose characters on the LCD monitor. (The character content is the same as the video output signal.) ON: Enable superimpose. (Not interlocked with the VIDEO OUT CHARACTER switch.) OFF: Disable superimpose. (Not interlocked with the VIDEO OUT CHARACTER switch.)
VFMODE - CUF-	EE/PB EE	Select the image to display in the viewfinder. EE/PB: Display the playback image in the playback mode. EE: Always display the camera image.
THUMBNAIL OUT	ON OFF	Select whether or not to output clip thumbnails displayed on the LCD monitor to the video output and monitor output signals. ON: Enable output. OFF: Disable output.

8-2-5 LCD MONITOR

Items/	A dimetable	
Data Saved	Adjustable Range	Remarks
BRIGHTNESS	- 7	Adjust the LCD monitor brightness.
	: <u>+0</u>	
- C U F -	+7	
COLOR LEVEL	- 7	Adjust the LCD monitor chroma level.
	: <u>+0</u>	
- C U F -	: +7	
CONTRAST	- 7	Adjust the LCD monitor contrast.
	: <u>+0</u>	
1 1-1-1-1	: +7	
BACKLIGHT	HIGH NORMAL	Select whether or not to set the LCD monitor brightness to always high. HIGH: Set to always high. NORMAL: The brightness changes according to the BRIGHTNESS setting.
	NORMAL <u>MIRROR</u>	Select whether or not to change the LCD monitor to mirror image. NORMAL: Do not change to mirror image. MIRROR: Change to mirror image.
ASPECT CONV.	LT.BOX SQUEEZE	Select a screen ratio for images displayed on the LCD monitor. LT.BOX: Display images in the letter box size. SQEEZE: Display images in the squeeze size. Note> This item is enabled only when ASPECT described in "8-2-1 SYSTEM MODE" is set to 16:9.

8-2-6 GENLOCK

Items/ Data Saved	Adjustabl e Range	Remarks
GENLOCK	<u>INT</u> EXT	Switch the camera synchronising signal. INT: Synchronise with the internal reference signal regardless of the reference signal input to the GENLOCK IN terminal. EXT: Synchronise with the reference signal input to the GENLOCK IN terminal.
- C U F E H PHASE COARSE	-50 : +00	Perform coarse phase adjustment for horizontal hold when configuring a system.
- - - - H PHASE FINE	+50 -160	Perform fine phase adjustment for horizontal hold when configuring a system.
	<u>+000</u> : +160	<note> This adjustment simultaneously shifts the SC phase.</note>
SC PHASE COARSE	0 1	Perform coarse SC PHASE adjustment when GENLOCK is set.
SC PHASE FINE	3 -75 : +00	Perform fine SC PHASE adjustment when GENLOCK is set.
	: +75	When adjusting GENLOCK, please adjust H PHASE first, and then adjust SC PHASE.

8-3 PAINT

8-3-1 ROP

_	Ite ata	em		. 4	Adjustable	Remarks
1	STI				Range -200	Set the master pedestal level.
					: +008	est the master peacetal level.
Ļ	_		_	_		
	STI				+200 -31	Set the H Detail and V Detail levels.
IVI	1011	ΕN	ווט	-	:	Set the fi Detail and v Detail levels.
					<u>+00</u> :	
	С		F	Ε	: +31	
1	ASTI AMN				0.35 :	Set MASTER GAMMA in 0.01 steps.
					<u>0.45</u> ·	
1	С			Е	0.75	
KN	İΕΕ	PO	INT		70.0%	Set the KNEE POINT position in 0.5% steps.
					<u>85 0%</u>	
s	С	U	F	Ε	: 107.0%	
KN	ΙΕΕ	SLO	OPE		0	Set the KNEE slope.
					<u>:</u> <u>50</u>	
s	С	U	F	Е	: 99	
R (GAII	N			-200	Set the Rch gain.
					: +000	
s	С	U	F	Ε	: +200	
	GAII		_	_	-200	Set the Gch gain.
					: +000	-
-	С		_	Е	: +200	
	GAIN		-	_	- 200	Set the Bch gain.
`	٠, ۱,,	•			: +000	gam.
L	_		_	_	+000 : +200	
1 -	C	_			+200 -100	Set the Rch pedestal level.
lu i	LD	LS	IAL		:	Set the non pedestal level.
					<u>+000</u> :	
	С				+100	
G F	PED	ES	IAL		–100 :	Set the Gch pedestal level.
					<u>+000</u>	
1	С			Ε	+100	
B F	ED	ES	TAL		–100	Set the Bch pedestal level.
					<u>+000</u>	
S	С	U	F	Ε	: +100	

The $\underline{\hspace{1cm}}$ in the Adjustable Range column indicates the preset mode.

8-3-2 **MATRIX**

D		em Sa		ed	Adjustabl e Range	Remarks
		RIX			<u>A</u>	Select the color correction table. 2 types of
	BLE				В	tables can be stored: type A and type B.
	l	U		Е		
MA	TRI	ΧR	l-G		-31	Adjust the tint.
					: <u>+30</u>	
S	С	U	F	Е	: +31	
MA	TRI	ΧF	-B		-31	Adjust the tint.
					: <u>+05</u>	
s	С	U	F	Ε	: +31	
MA	TRI	ΧG	i-R		-31	Adjust the tint.
					: <u>+16</u>	
s	С	U	F	Е	+31	
MA	TRI	X G	i-B		-31	Adjust the tint.
					: <u>+19</u>	
s	С	U	F	Ε	: +31	
MA	TRI	ХВ	-R		-31	Adjust the tint.
					: <u>+16</u>	
	l			Ε	: +31	
MA	TRI	ХВ	-G		-31	Adjust the tint.
					: +05	
S	С	U	F	Е	÷ +31	
		RIX			OFF	Select the color correction table to be applied
	BLE				<u>A</u>	to the selected GAIN switch (L/M/H).
S	С	U	F	Е	В	

<Note>

The items indicated by \blacksquare are the setting items for PAINT MENU SW(\blacksquare) R/W in the <SD CARD R/W SELECT> screen. The items without \blacksquare are the setting items for PAINT MENU LEVEL R/W. Please refer to [8-7-2 SD CARD R/W SELECT] for more information.

8-3-3 COLOR CORRECTION

Items/	Adiustable	
Data Saved	Adjustable Range	Remarks
R	-63	Perform red color correction (saturation and
(SAT/PHASE)	: <u>+00</u>	hue).
SCUFE	: +63	
R-Mg	-63	Perform color correction (saturation and
(SAT/PHASE)	: +00	hue) between red and magenta.
SCUFE		
Mg (SAT/PHASE)	–63 :	Perform magenta color correction (saturation and hue).
(6/11/11/102)	<u>+00</u>	(
S C U F E	+63	
Mg-B (SAT/PHASE)	-63 ·	Perform color correction (saturation and hue) between magenta and blue.
	<u>+00</u> :	nue) between magenta and blue.
SCUFE		
B (SAT/PHASE)	–63 :	Perform blue color correction (saturation and hue).
,	<u>+00</u> :	
SCUFE B-Cv	+63 -63	Perform color correction (saturation and
(SAT/PHASE)	:	hue) between blue and cyan.
- - - -	<u>+00</u> :	
- - -	+63	Derforms and a selection (a shoughting
(SAT/PHASE)	-63 :	Perform cyan color correction (saturation and hue).
,	<u>+00</u> :	
SCUFE		
Cy-G (SAT/PHASE)	-63 :	Perform color correction (saturation and hue) between cyan and green.
	<u>+00</u> :	
	+63	
G (SAT/PHASE)	-63 :	Perform green color correction (saturation, hue).
,	<u>+00</u> :	,
	+63	
G-YI (SAT/PHASE)	–63 :	Perform color correction (saturation, hue) between green and yellow.
,	<u>+00</u> :	
SCUFE		
(SAT/PHASE)	-63 :	Perform yellow color correction (saturation, hue).
(-,, (-, -, -, -, -, -, -, -, -, -, -, -, -, -	<u>+00</u> :	
	+63	
YI-R (SAT/PHASE)	–63 :	Perform color correction (saturation, hue) between yellow and red.
(5/11/11/102)	<u>+00</u>	
	+63	
■COLOR CORRECT	ON OFF	Select whether or not to enable color correction for the selected GAIN switch (L/
OST III LOT	<u> </u>	M/H).
		ON: Enable correction. OFF: Disable correction.
SCUFE		

8-3-4 LOW SETTING

Items/ Data Saved	Adjustable Range	Remarks
■MASTER	-3dB	Select the master gain from -3, 0, 3, 6, 9,
GAIN	: 0dB	12, 15, 18, 21, 24, 27, or 30dB.
SCUFE	: 30dB	
H.DTL LEVEL	00	Set H.DTL LEVEL.
	<u>17</u>	
1 - 1 - 1 - 1	63	
V.DTL LEVEL	00	Set V.DTL LEVEL.
	<u>24</u>	
SCUFE	31	
DTL CORING	00	Set DTL CORING.
	<u>02</u>	
	15	
H.DTL FREQ.	00	Set a frequency (DTL width) at which H.DTL is added. The greater the value, the higher
	<u>20</u>	the frequency (the narrower the DTL).
SCUFE		
LEVEL DEPEND.	0	Set LEVEL DEPEND. No DTL is added to the portion whose
DEI END.	: 5	brightness is the setting value or less. When the GAMMA MODE SEL item is set to
		STD, each setting value represents brightness levels, as follows: 0 = about 0%,
		1 = about 4%, 2 = about 8%, 3 = about 12%, 4 = about 16%, 5 = about 20%.
S C U F E	0.05	Cat MACTED CAMMA is 0.04 store
GAMMA	0.35	Set MASTER GAMMA in 0.01 steps.
	0.45	
	0.75	Cot the gamma guyb few dayle arets
BLACK STRETCH	-3 :	Set the gamma curb for dark spots.
	OFF :	
	+3	
■MATRIX TABLE	OFF A	Select the color correction table.
SCUFE		
■COLOR	ON	Set the color correction to ON or OFF.
CORRECT	<u>OFF</u>	
SCUFE		

8-3-5 MID SETTING

Items/ Data Saved	Adjustable Range	Remarks
■MASTER GAIN	-3dB : 9dB	Select the master gain from -3, 0, 3, 6, 9, 12, 15, 18, 21, 24, 27, or 30dB.
SCUFE	30dB	
H.DTL LEVEL	00	Set H.DTL LEVEL.
	1 <u>14</u>	
SCUFE	63	
V.DTL LEVEL	00	Set V.DTL LEVEL.
	<u>20</u>	
SCUFE	31	
DTL CORING	00	Set DTL CORING.
	<u>03</u>	
SCUFE	15	
H.DTL FREQ.	00	Set a frequency (DTL width) at which H.DTL is added. The greater the value, the higher
	<u>20</u>	the frequency (the narrower the DTL).
SCUFE	31	
LEVEL DEPEND.)	0 1 : 5	Set LEVEL DEPEND. No DTL is added to the portion whose brightness is the setting value or less. When the GAMMA MODE SEL item is set to STD, each setting value represents brightness levels, as follows: 0 = about 0%, 1 = about 4%, 2 = about 8%, 3 = about 12%, 4 = about 16%, 5 = about 20%.
SCUFE		
MASTER GAMMA	0.35 : <u>0.45</u>	Set MASTER GAMMA in 0.01 steps.
SCUFE		
BLACK STRETCH	-3 : OFF	Set the gamma curb for dark spots.
SCUFE		
■MATRIX TABLE	OFF A	Select the color correction table.
SCUFE	В	
■COLOR CORRECT	ON OFF	Set the color correction to ON or OFF.
SCUFE		

<Note>

The items indicated by \blacksquare are the setting items for PAINT MENU SW(\blacksquare) R/W in the <SD CARD R/W SELECT> screen. The items without \blacksquare are the setting items for PAINT MENU LEVEL R/W. Please refer to [8-7-2 SD CARD R/W SELECT] for more information.

8-3-6 HIGH SETTING

Items/	Adjustable	
Data Saved	Range	Remarks
■MASTER	-3dB	Select the master gain from -3, 0, 3, 6, 9,
GAIN	: 18dB	12, 15, 18, 21, 24, 27, or 30dB.
SCUFE	30dB	
H.DTL LEVEL	00	Set H.DTL.
	<u>12</u>	
SCUFE	63	
V.DTL LEVEL	00	Set V.DTL LEVEL.
	1 <u>17</u>	
SCUFE	31	
DTL CORING	00	Set DTL CORING.
	08	
SCUFE	15	
H.DTL FREQ.	00	Set a frequency (DTL width) at which H.DTL
	<u>20</u>	is added. The greater the value, the higher the frequency (the narrower the DTL).
SCUFE	31	
LEVEL	0	Set LEVEL DEPEND.
DEPEND.)	3	No DTL is added to the portion whose brightness is the setting value or less.
	5	When the GAMMA MODE SEL item is set to STD, each setting value represents
		brightness levels, as follows: 0 = about 0%,
		1 = about 4%, 2 = about 8%, 3 = about 12%, 4 = about 16%, 5 = about 20%.
S C U F E	0.35	·
GAMMA	:	Set MASTER GAMMA in 0.01 steps.
	0.55	
S C U F E		Cat the games ough for dark and
STRETCH	-3 <u>:</u>	Set the gamma curb for dark spots.
	OFF :	
	+3	
■MATRIX TABLE	OFF A	Select the color correction table.
SCUFE		
■ COLOR	ON	Set the color correction to ON or OFF.
CORRECT	<u>OFF</u>	
SCUFE		

8-3-7 ADDITIONAL DTL


Items/ Data Saved	Adjustable Range	Remarks
KNEE APE LVL	OFF 1 2	Set KNEE APE LEVEL.
CHROMA DTL	5 OFF 0 : 5	Set the chroma detail. Detects the chroma edge and superimposes it on Y to enhance H.DTL. A greater value increases the correction.
DTL GAIN(+)	-31 : +00 :: +31	Adjust the detail level toward + (upwards).
DTL GAIN(-)	-31 : +00 : +31	Adjust the detail level toward the – (downwards).
DTL CLIP	00 : 63	Adjust the detail signal clip towards the + direction.
S C U F E	(R+G)/2 (G+B)/2 2G+R+B /4 (3G+R)/4 R G	Set the signal source for detail signal components.
H.DTL LINE MIX	1 <u>H</u> 2H	Set the scan line to generate the H.DTL signal.
SCUFE	ON OFF	ON/OFF switching for CORNER DTL mode, which enhances the resolution around the screen perimeter.

<Note>

The items indicated by \blacksquare are the setting items for PAINT MENU SW(\blacksquare) R/W in the <SD CARD R/W SELECT> screen. The items without \blacksquare are the setting items for PAINT MENU LEVEL R/W. Please refer to [8-7-2 SD CARD R/W SELECT] for more information.

8-3-8 SKIN TONE DTL

Items/	Adjustable	
Data Saved	Range	Remarks
■SKIN TONE	ON	Set the skin tone DTL to ON or OFF.
DTL	<u>OFF</u>	
SCUFE		
■SKIN TONE	ON	ON/OFF switching for ZEBRA within the
ZEBRA	<u>OFF</u>	SKIN TONE range.
SCUFE		
SKIN DTL CORING	0	Adjust the effect of SKIN TONE DTC CORING.
	<u>5</u>	CONING.
SCUFE	: 7	
SKIN TONE	-	Used when obtaining the target hue for
GET		SKIN TONE DTL. Align the center marker
		and the target object with each other.
Y MAX	000	Set the maximum value of the brightness
	: 190	signal to which SKIN TONE effect is
		enabled.
	255	
YMIN	000	Set the minimum value of the brightness
	010	signal to which the SKIN TONE effect is enabled.
SCUFE	:	onabled.
I CENTER	000	Set the center position on the I axis (the
I OZNIZII	:	area where SKIN TONE is enabled).
	022	
SCUFE	255	
I WIDTH	000	Set the area width where SKIN TONE is
	010	enabled along the I axis above and below the I CENTER.
COULT].	UICTOLNIEN.
S C U F E		Set the area width where SKIN TONE is
Q WIDTH	000	enabled along the Q axis above and below
	<u>005</u>	the I CENTER.
SCUFE	255	
Q PHASE	-128	Set the phase in the area where SKIN TONE
	:	is enabled based on the Q axis.
L	<u>+000</u> :	
SCUFE	+127	

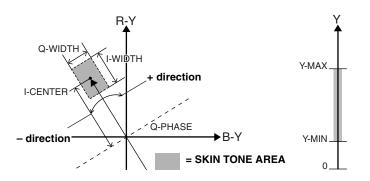

8-3-9 KNEE/LEVEL

Items/ Data Saved	Adjustable Range	Remarks
MASTER PED	-200	Set the master pedestal.
	±020	
SCUFE	+200	
■MANUAL KNEE	<u>ON</u> OFF	Set the mode when the AUTO KNEE switch is OFF. The KNEE POINT/SLOPE set value is enabled when this setting is ON.
SCUFE		, and the second
KNEE POINT	70.0%	Set the KNEE POINT position in 0.5% steps.
	85.0%	
SCUFE	107.0%	
KNEE SLOPE	00 : 50	Set the KNEE SLOPE. 0 setting is equal to KNEE OFF. <note></note>
SCUFE	99 (98)	The adjustable range when using the AJ-EC3E is from 00 to 98.
WHITE CLIP	ON OFF	Set the WHITE CLIP feature to ON or OFF. The WHITE CLIP LVL set value is enabled when this setting is ON.
WHITE CLIP	90%	Set WHITE CLIP LEVEL.
LVL	: 105%	Set WITTE OLIT LEVEL.
SCUFE	109%	
A.KNEE POINT	80%	Set the AUTO KNEE POINT position in
	<u>85%</u>	0.5% steps. This setting is enabled when the OUTPUT/AUTO KNEE selector switch is set
SCUFE	107%	to CAM.AUTO KNEE ON.
A.KNEE LVL	100	Set the AUTO KNEE LEVEL.
	105 105	
SCUFE	109	
A.KNEE RESPONSE S C U F E	1 : 4	Set the AUTO KNEE response speed. The smaller the setting value, the faster the response speed.

<Note>

The items indicated by \blacksquare are the setting items for PAINT MENU SW(\blacksquare) R/W in the <SD CARD R/W SELECT> screen. The items without \blacksquare are the setting items for PAINT MENU LEVEL R/W. Please refer to [8-7-2 SD CARD R/W SELECT] for more information.

8-3-10 GAMMA

	Ite	em	ıs/		Adjustable	Barrantia
D	ata	S	ave	ed	Range	Remarks
MA	ASTI	ER			0.35	Set the master gamma in 0.01% steps.
G/	MM	lΑ			: 0.45	
Ļ			_	_	:	
				E	0.75	
K	GAN	/IIVI	A		-15	Set the Rch gamma.
					<u>+00</u>	
s	С	U	F	Ε	+15	
В	GAN	1M	4		-15	Set the Bch gamma.
					: +00	
	-			_	:	
	С					
1 -	MM	IA N	MOI	DΕ	STD	Select the gamma.
SE	L				NEWS	STD: Standard gamma feature. This video gamma feature can
					FILM LIKE1	effectively reproduce gradations by
					FILM LIKE2	reducing whiteouts and blackouts
						when shooting an object with
						partially highlighted areas. This
						gamma is especially effective in the
						AUTO KNEE mode.
						FILM LIKE1:
						Cinema gamma feature for video.
						This gamma is set with scene file 4
						as the factory setting.
						FILM LIKE2:
						Cinema gamma feature for video.
						This gamma feature can reproduce
						gradations in highlighted areas better
						than FILM LIKE1 gamma. <notes></notes>
						Notes>Selecting NEWS gamma disables
						settings under the items KNEE SLOPE,
						KNEE POINT. and A.KNEE POINT
						outlined in [8-3-9 KNEE/LEVEL]. These
						settings are also disabled when NEWS
						gamma is selected with the USER switch.
						When FILELIKE1 or FILELIKE2 is
						selected, little change occurs and a
						certain curve is maintained when the
						setting value for the KNEE SLOPE item in
6	С		E	F	†	[8-3-9 KNEE/LEVEL] is 00 to 50.
5	U	U	-			


8-3-11 FLARE

Dat		m: Sa		ed	Adjustabl e Range	Remarks
R FL	.AF	RE			000 : 100	Set the R FLARE.
S	C	U	F	Ε	100	
G FL	AF	RE			000 : :100	Set the G FLARE.
S	С	U	F	Ε	100	
B GA	٩M	MĀ			000 : 100	Set the B FLARE.
S	C	U	F	Ε	100	

8-3-12 ■CAMERA SETTING

D		em Sa			Adjustable Range	Remarks
DE	TAI	L			<u>ON</u> OFF	Set the DTL (H, V) to ON or OFF.
S	С	U	F	Е		
2D	LP	F			ON OFF	ON/OFF switching for the two-dimensional LPF that reduces cross-color.
S	С	U	F	E		
HIC	ЗH	COI	OF	1	ON OFF	ON/OFF switching for the HIGH COLOR mode, which enhances the color dynamic
S	С	U	F	E		range.
GA	MN	1A			<u>ON</u> OFF	Set the gamma circuit to ON or OFF.
S	С	U	F	E		
TE	ST	SAV	V		ON OFF	Switch the test signal ON or OFF.
S	С	U	F	Е		
FL	ARE				ON OFF	Set the flare correction to ON or OFF.
S	С	U	F	Е		
H-f	C	IMC	PE.		<u>ON</u> OFF	ON/OFF switching for the H-F COMPE mode, which enhances the DTL in the high-
S	С	U	F	E		frequency range.

ZEBRA Pattern Display



<Note>

All items in CAMERA SETTING are setting targets of the item PAINT MENU SW(■) R/W in the <SD CARD R/W SELECT> screen.

8-4 VF

8-4-1 VF DISPLAY

Items/ Data Saved	Adjustable Range	Remarks
DISP CONDITION - C U F E	NORMAL HOLD	NORMAL: Display status constantly. HOLD: Display status only when the MODE CHECK switch is pressed.
- CUFE	1 2 <u>3</u>	Set the DISP MODE. Switch the camera's Warning/Message indication. Please refer to [4-7-4 Display Modes and Setting Changes/adjustment Result Messages] for more information.
VF OUT	Y NAM R G B	Select the VF output. Y: Brightness signal NAM: Output signal with the highest level among R, G, and B signals. R: Rch signal G: Gch signal B: Bch signal
- C U F E	0	Select the VF DTL.
- CUFE	: <u>3</u> :	Additionally enhance the DTL for the VF signal. 0 setting is the same DTL as the primary scan lines.
ZEBRA1 DETECT	0%	Set the ZEBRA1 detection level (IRE value).
- CUFE	70% :	
ZEBRA2 DETECT	0% : 85%	Set the ZEBRA2 detection level (IRE value).
- C U F E	109% ON	Set the ZEBRA2 to ON, OFF, or SPOT.
- CUFE	<u>SPOT</u>	Set the ZEBRAZ to ON, OFF, of SPO1.
- C U F E	OFF 10% 15% 20% 25% 30% 35%	Set the camera incoming light volume at which to display LOW LIGNT.
DISP.	ON OFF	Set the menu display on the VF to ON or OFF when the ECU is connected.
50M INDICATOR - C U F E	ON OFF	Set the 50M recording indication to ON or OFF.
MARKER/CHAR	50% 60% 70% 80% 90% 100%	Adjust the brightness of markers and characters displayed on the VF.

8-4-2 VF MARKER

Items/ Data Saved	Adjustable Range	Remarks
TABLE	A	Select the VF MARKER setting table.
	В	First, select table A or B, then set the items below for each table.
- CUFE		below for each table.
CENTER MARK	OFF	Switch the center mark.
	1	OFF: Do not display center mark.
	2	1: + (large) 2: Hollow (large)
	3	2: Hollow (large) 3: + (small)
	4	4: Hollow (small)
- C U F E		Tioness (eman)
SAFETY ZONE	OFF	Select the frame type for the safety zone.
	1	OFF: Do not display frame.
	2	1: Box
- C U F E		2: Corner frame
SAFETY AREA	80%	Set the position of the safety zone.
	90%	
	:	
- CUFE		
FRAME SIG	4:3	Set the frame marker.
	13:9	Only enabled when REC MODE is set to 16:9.
	14:9	The VISTA ratio is 16:8.65.
- C O 1 C	VISTA	THE VISTA IAIIO IS 10.0.03.
FRAME MARK	ON	Set the frame marker to ON or OFF.
- CUFE	<u>OFF</u>	
FRAME LVL	0	Set the level outside the frame marker.
	: 15	0: Equivalent to signal OFF.
	12	15: Same brightness as center area.
		This setting, however, is disabled if the FRAME SIG is set to VISTA.
- C U F E		LITE FRANCE SIG IS SELLO VISTA.

8-4-3 **USER BOX**

Iten Data S		ed	Adjustable Range	Remarks
USER BO			ON <u>OFF</u>	Select whether or not to display the USER BOX.
USER BO		Ε	1	Set the width of the USER BOX.
	WIDTH		13 : 100	
	USER BOX		1 : : 13	Set the height of the USER BOX.
- C U	F	Ε	: 144	
POS	OX H		–50 : <u>+00</u>	Set the horizontal position of the USER BOX.
- C U			+50 -144	Cat the vertical position of the LICED DOV
POS	JX V		-144 : +000	Set the vertical position of the USER BOX.
- C U	F	Е	+144	

8-4-4 VF INDICATOR1

Items/ Data Saved	Adjustable Range	Remarks
EXTENDER	ON OFF	Set the extender indication to ON or OFF.
- CUFE SHUTTER	ON	Set the shutter aread indication to ON or
	OFF	Set the shutter speed indication to ON or OFF.
- C U F E FILTER	ON	Set the filter No. indication to ON or OFF.
	ON OFF	Set the litter No. Indication to ON or OFF.
- CUFE WHITE	ON	Set the AWB PRE/A/B indication to ON or
	OFF	OFF.
- C U F E		
GAIN	ON OFF	Set to ON or OFF the indications for current gain setting, S.GAIN, and DS.GAIN.
- C U F E		
RIS - C U F E	OFF IRIS S+IRIS S	OFF: Disable indications of both the super iris ON status and the iris value. IRIS: Enable only the iris value indication. S+IRIS: Enables indications of the super iris ON status and the iris value. S: Enable indication of the super iris ON status. (The iris value indication and the iris override indication/non indication are interlocked.)
CAMERA ID	BAR CAM ALWAYS OFF	Select when to enable the ID mix during recording. BAR: Enable when recording color bars. CAM: Enable when recording camera image. ALWAYS: Enable always. OFF: Disable ID mix.
- CUFE	UPPER R	Set the camera ID recording position.
- CUFE	UPPER L LOWER R LOWER L	UPPER R: Upper right. UPPER L: Upper left. LOWER R: Lower right. LOWER L: Lower left.
DATE/TIME	ON	Select whether or not to simultaneously mix
- CUFE	<u>OFF</u>	the year/month/date and hour/minute/ second when recording the camera ID.
ZOOM LVL	ON	Set the zoom position indication to ON or
- CUFE	OFF	OFF.
COLOR TEMP	ON OFF	Set the color temperature indication to ON or OFF.
CAMERA MODE C U F E	<u>ON</u> OFF	Set the camera operation mode indication to ON or OFF.

8-4-5 VF INDICATOR2

	A .II I. I.	
Items/ Data Saved	Adjustable Range	Remarks
P2CARD REMAIN	TOTAL ONE-CARD OFF	Select the indication mode for the P2 card's remaining capacity. TOTAL: Display the total remaining capacity of all P2 cards in slots. ONE-CARD: Display the remaining capacity of the P2 card currently used for recording. OFF: Disable the remaining capacity
- C U F E		indication.
BATTERY - C U F E	ON OFF	Set the battery voltage indication to ON or OFF.
AUDIO LVL	ON OFF	Set the audio lever meter indication to ON or OFF.
- C U F E		
TC	TCG TCR TCG/TCR OFF	Select the time code to display. TCG: Display the time code generator value in E-E mode. TCR: Display the time code reader value in V-V mode. TCG/TCR:
- C U F E		Display the time code generator value in E-E mode, and the time code reader value in V-V mode. OFF: Disable the time code display.
SYSTEM INFO	ALWAYS NORMAL OFF	Select the method of displaying system information and warnings. ALWAYS: Always display warnings. NORMAL: Display warnings for 3 seconds only when problems occur.
- C U F E		OFF: Display no warnings other than "TURN POWER OFF".
SAVE LED	P2CARD SAVE	Set the SAVE lamp function. P2CARD: The lamp blinks in synch with the warning message when the P2 card's remaining recording capacity is getting low. SAVE: The lamp lights up when the SAVE ON/OFF switch is set to ON and the output system assigned in [8-2-2 OPTION MODE] is in the save mode.
DV F E	<u>ON</u>	DV Select whether or not to enable DV
- C U F E	OFF	indication when the format is set to DV. ON: Enable DV indication. OFF: Disable DV indication.
VOICEMEMO - C U F E	<u>ON</u> OFF	Select whether or not to enable the Vindication during voice memo recording. ON: Enable DV indication. OFF: Disable DV indication.

8-4-6 MODE CHECK IND

D	Items/ Data Saved			ed	Adjustable Range	Remarks
	ATU				<u>ON</u> OFF	Select whether or not to display the status indication during MODE CHECK.
_	С	U	F	E		
!LE	D				<u>ON</u> OFF	Select whether or not to display the cause indication screen when the ! LED turns on
-	С	U	F	E		during MODE CHECK
FU	FUNCTION				<u>ON</u> OFF	Select whether or not to display the FUNCTION indication screen during MODE
-	С	U	F	Е		CHECK.
AU	DIC)			<u>ON</u> OFF	Select whether or not to display the AUDIO indication screen during MODE CHECK.
-	С	U	F	E		
P.C	N I	ND			<u>ON</u> OFF	Select whether or not to display the status indication screen after the power is turned ON.
-	С	U	F	E		ON.

8-4-7 !LED

Items/	Adjustable	
Data Saved	Range	Remarks
GAIN(0dB)	<u>ON</u>	Select whether or not to illuminate when
	OFF	GAIN is set to other than 0 dB.
- C U F E		
GAIN (-3dB)	ON OFF	Select whether or not to illuminate when GAIN is set to other than –3 dB.
- CUFE	_	GAMA 10 OCT TO OTHER THAIR O' GD.
DS.GAIN	ON	Select whether or not to illuminate when
	OFF	DS.GAIN (storage gain) is ON.
- C U F E		
SHUTTER	<u>ON</u>	Select whether or not to illuminate when the
- CUFE	OFF	shutter is set to ON.
WHITE	ON	Select whether or not to illuminate when the
PRESET	OFF	WHITE BAL switch is set to PRST.
- C U F E		
EXTENDER	ON	Select whether or not to illuminate when the
	OFF	lens is in EXTENDER mode.
- CUFE	ON	
BLACK STR	ON OFF	Select whether or not to illuminate when BLACK STRETCH is used.
- CUFE		
MATRIX	ON	Select whether or not to illuminate when
	<u>OFF</u>	MATRIX is set to ON.
- C U F E		
COLOR CORRECTION	ON OFF	Select whether or not to illuminate when COLOR CORRECTION is set to ON.
- CUFE		COLOR CORRECTION IS SELECTION.
FILTER	ON	Select whether or not to illuminate with filter
1 121211	OFF	combinations other than the CC filter "B"
- C U F E		(3200 K) and ND filter "1" (CLEAR).
SUPER V	ON	Select whether or not to illuminate when
	<u>OFF</u>	SUPER V is set to ON.
- CUFE		Colort whather an pot to illuminate and a second
50M/25M/DV	OFF W/O 50M	Select whether or not to illuminate according to the recording mode.
	W/O 25M	OFF: Does not illuminate in any recording
	W/O DV	mode. W/O 50M:
		Illuminate except in DVCPRO50
		mode. W/O 25M:
		Illuminate except in DVCPRO mode.
		W/O DV:
- C U F E		Illuminate except in DV mode.
ATW	ON	Select whether or not to illuminate when
	<u>OFF</u>	auto-tracking white balance is allocated to the WHITE BAL switch B.
- C U F E	ONL	
D.ZOOM	ON OFF	Select whether or not to illuminate during digital zoom operation.
- CUFE	<u> </u>	

<Note>

If both GAIN (0 dB) and GAIN (-3 dB) are set to ON, the LED illuminates except when GAIN is adjusted to 0 dB and -3 dB.

The $\underline{\hspace{1cm}}$ in the Adjustable Range column indicates the preset mode.

8-5 CAM OPERATION

8-5-1 CAMERA ID

D	Items/ Data Saved			ed	Adjustable Range	Remarks
ID1	ID1					Setting 1 for the CAMERA ID recorded on color bars. Up to 10 characters are allowed
-	С	U	F	-		for this setting.
ID2	2					Setting 2 for the CAMERA ID recorded on color bars. Up to 10 characters are allowed
-	С	U	F	_		for this setting.
ID3	ID3					Setting 3 for the CAMERA ID recorded on color bars. Up to 10 characters are allowed
-	С	U	F	_		for this setting.

<Note>

This setting is canceled when READ FACTORY DATA is selected

8-5-2 SHUTTER SPEED

Da	Items/ Data Saved			ed	Adjustable Range	Remarks
SYI SC.	AN			_	ON OFF	Allocate SYNCHRO SCAN as a shutter speed selectable by the shutter switch.
SU	PEI				ON OFF	Allocate SUPER V as a shutter speed selectable by the shutter switch.
PO	SIT	TON U	l1		<u>ON</u> OFF	Allocate the shutter speed set by POSITION SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>
PO	SIT		12		ON OFF	Allocate the shutter speed set by POSITION2 SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>
PO		U		E	ON OFF	Allocate the shutter speed set by POSITION3 SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>
	С	U	F	E	<u>ON</u> OFF	Allocate the shutter speed set by POSITION4 SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>
PO		U		E	<u>ON</u> OFF	Allocate the shutter speed set by POSITION5 SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>
PO	-	U		E	<u>ON</u> OFF	Allocate the shutter speed set by POSITION6 SELECT in the <shutter select=""> screen as the shutter speed selectable by the shutter switch.</shutter>

8-5-3 SHUTTER SELECT

Items/	Adjustable	
Data Saved	Range	Remarks
SUPER V MODE	FRM1 FRM2	Select the SUPER V switching mode. FRM1: Normal mode. FRM2: After-image reduction mode. <note> The SUPER V mode increases vertical resolution by directly outputting the photo-diode vertical signal from the CCD. FRM1 sets the accumulation level to 1/25th second. FRM sets the level to 1/50th second, reducing sensitivity by half.</note>
POSITION1 SEL	1/60 1/120 1/250 1/500 1/1000 1/2000	Select the shutter speed to be allocated to POSITION1.
POSITION2 SEL	1/60 1/120 1/250 1/500 1/1000 1/2000	Select the shutter speed to be allocated to POSITION2.
POSITION3 SEL	1/60 1/120 <u>1/250</u> 1/500 1/1000	Select the shutter speed to be allocated to POSITION3.
POSITION4 SEL	1/60 1/120 1/250 1/500 1/1000 1/2000	Select the shutter speed to be allocated to POSITION4.
POSITIONS SEL	1/60 1/120 1/250 1/500 1/1000 1/2000	Select the shutter speed to be allocated to POSITION5.
POSITION6 SEL - C U F E	1/60 1/120 1/250 1/500 1/1000 1/2000	Select the shutter speed to be allocated to POSITION6.

8-5-4 **USER SW**

	Adjustable	Remarks
Data Saved USER MAIN SW	Range	Allocate the USER MAIN button.
- CUFE	S.GAIN DS.GAIN S.IRIS I.OVR S.BLK B.STR D.ZOOM ATW Y GET NEWS-G. AUDIO CH1 AUDIO CH2 REC SW RET SW	Allocate the OSEA MAIN button.
USER1 SW	INH S.GAIN DS.GAIN S.IRIS I.OVR S.BLK B.STR D.ZOOM ATW Y GET NEWS-G. AUDIO CH1 AUDIO CH2 REC SW RET SW	Allocate the USER1 button.
USER2 SW	INH S.GAIN DS.GAIN S.IRIS I.OVR S.BLK B.STR D.ZOOM ATW Y GET NEWS-G. AUDIO CH1 AUDIO CH2 REC SW RET SW SLOT SEL	Allocate the USER2 button.

<Note>

For each function of the USER switches, refer to [4-9-4 Assigning Functions to USER MAIN, USER1 and USER2 Buttons].

8-5-5 SW MODE

Items/	Adjustable	Pomarke		
Data Saved	Range	nemarks		
RET SW	REC CHECK	Select the RET switch function. REC CHECK:		
	CAM RET	Perform REC REVIEW.		
		CAM RET: Perform return signal output.		
- C U F E	OFF	Set the super black level.		
O.DER EVE	<u>-10</u>	Set the super black level.		
	-20 -30			
- C U F E	ON	Select whether or not to use the AUTO		
SW	OFF	KNEE switch.		
S C U F E				
SHD,ABB SW CTL	<u>ON</u> OFF	Select whether or not to enable the automatic black shading adjustment if the		
OIL	OFF	ABB switch has been pressed for 5 seconds		
- CUFE		or more.		
COLOR BARS	SMPTE FULL	Select the color bars to use. SMPTE: Use the SMPTE color bars.		
	BARS	FULL BARS: Use full color bars.		
	SPLIT	SPLIT: Use SPLIT color bars. ARIB: Use ARIB multi-format color		
- CUFE	ARIB	bars.		
S.GAIN OFF	<u>L/M/H</u>	Select when the SUPER GAIN mode is		
	S.GAIN	disabled. L/M/H: Disabled when the gain selector		
		switch is operated.		
		S.GAIN: Disabled only with the S.GAIN switch (USER button).		
DS.GAIN OFF	L/M/H	Select when the DIGITAL SUPER GAIN		
DS.GAIN OFF	DS.GAIN	mode (stored gain) is disabled.		
		L/M/H: Disabled when the gain selector switch is operated.		
		DS.GAIN: Disabled only with the DS.GAIN		
- CUFE		switch (USER button).		
ECU DATA	ON	ON: Store the values set and adjusted with the ECU when the ECU is		
SAVE	<u>OFF</u>	disconnected from the camera-		
		recorder. OFF: Does not store camera-related set		
- C U F -		values.		
	R.REVIEW	Select the camera-recorder operation to be		
SW	PLAY	performed when the ECU REC CHECK		
		button is pressed. R.REVIEW: Perform REC REVIEW.		
		PLAY: Play back the most-recently recorded clip from the beginning.		
-CUFE		recorded clip from the beginning.		

8-5-6 WHITE BALANCE MODE

Items/	Adjustable	
Data Saved	Range	Remarks
FILTER INH	<u>ON</u> OFF	Select whether or not to retain white balance memory (A/B) data for individual CC filters. ON: Retain data in the A/B memory (2 memory areas) regardless of the CC filters.
- C U F E		OFF: Retain data for individual CC filters.
SHOCKLESS AWB	OFF FAST NORMAL SLOW1 SLOW2 SLOW3	Set SHOCKLESS AWB to ON (FAST/ NORMAL/SLOW1-3) or OFF. SHOCKLESS AWB eliminates the shock caused by switching the WHITE BAL switch's PRST/A/B setting. The switching time can also be selected.
AWB AREA	25% 50% 90%	Switch the AWB detection area. 25%: Detect 25% of area around the screen center. 50%: Detect 50% of area around the screen center. 90%: Detect 90% of area in the full screen.
- CUFE		
AWB & ABB OFFSET	ON OFF	Select whether or not to reset the GAIN and PED values in the ROP menu when AWB and ABB are executed. ON: Do not reset. OFF: Reset values.
COLOR TEMP	3200K	Set the AWB PRE color temperature.
PRE CUFE	5600K	Set the AWB FIL Color temperature.
AWB A	MEM VAR	Select the function to be allocated to WHITE BAL switch A. MEM: Function to store values set by executing the auto white balance. VAR: Function to apply color temperature
- C U F E		set by COLOR TEMP A.
COLOR TEMP A - C U F E	3200K : 5600K	Set the color temperature when VAR is selected under AWB A.
AWB B	MEM ATW VAR	Select the function to be allocated to WHITE BAL switch B. MEM: Function to store values set by executing auto white balance. ATW: Function to execute auto-tracking white balance. VAR: Function to apply color temperature
- CUFE		set by COLOR TEMP B.
COLOR TEMP B	3200K : 5600K	Set the color temperature when VAR is selected under AWB B.
ATW SPEED	NORMAL SLOW	Select the control speed for the auto-tracking white balance.
- CUFE	FAST	

8-5-7 USER SW GAIN

Items/ Data Saved	Adjustable Range	Remarks
S.GAIN	*	Select whether or not to enable 30dB for
30 dB	•	SUPER GAIN.
		*: Enable.
- CUFE		•: Disable.
36 dB	*	Select whether or not to enable 36dB for
	•	SUPER GAIN.
		*: Enable.
- CUFE		•: Disable.
42 dB	*	Select whether or not to enable 42dB for
	•	SUPER GAIN.
		*: Enable.
- CUFE		•: Disable.
48 dB	*	Select whether or not to enable 48dB for
	•	SUPER GAIN.
		*: Enable.
- C U F E		•: Disable.
DS.GAIN	*	Select whether or not to enable 6 dB ↑ (1/25)
6 dB ↑	•	for DS.GAIN.
(1/25)		*: Enable.
- C U F E		•: Disable.
12 dB ↑	*	Select whether or not to enable 12 dB ↑ (1/12)
(1/12)	 •	for DS.GAIN.
		*: Enable.
- C U F E		•: Disable.
20 dB ↑	*	Select whether or not to enable 20 dB ↑ (1/5)
(1/5)	•	for DS.GAIN.
		*: Enable.
- CUFE		•: Disable.
- - -		

8-5-8 IRIS

Items/ Data Saved	Adjustable Range	Remarks
A.IRIS LEVEL	000	Set the target value for auto iris.
	050 :	
- C U F E	100	
A.IRIS PEAK/ AVE	000	Determine the peak-to-standard ratio for the auto iris.
	040	A larger value sets the auto iris to respond to
	100	the peak in the IRIS detection window, while a smaller value sets it to respond to the
- C U F E		average value in the window.
A.IRIS MODE	NORM1	Select the auto iris detection window.
	NORM2 CENTR	NORM1: The window closer to the center of the screen.
	OLIVIII	NORM2:The window closer to bottom of the
		screen. CENTR: The spot window in the center of the
-CUFE		screen.
S.IRIS LEVEL	000	Set the target value for the super iris.
	<u>080</u>	
- C U F E	100	
IRIS GAIN	CAM	Select which unit controls IRIS GAIN.
	<u>LENS</u>	<note> Lenses with an extender, such as ×2, ×0.8 sold before FUJINON DIGI POWER, perform IRIS compensation while enabling the extender. Therefore, if this setting is switched to CAM, the camera's iris control will not operate properly.</note>
- C U F E		
IRIS GAIN VALUE	01 : <u>08</u>	Set the adjustable value for IRIS GAIN. This setting is effective when CAM is selected for IRIS GAIN.
- C U F E	: 20	

8-6 MAIN OPERATION

8-6-1 BATTERY/P2CARD

Items/	Adjustable	Dom - :-!
Data Saved	Range	Remarks
BATTERY SELECT	PRO14 TRIM14 HYTRN50 HYTRN100 HYTRN120 DIONIC90 DIONIC160 HP-90L BP-H120 NP-L50 ENDURA50 ENDURA50 ENDURA80 BP-L60/90 NiCd14 NiCd13 NiCd12 TYPE A TYPE B	Select the battery to use. Remaining capacity detection is also performed according to the selected battery. The selectable battery types change depending on the settings under [8-6-2 BATTERY SETTING1] and [8-6-3 BATTERY SETTING2].
EXT DC IN SELECT	AC ADPT PRO14 TRIM14 HYTRN50 HYTRN100 HYTRN120 DIONIC90 DIONIC160 HP-90L BP-H120 NP-L50 ENDURA50 ENDURA50 ENDURA80 BP-L60/90 NiCd14 NiCd13 NiCd12 TYPE A TYPE B	Set the remaining capacity detection type when a battery is connected to the DC IN connector. Remaining capacity detection is also performed according to the selected battery type. The selectable battery types change depending on the settings under [8-6-2 BATTERY SETTING1] and [8-6-3 BATTERY SETTING2]. <note> The % display is disabled even when a digital battery is connected to the DC IN connector.</note>
BATT NEAR END ALARM	ON OFF	Select whether or not to set the alarm to beep for BATT NEAR END ALARM.
BATT NEAR END CANCEL	ON OFF	If set to ON, the warning tone and indication can be canceled by pressing the MODE CHECK button when BATT NEAR END ALARM is triggered.
BATT END ALARM	ON OFF	Select whether or not to set the alarm to beep for BATT END ALARM.
BATT REMAIN FULL	100% 70%	Set the display content of the remaining battery capacity indicator bars in the display window when using a digital battery. 100%: Indicate FULL at 100% capacity. 70%: Indicate FULL at 70% capacity.

Items/ Adjustable Remarks **Data Saved** Ŕange CARD NEAR ON Select whether or not to set the alarm to beep for P2 CARD NEAR END ALARM. END ALARM <u>OFF</u> - C U F -CARD NEAR 3min Set the remaining time to indicate the P2 END TIME 2min CARD NEAR END TIME alarm. - C U F CARD END <u>ON</u> Select whether or not to set the alarm to ALARM OFF beep for P2 CARD END ALARM. - C U F -CARD REMAIN/ 5min/■ Set the length of time for one segment (■) of the P2 card's remaining capacity indicator 3min/■ **5min:** One segment represents 5 minutes. **3min:** One segment represents 3 minutes. - C U F

8-6-2 BATTERY SETTING1

END /e .1 V ECT.
re .1 V
/e 1 V ECT.
/e 1 V ECT.
/e 1 V ECT.
.1 V ECT.
.1 V ECT.
.1 V ECT.
ECT.
END
END
LIND
u .1 V
. I V
ECT.
END
u
.1 V
ECT.
END
LIND
u .1 V
•
ECT.
END
u
.1 V

Items/ Data Saved	Adjustable Range	Remarks
DIONIC90	*	Enable selection under BATTERY SELECT.
	•	*: Enable selection.
		• : Disable selection.
	AUTO	Select auto or manual to set the NEAR END
	MANUAL	voltage. AUTO: Set voltage automatically.
		MANUAL: Set voltage manually.
	11.0	When MANUAL is selected in the menu
	: 13.6	above, set the NEAR END voltage in 0.1 V steps.
- C U F -	i 15.0	
DIONIC160	*	Enable selection under BATTERY SELECT.
	•	*: Enable selection. •: Disable selection
	AUTO	Disable selection. Select auto or manual to set the NEAR END
	MANUAL	voltage.
	100,110,12	AUTO: Set voltage automatically.
		MANUAL: Set voltage manually.
	11.0	When MANUAL is selected in the menu
	: 13.3	above, set the NEAR END voltage in 0.1 V
L., ., ., .	:	steps.
- C U F -	15.0	
HP-90L	*	Enable selection under BATTERY SELECT.
	•	*: Enable selection.
	AUTO	Disable selection. Select auto or manual to set the NEAR END
	MANUAL	voltage.
	WIANOAL	AUTO: Set voltage automatically.
		MANUAL: Set voltage manually.
	11.0	When MANUAL is selected in the menu
	12.4 ·	above, set the NEAR END voltage in 0.1 V steps.
- C U F -	15.0	
BP-H120	*	Enable selection under BATTERY SELECT.
	•	*: Enable selection. •: Disable selection.
	AUTO	Disable selection. Select auto or manual to set the NEAR END
	MANUAL	voltage.
	100,110,12	AUTO: Set voltage automatically.
		MANUAL: Set voltage manually.
	11.0	When MANUAL is selected in the menu
	: 11.5	above, set the NEAR END voltage in 0.1 V steps.
- C U F -	15.0	οιορο.
NP-L50	*	Enable selection under BATTERY SELECT.
	•	*: Enable selection.
		•: Disable selection.
	<u>AUTO</u>	Select auto or manual to set the NEAR END
	MANUAL	voltage. AUTO: Set voltage automatically.
		AUTO: Set voltage automatically. MANUAL: Set voltage manually.
	11.0	When MANUAL is selected in the menu
	:	above, set the NEAR END voltage in 0.1 V
	<u>13.0</u>	steps.
- C U F -	15.0	

Items/ Data Saved	Adjustable Range	Remarks
ENDURA50	*	Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
	AUTO MANUAL	Select auto or manual to set the NEAR END voltage. AUTO: Set voltage automatically.
	11.0 : 13.1	MANUAL: Set voltage manually. When MANUAL is selected in the menu above, set the NEAR END voltage in 0.1 V steps.
- C U F -	15.0 <u>*</u>	Enable selection under BATTERY SELECT.
	•	*: Enable selection. •: Disable selection.
	AUTO MANUAL	Select auto or manual to set the NEAR END voltage. AUTO: Set voltage automatically. MANUAL: Set voltage manually.
	11.0 : 13.5	When MANUAL is selected in the menu above, set the NEAR END voltage in 0.1 V steps.
- C U F -	15.0	
BP-L60/90	*	Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
	AUTO MANUAL	Select auto or manual to set the NEAR END voltage. AUTO: Set voltage automatically. MANUAL: Set voltage manually.
	11.0 : 11.2	When MANUAL is selected in the menu above, set the NEAR END voltage in 0.1 V steps.
- C U F -	15.0	

<Note>

The remaining battery capacity for digital batteries is displayed as % inside the viewfinder (PRO14/TRIM14/HYTRON50/HYTRON100/HYTRON120/DIONIC90/DIONIC160/NP-L50). The BATT NEAR END alarm, however, is triggered according to the setting on the <BATTERY SETTING1> screen, regardless of the % indication.

8-6-3 BATTERY SETTING2

Items/ Data Saved	Adjustable Range	Remarks
NiCd14	<u>*</u>	Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
NEAR END	11.0	Set the NEAR END voltage in 0.1 V steps.
	13.6 : 15.0	
END	11.0	When MANUAL is selected in the menu
	: 13.2	above, set the END voltage in 0.1 V steps.
- C U F -	15.0	
NiCd13	<u>*</u>	 Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
NEAR END	11.0	Set the NEAR END voltage in 0.1 V steps.
	<u>12.7</u>	
END	15.0	
END	11.0	When MANUAL is selected in the menu above, set the END voltage in 0.1 V steps.
	12.2 :	
- C U F - NiCd12	15.0 *	Enable selection under BATTERY SELECT.
NIOU 12	•	*: Enable selection. •: Disable selection.
NEAR END	11.0	Set the NEAR END voltage in 0.1 V steps.
	<u>11.5</u>	
END	15.0	NAME OF BRIDE
END	11.0 : 11.2	When MANUAL is selected in the menu above, set the END voltage in 0.1 V steps.
- C U F -	15.0	
TYPE A	*	Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
FULL	12.0	Set the voltage to display the FULL
	15.0	indication in 0.1 V steps.
	17.0	
NEAR END	11.0	Set the NEAR END voltage in 0.1 V steps.
	13.6 	
END	15.0 11.0	When MANUAL is selected in the menu
	: 13.2	above, set the END voltage in 0.1 V steps.
- C U F -	: 15.0	

Items/ Data Saved	Adjustable Range	Remarks
TYPE B	*	Enable selection under BATTERY SELECT. *: Enable selection. •: Disable selection.
FULL	12.0 : 13.5 : 17.0	Set the voltage to display the FULL indication in 0.1 V steps.
NEAR END	11.0 : 11.8 : 15.0	Set the NEAR END voltage in 0.1 V steps.
END	11.0 : 11.1	When MANUAL is selected in the menu above, set the END voltage in 0.1 V steps.
- C U F -	15.0	

8-6-4 MIC/AUDIO1

Itomo/	A divetable	
Items/ Data Saved	Adjustable Range	Remarks
FRONT VR CH1	FRONT W.L. REAR ALL OFF	Select whether or not to enable the FRONT AUDIO LEVEL control for the signal selected as the input signal to AUDIO CH1. FRONT: Only enabled when FRONT is selected.
	<u>OFF</u>	W.L.: Only enabled when WIRELESS is selected.
		REAR:Only enabled when REAR is selected.
- C U F -	_	ALL: Enabled for any input selected. OFF: Disabled for any input selected. Recording level does not change by turning the volume control.
FRONT VR CH2	W.L. REAR	Select whether or not to enable the FRONT AUDIO LEVEL control for the signal selected as an input signal to AUDIO CH2. FRONT: Only enabled when FRONT is
	ALL OFF	selected. W.L.: Only enabled when WIRELESS is
		selected. REAR: Only enabled when REAR is selected.
		ALL: Enabled for any input selected. OFF: Disabled for any input selected. Recording level does not change by
- CUF-	FRONT	turning the volume control. Select the microphone low-cut filter.
CH1	REAR W.L.	Goldet the microphone for our such micro.
- C U F -	OFF	
MIC LOWCUT CH2	FRONT REAR W.L.	Select the microphone low-cut filter.
- C U F -	OFF	
MIC LOWCUT CH3	FRONT REAR W.L.	Select the microphone low-cut filter.
- C U F -	<u>OFF</u>	
MIC LOWCUT CH4	FRONT REAR W.L.	Select the microphone low-cut filter.
- C U F -	OFF	
LIMITER CH1	ON OFF	Select the limiter.
LIMITER CH2	ON	Select the limiter.
- CUF-	<u>OFF</u>	
AUTO LEVEL CH3	ON OFF	Select the level setting method.
- C U F -		
AUTO LEVEL CH4	<u>ON</u> OFF	Select the level setting method.
- C U F -	SW	Select the signals to be recorded in CH3
CH3/CH4	CH1/2	select the signals to be recorded in Cris and CH4. SW: According to camera's CH3 and CH4 selector switches.
- CUF-		CH1/2: Record same signals as CH1 and CH2.
25M REC CH	2CH	Select the audio channels to be recorded in
SEL	4CH	the DVCPRO and DV formats. 2CH: Only recorded in CH1 and CH2. 4CH: Recorded in all channels from CH1
- C U F -		to CH4.

Items/ Data Saved	Adjustable Range	Remarks
- CUF-	NORMAL ALWAYS OFF CHSEL	Select the test signal. NORMAL: Output test tones to CH1/2 when the OUTPUT/AUTO KNEE selector switch is set to BARS and the AUDIO IN switch CH1 is set to FRONT. ALWAYS: Output test tones to CH1/2 when OUTPU/AUTO KNEE selector switch is set to BARS. OFF: Disable test tone output. CHSEL: Output test tone to the channels where the AUDIO IN switch CH1 or CH2 is set to FRONT when OUTPUT/AUTO KNEE selector switch is set to BARS. The test tone is not output to CH3 and CH4.

8-6-5 MIC/AUDIO2

Items/ Data Saved	Adjustable Range	Remarks
FRONT MIC	<u>ON</u>	Select the phantom power supply for the
POWER	OFF	front microphone.
- C U F -		
REAR MIC	<u>ON</u>	Select the phantom power supply for the
POWER	OFF	rear microphone.
- C U F -		
AUDIO OUT	ON OFF	Set the audio output circuit. OFF: Power-down output circuit to disable output.
- C U F -		ON: Enable output.
MONITOR SELECT	STEREO MIX	Select the signal format for the monitor output.
- C U F -		·
FRONT MIC	-40dB	Select the front microphone input level.
LEVEL	-50dB	
- C U F -		
REAR MIC CH1	-50dB	Select the rear microphone input level.
LVL	<u>-60dB</u>	·
- C U F -		
REAR MIC CH2	-50dB	Select the rear microphone input level.
LVL	<u>-60dB</u>	
- C U F -		
REAR LINE IN	0dB	Select the rear line input level.
LVL	+4dB	
- C U F -		
AUDIO OÙT LVL	<u>0dB</u> +4dB	Select the audio output level.
- CUF-		
HEADROOM	18dB	Set the headroom (standard level).
- CUF-	20dB	(
WIRELESS	ON	Select whether or not to enable the alarm to
WARN	<u>OFF</u>	trigger for poor wireless receiver reception.
- CUF-		

8-6-6 TC/UB

Items/ Data Saved	Adjustable Range	Remarks
UB MODE	USER TIME DATE EXT TCG FRM RATE REGEN	Select the user bits mode. USER: Select UB value set in the LCD section. TIME: Select local time (hours, minutes, seconds). DATE: Select local date and time (2 last digits of year, month, date, time). EXT: Slaved to UB from TC-IN. If reading fails, USER value is retained. TCG: TCG value enters UB. FRM RATE: Select same camera shoting information (frame rate, etc.) with the VAUX UB (VITC UB). REGEN:Read out value stored in the card and record value continuously.
VITC UB MODE	USER/EXT TIME DATE TCG ERM RATE REGEN	Select the user bits mode for VAUX TC (VITC). USER/EXT: If UB MODE is set to EXT, the EXT value is recorded. If not, USER value set by UB is recorded. TIME: Select local time (hours, minutes, seconds). DATE: Select local date and time (2 last digits of year, month, date, time). TCG: TCG value enters UB. FRM RATE: Select same camera shoting information (frame rate, etc.) with the VAUX UB (VITC UB). REGEN:Read out value stored in card and record value continuously.
TCG SET HOLD	ON <u>OFF</u>	ON/OFF switching for the feature that always starts recording (when the power is turned ON again) the TCG value that was set before the power is turned OFF.
	REGEN PRESET	For the first recording after the power is turned on, a P2 card is inserted and then switching from this P2 card to another recording-target P2 card is performed, select whether or not to regenerate the time code as the value on the new P2 card. REGEN: For clips recorded on the recording-target P2 card, regenerate the time code as the time code of the clip that has the most recent date and time. PRESET: Use the camera-recorder's internal time code. <note> Set the date and time accurately. For guidance on setting, see [4-5-2 Setting the lateral Clock's Date and Time]</note>
POFF LCD DISPLAY	<u>ON</u> OFF	Internal Clock's Date and Time]. Select whether or not to display the time code setting and counter indication on the LCD monitor when the power is turned OFF. ON: Display setting and indication while the power is turned OFF. OFF: Power-down LCD monitor while camera power is turned OFF. Setting and indication disabled.

Items/ Data Saved	Adjustable Range	Remarks
TC OUT	TCG	Select the time code to be output to the time
	TCG/TCR	code output connector.
		TCG: Always output time code generator
		value.
		TCG/TCR:
		Display time code generator value in
		E-E mode, and time code reader
- C U F -		value in V-V mode.

8-6-7 UMID SET/INFO

Items/ Data Saved	Adjustable Range	Remarks		
COUNTRY	NO-INFO	Input the user's country. NO-INFO is displayed until the input completes.		
ORGANIZATION - C U F -	NO-INFO	Input the user's organisation or company name. NO-INFO is displayed until the input completes.		
USER - C U F -	NO-INFO	Input the user name. NO-INFO is displayed until the input completes.		
DEVICE NODE		Indicate the product ID number.		

<Note>

Please refer to [4-5-6 Setting the UMID Information] for the UMID information setting. $\label{eq:continuous} % \begin{subarray}{ll} \end{subarray} % \begin{subarray}{ll} \end{subarr$

8-7 FILE

8-7-1 SD CARD READ/WRITE

Items/ Data Saved	Adjustable Range	Remarks
R.SELECT	<u>1</u> :	Select the file number to read out.
F -	8	
READ		Read out the data from the SD card.
- - - -		
W.SELECT	<u>1</u> :	Select the file number to write in.
F -	8	
WRITE		Write the camera-recorder's menu data to the SD card.
- - - -		
CARD CONFIG		Format the SD card.
TITLE READ		Read out the title of the data recorded on the SD card.
TITLE1-8:		Up to 8 letters can be set for the title name.

8-7-2 SD CARD R/W SELECT

Items/ Data Saved	Adjustable Range	Remarks
ID READ/	ON	Select whether or not to include the
WRITE	<u>OFF</u>	CAMERA ID when reading out or writing to
F -		the SD card.
USER MENU	<u>ON</u>	Select whether or not to include the FILE
SELECT R/W	OFF	MENU settings when reading out or writing
F -		to the SD card.
SYSTEM MENU		Select whether or not to include the set
R/W	OFF	values on the SYSTEM SETTING page
F -		when reading out or writing to the SD card.
PAINT MENU	ON	Select whether or not to include the adjusted
LEVEL R/W	OFF	values on the PAINT page when reading out
F -		or writing to the SD card.
PAINT MENU	ON	Select whether or not to include the set
SW(■) R/W	OFF	values on the PAINT MENU page when
F -		reading out or writing to the SD card.
VF MENU	ON	Select whether or not to include the set
R/W	OFF	values on the VF page when reading out or
F -		writing to the SD card.
CAM OPE	ON	Select whether or not to include the set
MENU R/W	OFF	values on the CAM OPERATION page when
F -		reading out or writing to the SD card.
MAIN OPE	ON	Select whether or not to include the set
MENU R/W	OFF	values on the MAIN OPERATION page
F -		when reading out or writing to the SD card.
MAINTE MENU	ON	Select whether or not to include the set
R/W	OFF	values on the MAINTENANCE page when
F -		reading out or writing to the SD card.

8-7-3 LENS FILE

Items/ Data Saved	Adjustable Range	Remarks
FILE NO.	1:	Select the lens file number.
- - - - READ	8	Read the lens file data.
WRITE		Write the lens file data.
TITLE1-8		Up to 12 letters can be set for the title name.

8-7-4 SCENE

Items/ Data Saved	Adjustable Range	Remarks
READ USER		Read out the data from the user area in the
DATA		memory.
- - - -		
SCENE SEL	<u>1</u>	Select the scene file.
	: 4	
- - - -	4	
READ		Read the scene file.
- - - -		
WRITE		Write the scene file.
- - - -		
RESET		Reset the scene file values to the initial values.
- - - -	•	
TITLE 1-3		Create the scene file title.
- - - -		
TITLE 4	FILMLIKE	Create the scene file title. The title, including
		the data, is set to FILMLIKE, both as the
- - - -		initial value and after resetting.

8-7-5 INITIALIZE

Items/ Data Saved	Adjustable Range	Remarks
READ FACTORY DATA		The menu (USER MENU, MAIN MENU, OPTION MENU) values are all reset to factory settings.
WRITE USER DATA		Save the user preference menu data in the camera's internal memory.
RESET LENS FILES		Reset the lens file data to the factory settings.

8-8 MAINTENANCE

8-8-1 SYSTEM CHECK

Items/ Data Saved	Adjustable Range	Remarks
COLOR CHECK	OFF	ON/OFF switching for checking proper operation of the camera-recorder. Displays the center Y and RGB levels on the viewfinder to indicate whether the signals have been properly processed and transmitted from the optical system to the digital system.

8-8-2 LENS ADJ

Items/ Data Saved	Adjustable Range	Remarks
F2.8 ADJ	ON OFF	The iris is only set to F2.8 when this item set to ON.
F16 ADJ	ON OFF	The iris is only set to F16 when this item set to ON.
- - - -		

8-8-3 BLACK SHADING

Items/ Data Saved					Adjustable Range	Remarks
CORRECT				E	<u>ON</u> OFF	ON/OFF switching for digital black shading compensation.
DETE (DIG)	CT	1C	N –	_	_	Execute digital black shading compensation.

8-8-4 WHITE SHADING

					Adjustable Range	Remarks
CC	CORRECT				<u>ON</u> OFF	ON/OFF switching for white shading compensation.
-	- C U F E			Е		
DETECTION (V SAW)			ÖN		_	Execute white shading compensation.
_	_	_	<u> </u>	_		

8-8-5 DIAGNOSTIC1

Items/ Data Saved	Adjustable Range	Remarks
CAMSOFT(IN)		Display the software version for the microprocessor-controlled flash.
- - - - - CAMSOFT		Display the software version for the external
(OUT)		flash.
CAM TABLE		Display the table version.
FONT ROM		Display the character font version.
CAM DSP FPGA1		Display the program version for the FPGA (Field Programmable Gate Array) that processes camera block signals.
CAM DSP FPGA2		Display the program version for the FPGA that processes camera block signals.
- - - - - CAM SYS		Display the program version for the FPGA
FPGA		that processes camera block signals.
- - - - - PULSE FPGA		Display the program version for the FPGA
_		that processes the CCD scanning.

8-8-6 DIAGNOSTIC2

Items/ Data Saved	Adjustable Range	Remarks
SYSCON SOFT		Display the software version for the system control microprocessor.
LCD SOFT		Display the software version for the LCD microprocessor.
- - - -		
P2CS OS		Display the OS version for the streaming controller.
P2CS AP		Display the application version for the streaming controller.
- - - -		
MSC FPGA		Display the program version for the streaming control FPGA.
FLT FPGA		Display the program version for the FPGA that processes recording / playback signals.
SIF FPGA		Display the program version for the serial interface FPGA.

8-8-7 HOURS METER

Items/ Data Saved	Adjustable Range	Remarks
OPERATION		Display total hours the camera power has been turned ON.
- - - -		
LCD BACKLIGHT		Display total hours the LCD monitor backlight power has been turned ON.
P.ON TIMES		Display total number of times the power switch has been turned ON.

8-9 OPTION MENU

8-9-1 **OPTION**

Items/ Data Saved	Adjustable Range	Remarks
ENG	ON	Select whether or not to prohibit opening the
SECURITY	<u>OFF</u>	menu screen.
		ON: Menu screen cannot be opened. Please consult your nearest service center to release the setting. OFF: Menu screen can be opened.
- C - - -		·
P.HALF SHUT	ON OFF	Select whether or not to enable the 1/2 shutter when the shutter is set to OFF while operating in the progressive mode.
		ON: Enable 1/2 shutter.
- C		OFF: Disable 1/2 shutter.
ID MIX INH	<u>ON</u> OFF	Select whether or not to inhibit mixing the ID in the camera image. ON: Inhibit mixing. ID is not mixed in the camera image. OFF: Do not inhibit. Camera ID setting under VF INDCATOR1 is reflected in
- C		the camera image.
AUDIO OUT DELAY	DELAYED THROUGH	Select whether or not to delay audio, headphone and speaker outputs. DELAYED:
		Delay audio output in
		synchronisation with video output. THROUGH:
		Output audio input without delay.
		This setting prevents echo effect
		between the sound source and audio
L.,.,.		output when the sound source is
- c - -		near the camera-recorder.

Chapter 9 Specifications

[General]

Power supply:

DC 12 V (11.0 V - 17.0 V)

Power consumption:

24 W (Main unit only, with LCD monitor OFF) 27 W (With the SDI and IEEE1394 option installed, LCD monitor ON)

ind

indicates safety information.

Operating temperature:

0 °C to +40 °C

Storage temperature:

-20 °C to +60 °C

Operating humidity:

10% to maximum 85% (relative humidity)

Maximum continuous operation:

Approximately 120 minutes (main unit only, with LCD monitor OFF and using an Anton/Bauer Hytron50 battery)

Dimensions (W \times H [excluding handle and wireless option cover] \times D):

137 mm imes 209 mm imes 318 mm

Weight:

4.2 kg (main unit only, excluding VF mount)

[Camera Unit]

Pickup devices:

2/3-inch, 600,000 pixels IT CCD \times 3

CC/ND Filters:

CC A: CROSS

B: 3200K

C: 4300K

D: 6300K

ND 1: CLEAR

2: 1/4ND

3: 1/16ND

4: 1/64ND

Quantizing:

14-bit linear/18 MHz

Digital signal processing:

36 MHz

Horizontal drive frequency:

18 MHz

Programmable gain:

Three positions (L/M/H) can be set by selecting from -3, 0, +3, +6, +9, +12, +15, +18, +21, +24, +27 or +30 dB

Super Gain (S.GAIN):

Selectable from +30, +36, +42 or +48 dB

Digital Super Gain (DS.GAIN):

Selectable from +6, +12 or +20 dB

Shutter speeds:

1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000

Synchro-scan shutter:

1/50.4 to 1/248.0

Lens mount:

2/3-inch bayonet type

Color separation optical system:

Optical prism (F1.4)

Sensitivity:

F13 (2000 lux, 89.9% reflection)

Minimum object illuminance:

0.01 lux

(F1.4 with +48 dB (S.GAIN) and +20 dB (DS.GAIN))

Video S/N:

63 dB (standard)

Horizontal resolution:

750 lines (center, standard)

Vertical resolution:

450/500 lines (SUPER V mode)

LCD Monitor:

3.5-inch LCD color monitor, 200,000 pixels

Memory Card Unit

Video recording formats:

Selectable from DVCPRO50, DVCPRO and DV

Audio recording formats:

48 kHz 16-bit 4ch (DVCPRO50)

48 kHz 16-bit 2ch/4ch selectable (DVCPRO)

Recording/playback time:

Approximately 8 minutes:

When recorded in DVCPRO format using one AJ-P2C002SG card with audio signals recorded on 2 channels.

Approximately 16 minutes:

When recorded in DVCPRO format using one AJ-P2C004HG card with audio signals recorded on 2 channels.

<Note>

This recording time represents one shot continuously recorded on a P2 card. The recording time may be shorter, depending on the number of shots recorded.

Video System

Analog component output

Frequency range:

Y: 25 Hz to 5.75 MHz, +1.0/–3.0 dB

(DVCPRO50)

PB/PR: 25 Hz to 2.75 MHz +1.0/–3.0 dB

(DVCPRO50)

S/N:

Minimum 55 dB

Audio System

Sampling frequency:

48 kHz (synchronised with video)

Quantizing:

16 bits

Frequency response:

20 Hz - 20 kHz ± 1.0 dB (at standard level)

Dynamic range:

Minimum 85 dB (1 kHz, AWTD)

Distortion factor:

0.1% or less (1 kHz, standard level)

Headroom:

18 dB

[Input/output Unit]

Video input

GEN LOCK IN:

BNC, 1.0 Vp-p, 75 Ω

(VIDEO IN can be selected by switching menu)

Video output

MON OUT:

BNC, 1.0 Vp-p, 75 Ω

VIDEO OUT:

BNC, 1.0 V_P-P, 75 Ω

Audio input

AUDIO IN CH1/CH2:

XLR \times 2, 3 pins

LINE, MIC, and +48 V switch-selectable

LINE: 0 dBu

(0/+4 dBu selectable with menu)

MIC: -60 dBu

(-60/-50 dBu selectable with menu)

MIC + 48V: Compatible with +48V phantom power

supply -60 dBu

(-60/-50 dBu selectable with menu)

MIC IN:

XLR, 3 pins

+48V phantom: ON/OFF selectable with menu,

3 k Ω balanced, -50/-40 dBu

selectable with menu

WIRELESS IN:

25 pin D-SUB, -40 dBu

Audio output

AUDIO OUT CH1/CH2:

XLR, 5 pins, 0 dBu

(0/+4 dBu selectable with menu)

Balanced low-impedance output

Headphones:

Stereo mini jack \times 2

Time code input

TC IN:

BNC, 0.5 VP-P to 8 VP-P, 10 $k\Omega$

Time code output

TC OUT:

BNC, low impedance, 2.0 ± 0.5 VP-P

Miscellaneous

DC IN:

XLR, 4 pins, DC 12 V (DC 11 V - 17 V)

DC OUT:

4 pins, DC 12 V (DC 11 V - 17 V)

Maximum rated current: 1 A

LENS:

Multiple 12 pins

EVF:

Multiple 20 pins

GPS:

6 pins (connector for AJ-GPS900G)

ECU:

6 pins (connector for AJ-EC3E)

Accessories

Shoulder Strap

Front Audio Level control knob

Screw, M2 \times 6 mm (XYNZ+J6FZ) \times 1 pc

ı	_	١
ľ		ľ
١	_	
С	•	٠.

IEMO	

