

2003 SONY MOBILE PRODUCT GUIDE



- 12" Polypropylene Cone
- 1200W peak power (350W RMS)
- Unique cone design offers superior rigidity
- Gold-plated Binding Posts
- Small sealed/ported enclosure optimized
- 4Ω Voice Coil

XS-L121P5 12" Component Subwoofer

Specifications

Speaker	Woofer 30 cm (12 in.), cone type
Peak power	1,200 watts
Rated power	350 watts
Impedance	4 ohms
Sensitivity	89 dB/W/m
Frequency response	18 – 2,000 Hz
Mass	Approx. 5.7 kg (12 lb. 10oz.) per speaker
Supplied accessory	Parts for installation


Thiele/Small Parameters

Impedance	4Ω	Vas (Lit.)	55.5
d (mm)	250	Vas (Cu.ft)	1.96
d (inch)	9.8	Mms (g)	219.0
Rdc (Ω)	3.2	Lvc (mH)	1.2
Fs (Hz)	26.4	Xmax (mm)	7.5
Qts	0.42	Xmax (inch)	0.3
Qes	0.44	BL (Tm)	16.1
Qms	5.86	Enclosure vol. (Net)	28 Lit. (1.00 cu.ft)

Recommended Enclosure: Sealed type

Dimensions

Unit: mm(in.)

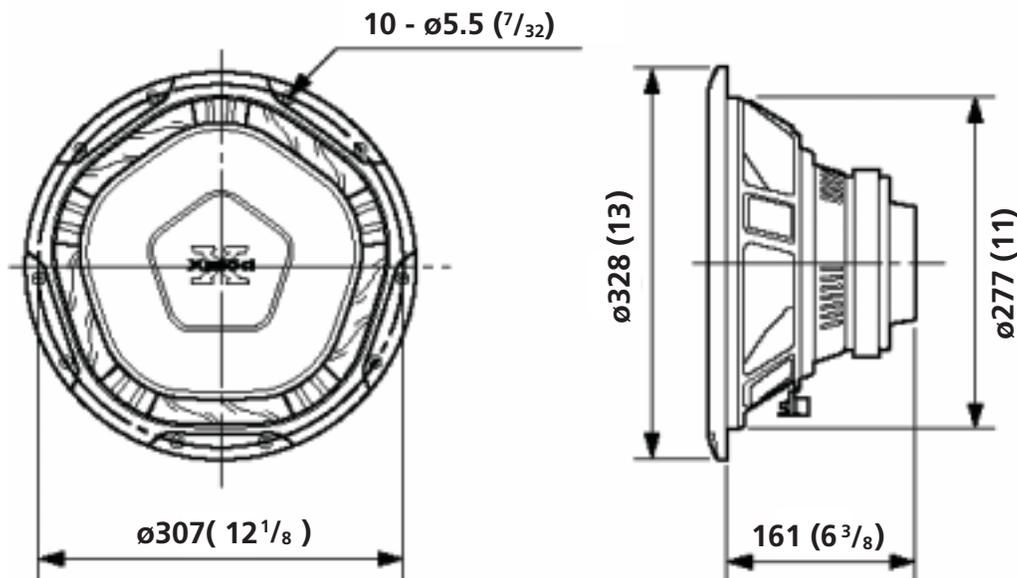

Design and Specifications subject to change without notice.

SONY®