



WIRELESS TEMPERATURE STATION



BUTTONS

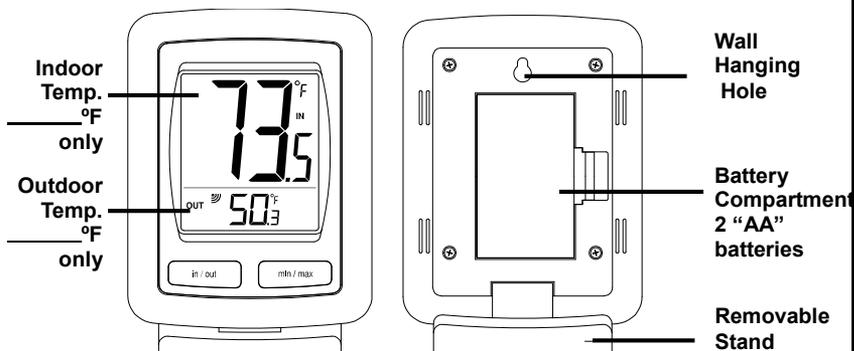

TX38U-IT
Temperature
Sensor



Battery
compartment
2 "AAA"
batteries

Get Started

- Step 1:** Insert 2 fresh AAA batteries into the TX38U-IT sensor according to the polarity markings
- Step 2:** Insert 2 fresh AA, batteries into the temperature station according to the polarity markings.
- Step 3:** Let station and sensor sit together for 15 minutes. Then place sensor outside in a shaded area.

Restart: If the outdoor temperature is not displayed after 3 minutes, remove batteries from the temperature station & outdoor sensor. Press any button on the temperature station 20 times. After 15 minutes, return to **Step 1** above.

Display Options

- Choose to have the indoor or the outdoor temperature on top, in large numbers.
- Simply press the **IN/OUT** button to change.

View/Reset MIN/MAX Readings

View: Press the **MIN/MAX** button to view minimum and maximum indoor/outdoor temperatures.

Reset: Hold the **MIN/MAX** button for 5 seconds.

Low Battery Icon

- When the TX icon is displayed replace batteries in the outdoor sensor.
- When the RX icon is displayed replace batteries in the wireless thermometer .

Low
Battery
Icons



Specifications

Indoor:

Temperature Range:	14.2°F to 140°F (-9.9°C to +60°C)
--------------------	--------------------------------------

Outdoor:

Temperature Range:	-19.9°F to +140°F (-28.8°C to +60°C)
Distance:	Over 260 ft. (79 meters) RF 915MHz (open air)
Interval:	About every 30 seconds

Power:

Wireless Temperature Station:	2-AA, IEC, LR6 batteries (not included)
TX38U-IT Sensor:	2-AAA, IEC, LR3 batteries (not included)

Battery Life:

Wireless Temperature Station:	Over 24 months
TX38U-IT Sensor:	Over 24 months

Dimensions:

Wireless Temperature Station:	3.27" x 4.33" x 1.14" (83.1 x 109.98 x 28.96mm)
TX38U-IT Sensor:	1.27" x 3.41" x 0.55" (32.4 x 86.5 x 14.1mm)

Position Outdoor Sensor

- Mount the outdoor sensor on a north-facing wall or in any well shaded area. Under an eave or deck rail is preferred.
- The maximum transmitting range to the Wireless Temperature Station is over 260 feet (79 meters) in open air, not including walls.

Care and Maintenance

- **Do not mix old and new batteries**
- **Do not mix Alkaline, Standard, Lithium or Rechargeable Batteries**
- Always purchase the correct size and grade of battery most suitable for the intended use.
- Replace all batteries of a set at the same time.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed correctly with regard to polarity (+and -).
- Remove batteries from equipment with is not to be used for an extended period of time.
- Remove expired batteries promptly.
- Do not expose to extreme temperature, vibration or shock.
- Clean with a soft damp cloth. Do not use solvents.
- The product is not a toy. Keep it out of reach of children.
- The product is not to be used for medical purpose or for public information. It is intended for home use only.
- The specifications of this product may change without prior notice.
- Improper use or unauthorized opening of housing voids warranty.

Warranty and Support Information

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

Before returning a product, please contact our friendly customer support with questions or visit our online help (manuals and FAQs):

Phone: 1-608-782-1610

Online Product Support: www.lacrossetechnology.com/support

Product Registration:

www.lacrossetechnology.com/support/register

View full warranty details online at:

www.lacrossetechnology.com/warranty_info.pdf

Warranty Address:

La Crosse Technology, Ltd
2830 S. 26th St.
La Crosse, WI 54601

Protected under U.S. Patents:
5,978,738 | 6,076,044 | RE43903

**FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

**(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.**

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences.

All trademarks and patents are recognized.