

Item
Model
ProjectName



603536

FEATURES

- The LMP500BF is a floor standing belt dough sheeter mounted on wheels.
- Working width of 500 mm and two working belts 1000 mm in length.
- The rolling direction may be inverted by the movement of a joystick.
- Available in 1 or variable speed.
- The cylinders may be regulated for sheets ranging from 0,1 to 34 mm in thickness.

LMP500BF

The pastry roller has an important role in catering or restaurant kitchens, as it helps with the lining of pastry, rolling of dough and puff pastry work. The LMP500BF is used in restaurants and big production kitchens. It can work with any type of dough and can allow for a wide range of thicknesses.

- Rollers: 60 mm Ø in chromium plated steel. The accessibility of the parts in contact with the pastry/dough makes cleaning easier. The smooth surfaces are white-paint finished.
- The upper and lower roller scrapers may be easily removed for cleaning.
- The slides can be raised to save space.

Dough sheeters



DITO**Electrolux**

- Each safety grating is hinged on the structure and is equipped with a safety micro-switch which helps to avoid injury. When the gratings raise over a particular level, the motor stops.
- Remote foot pedal to change rolling direction (available as accessory).
- Flour container fixed on the top of the machine.

- General electrical protection by fuses.
- Motor protected by a circuit breaker.
- The belts can be removed and are washable.
- Ergonomic controls situated very close together and are designed to suit natural movements.
- Emergency stop button with lock and manual re-start.

Specifications

MODEL	LMP500BF1 603536	LMP500BFV 603537
External dimensions - mm		
width	2380	2380
depth	890	890
height	1265	1265
Power - kW		
installed-electric	0.75	0.75
Net weight - kg.	160	160
Supply voltage	380...415 V, 3, 50/60	230...240 V, 1N, 50/60
Belt speed	one	variable

Optional accessories

CODE	DESCRIPTION	LMP500BF1 603536	LMP500BFV 603537
653600	PEDAL TO CHANGE ROLLING DIRECT.-SHEETERS	✓	✓




DITO

Electrolux

Installation drawings

603536, 603537

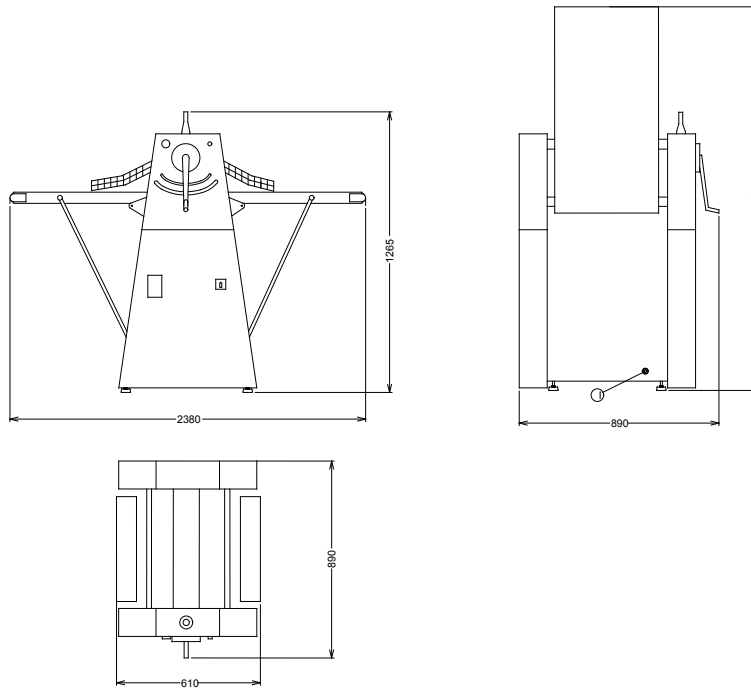

MODEL

I - Electrical connection

**LMP500BF1
603536**

380...415 V, 3,
50/60

**LMP500BFV
603537**

230...240 V, 1N,
50/60

The manufacturer reserves the right to modify and make improvements to the products without giving prior warning. Dimensions, illustrations, technical data, weights, etc. are given as an indication only.



www.dito-electrolux.com

Dough sheeters



AID010