


## CRMR27-LP

### Commercial Series Undercounter Refrigerator







- · Anodized Aluminum interior sides and back with stainless steel interior floor
- Meets ADA requirements
- Stainless steel exterior door with ABS interior liner
- Cabinet and door are insulated with 2" of CFC free, foamed in place polyurethane
- Exclusive "stepped" door design to protect door gasket
- Spring assisted self-closing door with stay open feature
- · Extruded aluminum flush mount door handle
- Field reversible door
- · Magnetic door gasket is easily removable for cleaning
- Enamel coated evaporator coil
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Standard with 2.25" stem casters (two with brakes)
- Three years parts and labor warranty
- Five year compressor warranty
- 8 ft. cord and plug
- \* CRMR27-LP is ENERGY STAR qualified

### **Dimensions / Capacity**

Model #	One Section CRMR27-LP
Nominal Storage Capacity (CF)	7.2 ft³
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>
Overall Width x Depth	27" x 30"
Height (including 2.25" casters)	32.3"
Door Opening Width x Height	22.6" x 22.9"
Depth with Door open at 90°	54.5"
Adjustable Shelves	1
Shelf Dimensions (W x D)	22.0" x 16.0"
Crated Shipping Weight	160 lbs
Crated Height x Width x Depth	36.5" x 31.5" x 34"

**Electrical / Refrigeration Data** 

Model #	One Section CRMR27-LP
Amperage	2.6
Energy Consumption (kwh/day) ENERGY STAR	.65
Heat Rejection (BTU/Hr.) @NSF	180
Approx. Nominal Compres. BTU/HR(HP)	1029(1/6HP)



CRMR27-LP 1/15 Item #13328

Hoshizaki America, Inc. reserves the right to change

Item #

Project:

Qty:

\*AutoCad available on KCL

### CRMR27-LP Dimensions W x D x H

I Section - 27" x 30" x 32.3\* \*with 2.25" casters

### Electrical/Refrigeration

Voltage | 15/60/1

HACR Breaker 15.0

Electrical Connection (NEMA)

5-15P

Voltage Range 104-126

Ambient Temp. Range 45°-100°F

Temperature Range 32° to 52°F

\*Refrigerant R-134a

### **Warranty**

Valid in United States, Canada, Puerto Rico, and U.S. Territories. Contact factory for warranty in other countries.

- Three Year Parts & Labor on entire machine.
- Five Year Parts on: Compressor.

### **Options**

- · Additional epoxy shelves
- Cylinder locks -01 (factory installed)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 TEL 800-438-6087 FAX 800-345-1325 www.hoshizaki.com




# CRMR27-LP


Commercial Series Undercounter Refrigerator








CRMR27-LP FRONT VIEW



CRMR27-LP SIDE VIEW (Cross Section)

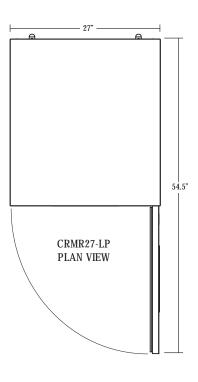

### **Cabinet Construction**

The exterior cabinet top, front, and sides, are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior back and sides are anodized aluminum with an ABS ceiling and stainless steel floor. One heavy duty epoxy coated shelf per section is standard. Mounted on anodized aluminum pilasters the shelf is adjustable in ½" increments. Cabinet walls and doors are insulated with 2" of environmentally friendly, CFC free, foamed in place polyurethane. 2.25" polyolefin, stem casters (two with brakes) are standard.

### **Door Construction**

Door is constructed of high grade stainless steel exterior with an ABS interior liner. Hoshizaki's exclusive "stepped" design protects the gasket while product is removed from the cabinet. Door is provided with a one piece, extruded aluminum, flush mount handle. Spring assisted self-closing door is equipped with a stay open feature past 90 degrees. Snap-in magnetic door gasket is durable and easily removed for cleaning. Field reversible door hinging is standard.

### **Refrigeration System**

The high efficiency refrigeration system is self-contained with an enamel coated evaporator for extended life. Condensate removal is accomplished with an energy efficient non-electric evaporation system. A capillary tube controls the flow of environmentally friendly R-134A refrigerant through the evaporator. Refrigeration system utilizes an "off cycle" defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with an eight foot cord and plug (20.0 amps or less).

### © HOSHIZAKI AMERICA, INC.







# Hoshizaki America, Inc.

Commercial Series
Refrigerated Kitchen Equipment

Models
Undercounter
Worktop
Prep Table



INSTRUCTION MANUAL

www.hoshizaki.com



Issued: 12-2-2013

### **A** WARNING

Only qualified service technicians should install and service the appliance. To obtain the name and phone number of your local Hoshizaki Certified Service Representative, visit www.hoshizaki.com. No installation or service should be undertaken until the technician has thoroughly read this Instruction Manual. Likewise, the owner/manager should not proceed to operate the appliance until the installer has instructed them on its proper operation. Failure to install, operate, and maintain the appliance in accordance with this manual may adversely affect safety, performance, component life, and warranty coverage. Proper installation is the responsibility of the installer. Product failure or property damage due to improper installation is not covered under warranty.

Hoshizaki provides this manual primarily to assist qualified service technicians in the installation, maintenance, and service of the appliance.

Should the reader have any questions or concerns which have not been satisfactorily addressed, please call, send an e-mail message, or write to the Hoshizaki Technical Support Department for assistance.

Phone: 1-800-233-1940; (770) 487-2331 Fax: 1-800-843-1056; (770) 487-3360

E-mail: techsupport@hoshizaki.com

HOSHIZAKI AMERICA, INC. 618 Highway 74 South Peachtree City, GA 30269

Attn: Hoshizaki Technical Support Department

Web Site: www.hoshizaki.com

**NOTE:** To expedite assistance, all correspondence/communication MUST include the following information:

<ul> <li>Model Number</li> </ul>	
<ul> <li>Serial Number</li> </ul>	

• Complete and detailed explanation of the problem.

### **IMPORTANT**

This manual should be read carefully before the appliance is installed and operated. Read the warnings and guidelines contained in this manual carefully as they provide essential information for the continued safe use and maintenance of the appliance. Retain this manual for any further reference that may be necessary.

### **CONTENTS**

Important Safety Information	4
I. Installation Instructions	7
A. Location	7
B. Checks Before Installation	8
C. Setup	8
D. Door Reversal	14
E. Electrical Connection	
F. Final Checklist	18
II. Operating Instructions	19
A. Important Notes About Usage	
B. Startup	
C. Controls and Adjustments	
1. Temperature Reading	
2. Adjusting the Temperature	
D. Defrost	
Undercounter and Worktop Refrigerators	
2. Prep Table Refrigerators and Undercounter and Worktop Freezers	
E. Food Storage	
F. Safety Devices	
G. Cooling Performance	
H. Cabinet Condensation	
III. Cleaning and Maintenance Instructions	
A. Cleaning	
1. Exterior	
2. Cabinet Interior	
3. Door/Drawer Gaskets	
4. Shelves	
5. Drawers	
6. Worktop (Worktop Models)	
7. Cutting Board (Prep Table Models)	
8. Rail, Rail Hood, and Rail Cover (Prep Table Models)	
B. Maintenance	
1. Condenser	
Condenser     Z. Power Supply Connection	
IV. Preparing the Appliance for Periods of Non-Use	
V. Disposal	
V. DISUUSAI	/ 9

### **Important Safety Information**

Throughout this manual, notices appear to bring your attention to situations which could result in death, serious injury, damage to the appliance, or damage to property.

**A** WARNING Indicates a hazardous situation which could result in death or

serious injury.

**NOTICE** Indicates a situation which could result in damage to the

appliance or property.

**IMPORTANT** Indicates important information about the use and care of the

appliance.

### **A** WARNING

The appliance should be destined only to the use for which it has been expressly conceived. Any other use should be considered improper and therefore dangerous. The manufacturer cannot be held responsible for injury or damage resulting from improper, incorrect, and unreasonable use. Failure to install, operate, and maintain the appliance in accordance with this manual will adversely affect safety, performance, component life, and warranty coverage.

To reduce the risk of death, electric shock, serious injury, or fire, follow basic precautions including the following:

- Only qualified service technicians should install and service the appliance.
- The appliance must be installed in accordance with applicable national, state, and local codes and regulations.
- To reduce the risk of electric shock, do not touch the plug with damp hands.
- Unplug the appliance before servicing.
- The appliance requires an independent power supply of proper capacity. See the nameplate for electrical specifications. Failure to use an independent power supply of proper capacity can result in a tripped breaker, blown fuse, damage to existing wiring, or component failure. This could lead to heat generation or fire.
- THE APPLIANCE MUST BE GROUNDED. The appliance is equipped with a NEMA 5-15 three-prong grounding plug : to reduce the risk of potential shock hazards. It must be plugged into a properly grounded, independent 3-prong wall outlet. If the outlet is a 2-prong outlet, it is your personal responsibility to have a qualified electrician replace it with a properly grounded, independent 3-prong wall outlet. Do not remove the ground prong from the power cord and do not use an adapter plug. Failure to follow these instructions may result in death, electric shock, or fire.
- Do not use an extension cord.
- Do not use an appliance with a damaged power cord. The power cord should not be altered, jerked, bundled, weighed down, pinched, or tangled. Such actions could result in electric shock or fire. To unplug the appliance, be sure to pull the plug, not the cord, and do not jerk the cord.

### **▲** WARNING, continued

- The GREEN ground wire in the factory-installed power cord is connected to the appliance. If it becomes necessary to remove or replace the power cord, be sure to connect the power cord's ground wire.
- Do not splash, pour, or spray water directly onto or into the appliance. This might cause short circuit, electric shock, corrosion, or failure.
- Do not make any alterations to the appliance. Alterations could result in electric shock, injury, fire, or damage to the appliance.
- The appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be properly supervised around the appliance.
- Do not climb, stand, or hang on the appliance or doors/drawers or allow children or animals to do so. Do not climb into the appliance or allow children or animals to do so. Death or serious injury could occur or the appliance could be damaged.
- Be careful not to pinch fingers when opening and closing the doors/drawers or rail cover (prep table models) or when handling food pans. Be careful when opening and closing the doors/drawers or rail cover when children are in the area.
- Open and close the doors/drawers and rail cover (prep table models) with care.
   Opening the doors/drawers or rail cover too quickly or forcefully may cause injury or damage to the appliance or surrounding equipment.
- Do not use combustible spray or place volatile or flammable substances in or near the appliance. They might catch fire.
- Keep the area around the appliance clean. Dirt, dust, or insects in the appliance could cause harm to individuals or damage to the equipment.
- Do not throw anything onto the shelves or load any single shelf with more than 120 lb. (54.5 kg) of product. They might fall off and cause injury.
- Do not load any single drawer with more than 75 lb. (34 kg) of product. Depending on the weight of product in the drawers, secure the unit as necessary to prevent it from overturning. Do not open more than one drawer at a time.
- The appliance is designed only for temporary storage of food. Employ sanitary methods. Use for any other purposes (for example, storage of chemicals or medical supplies such as vaccine and serum) could cause deterioration of stored items.
- Do not block air inlets or outlets, otherwise cooling performance may be reduced.
- Do not tightly pack the cabinet. Allow some space between items to ensure good air flow. Also allow space between items and interior surfaces.
- Do not put warm or hot foods in the cabinet. Let them cool first, or they will raise the cabinet temperature and could deteriorate other foods in the cabinet or overload the appliance.

### **A** WARNING, continued

- All foods should be wrapped in plastic film or stored in sealed containers. Otherwise
  foods may dry up, pass their smells onto other foods, cause frost to develop, result
  in poor appliance performance, or increase the likelihood of cross-contamination.
  Certain dressings and food ingredients, if not stored in sealed containers, may
  accelerate corrosion of the evaporator, resulting in failure.
- Do not store items near air outlets. Otherwise, items may freeze up and crack or break causing a risk of injury or contamination of other food.

### **Additional Warnings for Prep Table Models**

- The entire rail must always be covered by rail dividers and pans (1/6 size, up to 6" (15 cm) deep). Otherwise, the appliance will not cool properly.
- Use only 1/6 size pans up to 6" (15 cm) deep. Do not use damaged pans.
- Ingredients must be pre-chilled to 37°F (3°C) or less before placing in rail.
- Keep the rail cover closed when not actively preparing food.
- The rail is for keeping ingredients cool while preparing food. If not actively preparing food for a long period such as overnight, seal pans with plastic wrap in addition to closing the rail cover. Depending on conditions, the cabinet temperature setting may need to be adjusted to prevent items from freezing. Alternatively, seal ingredients and store them in a refrigerator or freezer.

### **NOTICE**

- Protect the floor when moving the appliance to prevent damage to the floor.
- Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction. Do not place anything on top of the appliance in an undercounter installation. There must be at least 1.5" (4 cm) overhead clearance for proper ventilation. The factory-installed rear bumpers must be in place to ensure proper rear clearance. Blockage of airflow could negatively affect performance and damage the appliance.
- Do not allow the appliance to bear any outside weight.
- To prevent deformation or cracks, do not spray insecticide onto the plastic parts or let them come into contact with oil.
- To avoid damage to the gasket, use only the door/drawer handle when opening and closing.
- To avoid damage to the top seal, do not lift the appliance by the top panel or remove the top panel.

### <u>Additional Notice for Prep Table Models</u>

• Do not place anything on top of the rail hood or rail cover and do not lift the appliance by the rail hood or rail cover. The rail hood and rail cover are not designed to bear any outside weight.

### I. Installation Instructions

### **A** WARNING

- The appliance must be installed in accordance with applicable national, state, and local regulations.
- Appliance is heavy. Use care when lifting or positioning. Work in pairs when needed to prevent injury or damage.
- Do not tilt the appliance more than 45°.

### A. Location

### **A** WARNING

- The appliance is not intended for outdoor use.
- Normal operating ambient temperature:
  - Undercounter and Worktop Models 45°F to 100°F (7°C to 38°C)
  - Prep Table Models 45°F to 86°F (7°C to 30°C)
     Operation of the appliance, for extended periods, outside of this normal temperature range may affect appliance performance.

### For best operating results:

- The appliance should not be located next to ovens, grills, or other high heat producing equipment.
- The location should provide a firm and level foundation for the appliance.
- The appliance should not be located in a corrosive environment.
- The factory-installed rear bumpers must be in place to ensure proper rear clearance. For undercounter and worktop models, a minimum of 1.5" (4 cm) overhead clearance should be provided for proper ventilation. For prep table models, a minimum of 10" (25 cm) clearance above the rail hood should be provided to allow the rail cover to open.

### **B. Checks Before Installation**


# Refer to the nameplate for electrical specifications. The nameplate is located on the right side wall of the cabinet interior. For more electrical connection details, see "I.E. Electrical Connection." We reserve the right to make specification and design changes without prior notice. Nameplate

- Visually inspect the exterior of the shipping package and immediately report any damage to the carrier. Upon opening the package, any concealed damage should also be immediately reported to the carrier.
- Remove the shipping carton, tape, and packing material. Also remove the protective plastic film from both the exterior panels and the interior door/drawer panel. If the appliance is exposed to the sun or to heat, remove the film after the appliance cools.
- Remove all accessory containers before discarding the packing materials. Dispose of all packing materials in a proper and environmentally responsible manner.
- Check for missing or damaged accessories.

### C. Setup

### 1. Remove the Appliance from the Pallet

- 1) Move as close to the final location as possible.
- 2) Remove the 2 bolts securing the appliance to the pallet, then remove the appliance from the pallet. Block the appliance securely at a height of 8" (20 cm) off the floor. Do not lay the appliance down.
- 3) Attach the casters to the bottom of the appliance. Locking casters should be attached to the front of the appliance. See Fig. 1. **NOTICE!** Ensure casters are completely threaded into appliance and tight.

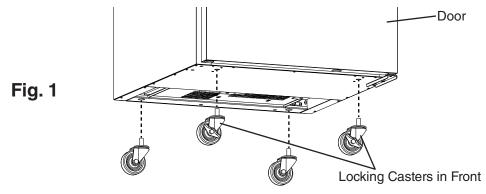

### 2. Check the Refrigeration Circuit

- Visually check that the refrigerant lines do not rub or touch other lines or surfaces and that the condenser fan blade turns freely.
- Check that the compressor is securely attached.

### 3. Position the Appliance and Lock the Front Casters

The front casters on the appliance are lockable. After positioning the appliance in its final location, lock the front casters.

### 4. Remove the Nylon Ties and Adjust the Shelves

Shelves are pre-installed. There is 1 shelf per section.

- 1) Remove and discard the nylon ties used to secure the shelves during shipping. See Fig. 2. Use caution to prevent damage to the shelf and appliance interior.
- 2) To adjust a shelf, first remove the shelf from the appliance. Position the shelf support clips on the pilasters at the desired shelf height, then place the shelf in position.


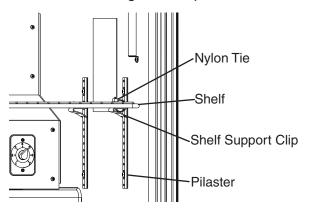



Fig. 2


### 5. Install the Rail Dividers and Pans (Prep Table Models)


Install the rail dividers and 1/6 size pans included with the appliance. See Fig. 3 and the table below. The entire rail must always be covered by rail dividers and pans. Otherwise, the appliance will not cool properly. Use pans with a depth of up to 6" (15 cm). Do not use damaged rail dividers or pans.

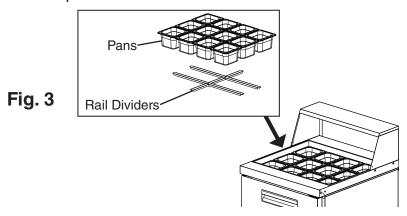

### **Rail Divider Layout**

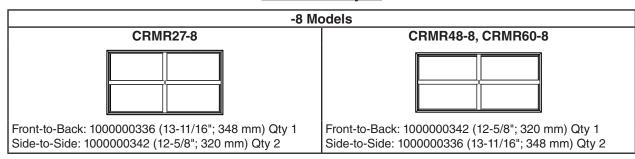


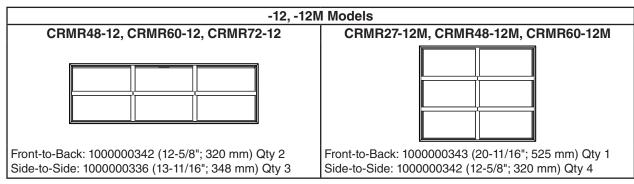

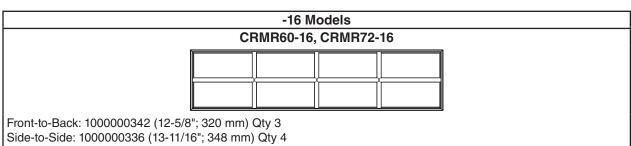

### Rail Divider Layout, continued


nan Bivido Edyodi, commod		
-18, -18N	// Models	
CRMR72-18	CRMR48-18M, CRMR60-18M, CRMR72-18M	
F	F D	
Front-to-Back: 1000000342 (12-5/8"; 320 mm) Qty 2 Side-to-Side: 1000000343 (20-11/16"; 525 mm) Qty 3	Front-to-Back: 1000000343 (20-11/16"; 525 mm) Qty 2 Side-to-Side: 1000000342 (12-5/8"; 320 mm) Qty 6	
Side-to-Side. 1000000343 (20-11/16 , 525 IIIII) Qty 3	Side-to-Side: 1000000342 (12-5/6 , 320 Hill) Qty 6	
0.444		
	Models	
CRMR60-24M, CRMR72-24M		

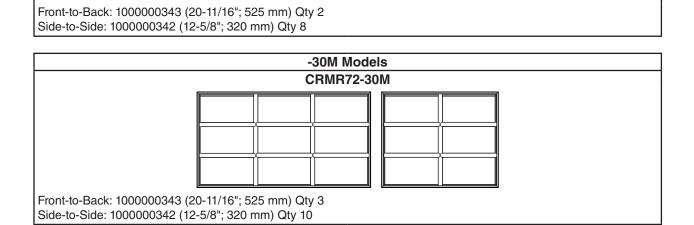

### 6. Install the Rail Cover (Prep Table Models)


### a) Single Rail Cover

1) Use the pivot pins provided to attach the rail cover to the rail hood. See Fig. 4. Ensure the pivot pins do not pinch the rail cover and that they are securely tightened.

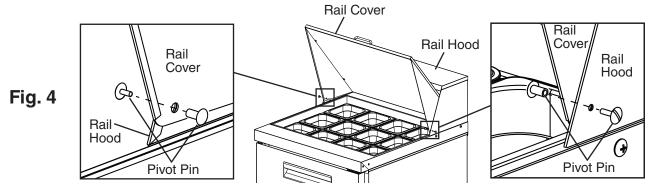


### b) Dual Rail Cover

- 1) Use the 4×8 screws provided to secure the rail cover brackets to the rail. See Fig. 5.
- 2) Place one of the rail covers in position, then use a pivot pin provided to attach the rail cover to the rail hood. See Fig. 6. Repeat with the remaining rail cover. Ensure the pivot pins do not pinch the rail covers and that they are securely tightened.
- 3) Use the remaining pivot pin provided to attach the rail covers to the rail cover brackets. Ensure the pivot pin is securely tightened.

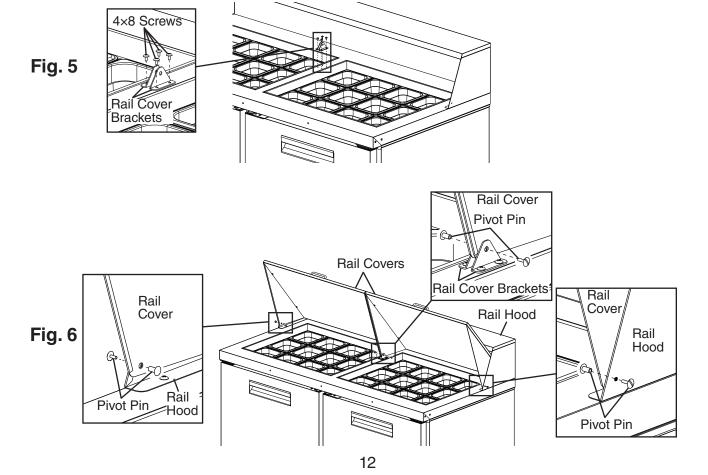

### 7. Attach the Cutting Board Brackets and Cutting Board (Prep Table Models)

- 1) Remove the screws from the cutting board bracket mounting locations on the appliance. See Fig. 7.
- 2) Use the screws removed in step 1 to attach the cutting board brackets.
- 3) Slide the cutting board into the outer cutting board brackets. WARNING! Make sure the cutting board brackets and cutting board are secure. Otherwise, the cutting board could come off and cause injury.

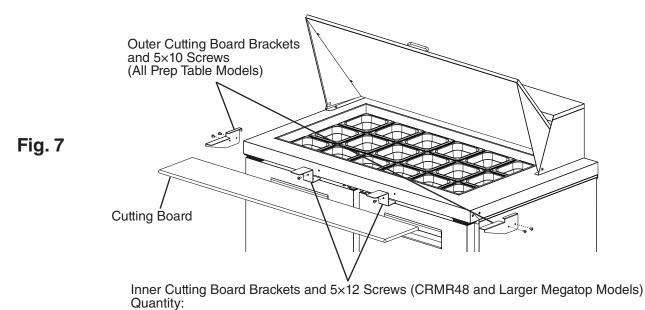


2 for CRMR48 Megatop Models 3 for CRMR60 and CRMR72 Megatop Models

### **D. Door Reversal**


The appliance is provided with a cabinet design which, after being delivered to the installation location, permits changing of the door swing from left to right or right to left. To change the door swing, follow the steps below. Example shows change from right hinged to left hinged.

### **A** WARNING


- Wear eye protection when reversing the doors.
- Keep fingers away from edge of upper hinge bracket. Spring cartridge can cause the upper hinge bracket to move suddenly with extreme force.
- Make sure the appliance is unplugged from the electrical outlet and the casters are locked.
- 2) Open the door to the fully open position, then remove the inner screw from the upper hinge bracket. See Fig. 8.
- 3) Close the door. **WARNING!** Keep away from upper hinge bracket. Upper hinge bracket kicks out when door is closed. See Fig. 9. Remove the outer screw from the upper hinge bracket.

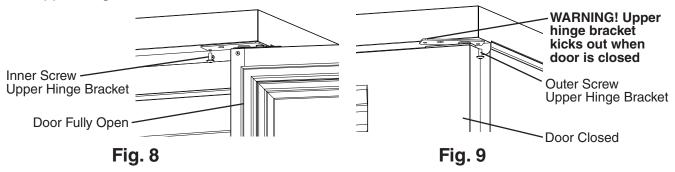


- 4) While maintaining a hold on the door, remove the lower hinge bracket. See Fig. 10. Leave the thrust-washer in place.
- 5) Pull out the bottom of the door slightly and gently remove the door from the appliance.
- 6) Remove the upper hinge bracket from the spring cartridge. See Fig. 11.

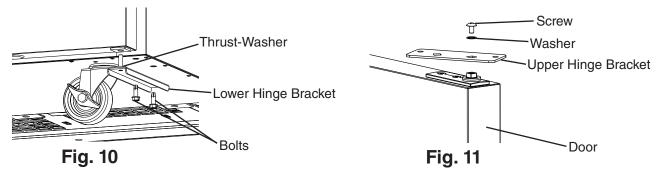


7) Remove the filler cap, filler screws, and spring cartridge. See Fig. 12. Leave the thrust-washers in place on the spring cartridge. **NOTICE!** Spring cartridge may be difficult to remove. Be careful not to damage the finish.

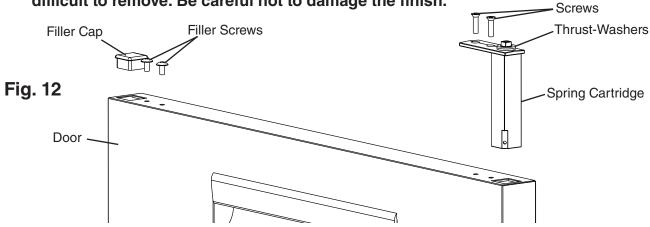


8) Clear material from the spring cartridge hole to allow for spring cartridge installation. Reinstall the filler cap, filler screws, and spring cartridge on the opposite side of the

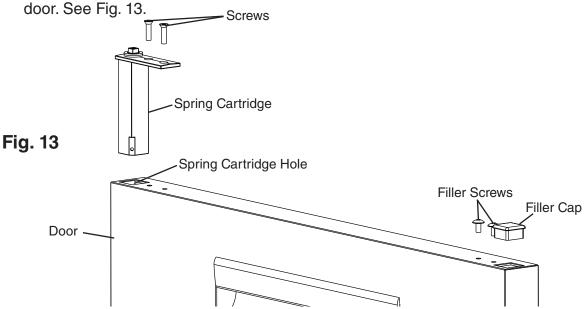


- 9) Make sure the thrust-washers are in place on the spring cartridge, then install the upper hinge bracket onto the spring cartridge. See Fig. 14. The upper hinge bracket should be canted out towards the center as shown with the screw holes towards the back of the appliance.
- 10) Remove the filler cap and nylon bearing from the bottom of the door. See Fig. 15. Reinstall on the opposite side.

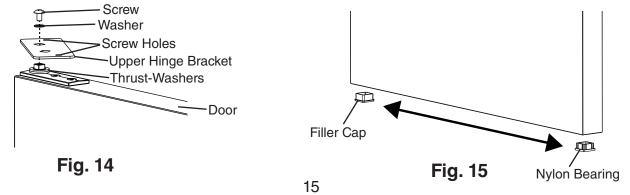

- 11) Move the door into position and maintain a hold on the door. Make sure the thrust-washer is in place, then install the lower hinge bracket. Do not tighten the bolts yet. Start each bolt for a few threads only and leave loose. See Fig. 16.
- 12) Install the outer screw into the upper hinge bracket. Do not tighten the screw yet. Start the screw for a few threads only and leave loose. See Fig. 17.

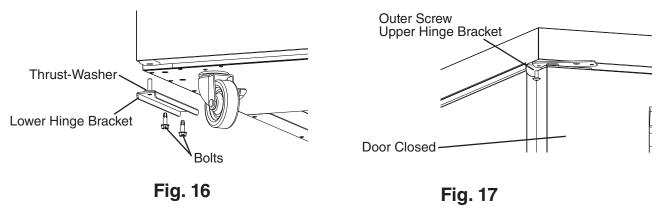

- 13) Open the door to the fully open position.
- 14) Rotate the upper hinge bracket inward into position using pliers. See Fig. 18.
  NOTICE! Be careful not to damage the finish. Install the inner screw into the upper hinge bracket.
- 15) Tighten all fasteners.

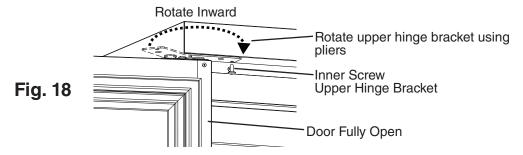

### **E. Electrical Connection**

### **A** WARNING

- Electrical connection must meet national, state, and local electrical code requirements. Failure to meet these code requirements could result in death, electric shock, serious injury, fire, or severe damage to equipment.
- The appliance requires an independent power supply of proper capacity. See the nameplate for electrical specifications. Failure to use an independent power supply of proper capacity can result in a tripped breaker, blown fuse, damage to existing wiring, or component failure. This could lead to heat generation or fire.
- THE APPLIANCE MUST BE GROUNDED. The appliance is equipped with a NEMA 5-15 three-prong grounding plug 'to reduce the risk of potential shock hazards. It must be plugged into a properly grounded, independent 3-prong wall outlet. If the outlet is a 2-prong outlet, it is your personal responsibility to have a qualified electrician replace it with a properly grounded, independent 3-prong wall outlet. Do not remove the ground prong from the power cord and do not use an adapter plug. Failure to follow these instructions may result in death, electric shock, or fire.
- To reduce the risk of electric shock, do not touch the plug with damp hands.
- Do not use an extension cord.
- Do not use an appliance with a damaged power cord. The power cord should not be altered, jerked, bundled, weighed down, pinched, or tangled. Such actions could result in electric shock or fire. To unplug the appliance, be sure to pull the plug, not the cord, and do not jerk the cord.
- The GREEN ground wire in the factory-installed power cord is connected to the appliance. If it becomes necessary to remove or replace the power cord, be sure to connect the power cord's ground wire.
- Usually an electrical permit and services of a licensed electrician are required.
- The maximum allowable voltage variation is ±10 percent of the nameplate rating.

### F. Final Checklist

- 1) Is the appliance level?
- 2) Have the casters been properly installed and have the front casters been locked?
- 3) Is the appliance in a site where the ambient temperature is constantly within 45°F to 100°F (7°C to 38°C) for undercounter and worktop models or 45°F to 86°F (7°C to 30°C) for prep table models?
- 4) Have the shipping carton, tape, and packing material been removed from the appliance? Has the protective plastic film been removed from both the exterior panels and the interior door/drawer panel?
- 5) Have the appliance and accessories been checked for shipping damage?
- 6) Are the factory-installed rear bumpers in place to ensure proper rear clearance? For undercounter and worktop models, is there at least 1.5" (4 cm) overhead clearance for proper ventilation? For prep table models, is there at least 10" (25 cm) clearance above the rail hood to allow the rail cover to open?
- 7) For prep table models, have the rail dividers, pans, rail cover, cutting board brackets, and cutting board been properly installed?
- 8) Has the power supply voltage been checked or tested against the nameplate rating? Is the power supply a properly grounded, independent wall outlet? Does the electrical connection meet all national, state, and local code and regulation requirements.
- 9) Have the refrigerant lines been checked to make sure they do not rub or touch other lines or surfaces? Has the condenser fan blade been checked to make sure it turns freely? Is the compressor securely attached?
- 10) Have the nylon ties used to secure the shelves during shipping been removed and discarded? Have the shelves been adjusted to the desired height?
- 11) Has the end user been given the instruction manual, and instructed on how to operate the appliance and the importance of the recommended periodic maintenance?
- 12) Has the end user been given the name and telephone number of an authorized service agent?
- 13) Has the warranty card been filled out and forwarded to the factory for warranty registration?

### **II. Operating Instructions**

### A. Important Notes About Usage

### **A** WARNING

- Only qualified service technicians should install and service the appliance.
- Failure to install, operate, and maintain the appliance in accordance with this manual may adversely affect safety, performance, component life, and warranty coverage.
- To reduce the risk of electric shock, do not touch the plug with damp hands.
- Do not splash, pour, or spray water directly onto or into the appliance. This might cause short circuit, electric shock, corrosion, or failure.
- The appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be properly supervised around the appliance.
- Do not climb, stand, or hang on the appliance or doors/drawers or allow children or animals to do so. Do not climb into the appliance or allow children or animals to do so. Death or serious injury could occur or the appliance could be damaged.
- Be careful not to pinch fingers when opening and closing the doors/drawers or rail cover (prep table models) or when handling food pans. Be careful when opening and closing the doors/drawers or rail cover when children are in the area.
- Open and close the doors/drawers and rail cover (prep table models) with care.
   Opening the doors/drawers or rail cover too quickly or forcefully may cause injury or damage to the appliance or surrounding equipment.
- Do not use combustible spray or place volatile or flammable substances in or near the appliance. They might catch fire.
- Keep the area around the appliance clean. Dirt, dust, or insects in the appliance could cause harm to individuals or damage to the equipment.
- Do not throw anything onto the shelves or load any single shelf with more than 120 lb. (54.5 kg) of product. They might fall off and cause injury.
- Do not load any single drawer with more than 75 lb. (34 kg) of product. Depending on the weight of product in the drawers, secure the unit as necessary to prevent it from overturning. Do not open more than one drawer at a time.
- The appliance is designed only for temporary storage of food. Employ sanitary
  methods. Use for any other purposes (for example, storage of chemicals or
  medical supplies such as vaccine and serum) could cause deterioration of stored
  items.
- Do not block air inlets or outlets, otherwise cooling performance may be reduced.
- Do not tightly pack the cabinet. Allow some space between items to ensure good air flow. Also allow space between items and interior surfaces.

### **A** WARNING, continued

- Do not put warm or hot foods in the cabinet. Let them cool first, or they will raise
  the cabinet temperature and could deteriorate other foods in the cabinet or
  overload the appliance.
- All foods should be wrapped in plastic film or stored in sealed containers. Otherwise
  foods may dry up, pass their smells onto other foods, cause frost to develop, result
  in poor appliance performance, or increase the likelihood of cross-contamination.
  Certain dressings and food ingredients, if not stored in sealed containers, may
  accelerate corrosion of the evaporator, resulting in failure.
- Do not store items near air outlets. Otherwise, items may freeze up and crack or break causing a risk of injury or contamination of other food.

### <u>Additional Warnings for Prep Table Models</u>

- The entire rail must always be covered by rail dividers and pans (1/6 size, up to 6" (15 cm) deep). Otherwise, the appliance will not cool properly.
- Use only 1/6 size pans up to 6" (15 cm) deep. Do not use damaged pans.
- Ingredients must be pre-chilled to 37°F (3°C) or less before placing in rail.
- Keep the rail cover closed when not actively preparing food.
- The rail is for keeping ingredients cool while preparing food. If not actively preparing food for a long period such as overnight, seal pans with plastic wrap in addition to closing the rail cover. Depending on conditions, the cabinet temperature setting may need to be adjusted to prevent items from freezing. Alternatively, seal ingredients and store them in a refrigerator or freezer.

### **NOTICE**

- Protect the floor when moving the appliance to prevent damage to the floor.
- Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction. Do not place anything on top of the appliance in an undercounter installation. There must be at least 1.5" (4 cm) overhead clearance for proper ventilation. Blockage of airflow could negatively affect performance and damage the appliance.
- Do not allow the appliance to bear any outside weight.
- To prevent deformation or cracks, do not spray insecticide onto the plastic parts or let them come into contact with oil.
- To avoid damage to the gasket, use only the door/drawer handle when opening and closing.
- To avoid damage to the top seal, do not lift the appliance by the top panel or remove the top panel.
- Do not leave the doors/drawers open.

### **Additional Notice for Prep Table Models**

 Do not place anything on top of the rail hood or rail cover and do not lift the appliance by the rail hood or rail cover. The rail hood and rail cover are not designed to bear any outside weight.

### **B.** Startup

### **A** WARNING

All parts are factory-adjusted. Improper adjustments may adversely affect safety, performance, component life, and warranty coverage.

- 1) Plug the appliance into the electrical outlet. **WARNING! To reduce the risk of electric shock, do not touch the plug with damp hands.** At startup, there is a slight delay before the compressor starts.
- 2) Allow the appliance to cool down prior to loading it with food products. For prep table models, the entire rail must be covered by rail dividers and pans (1/6 size, up to 6" (15 cm) deep) and the rail cover must be closed. Otherwise, the appliance will not cool properly. Leave the pans empty until the appliance cools down. Wash the pans and cutting board before use. WARNING! Make sure the cutting board brackets and cutting board are secure. Otherwise, the cutting board could come off and cause injury.

### **C. Controls and Adjustments**


### 1. Temperature Reading

A thermometer with both °F and °C scales is mounted in the cabinet. See Fig. 19.

### 2. Adjusting the Temperature

The appliance features a cabinet temperature control dial. The warmest setting is 1 and the coldest setting is 7. See the table below for default settings.

Model	Default Temperature Setting	Approximate Default Temperature
Undercounter	Between 4 and 5	Refrigerator: 34°F (1°C)
Worktop		Freezer: -5°F (-21°C)
Prep Table	6	34°F (1°C)

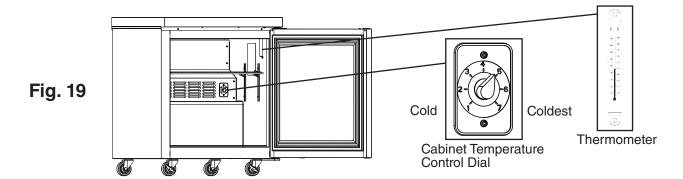

### **D. Defrost**

### 1. Undercounter and Worktop Refrigerators

Off-Cycle Defrost: Undercounter and worktop refrigerators defrost naturally between run cycles.

### 2. Prep Table Refrigerators and Undercounter and Worktop Freezers

Time-Initiated Defrost Cycle: Prep table refrigerators and undercounter and worktop freezers have a defrost timer to control defrost cycle initiation and termination.

To initiate a manual defrost cycle follow the steps below.

- 1) Make sure the appliance is unplugged, then remove the rear panel. See Fig. 20.
- 2) Rotate the defrost timer cam clockwise until it clicks. When the appliance is plugged in it will start in a defrost cycle. To bypass one defrost cycle, rotate the defrost timer cam clockwise until it clicks a 2<sup>nd</sup> time.
- 3) Replace the rear panel in its correct position.
- 4) Plug the appliance into the electrical outlet.

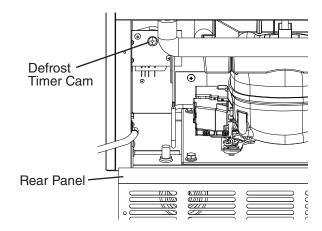


Fig. 20

### E. Food Storage

### **A** WARNING

- The appliance is designed only for temporary storage of food. Employ sanitary methods. Use for any other purposes (for example, storage of chemicals or medical supplies such as vaccine and serum) could cause deterioration of stored items.
- Do not block air inlets or outlets, otherwise cooling performance may be reduced.
- Do not tightly pack the cabinet. Allow some space between items to ensure good air flow. Also allow space between items and interior surfaces.
- Do not put warm or hot foods in the cabinet. Let them cool first, or they will raise
  the cabinet temperature and could deteriorate other foods in the cabinet or
  overload the appliance.
- All foods should be wrapped in plastic film or stored in sealed containers. Otherwise
  foods may dry up, pass their smells onto other foods, cause frost to develop, result
  in poor appliance performance, or increase the likelihood of cross-contamination.
  Certain dressings and food ingredients, if not stored in sealed containers, may
  accelerate corrosion of the evaporator, resulting in failure.
- Do not store items near air outlets. Otherwise, items may freeze up and crack or break causing a risk of injury or contamination of other food.

### <u>Additional Information for Prep Table Models</u>

- The entire rail must always be covered by rail dividers and pans (1/6 size, up to 6" (15 cm) deep). Otherwise, the appliance will not cool properly.
- Use only 1/6 size pans up to 6" (15 cm) deep. Do not use damaged pans.
- Ingredients must be pre-chilled to 37°F (3°C) or less before placing in rail.
- Keep the rail cover closed when not actively preparing food.
- The rail is for keeping ingredients cool while preparing food. If not actively preparing food for a long period such as overnight, seal pans with plastic wrap in addition to closing the rail cover. Depending on conditions, the cabinet temperature setting may need to be adjusted to prevent items from freezing. Alternatively, seal ingredients and store them in a refrigerator or freezer.

### **F. Safety Devices**

### 1. Compressor External or Internal Protector

If combined temperature/amperage value is above the limit specified by the compressor manufacturer, the compressor protector operates independently to turn off the compressor. The compressor protector de-energizes the compressor until the temperature/amperage value returns to an acceptable level.

### 2. High-Pressure Switch (CRMF48(-W))

If pressure on the high-side of the unit exceeds Hoshizaki specifications, the high-pressure switch activates and interrupts the compressor circuit, de-energizing the compressor until the pressure returns to an acceptable level.

### **G.** Cooling Performance

Be sure the appliance is properly installed and located for optimum cooling performance. If cooling performance is not at its optimum level, check the following items:

- Doors/drawers opened too often.
- Doors/drawers left open. Close.
- Cabinet too tightly packed or air inlets/outlets blocked. Allow some space between items to ensure good air flow.
- Warm or hot foods inside. Take them out until they cool down more.
- Ambient temperature too high. Avoid installation near high heat producing equipment or exposure to direct sunlight.
- Temperature control setting not cold enough. Adjust to a colder setting. The warmest setting is 1 and the coldest setting is 7.
- Prep Table Refrigerators and Undercounter and Worktop Freezers: Appliance in defrost cycle. The cabinet temperature may rise temporarily during the defrost cycle, but this will not affect the food inside.

### <u>Additional Information for Prep Table Models</u>

- Pans and rail dividers not in place. The entire rail must always be covered by rail dividers and pans (1/6 size, up to 6" (15 cm) deep) or the rail will not cool properly.
- Warm or hot ingredients inside. Only load ingredients that have been pre-chilled to 37°F (3°C) or less.
- Rail cover open when not actively preparing food. When not actively preparing food, close the rail cover.

### **H. Cabinet Condensation**

In the event condensation develops on the cabinet exterior, check the following items:

- Doors/drawers left open. Close.
- Ambient humidity too high. In high humidity areas it may be necessary to wipe off the cabinet frame occasionally.

### **III. Cleaning and Maintenance Instructions**

### A. Cleaning

### **A** WARNING

- Unplug the appliance before cleaning to prevent electric shock by unexpected entrance of water into the appliance or injury by moving parts. To reduce the risk of electric shock, do not touch the plug with damp hands.
- Before cleaning the appliance, move all foods into another clean refrigerator or freezer.
- Do not splash, pour, or spray water directly onto or into the appliance. This might cause short circuit, electric shock, corrosion, or failure.
- Before using a sanitizer such as inert soap and sodium hypochlorite (chlorine bleach), thoroughly read the manufacturer's instructions on its proper usage.

### **NOTICE**

- To prevent damage to the plastic surfaces, do not use the following: thinner, benzine, alcohol, petroleum, soap powder, polishing powder, alkaline cleaner, acid, scouring pad and especially those strong cleaners for use on a ventilating fan or a cooking range. Also, to prevent corrosion, do not use sodium hypochlorite (chlorine bleach) on the stainless steel surfaces.
- Use a clean cloth for cleaning.

### 1. Exterior

Wipe the exterior occasionally with a clean, soft cloth. Use a damp cloth containing a neutral cleaner to wipe off oil or dirt buildup.

### 2. Cabinet Interior

Spills should be wiped up promptly to avoid unpleasant odors. The cabinet interior should be cleaned periodically with a mild soap or detergent and warm water.

### 3. Door/Drawer Gaskets

Door/drawer gaskets should be cleaned regularly with mild soap and warm water to remove dirt and grease.

### 4. Shelves

Remove and clean regularly.


### 5. Drawers

Drawers and drawer slides are removable.

- To remove a drawer: Remove all items from the drawer. Pull the drawer out to its fully extended position. Open the safety clips (one on each side) by sliding them forward, then rotating them up. See Fig. 21. Lift up on the handle slightly, then pull to disengage the drawer. Be sure to support the rear and front of the drawer while removing it.

  WARNING! Be sure to close the safety clips when reinstalling the drawer.
- To remove a drawer slide (center slide containing rollers): Push up on the stop lever while pulling on the drawer slide. See Fig. 22. Drawer slides do not require lubrication, but drawer slides should be kept clean and free of food.

  Note: Drawer slides are dishwasher safe.

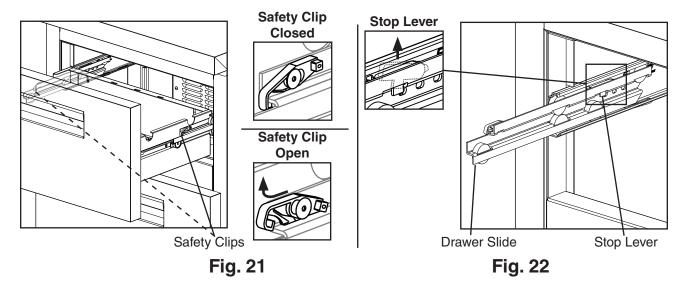

### 6. Worktop (Worktop Models)

Clean the work surface as often as necessary to maintain a clean, sanitary surface.

### 7. Cutting Board (Prep Table Models)

Remove and clean the cutting board as often as necessary to maintain a clean, sanitary work surface. Also clean the space underneath the cutting board as often as necessary to maintain a clean, sanitary surface. After cleaning, slide the cutting board back into the cutting board brackets. WARNING! Make sure the cutting board brackets and cutting board are secure. Otherwise, the cutting board could come off and cause injury.

### 8. Rail, Rail Hood, and Rail Cover (Prep Table Models)

Spills and splashes should be wiped up promptly to avoid unpleasant odors. Wipe the rail area, the rail hood, and the rail cover occasionally with a clean, damp sponge or cloth containing a neutral cleaner. Do not pour or spray water into the rail area.

WARNING! Support the rail cover when cleaning. Otherwise, the rail cover could close suddenly and cause injury.

NOTICE! Do not allow any foreign objects to fall into the cabinet while cleaning.

### **B.** Maintenance

### **A** WARNING

- Unplug the appliance before performing maintenance to prevent electric shock or injury by moving parts. To reduce the risk of electric shock, do not touch the plug with damp hands.
- Before performing maintenance, move all foods into another clean refrigerator or freezer.

### 1. Condenser

Check the condenser once a year and use a brush or vacuum cleaner to clean the condenser as required.

### 2. Power Supply Connection

If the plug or power cord is damaged, contact your local Hoshizaki service representative or local Hoshizaki distributor immediately and ask for repairs.

All other maintenance or service on the appliance should be performed in accordance with the Hoshizaki Service Manual by a qualified service technician.

### IV. Preparing the Appliance for Periods of Non-Use

When shutting down the appliance for more than one week, follow the instructions below.

### **A** WARNING

When preparing the appliance for long storage, prevent the doors/drawers from closing to reduce the risk of children getting trapped.

### **NOTICE**

When preparing the appliance for long storage, clean the appliance. See "III.A. Cleaning" for details.

- 1) Before shutting down the appliance, move all foods into another clean refrigerator or freezer.
- 2) Unplug the appliance. WARNING! To reduce the risk of electric shock, do not touch the plug with damp hands.

### V. Disposal

### **A** WARNING

When preparing the appliance for disposal, remove the doors/drawers to reduce the risk of children getting trapped. Leave any shelves in place so that children may not easily climb inside.

The appliance contains refrigerant and must be disposed of in accordance with applicable national, state, and local codes and regulations. Refrigerant must be recovered by properly certified service personnel.





HOSHIZAKI AMERICA, INC. A Georgia corporation with its principal offices at 618 Hwy. 74 South, Peachtree City, Georgia 30269, ("Hoshizaki") warrants to the original owner/user that any Refrigerator or Freezer manufactured by Hoshizaki ("the products") shall be free of defects in material or workmanship under normal and proper use and maintenance service as specified by Hoshizaki and upon proper installation and start-up in accordance with the instruction manual supplied with the Product. Proper warranty registration must be completed within 30 days of the original installation date to validate the product warranty. In the event that proper registration has not been completed, the warranty shall begin from the factory ship date or the distributor sold date, whichever is available. The owner/user is responsible to provide valid proof of installation if the unit is installed more than 180 days from the current registration start date. Regardless of the actual installation date, the warranty start date shall not exceed twenty-four (24) months from the factory ship date. The obligation of Hoshizaki and the rights and remedies of the owner/user under this warranty are exclusively limited to (1) the repair or replacement, including labor charges, of parts or assemblies that in Hoshizaki's opinion are defective within two years after the original date of installation; and (2) the repair or replacement, excluding labor charges, of a compressor that in the opinion of Hoshizaki is defective during the three year period after the two year warranty period. The labor warranty shall include standard straight time labor charges at the product location only and shall exclude charges for travel time, mileage or other premium charges. Any labor service required to fulfill the warranty obligation must be performed by a refrigeration service company qualified and accepted by Hoshizaki and/or the local Hoshizaki distributor.

This warranty does not include parts or labor coverage for component failure or other damage resulting from:

- \* External electrical power failure or miswiring to Product for any reason.
- \* Adverse operating conditions as set forth in the owner/user manual for the Product.
- \* Failure to clean and/or maintain Product as set forth in the owner/user manual for the Product.

All claims for labor or parts must be made through the local Hoshizaki distributor. The defective part for which labor reimbursement is claimed, together with the service invoice, must be returned to the Hoshizaki distributor within fifteen days from the date of service to be eligible for labor and parts warranty coverage. All replacement parts must be approved Hoshizaki parts. Incidents of failure that do not require replacement of a part shall be explained in sufficient detail on the service invoice to identify the failure. All claims shall include the product model number, serial number, original date of installation and customer identification.

The foregoing warranty shall not apply to (1) any part or assembly (a) that has been altered, modified, or changed, (b) that has been subjected to misuse, abuse, neglect or accidents, or (c) any Product on which the serial or model number has been removed or altered, or (2) any Product that has been installed and/or maintained inconsistent with Hoshizaki's technical publications, or (3) any Product that has been installed or is located outside the standard warranty coverage area. Warranty valid in United States, Canada, Puerto Rico, and U.S. territories. Contact factory for warranty in other countries.

The five year compressor parts warranty shall not apply when the Product refrigeration system is modified with a condenser, heat reclaimed device, or parts and assemblies other than those manufactured by Hoshizaki unless Hoshizaki has accepted modifications for specific installations in writing.

### "LIMITATION OF LIABILITY AND OTHER WARRANTIES"

Hoshizaki assumes no liability for misuse or inadequate maintenance of the Product. In no event shall the user be entitled to recover incidental or consequential damages, including but not limited to, damages for inconvenience, food loss, rental or replacement equipment, loss of profits, or other commercial loss.

Warranties stated above are the only warranties made in connection with the sale and distribution of the Products. ANY AND ALL OTHER EXPRESSED, STATUTORY AND IMPLIED WARRANTIES APPLICABLE TO THE PRODUCT, INCLUDING, WITHOUT LIMITATION, ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE ARE EXPRESSLY DISCLAIMED.

The warranty information set forth above shall be governed by and construed in accordance with the laws of the State of Georgia and, if applicable, the laws of the United States of America. The warranty, as stated, is extended only to the original owner/user and is not assignable.



2A4021-01<u>0</u>