


*it all
starts
with a
vision*



VISION  FITNESS®

500 South CP Avenue • P.O. Box 280 • Lake Mills, WI 53551
toll free 800.335.4348 • phone 920.648.4090 • fax 920.648.3373
www.visionfitness.com

©2007 Vision Fitness. All Rights Reserved. 5.07
AG18.43PRD
REV3

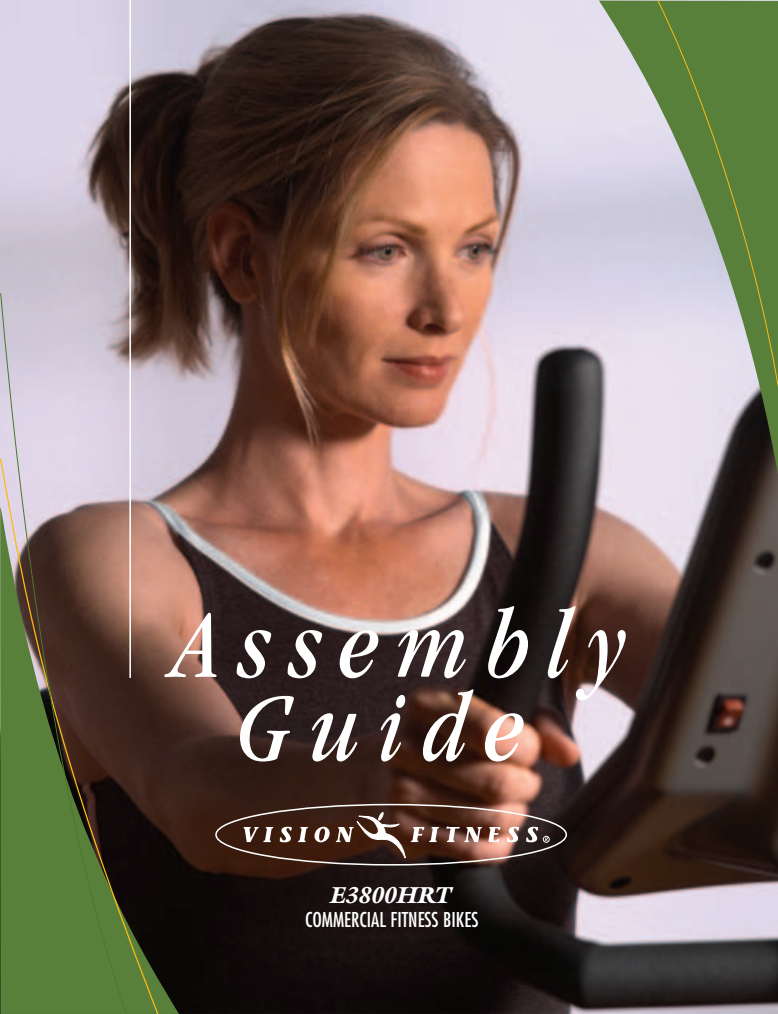


*Assembly
Guide*

VISION  FITNESS®


E3800HRT
COMMERCIAL FITNESS BIKES

TOOLS & PARTS INCLUDED

5mm T-Shaped Wrench

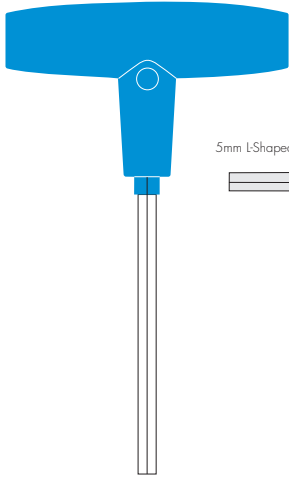

1.5mm Pedal Wrench

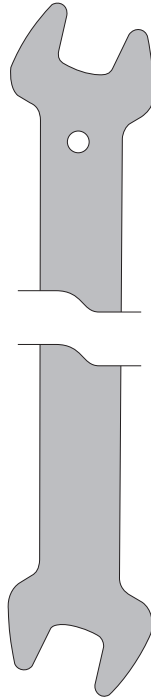

Screwdriver



5mm L-Shaped Wrench




PARTS BOX


Console Mast Cover
Accessory Tray
Colorcoded Hardware Bags
Owner's Guide
Assembly Guide
Warranty Card

HARDWARE INCLUDED

ORANGE BAG



M8 x 6.5L Bolt
Quantity: 2



M8 x 20L Bolt
Quantity: 2



M8 Lock Washer
Quantity: 4

PINK BAG



M8 x 1.5L Bolt
Quantity: 4

BLUE BAG



M8 x 1.5L Bolt
Quantity: 7



M8 Lock Washer
Quantity: 6

Assembly Guide

E3800HRT COMMERCIAL FITNESS BIKE

To avoid possible damage to this Fitness Bike, please follow these assembly steps in the correct order. Before proceeding, find your new Fitness Bike's serial number located on the front axle tube, and enter here:

Refer to this number when calling for service, and enter this serial number on your Warranty Card and in your own records. Be sure to read your Owner's Guide before using your new Fitness Bike. If any parts, hardware or tools are missing, please call 1.800.335.4348, Extension 12





NOTE: It is recommended that you apply grease to the threads of each bolt and screw as you assemble your Fitness Bike to prevent loosening and noise. Also, during each assembly step, ensure that ALL bolts and screws are in place and partially threaded in before completely tightening any ONE bolt or screw.

STEP 1 ORANGE BAG

- Install the rear foot with four lock washers (M8), two inside bolts (M8x6.5L), and two outside bolts (M8x2.0L). Tighten with the 5mm T-shaped wrench.

STEP 2 BLUE BAG

- Slide the console mast boot onto the console mast.
- Unfold the wire harness, coaxial cable, and TV power cable located in the console mast frame bracket. Connect the cables and wire harness to the wire tie coming from the bottom of the console mast. Pull the wire tie and cables up through the top of the console mast while simultaneously sliding the mast into the frame bracket.
- Secure the mast to the frame using six lock washers (M8) and six bolts (M8x1.5L). Tighten with the 5mm T-shaped wrench. Place the seventh bolt (M8x1.5L) in the rear of the frame bracket and tighten until snug. Tighten with the 5mm T-shaped wrench.
- Slide the console mast boot down and set it in place on the side cover.
- Remove the nuts (M8) from the bottom of the seat. Attach the seat to the seat post with the nuts you just removed. Tighten with the 15mm wrench.

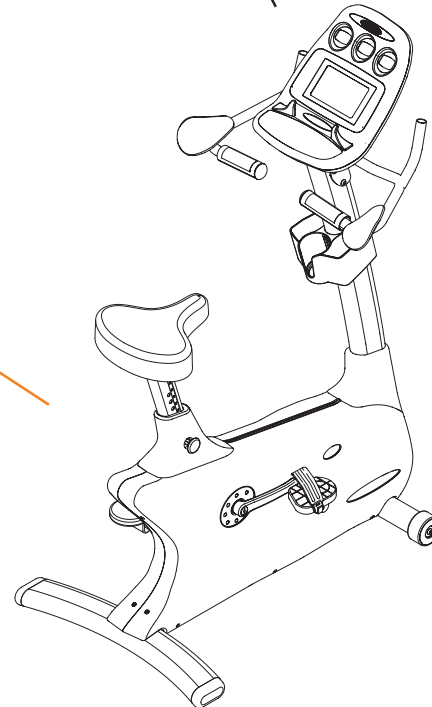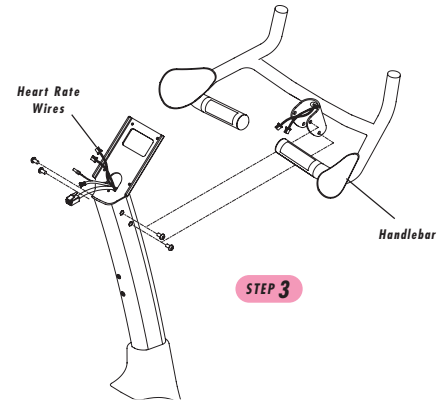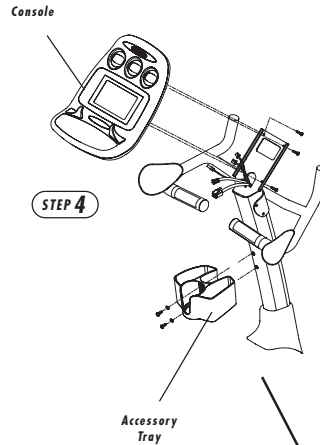

STEP 3 PINK BAG

- Feed the heart rate wires of the handlebar through the small hole located in the front of the console mast. Pull these wires up through the hole at the top of the console mast. Attach the handlebar to the console mast using four bolts (M8x1.5L). Tighten with the 5mm T-shaped wrench.
 - Tuck the coaxial and TV power cables into the console mast.
- NOTE:** If you have purchased the TV bracket assembly, remove the bolts from the TV bracket cover located at the front of the console mast and remove the cover. Feed the coaxial and TV power cables through the hole at the front of the console mast.

STEP 4 CONSOLE

- Remove the four mounting bolts from the back of the console with the screwdriver. Plug in the wire harness and the two heart rate wires to the back of the console. Attach the console to the console mast with the four bolts removed earlier in this step.
- With the screwdriver, remove the two bolts located half way up the console mast. Attach the accessory tray to the console mast with the two bolts.

