

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



# SPECIFICATION OF PRODUCT

**for Lithium-ion Rechargeable Cell**

**Model : ICP103450S**

**Mar. 2008**

**Samsung SDI Co., Ltd.**

**Mobile Energy Business Team**

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



## 1. Scope

This product specification has been prepared to specify the rechargeable lithium-ion cell ('cell') to be supplied to the customer by Samsung SDI Co., Ltd.

## 2. Description and Model

2.1 Description	Cell (lithium-ion rechargeable cell)
2.2 Model	ICP103450S

## 3. Nominal Specifications(Bare Cell)

Item	Specification
3.1 Nominal Capacity	2000mAh (0.2C discharge)
3.2 Charging Voltage	4.2V
3.3 Nominal Voltage	3.7V
3.4 Charging Method	CC-CV (constant voltage with limited current)
3.5 Charging Current	Standard charge: 1000mA Rapid charge : 1700mA
3.6 Charging Time	Standard charge : 3hours Rapid charge : 2.5hours
3.7 Max. Charge Current	1700mA
3.8 Max. Discharge Current	2000mA
3.9 Discharge Cut-off Voltage	2.75V
3.10 Cell Weight	42g max
3.11 Cell Dimension	Thickness : 10.4mm(ex-factory status) Height : 48.7mm max Width : 33.9mm max
3.12 Operating Temperature	Charge : 0 to 45℃ Discharge: -20 to 60℃
3.13 Storage Temperature	1 year : -20~25℃(1*) 3 months : -20~45℃(1*) 1 month : -20~60℃(1*)

Note (1): If the cell is kept as ex-factory status (55% of charge),  
the capacity recovery rate is more than 80%.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



#### 4. Outline Dimensions

See the attachment(Fig. 1)

#### 5. Appearance

There shall be no such defects as scratch, rust, discoloration, leakage which may adversely affect commercial value of the cell.

#### 6. Standard Test Conditions

##### 6.1 Environmental Conditions

Unless otherwise specified, all tests stated in this specification are conducted at temperature  $25 \pm 5^\circ\text{C}$  and humidity  $65 \pm 20\%$ .

##### 6.2 Measuring Equipment

###### (1) Ammeter and Voltmeter

The ammeter and voltmeter should have an accuracy of the grade 0.5 or higher.

###### (2) Slide caliper

The slide caliper should have 0.01 mm scale.

###### (3) Impedance meter

The impedance meter with AC 1kHz should be used.

#### 7. Characteristics

##### 7.1 Standard Charge

This "Standard Charge" means charging the cell with charge current 950mA and constant voltage 4.2V at  $25^\circ\text{C}$  for 3hours.

##### 7.2 Rated Charge

This "Rated Charge" means charging the cell with charge current 950mA and constant voltage 4.2V and 2.5h or 0.05C(=100mA) cut-off at  $25^\circ\text{C}$ .

##### 7.3 Standard Discharge Capacity

The standard discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 400mA with 2.75V cut-off at  $25^\circ\text{C}$  within 1 hour after the standard charge.

$$\text{Standard Discharge Capacity} \geq 2000\text{mAh}$$

##### 7.4 Rated Discharge Capacity

The rated discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 1000mA with 3.0V cut-off at  $25^\circ\text{C}$  within 1 hour after the rated charge.

$$\text{Rated Discharge Capacity} \geq 2000\text{mAh}$$

##### 7.5 Initial internal impedance

Initial internal impedance measured at AC 1kHz after rated charge.

$$\text{Initial internal impedance} \leq 60\text{m}\Omega$$

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



### 7.6 Charge Rate Capabilities

Discharge capacity is measured with constant current 950mA and 3.0V cut-off after the cell is charged with 4.2V as follows.

	Charge Condition			
Current	0.2C (400mA)	0.5C (1000mA)	1.0C (2000mA)	2.0C (4000mA)
Cut-off	7h or 0.05C	2.5h or 0.05C	2.5h or 0.05C	2.5h or 0.05C
Relative Capacity	100%	100%	95%	90%

Note: Percentage as an index of the rated discharge capacity(=2000mAh) is 100%.

### 7.7 Discharge Rate Capabilities

Discharge capacity is measured with the various currents in under table and 3.0V cut-off after the rated charge.

	Discharge Condition			
Current	0.2C (400mA)	0.5C (1000mA)	1.0C (2000mA)	2.0C (4000mA)
Relative Capacity	100%	100%	95%	90%

Note: Percentage as an index of the rated discharge capacity(=2000mAh) is 100%.

### 7.8 Temperature Dependence of Discharge Capacity

Capacity comparison at each temperature, measured with discharge constant current 950mA and 3.0V cut-off after the rated charge is as follows.

Charge Temperature	Discharge temperature				
25 °C	-10 °C	0 °C	25 °C	40 °C	60 °C
Relative Capacity	50%	80%	100%	95%	90%

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is 4 hours.  
Percentage as an index of the rated discharge capacity (=2000mAh) is 100%.

### 7.9 Temperature Dependence of Charge Capacity

Capacity comparison at each temperature, measured with discharge constant current

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



950mA and 3.0V cut-off after the rated charge is as follows.

	Charge temperature			Discharge temperature
	0 °C	25 °C	45 °C	25 °C
Relative Capacity	80%	100%	95%	

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is 4 hours.

Percentage as an index of the rated discharge capacity (=2000mAh) is 100%.

#### 7.10 Cycle Life

Each cycle is an interval between the charge (charge current 1600mA) with 2.5h or 0.05C cut-off and the discharge (discharge current 1000mA) with 3.0V cut-off.

Capacity is measured at 100cycles and 300cycles.

100cyc. Capacity  $\geq$  1800mAh (90% of the rated discharge capacity)

300cyc. Capacity  $\geq$  1500mAh (75% of the rated discharge capacity)

#### 7.11 Storage Characteristics

Capacity after storage for 30days at 25 °C after the rated charged, measured with discharge current 1000mA with 3.0V cut-off at 25 °C.

Capacity retention(after the storage)  $\geq$  1800mAh (90% of the rated discharge capacity)

### 8. Mechanical Characteristics

#### 8.1 Drop Test

Test method: Cell(rated charged) is dropped onto the steel plate (thickness:  $\geq$  10mm) from 1.0m height at each side and a random direction 3 times.  
(Total 9 times)

Criteria: No leakage, Open circuit voltage  $\geq$  4.0V, IR < 100m $\Omega$

#### 8.2 Vibration Test

Test method: Cell(rated charged) is vibrated per axis in each of three mutually orthogonal axes with total excursion of 1.6mm and with vibration cycling that consists of 10Hz to 55Hz to 10Hz at sweep rate  $1 \pm 0.055$ Hz/min.

Criteria: No leakage, Open circuit voltage  $\geq$  4.0V, IR < 100m $\Omega$

### 9. Environmental Characteristics

#### 9.1 Thermal Shock

Test method: Cell(rated charged) is repeatedly tested with 30 times heat cycling, which means maintaining the cell for 1hours at -40 °C and 85 °C, respectively.

Inspect its appearance and measure its thickness right after thermal shock.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



Measure the recovered capacity by rated charge/discharge cycling after  
 rated discharging(1000mA, 3.0V cut-off) at 25 °C.

Criteria: No leakage, Cell thickness < 14.4mm,  
 Recovery > 1400mAh (70% of the rated discharge capacity)

### 9.2 Humidity

Test method: Cell(rated charged) is exposed to 50 °C,95%RH. for 10days  
 Inspect appearance and measure thickness right after humidity test.  
 Measure the recovered capacity by rated charge/discharge cycling after  
 rated discharging(1000mA, 3.0V cut-off) at 25 °C.

Criteria: No leakage, Cell thickness < 11.3mm,  
 Recovery > 1800mAh (90% of the rated discharge capacity)

### 9.3 High Temperature Swelling

Test method: Cell(rated charged) is exposed to 85 °C for 4hours.  
 Measure thickness right after swelling test and the recovered capacity by  
 rated charge/discharge cycling after rated discharging(1000mA, 3.0V cut-  
 off) at 25 °C.

Criteria: No leakage, Cell thickness < 13.4mm,  
 Recovery > 1600mAh (80% of the rated discharge capacity)

## 10. Safety

### 10.1 Overcharge Test (with Breaker with PTC)

Test method: To charge the standard charged cell with 12V and 1C at 25 °C  
 for 2.5 hours.

Criteria: No fire, and no explosion.

### 10.2 External Short-circuit Test

Test method: To short-circuit the standard charged cell by connecting positive and  
 negative terminal by less than 50mΩ wire for 2.5 hours.

Criteria: No smoke, No fire, and no explosion.

### 10.3 Reverse Charge Test

Test method: To charge reversely the standard charged cell with charge current 1C  
 for 2.5 hours.

Criteria: No fire, and no explosion.

### 10.4 Nail Penetrating Test

Test method: To penetrate the standard charged cell with a nail vertically through the  
 center of wide plane(34 X 50).

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



Criteria: No fire, and no explosion.

#### 10.5 Heating Test

Test method: To heat the standard charged cell at heating rate 5°C per minute up to 150°C and keep the cell in oven for 60 minutes.

Criteria: No fire, and no explosion within 10min.

#### 10.6 Impact

Test method: To place 15.8mm diameter bar across the center of standard charged cell, and drop 9.1kg weight from 61cm height onto the cell.  
(Impacted side is longitudinal and wide axis.)

Criteria: No fire, and no explosion.

### 11. Warranty

Samsung SDI will be responsible for replacing the cell against defects or poor workmanship for 1year from the date of shipping. Any other problem caused by malfunction of the equipment or unsuitable use of the cell is not under this warranty.

The warranty set forth in proper using and handling conditions described above and excludes in the case of a defect which is not related to manufacturing of the cell.

#### -Disclaimer-

This Specification stipulates the final and comprehensive requirements for the respective products hereof beyond this Specification, it is the responsibility of the customer to explicitly disclose any additional requirements, information or reservations regarding these requirements to Samsung SDI prior to implementation, where any and all disclosures of the customer shall be with an authorized representative of Samsung SDI in writing.

Samsung SDI shall not be responsible for safety, performance, functionality or compatibility of the system with which the Samsung SDI-supplied components are intergrated unless such features have been expressly communicated and described in the Specification.

**SAMSUNG SDI MAKES NO GUARANTY OR WARRANTY, EXPRESS OR IMPLIED INCLUDING BUT NOT LIMITED TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, TO ANY PARTY.**

Moreover, any party should do their own due diligence regarding these requirements prior to implementation.

### 12. Others

#### 12.1 Storage for a long time

If the cell is kept for a long time(3months or more), It is strongly recommended that the cell is preserved at dry and low-temperature.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



### 12.2 Thermal Fuse Specification

The recommended Thermal Fuse model : Matsushita(Japan), EYP4MU092X


Part No.	TF	Function Temp	TH	DC ratings	DCR(avg)
EYP4MU092X	92 °C	89 ± 2 °C	55 °C	DC50V 4A	6.5mΩ

### 12.3 Other

Any matters that specifications does not have, should be conferred with between the both parties.



Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----

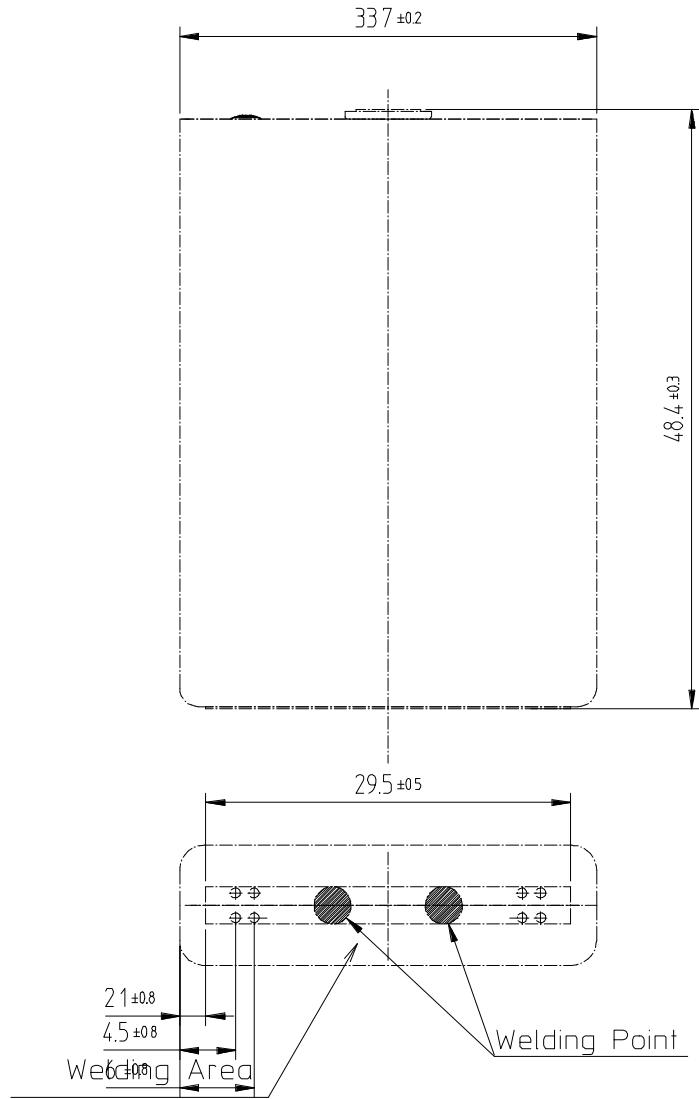

**Fig.1. ICP103450S**

Max. 10.5mm means 55% charged cell thickness.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



## **Proper Use and Handling of Lithium Ion Cells**

See before using lithium-ion cell

Supplied by

**Samsung SDI Co., Ltd.**

### **1. General**

This document has been prepared to describe the appropriate cautions and prohibitions, which the customer should take or employ when the customer uses and handles the lithium ion cell to be manufactured and supplied by Samsung SDI Co., Ltd., in order to obtain optimum performance and safety.

### **2. Charging**

#### **2.1 Charging current**

Charging current should be less than maximum charge current specified in the product specification.

#### **2.2 Charging voltage**

Charging should be done by voltage less than that specified in the product specification.

#### **2.3 Charging time**

Continuous charging under appropriate voltage does not cause any loss of characteristics. However, the charge timer is recommended to be installed from a safety consideration, which shuts off further charging at time specified in the product specification.

#### **2.4 Charging temperature**

The cell should be charged within a range of specified temperatures in the product specification.

#### **2.5 Reverse charging**

The cell should be connected, confirming that its poles are correctly aligned. Inverse charging should be strictly prohibited. If the cell is connected improperly, it may be damaged.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



### **3. Discharging**

#### **3.1 Discharging**

3.1.1 The cell should be discharged at less than maximum discharge current specified in the product specification.

#### **3.2 Discharging temperature**

3.2.1 The cell should be discharged within a range of temperatures specified in the product specification.

3.2.2 Otherwise, it may cause loss of characteristics.

#### **3.3 Over-discharging**

3.3.1 The system should equip with a device to prevent further discharging exceeding discharging cut-off voltage specified in the product specification.(over-discharging)

3.3.2 Over-discharging may cause loss of performance, characteristics, of battery function.

3.3.3 Over-discharging may occur by self-discharge if the battery is left for a very long time without any use.

3.3.4 The charger should equip with a device to detect cell voltage and to determine recharging procedures.

### **4. Storage**

#### **4.1 Storage conditions**

4.1.1 The cell should be stored within a range of temperatures specified in the product specification.

4.1.2 Otherwise, it may cause loss of characteristics, leakage and/or rust.

#### **4.2 Long-term storage**

4.2.1 The cell should be used within a short period after charging because long-term storage may cause loss of capacity by self-discharging.

4.2.2. If long-term storage is necessary, the cell should be stored at lower voltage within a range specified in the product specification, because storage at higher voltage may cause loss of characteristics.

### **5. Cycle life**

#### **5.1 Cycle life performance**

5.1.1 The cell can be charged/discharged repeatedly up to times specified in the produce specification with a certain level of capacity also specified in the product specification.

5.1.2 Cycle life may be determined by conditions of charging, discharging, operating temperature and/or storage.

### **6. Design of System**

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



## 6.1 Connection between the cell and the battery

- 6.1.1 The cell should not be soldered directly with leads. Namely, the cell should be welded with leads on its terminal and then be soldered with wire or leads to soldered lead.
- 6.1.2 Otherwise, it may cause damage of component, such as separator and insulator, by heat generation.

## 6.2 Positioning the battery in the System

- 6.2.1 The battery should be positioned as possible as far from heat sources and high temperature components.
- 6.2.2 Otherwise, it may cause loss of characteristics.

## 6.3 Mechanical shock protection of the battery

- 6.3.1 The battery should equip with appropriate shock absorbers in order to minimize shock.
- 6.3.2 Otherwise, it may cause shape distortion, leakage, heat generation and/or rupture.

## 6.4 Short-circuit protection of the cell

- 6.4.1 The cell equips with an insulating sleeve to protect short-circuit which may occur during transportation, battery assembly and /or system operation.
- 6.4.2 If the cell sleeve is damaged by some cause such as outside impact, it may cause short-circuit with some wiring inside the battery.

## 6.5 Connection between the battery and charger/system

- 6.5.1 The battery should be designed to be connected only to the specified charger and system.
- 6.5.2 A reverse connection of the battery, even in the specified system, should be avoided by employing special battery design such as a special terminals.

## 7. Battery Pack Assembly

### 7.1 Prohibition of usage of damaged cell

- 7.1.1 The cell should be inspected visually before battery assembly.
- 7.1.2 The cell should not be used if sleeve-damage, can-distorsion and/or electrolyte-smell is detected.

### 7.2 Terminals handling

- 7.2.1 Excessive force on the negative terminal should be avoided when external lead is welled.

### 7.3 Transportation

- 7.3.1 If the cell is necessary to transported to order place, such as the battery manufacturer, careful precautions should be taken to avoid damage of cell.

## 8. Others

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



## 8.1 Disassembly

- 8.1.1 The cell should not be dismantled from the battery pack.
- 8.1.2 Internal short-circuit caused by disassembly may lead to heat generation and/or venting.
- 8.1.3 When the electrolyte is coming in contact with the skin or eyes, flush immediately with fresh water and seek medical advice.

## 8.2 Short-circuiting

- 8.2.1 Short-circuit results in very high current which leads to heat generation.
- 8.2.3 An appropriate circuitry should be employed to protect accidental short-circuiting.

## 8.3 Incineration

- 8.3.1 Incinerating and disposing of the cell in fire are strictly prohibited, because it may cause rupture.

## 8.4 Immersion

- 8.4.1 Soaking the cell in water is strictly prohibited, because it may cause melt of components to damaged to functions.

## 8.5 Mixing use

- 8.5.1 Different types of cell, or same types but different manufacturer's cell may lead to cell rupture or damage to system due to the different characteristics of cell.

## 8.6 Battery exchange

- 8.6.1 Although the cell contains no environmentally hazardous component, such as lead or cadmium. the battery should be disposed according to the local regulations when it is disposed.
- 8.6.2 The cell should be disposed with a discharged state to avoid heat generation by an inadvertent short-circuit.

## 8.7 Caution

"The Battery used in this device may present a risk of fire or chemical burn if mistreated. Do not disassemble, heat above 100 °C or incinerate. Replace battery with Samsung SDI battery only. Use of another battery may present a risk of fire or explosion. Dispose of used battery promptly. Keep away from children. Do not disassemble and do not dispose of in fire."

## 8.8 Warning – Attached (Also provided in a box)

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



## **Handling Precaution and Prohibitions of Lithium ion & Lithium Ion Polymer Rechargeable Cells and Batteries**

Inaccurate handling of lithium ion and lithium ion polymer rechargeable battery may cause leakage, heat, smoke, an explosion, or fire.

This could cause deterioration of performance or failure. Please be sure to follow instructions carefully.

### 1.1 Storage

Store the battery at low temperature (below 20°C is recommended), low humidity, no dust and no corrosive gas atmosphere.

### 1.2 Safety precaution and prohibitions

To assure product safety, describe the following precautions in the instruction manual of the application.

#### **[ Danger!]**

##### ■ Electrical misuseage

Use dedicated charger.

Use or charge the battery only in the dedicated application.

Don't charge the battery by an electric outlet directly or a cigarette lighter charger.

Don't charge the battery reversely.

##### ■ Environmental misuseage

Don't leave the battery near the fire or a heated source.

Don't throw the battery into the fire.

Don't leave, charge or use the battery in a car or similar place where inside of temperature may be over 60°C.

Don't immerse, throw, wet the battery in water / seawater.

##### ■ others

Don't fold the battery cased with laminated film such as pouch and Polymer.

Don't store the battery in a pocket or a bag together with metallic objects such as keys, necklaces, hairpins, coins, or screws.

Don't short circuit (+) and (-) terminals with metallic object intentionally.

Don't pierce the battery with a sharp object such as a needle, screw drivers.

Don't heat partial area of the battery with heated objects such as soldering iron.

Don't hit with heavy objects such as a hammer, weight.

Don't step on the battery and throw or drop the battery on the hard floor to avoid mechanical shock.

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



Don't disassemble the battery or modify the battery design including electric circuit.

Don't solder on the battery directly.

Don't use seriously scared or deformed battery.

Don't put the battery into a microwave oven, dryer ,or high-pressure container.

Don't use or assemble the battery with other makers' batteries, different types and/or models of batteries such as dry batteries, nickel-metal hydride batteries, or nickel-cadmium batteries.

Don't use or assemble old and new batteries together.

Don't contact electrically the negative terminal of the cell with the surface of the cell and the case of the battery.

Unconsciously handling battery is capable of the corrosion of the battery case.

### [ Warning! ]

Stop charging the battery if charging isn't completed within the specified time.

Stop using the battery if the battery becomes abnormally hot, order, discoloration, deformation, or abnormal conditions is detected during use, charge, or storage.

Keep away from fire immediately when leakage or foul odors are detected. If liquid leaks onto your skin or cloths, wash well with fresh water immediately.

If liquid leaking from the battery gets into your eyes, don't rub your eyes and wash them with clean water and go to see a doctor immediately.

If the terminals of the battery become dirty, wipe with a dry cloth before using the battery.

The battery can be used within the following temperature ranges. Don't exceed these ranges.

Charge temperature ranges : 0°C ~ 45°C

Discharge Temperature ranges : -20°C ~ 60°C

Store the battery at temperature below 60°C

Cover terminals with proper insulating tape before disposal.

### [ Caution! ]

#### ■ Electrical misuseage

Battery must be charge with constant current-constant voltage (CC/CV).

Charge current must be controlled by specified value in Cell specification.

Cut-off Voltage of charging must be 4.2V.

Charger must stop charging battery by detecting either charging time or current specified in Cell's specification.

Discharge current must be controlled by specified value in Cell's specification.

Cut-off Voltage of discharging must be over 2.5V.

#### ■ others

Keep the battery away from babies and children to avoid any accidents such as swallow.



Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



If younger children use the battery, their guardians should explain the proper handling method and precaution before using.

Before using the battery, be sure to read the user's manual and precaution of it's handling.

Before using charger, be sure to read the user's manual of the charger.

Before installing and removing the battery from application, be sure to read user's manual of the application.

Replace the battery when using time of battery becomes much shorter than usual.

Cover terminals with insulating tape before proper disposal.

If the battery is needed to be stored for an long period, battery should be removed from the application and stored in a place where humidity and temperature are low.

While the battery is charged, used and stored, keep it away from object materials with static electric chargers.

### **Safety Handling Procedure for the Transporter**

- **Quarantine** : Packages that are crushed, punctured or torn open to reveal contents should not be transported. Such packages should be isolated until the shipper has been consulted, provided instructions and, if appropriate, arranged to have the product inspected and repacked.
- **Spilled Product** : In the event that damage to packaging results in the release of cells or batteries, the spilled products should be promptly collected and segregated and the shipper should be contacted for instructions.

### **Design of positioning the battery pack in application and charger**

To prevent the deterioration of the battery performance caused by heat, battery shall be positioned

away from the area where heat is generated in the application and the charger.

### **Design of the Battery Pack**

Be sure adopting proper safe device such as PTC specified type or model in Cell Specification. If you intend to adopt different safety device which is not specified in Cell Specification, please contact Samsung SDI to investigate any potential safety problem.

Be sure designing 2nd protective devices such as PTC & PCM at the same time to protect Cell just in case one protective device is fault.

Please contact following offices when you need any help including safety concerns.

### **Samsung SDI Emergency Contact Information**

- **Samsung SDI Headquarter.**

Spec. No.	ICP103450S	Version No.	1.0
-----------	------------	-------------	-----



Samsung Life Insurance Bldg. 150 Taepyungro 2-ga, Jung-gu, Seoul, Korea  
Tel:(+82)2-727-3686 Fax:(+82)2-727-3689

■ **Samsung SDI Chonan factory.**

508, Sungsung-Dong, Chonan City, Chungchongnam-Do, Korea  
Tel:(+82)41-560-3669 Fax:(+82)41-560-3697

■ **Samsung SDI America office.**

18600 Broadwick Street Rancho Dominguez CA 90220  
Tel:(+1)310-900-5205 Fax:(+1)310-537-1033

■ **Samsung SDI Taiwan office.**

Rm. 3010, 30F., 333, Keelung Rd. Sec. 1, Taipei, Taiwan  
Tel:(+886)2-2728-8469 Fax:(+886)2-2728-8480