

One Control | White Loop


Thank you for your purchase of the White Loop by One Control.



The White loops allows users to instantly change channels and the Flash Loop switches between two different effects loops. Additionally the White Loop features 2 DC outs which can be used to power 2 additional pedals, while using the DC INPUT.

To get the full potential of the unit and to avoid misuse, please read this user guide carefully.

- 1** GREEN LOOP RETURN: Output from effect pedal(s)
- 2** DC OUT: 9 Volt output to power an effect pedal
- 3** GREEN LOOP SEND: Input to effect pedal(s)
- 4** RED LOOP RETURN: Output from effect pedal(s)
- 5** RED LOOP SEND: Input to effect pedal(s)
- 6** 9VDC INPUT: Typical 9V center negative power supplies can be used. (We recommend the One Control EPA2000 power supply)
- 7** INPUT JACK: Plug in your instrument here.
- 8** FOOT SWITCH: Toggles White Loop on/off. While off, the pedal has true bi-pass.
- 9** FOOT SWITCH: Toggles Between Loop GREEN and RED. When Loop Green is selected the green LED will light up, when Loop Red is selected the red LED will light up
- 10** OUTPUT JACK: This is a typical output that should be connected to your amplifier.

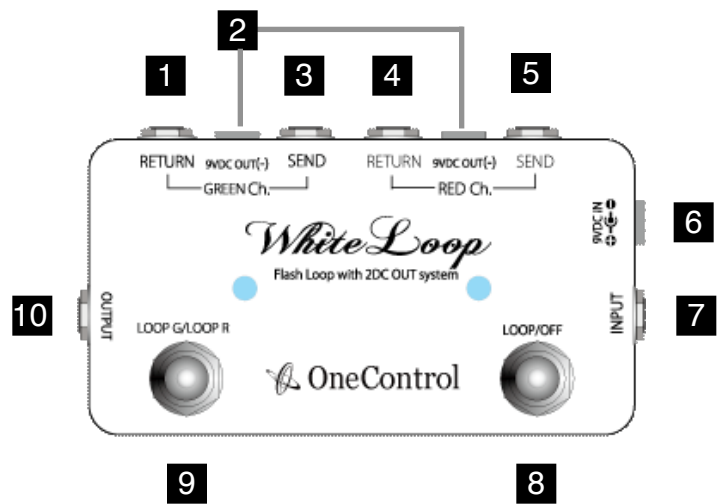

Effects connected to Loop Red and Loop Green, while being powered, can be bypassed with a true bypass switch. Effect 1 and 2 can be turned off with the Red and Green switch with one action.

Both loops can be used to connect a tuner to allow a mute function while tuning. Use the send out of either the Green or Red Loop.

Specifications

INPUT: 9 Volt center negative 6mA or 9 Volt Battery

OUTPUT: Two 9 Volt DC Outputs (only when using power supply like One Control EPA2000)

DIMENSIONS: 60x110x30 mm — 2.36x4.33x1.18 Inch

WEIGHT: 220g — 7.76oz.

Warranty

Repairs or exchanges under warranty are subject to these warranty guidelines:

This product is covered under our warranty for the period of 1 year from date of purchase, as filled out on the warranty card. In the case the product needs to be shipped, the cost of shipping will be paid by the buyer.

The Following are not covered by this warranty:

Fire, earthquake, natural disasters such as flooding, material breakage, or war. Warranty is void if there is any trace of repair or modification that is not performed or authorized by LEP International.

One Control by LEP International Co, LTD.

9-16 Suehiro Hanamaki

Iwate 025-0079, Japan

Phone: 0198-23-6600 Fax: 0198-29-4244

onecontrol.robert@gmail.com

www.one-control.com