

CARE AND OPERATING INSTRUCTIONS FOR COVER-CARE™ MODELS 350 AND 500 PUMPS

ITEM'S# 02555, 02533

FEATURES

The pump is a magnetically driven centrifugal water pump. It has no seals to wear and contains no oil. The pump has a garden hose thread on the pump outlet. A garden hose can be used to direct the water away from the pool. Place the pump where the water is the deepest. Bear in mind that the pump cannot pull water up from a lower level unless submerged and filled with water when starting. Should the pump not start pumping, disconnect electric, wiggle hose a few times and try again. All electrical components are encapsulated in epoxy with no seals to wear or break. The energy used is approximately 1/2 of regular motor driven pumps. The prefilter is provided for use in situations where deposits in the water could clog or damage the pump. This helps give uninterrupted service.

PREFILTER

A prefilter is supplied. The primary purpose is to prevent blockage of the pump by leaves etc. The prefilter may need occasional cleaning and eventual replacement. Do not use pump without prefilter to prevent blockage and impeller damage.

SERVICE AND MAINTENANCE

The housing should occasionally be removed to clean and inspect the impeller assembly. The impeller is the only serviceable item and can be pulled out of the body. Do not take the impeller apart. If it is worn or broken the entire impeller assembly should be replaced. This will restore the pump to original capacity. Pumps taken out of service for an extended period with fluid inside run the risk of forming a crust which may prevent subsequent starting. Always check cord for sharp bends which can cause premature cracking. Do not use power cord to lift or move pump.

Do not run pump dry for more than 15 minutes-damage to pump will occur- this type of damage voids warranty.

ELECTRICAL PRECAUTIONS


Always use a properly grounded outlet. Do not immerse plug in water. DO NOT REACH INTO WATER TO REMOVE PLUG. TURN OFF CIRCUIT FIRST. A "drip loop" should be provided. The "drip loop" is a loop in the cord below the level of the receptacle or plug that prevents water from traveling along the cord. The National Electric Code requires that a ground fault circuit interrupter (GFCI) be installed in the branch circuit supplying fountain or pond equipment. Your dealer can supply GFCI units. NEVER REMOVE GROUND PIN FROM PLUG. **WARNING; FOR YOUR PROTECTION ALWAYS UNPLUG THE UNIT FROM ITS POWER SOURCE BEFORE INSTALLING OR SERVICING. SHOULD THE UNIT APPEAR TO BE NOT WORKING DO NOT REACH, REMOVE OR DISASSEMBLE UNIT BEFORE YOU DISCONNECT POWER.** The pump is intended to pump water only. It cannot be used to pump oils, solvents, or gasoline.


LIMITED WARRANTY

E.G.Danner Mfg. Inc. will repair or replace any pump found to be defective within one year of original purchase. This warranty does not cover the replaceable filtering material supplied with the pump as it is considered expendable. Damaging, cutting or altering cord, removing or defacing product labels voids any warranty consideration. For warranty repair return only the part that is defective to our factory. Please include a dated proof of purchase and \$5.00 for postage and handling. Damages or injuries resulting from negligence or misuse of the product are not covered by warranty. This warranty gives you specific legal rights. You may have other rights which vary from state to state.

CARE AND OPERATING INSTRUCTIONS FOR COVER-CARE™ MODELS 350 AND 500 PUMPS

**YOUR PUMP MODEL #
IS ON THE PUMP NEAR
ELECTRICAL CORD**

	E160713
	LISTED 8C99
LISTED	MODEL 9.5B UTILITY PUMP
<small>WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK CONNECT ONLY TO A GROUNDING TYPE RECEPTACLE PROTECTED BY A CLASS A GROUND-FAULT CIRCUIT INTERRUPTER.</small>	
<small>WARNING: RISK OF ELECTRIC SHOCK THIS PUMP HAS NOT BEEN INVESTIGATED FOR USE IN SWIMMING POOL AREAS</small>	
<small>ATTENTION: BRANCHER SEULEMENT A UNE PRISE DE COURANT AVEC MISE A LA TERRE DIFFERENTIEL DE CLASSES A OSA ENCLOSURE 3</small>	
<small>DO NOT RUN DRY. NE PAS FAIRE FONCTIONNER A SE C THERMALLY PROTECTED</small>	
<small>115 VOLTS A.C./60HZ./93 WATTS/1.33 AMPS 08/01</small>	
<small>DISCONNECT POWER BEFORE HANDLING THE PUMP</small>	

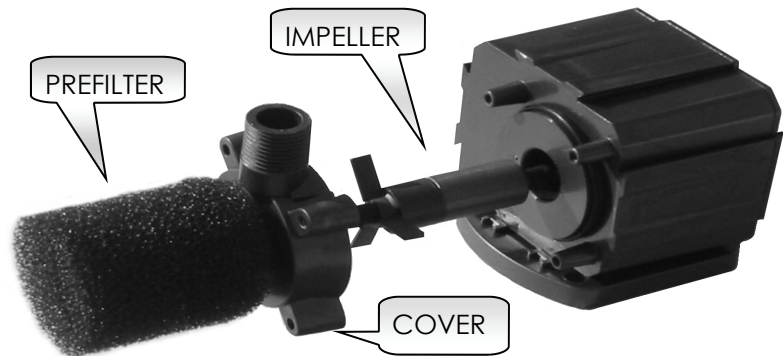

WARNING !: PONDS CAN BE DANGEROUS TO SMALL CHILDREN.
NEVER LEAVE CHILDREN UNSUPERVISED NEAR A POND!

REPLACEMENT PARTS LIST

MODEL #	COMPLETE IMPELLER	PUMP COVER	PREFILTER
MODEL 350	12555	12540	12505
MODEL 500	12575	12540	12505

DANNER MFG. INC. 160 OVAL DRIVE, ISLANDIA, NY 11749-1489
PHONE: 631-234 5261 WWW.DANNERMFG.COM FAX: 631-234 4778