



Longshine Technologie Europe GmbH

www.longshine.de

Table of Content

Unpacking Information	1
1. Introduction to 24+2G Gigabit Ethernet Web Smart Switch...	2
1.1 General Description	2
1.2 Key Features	3
1.3 The Front Panel	3
1.4 The Rear Panel	5
2. Installing 24+2G Gigabit Ethernet Web Smart Switch	6
2.1 Desktop Installation	6
2.2 Rack-mount Installation	6
2.3 Installing Network Cables	7
2.4 Network Application	7
3. Management guide.....	7
3. Management guide.....	8
3.1 Access the Switch.....	8
3.2 Home Page.....	10
3.2.1 System.....	11
3.2.2 Ports	12
3.2.3 VLANs	13
3.2.4 Aggregation/Trunking Configuration.....	14
3.2.5 Qos.....	15
3.2.6 Discovery	16
3.2.7 Default	17
3.2.8 Reboot	17
4. Product Specifications	18

Unpacking Information

Thank you for purchasing the 24+2G Gigabit Ethernet Web Smart Switch. Before you start, please check all the contents of this package.

The product package should include the following:



1. One 24+2G Gigabit Ethernet Web Smart Switch
2. One power cord
3. Rubber foot and screws
4. Rack-mount brackets
5. One RS-232 Cable (Optional)
6. One CD_ROM for user's manual
7. One quick installation guide

1. Introduction to 24+2G Gigabit Ethernet Web Smart Switch

1.1 General Description

The device is a 24+2G 10/100Mbps Ethernet Web Smart Switch.

The device is a powerful, high-performance Gigabit Ethernet switch, which provides smart and efficient management functions and support 26 ports connection with 24 ports of 10/100Mbps and 2 ports 10/100/1000Mbps with Full/Half duplex capability. The NWay auto-negotiation operation automatically negotiates with the connected partners on the network speed and duplex mode; that provides an easy way to integrate 10/100Mbps networks with no pain. It is ideal for micro-segmenting large networks into smaller, connected subnets for improved performance, enabling the bandwidth demanding multimedia and imaging applications.

Out of the ordinary dumb switches, the 24+2G Gigabit Ethernet Web Smart Switch embedded advanced management capability; that the device can be managed through console port or web-based UI. This is much useful for system manager to monitor and control the system efficiently.

Store-and-forward switching mode promises the low latency plus eliminates all the network errors, including runt and CRC error packets. To work under full-duplex mode, transmission and reception of the frames can occur simultaneously without causing collisions as well as double the network bandwidth.

The switch is plug-n-play without any software to configure and also fully compliant with all kinds of network protocols. Moreover, the rich diagnostic LEDs on the front-panel provide the operating status of individual port and whole system.

1.2 Key Features

- 24 fixed 10/100Mbps Fast Ethernet ports for easy network connecting application.
- Support 2 fixed 10/100/1000Mbps Gigabit ports
- Provide Auto-discovery Function for easy Network management.
- Provide 8K MAC address entries and 26 groups VLAN table
- Support Port aggregation.
- Supports 3 types of QoS priority for port base, 802.1p & TCP/IP TOS/DiffServ(DS) priority field
- Support full duplex flow control and half duplex back pressure
- Store-and-forward forwarding scheme
- Error packet filtering
- Supports 320K bytes buffer Memory
- Support local Console port or Web-based UI for configuration
- Internal switching power supply (100-240Vac/50-60Hz)

1.3 The Front Panel

The front panel of the switch is shown as below



Port Operation

There are 24 * 100Mbps and 2 * 1000Mbps RJ-45 (copper) ports on the front panel. The auto-negotiation feature of the switch allows each port of the device running at one of the following operation modes:

Speed	Duplex Mode
10Mbps	Full Duplex
	Half Duplex
100Mbps	Full Duplex
	Half Duplex
1000Mbps	Full Duplex

All ports supports MDI/MDI-X **auto crossover** capability that is the port can connect either the PC or hub without crossover cable adjustment.

Wiring for 10/100/1000Mbps (Copper)

Following are the summaries of cabling required:

Media	Speed	Wiring
10/100/1000Mbps copper	10Mbps	Category 3,4,5 UTP/STP
	100Mbps	Category 5 UTP/STP
	1000Mbps	Category 5,5e UTP/STP

LED Definition

The rich diagnostic LEDs on the front panel can provide the operating status of individual port and whole system.

Power LED

This indicator lights green when the switch is receiving power; otherwise, it is off.

Port LEDs

Every 100Mbps RJ-45 port on the front panel relevant one LED for indicating the data transmit & receive status. And two 1000Mbps RJ-45 ports support four LEDs to indicating the connection speed & data activity status.

Port LED summary table

10/100M		
LED	Status	Statement
10/100M	Steady green	Connected as 10/100Mbps
	Blinking green	The port is transmitting/receiving data
10/100/1000M		
LEDs	Status	Statement
1000M	Steady green	Connected as 1000Mbps
100M	Steady green	Connected as 100Mbps
10M	Steady green	Connected as 10Mbps
ACT	Blinking green	The port is transmitting/receiving data

If the port is connected but the Port LED is dark, check the following items:

- The switch and the connected device's power are on or not.
- The connecting cable is good and with correct type
- The cable is firmly seated in its connectors in the switch and in the associated device

1.4 The Rear Panel

The rear panel of the switch is shown as below



2. Installing 24+2G Gigabit Ethernet Web Smart Switch

This switch can be placed directly on your desktop, or mounted in a rack. Users can immediately use most of the features simply by attaching the cables and turning the power on.

2.1 Desktop Installation

For desktop installation, the switch needs to put on a clean, flat desk or table close to a power outlet. Plug in all network cables and the power cord, then the system is ready.

Before installing the switch, you must ensure:

1. It is accessible and cables can be connected easily
2. Cabling is away from:
 - ★ Sources of electrical noise such as radios, transmitters and broadband amplifiers
 - ★ Power lines and fluorescent lighting fixtures.
3. Keep water or moisture off
4. Airflow around the unit and through the vents in the side of the case is great for heat radiation (company recommend that you provide a minimum of 25 mm clearance)

To prolong the operational life of your units:

1. Never stack unit more than eight sets high if freestanding
2. Do not place objects on top of any unit or stack
3. Do not obstruct any vents at the sides of the case

2.2 Rack-mount Installation

The switch may standalone, or may be mounted in a standard 19-inch equipment rack. Rack mounting produces an orderly installation when you have a number of related network devices. The switch is supplied with rack mounting brackets and screws. These are used for rack mounting the unit.

Rack Mounting the Switch in the 19-inch rack:

1. Disconnect all cables from the switch before continuing.
2. Place the unit the right way up on a hard, flat surface with the front facing toward you.
3. Locate a mounting bracket over the mounting holes on one side of the unit.
4. Insert the screws and fully tighten with a suitable screwdriver.

5. Repeat the two previous steps for the other side of the unit.
6. Insert the unit into the 19" rack and secure with suitable screws (not provided).
7. Reconnect all cables.

2.3 Installing Network Cables


Station Connections

Reference to the wiring statement of the previous section; connect each station to the switch with correct type of cables.

Switch-to-Switch Connections

In making a switch-to-switch connection, use every port to connect another switch or backbone is strongly recommended. The Gigabit Ethernet ports provide the fat pipe to the server or backbone connectivity for boosting the total system performance. Reference to the wiring statement of the previous section; connect each station to the switch with correct type of cables.

2.4 Network Application

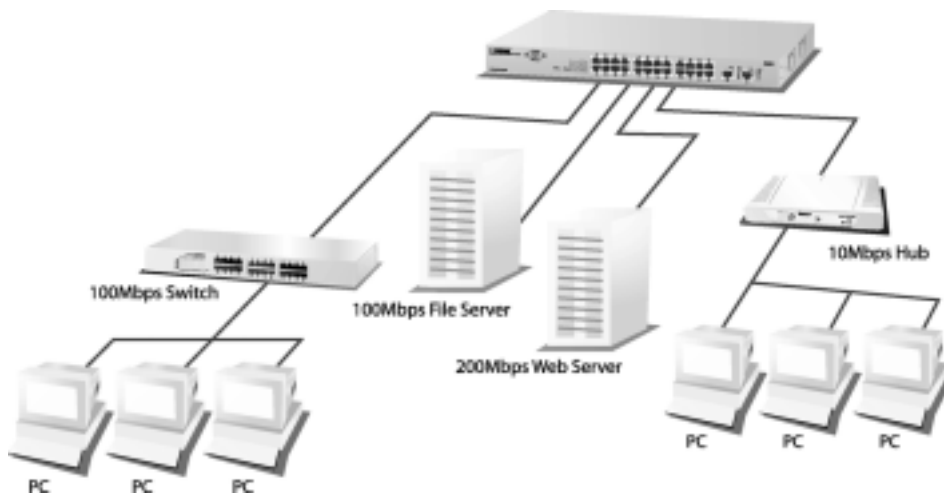

3. Management guide

This section instructs you how to enter and set up the configurations, which can be accessed by RS-232 serial port (out-of-band) on the rear panel or by Telnet session / Internet Browser over the network (in-band).

Factory Default value:

IP : 192.168.1.1
Subnet Mask : 255.255.255.0
Default Gateway : 192.168.1.254

3.1 Access the Switch

Console Port (Out-of-band) connection

The operating mode of the console port is:

- DCE
- 9600 (Fix baud rate)
- n (No parity checking)
- 8 (8 Data bits)
- 1 (1 stop bit)
- None (No flow control)

After attaching a RS-232 cable (Straight-through) to the serial port of a PC running a terminal emulation program, press “**Enter**” key then login screen appears. Enter your username and password to login the management console.

Note :

The management functions of console program are exactly the same with web-based management interface but in text mode.


- Attention :**

 1. The factory default value of UserName and Password is “admin”
 2. System configurations via the Console Port only will be allowed by the way of master device

In-Band Connections (Web Browser / Telnet)

To manage the switch through in-band access, you should configure the management station with an IP address and subnet mask compatible with your switch.

1. Running your Web Browser and enter the IP address "192.168.1.1" as the URL in the "address" field.
2. Key in the User name and password to pass the authentication. The factory default value of User Name and Password is **"admin"**.

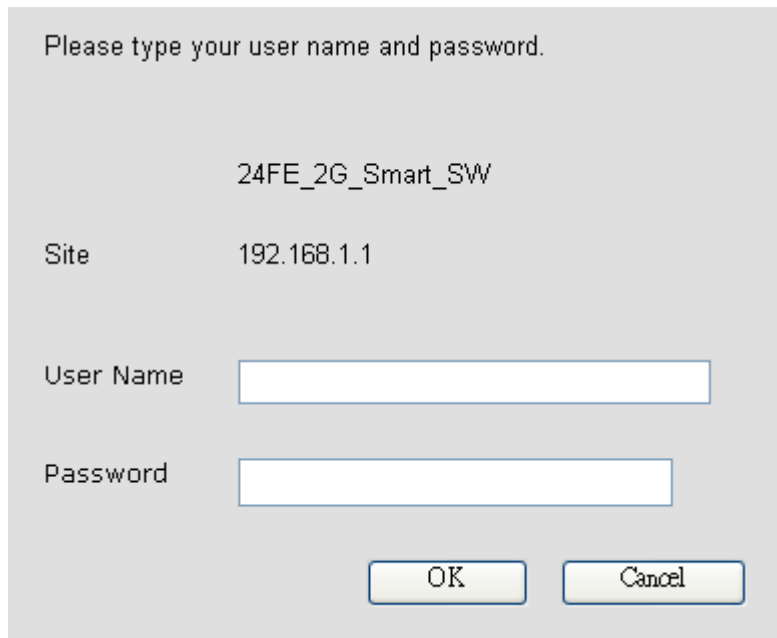

Please type your user name and password.

24FE_2G_Smart_SW

Site 192.168.1.1

User Name

Password

OK Cancel

The image shows a web-based authentication dialog box. At the top, it says 'Please type your user name and password.' Below this, the device name '24FE_2G_Smart_SW' is displayed. Underneath, the 'Site' is set to '192.168.1.1'. There are two input fields: 'User Name' and 'Password'. At the bottom right, there are two buttons: 'OK' and 'Cancel'.

3. After authentication procedure, the home page shows up.

3.2 Home Page

On the Home page, you can select the configuration by clicking the menu tabs located on the upside of the UI.

It includes,

- System
- Ports
- VLANS
- QoS
- Aggregation
- Discovery

System Configuration	
MAC Address	00-e0-7d-c0-c3-80
SW Version	1.0
HW Version	1.0
Inactivity Timeout (secs)	180
System Name	24FE_20_Smart_SW
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Gateway	192.168.1.254
Name	admin
Password	*****

To restore the **default** Values of switch, Click the “**Default**” Button. If you want to **reboot** the switch, click the “**Reboot**” Button.

3.2.1 System

To set up the system configurations such as login value, system name and IP address.

LONGSHINE

Default Reboot

System Ports VLANs QOS Aggregation Discovery

System Configuration

MAC Address	00:e0:7d:c0:c3:00	IP Address	192.168.1.1
S/W Version	1.0	Subnet Mask	255.255.255.0
H/W Version	1.0	Gateway	192.168.1.254
Inactivity Timeout (secs)	180	Name	admin
System Name	24FE_20_Swark_SW	Password	*****

Apply

Items	Functions
Mac Address	The Mac Address of the switch
S/W Version	To check up the Software Version, see this.
H/W Version	The Hardware version
System name	Name of the Switch
IP Address	Set up the IP of Switch
Subnet Mask	Set up the Subnet mask of Switch
Gateway	Set up the Gateway of Switch
Name	The Login name (default admin)
Password	The Login password (default admin)

To save the configuration of the system, click **“apply”** to save

3.2.2 Ports

On the page, you can view the Port status, set up the Speed mode and enable the FDX flow control.



Items	Functions
Admin	Enable or Disable the Admin function
Bandwidth	To control the bandwidth, you can select the speed limitation you need in the drop list. (Disable/128K/256K/512K/1M/2M/4M/8Mbps)
Operate mode	Choose the Speed mode of port 10/100, Half/Full. If you set to auto speed, it will be auto-negotiation. (Auto Speed, 10M half, 10M full, 100M half, 100M full)
Flow Control	Enable or Disable the Flow control
Link/Status	To show the status of each port. When it's green, it means the connection is down. Otherwise, it's red.

To save the configuration of the system, click "apply" to save. To see the latest status of port, click refresh button.

3.2.3 VLANS

VLANS Configuration is for dividing the LAN into subnet groups for better network management. (26 VLAN groups total)

Mode:

1. Disable: Turn off the VLAN function by selecting the mode.
2. Port BASE: Group the port you select by entering the group number (Ex.1) in VLAN textbox and selecting the port numbers (Ex.1, 2,3,4) you want.

Buttons

Add: Add the entry into the VLAN Table

Remove: Remove the Entry you select

Modify: Modify the Entry you select

Apply: Apply the Mode you select

Provides web manage security function, click enable VLAN group web manage to support web manage function for VLAN group

The screenshot shows the 'VLANS' configuration page in the LONGSHINE web interface. At the top, there are tabs for 'System', 'Ports', 'VLANS', 'QOS', 'Aggregation', and 'Discovery'. Below the tabs is a table listing VLAN configurations:

VLAN	Ports	Management
VLAN: 1	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26	Enable management
VLAN: 2	1,2,3,4,5,6,14,15,16,17,18,19,20,21,23,24,25,26	
VLAN: 26	1,2,3,4,5,6,7,13,14,15,16,17,18,19,20,22,26	Enable management
VLAN: 24	1,2,3,4,5,6,7,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26	Enable management

Below the table, the 'VLAN MODE' is set to 'PORT BASE' (selected over 'DISABLE'). The 'VLAN' number is set to '1', and the checkbox 'Enable VLAN group web manage' is checked. Under 'Select member:', all 26 ports (01-26) are selected with checkboxes. At the bottom, there are buttons for 'Add', 'Remove', 'Modify', and 'Apply'. A 'Note' section states: '1.The VLAN value can't exceed 26' and '2. Port 13 will take over management once you enable VLAN'.

3.2.4 Aggregation/Trunking Configuration

To set up the Port trunk groups, select "Enable" of the group you need. Don't forget to click the "Apply" to save the setting.
Supports 7 trunk groups for network application.

Trunk Group	Ports	Enable	Disable
TRUNK GROUP 1	Port02;Port14	<input type="radio"/>	<input checked="" type="radio"/>
TRUNK GROUP 2	Port03;Port04;Port15;Port16	<input type="radio"/>	<input checked="" type="radio"/>
TRUNK GROUP 3	Port05;Port06;Port17;Port18	<input type="radio"/>	<input checked="" type="radio"/>
TRUNK GROUP 4	Port07;Port08;Port19;Port20	<input checked="" type="radio"/>	<input type="radio"/>
TRUNK GROUP 5	Port09;Port10;Port21;Port22	<input checked="" type="radio"/>	<input type="radio"/>
TRUNK GROUP 6	Port11;Port12;Port23;Port24	<input type="radio"/>	<input checked="" type="radio"/>
TRUNK GROUP 7	Port25;Port26	<input type="radio"/>	<input checked="" type="radio"/>

Apply

3.2.5 Qos

There are three modes of Quality of Service to choose, TOS, Tag Base, and Port base. To Disable the QOS, click Disable and Click apply to save.

To use the **TOS**, select TOS and click **Apply** to save.

To enable the **Tag Base**, select Tag base and click **Apply** to save.

When you enable **Port Base**, packets from the port you select will have higher priority.

To enable the Port base,

1. Select the port-base
2. Select the port-base ratio (1:4; 1:8; 1:16; Always High) The higher a ratio is, the higher priority the port will get.
3. Select the ports in the table (High means high Priority, and Low means Low priority). The priority depends on the Port Base rate.
4. Click apply to save

LONGSHINE Default Reboot

System Ports VLANs **QOS** Aggregation Discovery

Select QOS Mode: ☐ TOS ☐ TAG BASE ☒ PORT BASE ☐ DISABLE

SELECT RATE: 1:4

Port	Port priority setup
1	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
2	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
3	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
4	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW
5	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
6	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
7	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW
8	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW
9	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
10	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW
11	<input checked="" type="radio"/> HIGH <input type="radio"/> LOW
12	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW
13	<input type="radio"/> HIGH <input checked="" type="radio"/> LOW

3.2.6 Discovery

When you install several 24+2G Gigabit Ethernet web-smart switches, the discovery management tool helps you to search and access those switches on the LAN easily. Therefore you can access any switch on your LAN without memorizing those IP addresses. You can only find switches with the IP Address compatible with the one you access.

Note. The Maximum number of Address list is 16.

Auto Search

1. Click the "Auto search" button to find the switches.
2. The IP address & name of Switch list will appear.
3. Click the one you want to access.

The screenshot displays the 'Discovery' section of the LONGSHINE web management interface. At the top, there is a navigation bar with tabs for 'System', 'Ports', 'VLANS', 'QOS', 'Aggregation', and 'Discovery'. The 'Discovery' tab is currently selected. Below the navigation bar, there are two main sections: 'Auto Search' and 'Manual Add'. The 'Auto Search' section has an 'Apply' button. The 'Manual Add' section has 'Add' and 'Delete' buttons. Below these sections, there are input fields for 'IP Address:' and 'Name:'. At the bottom, there are two tables. The first table, titled 'show search ip:', has columns for 'NO', 'search ip', and 'system name'. The second table, titled 'show the manual add result:', has columns for 'NO', 'manual ip', 'system name', and 'delete'. The second table contains one entry with 'NO' 1, 'manual ip' 10.1.1.10, 'system name' Netronix, and a 'delete' checkbox.

NO	search ip	system name
1	10.1.1.10	Netronix

NO	manual ip	system name	delete
1	10.1.1.10	Netronix	<input type="checkbox"/>

3.2.7 Default

To restore to default values,

1. Click the default button on the Home page
2. Click "Apply" to activate. Don't power off the switch while it's working.



3.2.8 Reboot

To reboot the switch,

1. Click the Reboot button on the Home page
2. Click "Apply" to activate. Don't power off the switch while it's working.



4. Product Specifications

Standard	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3x full-duplex operation and flow control IEEE802.1p Traffic prioritization
Interface	24 * 10/100Mbps auto MDI/MDI-X RJ-45 switching ports 2*10/100/1000Mbps auto MDI/MDI-X RJ-45 switching ports 1 * RS-232 Console port
Cable Connections	RJ-45 (10BASE-T): Category 3,4,5 UTP/STP RJ-45 (100BASE-TX): Category 5 UTP/STP
Network Data Rate	10/100/1000Mbps Auto-negotiation
Transmission Mode	10/100/1000Mbps Full-duplex, Half-duplex
LED indications	System Power 10/100M Link/Act 10/100/1000M 1000M; 100M; 10M, ACT
Memory	8K MAC entries 320K bytes Buffer Memory
Emission	FCC Class A CE Mark Class A VCCI-A
Operating Temperature	0° ~ 40°C (32° ~ 104°F)
Operating Humidity	10% - 90%
Power Supply	Internal power 100-240V/ 50-60Hz

FCC Certifications



This Equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received; including interference that may cause undesired operation.

CE Mark Warning



This equipment complies with the requirements relating to electromagnetic compatibility, EN 55022 class A for ITE, the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

Company has an on-going policy of upgrading its products and it may be possible that information in this document is not up-to-date. Please check with your local distributors for the latest information. No part of this document can be copied or reproduced in any form without written consent from the company.

Trademarks:

All trade names and trademarks are the properties of their respective companies.

Copyright © 2004, All Rights Reserved.

DECLARATION OF CONFORMITY

CE = European Community Conformity Mark

We, Manufacturer/Importer

Longshine Technologie (Europe) GmbH
An der Strusbek 9
22926 Ahrensburg
Germany

Declare That The Product

LCS-GFS9326
24-Port Web based Switch
24x10/100Mbps 2x10/100/1000Mbps, Rackmount

Is In Conformity With:

Standards	Results
EN 55022 :1994+A1:1995+A2:1997, Class A	Pass
EN 61000-3-2 :2000, Class A* see note * below)	Pass
EN 61000-3-3:1995+A1:2001	Pass
EN 55024:1998+A1 :2001+A2 :2003	Pass
IEC 61000-4-2:2001	Pass
IEC 61000-4-3:2002+A1:2002	Pass
IEC 61000-4-4:1995+A1:2000+A2:2001	Pass
IEC 61000-4-5:2001	Pass
IEC 61000-4-6:2001	Pass
IEC 61000-4-11:2001	Pass

Identification of signatory empowered to bind the manufacturer or his authorized representative.

Signature
Manufacturer/Importer



Date: 01.09.2004

Note* The power consumption of EUT is 5.645W, which is less than 75W and no limits apply. Therefore it is deemed to comply with EN61000-3-2:2000 without any testing.