

## **EQUIPMENT INVOLVED:**

Ovens with FastPad touch screen (FM2010).

## **WHAT'S NEW:**

A new update of the FastPad touch screen is available (version: **IHM: 035 – UC: 046 – FLA: 018 – REL: 133**). This version is installed on production line from serial n°: P27519506H (19/03/2013). It is possible to install it on all FastPad ovens via the USB stick after having downloaded it from our network using the “procédure mise à jour de l’interface FastPad EN-FR” procedure.

Ovens already equipped with the new version will be delivered with their USB stick which includes a brand new version of the FASTPAD PC software v1.6.

The new FastPad touch screen update includes :

- ✓ **modification of error messages titles and management**
- ✓ **addition of an error messages history** (visualization on the oven + exportation possible on USB stick)
- ✓ **addition of time operation indicators** (visualization on the oven + exportation possible on USB stick)
- ✓ addition of the Russian language
- ✓ addition of user manual in Portuguese and German
- ✓ correction of temperature setting in “descaling only” mode (cleaning mode)
- ✓ correction of rinsing launching in “auto cleaning” mode
- ✓ correction of day shifting in « Auto cleaning » mode (in English).


## **DETAILS ON ERROR MESSAGE MANAGEMENT :**

### **Possible access to error messages history and time operation indicators :**

It is possible to visualize the error messages list directly from the **technical parameters** screen in decreasing order of appearance. Export possible on the USB stick in a compatible Excel file.

Access to time operation indicators and number of output activations (time for each mode, number of time door openings, injection total time, cooling,...)

**Time operation indicators list will be available in the maintenance manual** (e.g.: CPT00: Total operating time in hours).

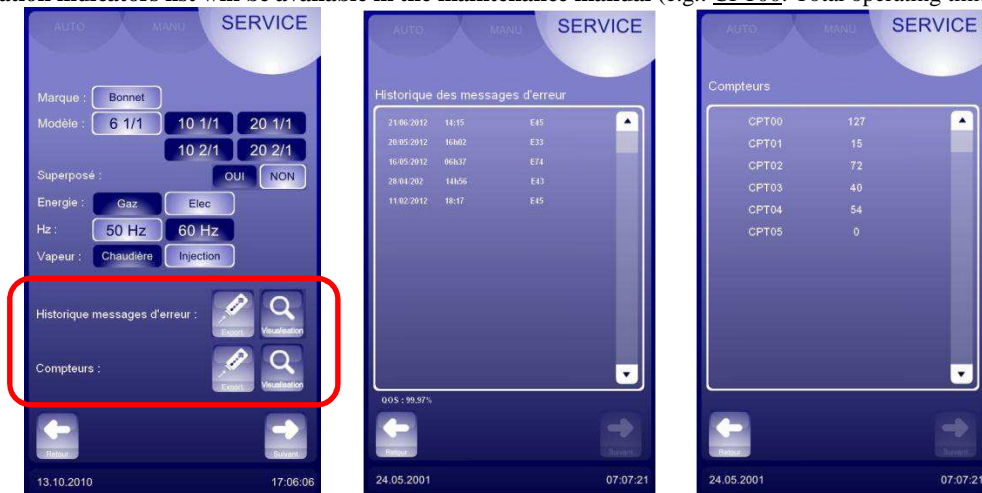

### **Management of blocking messages :**

All blocking error messages were stopping the cooking process. It was impossible to continue the cycle.

During a cooking, in the event of a “blocking fault” (e.g. : E53 or E70) :

- the oven goes to "PAUSE" (yellow button = as when the door is open)
- the message is displayed still (and the ovens stays on « pause ») until the screen is touched or scroll button is moved.
- when the screen is touched or scroll button is moved, the oven continues the cycle from where it was.
- the message will reappear if the fault is still there.
- by holding the pressure on STOP it will end the cooking process.

Example : Fault type E33 (core probe out of order), replacing the probe will allow to finish cooking.

Exception during cleaning/descaling/rinsing, where there is no modifications : when a blocking fault is detected, the oven goes straight to stop cycle.

### **Modification of error messages titles for more precisions :**

Error messages titles have been modified and give now more detailed information on their origins.

**New titles will be available in the user and maintenance manuals.**