User Manual

USB WALN Adapter for ANSEL 2420

Contents

Chapter 1 Getting Start	3
Minimum System Requirements	3
Optimize Wireless Performance	3
Installation	5
Uninstall	9
Chapter 2 Management Guide	11
Making a Basic Network Connection	11
Chapter 3 Introduction to the Wireless LAN Utility	14
Utility Interfaces	14
Network	16
Profile	17
Advanced	19
Statistics	20
WMM	21
WPS	22
SSO	23
CCX	24
Radio On/Off	25
About	26
Chapter 4 AP mode management guide	27
Control Menu	28
Config Setting	29
Access Control	31
MAC Table	32
Event Log	33
Statistics	34
About	35
Chanter 5 Product Specifications	36

Chapter 1 Getting Start

Minimum System Requirements

- Pentium 300 MHz or higher compatible processor
- At least one available USB 2.0 or 1.1 port
- The installation CD
- 5Mbytes free hard disk space.
- Windows 2000, XP, XP professional, Vista, or Windows 7.

If you do not have a USB 2.0 port on your computer, the throughput of the USB adapter will be limited to the 14 Mbps of the USB 1.1 standard.

Windows XP users must install SP2 or above for the Hot fix which fixes the USB 2.0 Host controller driver.

Before you proceed with the installation, please notice the following descriptions.

If you have installed the WLAN USB driver & utility before, please uninstall the old version first.

Note The following installation was operated under Windows XP. (Procedures are similar for Windows 98SE/Me/2000.)

Note The installation guide herein is operated under Windows system. For Linux or Mac driver installation guide, please refer to the instruction in README at directory the driver has stored in CD-Rom.

Optimize Wireless Performance

The speed and wireless coverage range of your connection can vary significantly based on the location of AP/router. You should choose a location for your AP/router that will maximize the network performance.

You can refer to the following methods to maximize AP/router performance.

Choose placement carefully for your AP/Router.



Place your AP/router at the center among your computers.



Place your AP/router at an elevated location.

Avoid obstacles to wireless signals.

Keep your wireless devices far away from metallic file cabinets, refrigerators, pipes, metal ceilings, reinforced concrete, and metal partitions.

Keep away from large amounts of water such as fish tanks and water coolers.

Reduce interference



Keep away from computers, cordless phones, cell phone, coping machine and fax machines.




Keep away from microwave oven.




Site survey nearby wireless devices to determine your operating channel.

Installation


1 If you insert the Wireless LAN USB Adaptor into your computer USB port, the following hardware setup wizard will pop up. Click **Cancel** to install driver from installation CD.

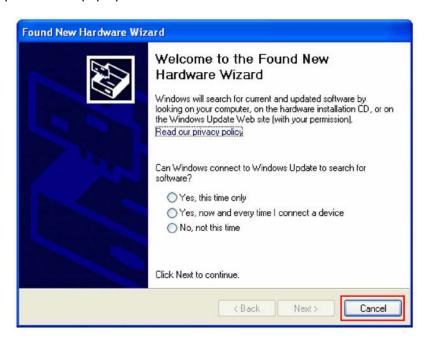


Insert your installation CD into CD drive of your computer. An installation page will pop up for you to install. Click **Utility Driver**.

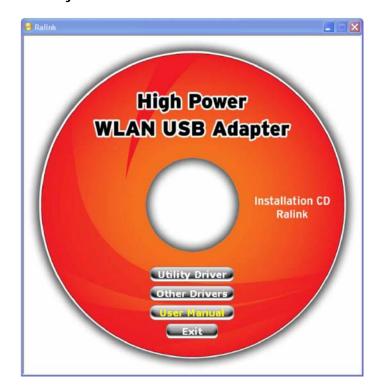

If the installation page does not appear, double click CD-ROM drive the installation CD was inserted to, or open the CD-ROM drive then click **Autorun.exe**

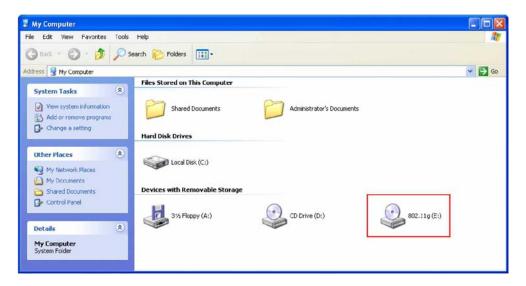


3 Clink checkbox to accept the terms of license agreement, then click **Next**

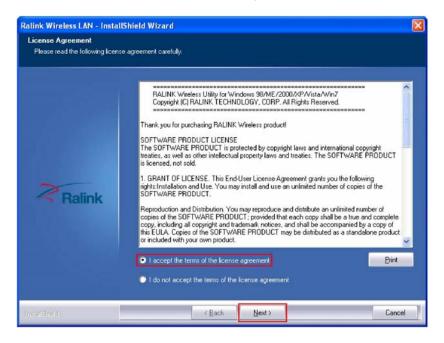

4. Select setup type for installing both driver and WLAN utility or install driver only. Choose Install driver and WLAN utility, then click **Next**

Note

If you choose to install driver only, refer to the note on next step.

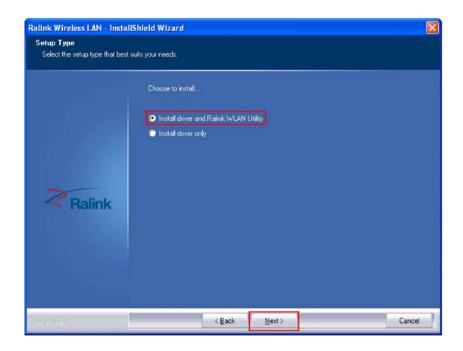

5. Select if you are going to configure your wireless network with WLAN utility or with Microsoft Zero Configuration tool. Choose WLAN Utility then click next.


Note

Type of configuration tool can be changed after installing this software.

Note

If you choose to install driver only on step 4, the installation will skip this step.


Windows Zero Configuration will be the default and only tool for managing your wireless network.

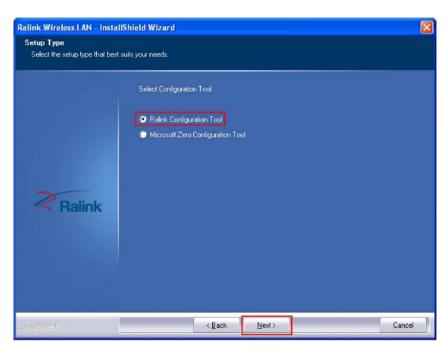

6. Click **Install** to begin the installation.



7. Click Finish to complete installation.

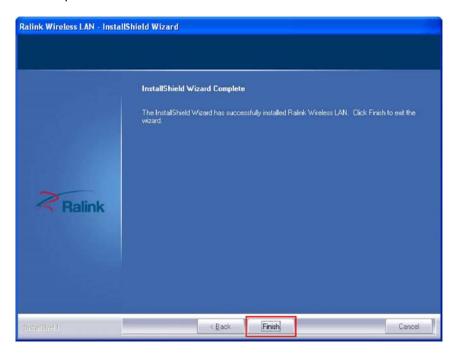

Uninstall

A. Uninstall the WLAN USB Adaptor Driver from start menu, All Programs, Ralink Wireless, click Uninstall or Control Panel, Add or Remove Programs, Ralink RT2870 Wireless LAN Card, click Remove to remove Wireless LAN USB Adaptor driver.






B. Click Yes if you want to remove Wireless LAN USB Adaptor driver.



C. Click **Finish** to complete uninstall.

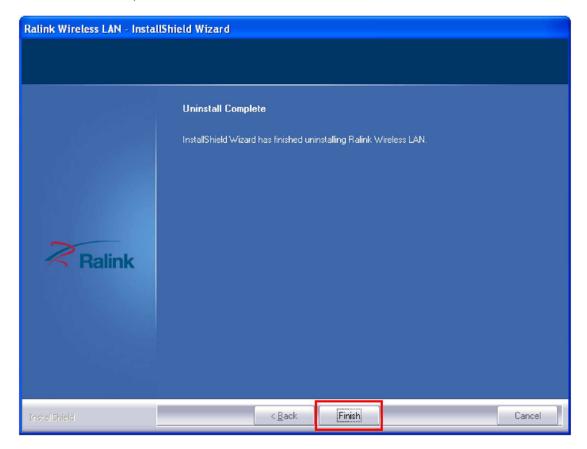

Chapter 2 Management Guide

Making a Basic Network Connection


Select a configuration tool

In the following instruction for making a network connection, we use WLAN utility to configure your wireless network settings that was installed as the steps in previous chapter.


To connect with 802.11 bgn Wireless LAN Utility

As default, the WLAN Utility is started automatically upon starting your computer and connects to the first available network. It is typically a network with the best signal strength among unsecured network. To change the connection to your own network, right click the

icon on system tray and select **Launch Config Utility**. The pop up WLAN configuration utility allows you to quickly connect the network you intend to.

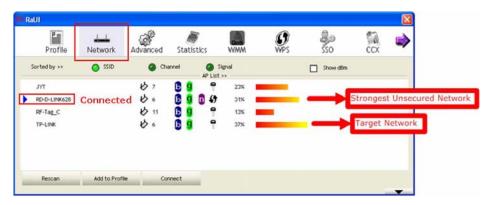


To join your target network, in Network tab, click on target network then **Connect**. Choose the security type of your network and type your security key, click on **OK** to complete a basic network connection.

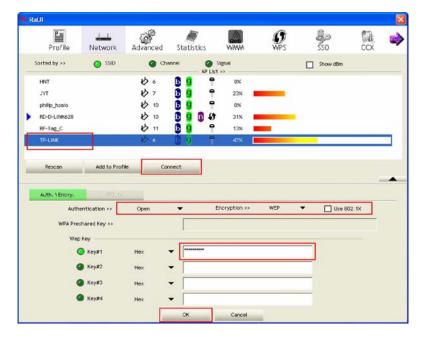

To connect with Microsoft Zero Configuration


To switch between the configuration tools, please right click on the icon on system tray. Select **Use Zero Configuration as Configuration Utility**

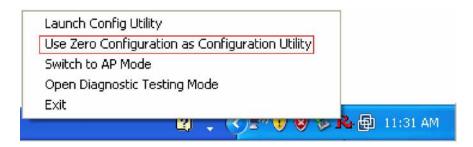

, double click on icon on system tray. The Zero Configuration pop up and show available wireless networks. Select your demanding network and click Connect



A pop up dialog allow you to setup your security key, then click **Connect** to join a network by Zero configuration.

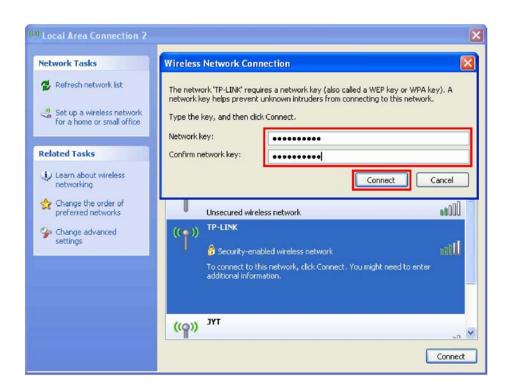


Chapter 3 Introduction to the Wireless LAN Utility

Utility Interfaces

This Utility is basically consisted of three parts:

- Button Section: on top of the window. Include buttons for selecting the Profile page, Network page, Advanced page, Statistics page, WMM page, WPS page, the About button, Radio On/Off button and Help.
- 2 Function Section: center of the Utility window. Appears to present information and options related to the button.
- 3 Status Section: bottom of the utility window. This section includes information about the link status, authentication status, AP's information and configuration, and retrying the connection when authentication is failed.

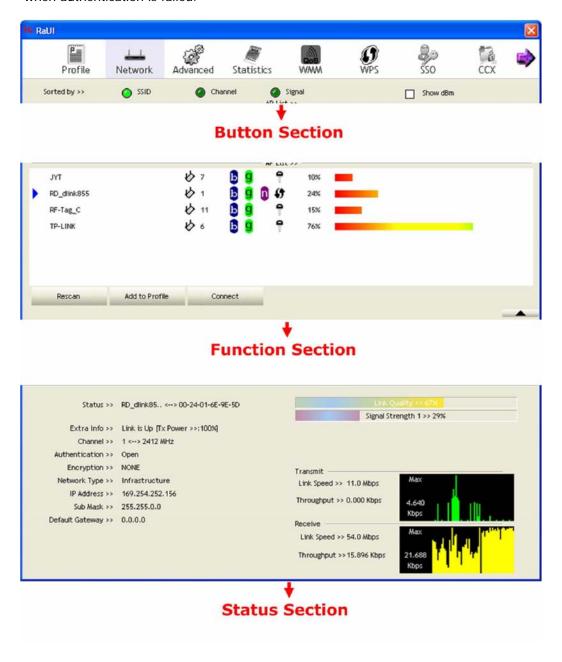

When starting utility, a small utility icon appears in the system tray of the taskbar.

You can double click it to maximize the dialog box if you selected to close it earlier. You may also use the mouse's right button to close utility.

Additionally, the small icon will change color to reflect current wireless network connection status. The status is shown as follows:

: Indicates the connected and signal strength is good.


: Indicates the connected and signal strength is normal.

: Indicates that it is not yet connected.

: Indicates that a wireless NIC can not be detected.

: Indicates that the connection and signal strength is weak.


Network

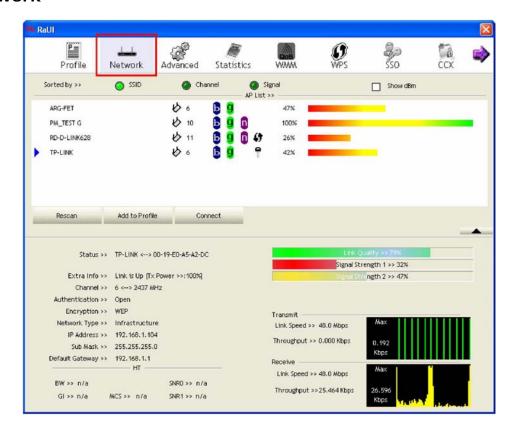

Items	Information
Status	Shows the connecting status. Also shows the SSID while connecting to a valid network.
Extra Info	Display link status in use.
Channel	Display current channel in use.
Authentication	Authentication mode in use.
Encryption	Encryption type in use.
Network Type	Network type in use.
IP Address	IP address of current connection.
Sub Mask	Subnet mask of current connection.
Default Gateway	Default gateway of current connection.
Link Speed	Show current transmit rate and receive rate.
Throughput	Display transmit and receive throughput in Mbps.
Link Quality	Display connection quality based on signal strength and TX/RX packet error rate.
Signal Strength 1	Receive signal strength 1, user can choose to display as percentage or dBm format.
Signal Strength 2	Receive signal strength 2, user can choose to display as percentage or dBm format.
Signal Strength 3	Receive signal strength 3, user can choose to display as percentage or dBm format.
Noise Strength	Display noise signal strength.
нт	Display current HT status in use, containing BW, GI, MCS, SNR0, and SNR1 value.

Profile

This profile page allows users to save different wireless settings, which helps users to get access to wireless networks at home, office or other wireless network environments quickly.

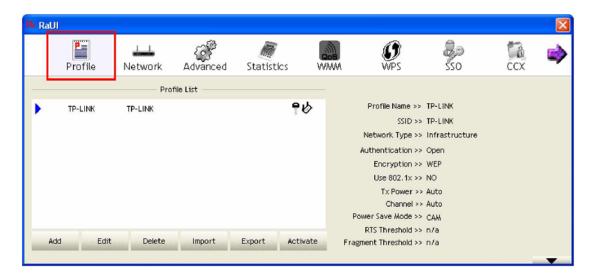

Items	Information
Profile Name	Choose a name for this profile, or use default name defined by system.
SSID	Fill in the intended SSID name or use the drop list to select from available Aps.
Network Type	There are two types, infrastructure and 802.11 Ad-hoc modes. Under Ad-hoc mode, you could also choose the preamble type; the available preamble type includes auto and long. In addition to that, the channel field will be available for setup in Ad-hoc mode.
Authentication	Authentication mode.
Encryption	Encryption mode.
Use 802.1x	Whether or not use 802.1x feature.
Channel	Channel in use for Ad-Hoc mode.
Power Save Mode	Choose from CAM (Constantly Awake Mode) or PSM (Power Saving Mode).
Tx Power	Transmit power, the amount of power used by a radio transceiver to send the signal out.
RTS Threshold	For adjusting the RTS threshold number by sliding the bar or key in the value directly. The default value is 2347.
Fragment Threshold	Adjust the Fragment threshold number by sliding the bar or key in the value directly. The default value is 2346.


To add a new profile:

Click the Add button. The add profile dialog pops up.

you could also add a new profile quickly by selecting an available network in the **Network** function then click the **Add to Profile** button.

There are three sub-tabs for fill in information:

1. **System Config:** to fill in wireless information of the network

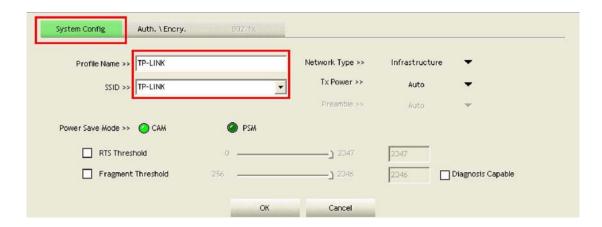

2. **Auth./Encry.:** to fill in wireless encryption or authentication Note information. Click Use 802.1X checkbox will enable 802.1x tab




3. **802.1x:** to configure the authentication information for 802.1x



Advanced


This page provides advanced configurations to this adapter. Please refer to the following chart for definitions of each item.

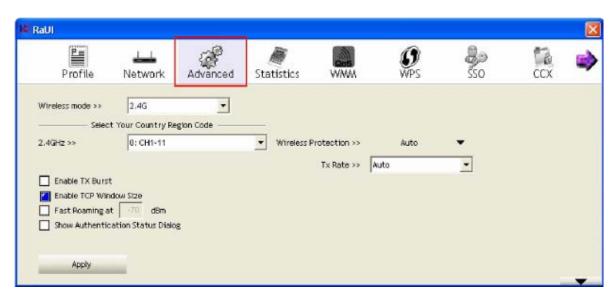


Items	Information	
Wireless mode	Click the drop list to select a wi	reless mode.
Enable TX Burst	Select to enable connecting to	a TX Burst supported device.
Enable TCP Window Size		CP window size, which help enhance
Fast Roaming at dBm	throughput. Mark the checkbox to enable fa	st roaming. Specify the transmit power for
	fast roaming.	
Show Authentication Status	Mark the checkbox to show "Au	thentication Status Dialog" while
Dialog		ntication. Authentication Status Dialog
	displays the process about 802	.1 x authentications.
TX Rate		e. The default setting is auto. (802.11n
	wireless cards do not allow the	user to select the TX Rate.)
Select Your Country Region	Eight countries to choose. Channel list:	
Code		
	Classification	Range
	0: FCC (Canada)	CH1 ~ CH11
	1: ETSI	CH1 ~ CH13
	2: SPAIN	CH10 ~ CH11
	3: FRANCE	CH10 ~ CH13
	4: MKK	CH14 ~ CH14
	5: MKKI (TELEC)	CH1 ~ CH14
	6: ISRAEL	CH3 ~ CH9
	7: ISRAEL	CH5 ~ CH13

Statistics

Statistics page displays the detail counter information based on 802.11 MIB counters. This page translates the MIB counters into a format easier for user to understand.

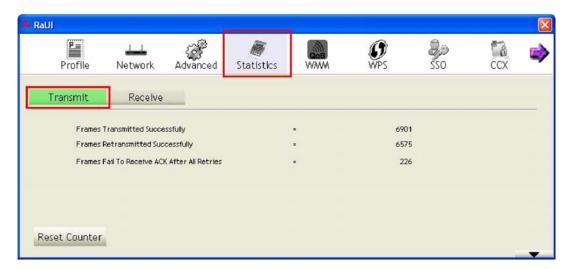


Items	Information
Frames Transmitted Successfully	Frames successfully sent.
Frames Retransmitted Successfully	Successfully retransmitted frames numbers.
Frames Fail To Receive ACK After All Retries	Frames failed transmit after hitting retry limit.
Reset Counter	Reset counters to zero.

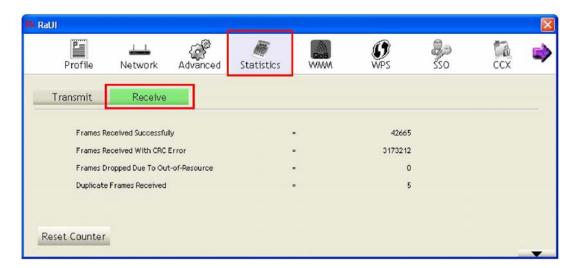

Items	Information
Frames Received Successfully	Frames received successfully.
Frames Received With CRC Error	Frames received with CRC error.
Frames Dropped Due To Out-of-Resource	Frames dropped due to resource issue.
Duplicate Frames Received	Duplicate received frames.
Reset Counter	Reset counters to zero.

WMM

This page allows users to activate the WMM function for this device. Please note that this function only works while connecting to a WMM compatible device.

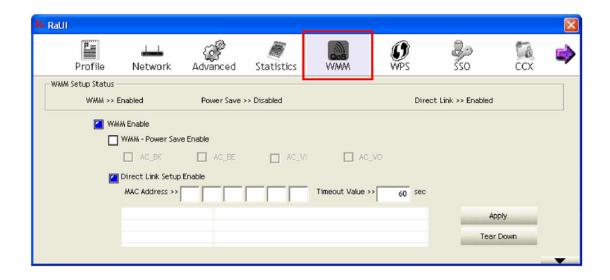

Items	Information
WMM Enable	Enable Wi-Fi Multi-Media.
WMM - Power Save Enable	Enable WMM Power Save. Please enable WMM before
	configuring this function.
Direct Link Setup Enable	Enable DLS (Direct Link Setup). Please enable WMM before
	configuring this function.
MAC Address	Fill in the blanks of Direct Link with MAC Address of STA.
Timeout Value	Time of automatically disconnect after some seconds. The value
	is integer. The integer must be between 0~65535. It represents
	that it always connects if the value is zero. Default value of
	Timeout Value is 60 seconds.
Apply / Tear Down	After fill in the "MAC Address" and "Timeout Value", click
	"Apply" button to save your configuration. The result will appear
	in the blanks. To remove the configuration, please select the
	configuration in the blanks and then click "Tear Down" button.

WPS

WPS Configuration: The primary goal of WiFi Protected Setup (WiFi Simple Configuration) is to simplify the security setup and management of WiFi networks. This adapter supports the configuration setup using PIN configuration method or PBC configuration method through an internal or external Registrar.




Items	Information
WPS AP List	Display the information of surrounding APs with WPS IE from last scan result. List information includes SSID, BSSID, Channel, ID (Device Password ID), and Security-Enabled.
Rescan	Click to rescan the wireless networks.
Information	Display the information about WPS IE on the selected network. List information includes Authentication Type, Encryption Type, Config Methods, Device Password ID, Selected Registrar, State, Version, AP Setup Locked, UUID-E and RF Bands.
Pin Code	8-digit numbers. It is required to enter PIN Code into Registrar using PIN method. Each Network card has only one PIN Code of Enrollee. Click on the Renew button to renew the PIN code.
Config Mode	The station serving as an Enrollee or an external Registrar.
WPS Profile List	Display all of credentials got from the Registrar. List information includes SSID, MAC Address, Authentication and Encryption Type. If STA Enrollee, credentials are created as soon as each WPS success. If STA Registrar, Utility creates a new credential with WPA2-PSK/AES/64Hex-Key and doesn't change until next switching to STA Registrar.
Detail	Information about Security and Key in the credential.
Connect	Command to connect to the selected network inside credentials.
Rotate	Command to connect to the next network inside credentials.
Disconnect	Stop WPS action and disconnect this active link. And then select the last profile at the Profile Page of Utility if exists. If there is an empty profile page, the driver will select any non-security AP.
Delete	Delete an existing credential. And then select the next credential if exist. If there is an empty credential, the driver will select any non-security AP.
PIN	Start to add to Registrar using PIN configuration method. If STA Registrar, remember that enter PIN Code read from your Enrollee before starting PIN.

PBC	Start to add to AP using PBC configuration method.
WPS associate IE	Send the association request with WPS IE during WPS setup. It is optional for STA.
WPS probe IE	Send the probe request with WPS IE during WPS setup. It is optional for STA.
Progress Bar	Display rate of progress from Start to Connected status.
Status Bar	Display currently WPS Status.
Auto	Starts to add to AP by using to select the AP automatically in PIN method.



When you click PIN or PBC, please don't do any rescan within two-minute connection. If you want to abort this setup within the interval, restart PIN/PBC or click Disconnect to stop WPS action.

SSO

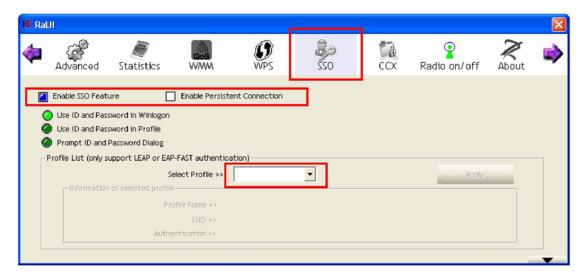

Items	Information
Enable SSO feature	Choose which SSO methods to log on
Use ID and Password in	Use the ID and password in Windows logon
Winlogon:	
Use ID and Password in	Use the ID and password in RaUI profile settings
Profile	
Use ID and Password in	Use the ID and password in pop-up authentication dialog
Dialog	
Enable Persistent	Use ID and Password in the previous activated Profile and not show any
Connection	authentication dialog
Profile List	Select Profile: Select a profile containing LEAP or EAP-Fast
	authentication Information of selected profile: Profile information,
	such as profile name, SSID.
Apply	Hit the Apply button to make the settings effective

CCX




Items	Information
Enable CCX (Cisco	Choose whether Cisco Compatible eXtensions are supported or not.
Compatible eXtensions)	
Enable Radio	Enable the radio measurement; the non-serving channel measurement
Measurement	limit is between 0 and 1023 milliseconds.
Apply	Hit the Apply button to make the settings effective


Radio On/Off

Click on the button to enable/disable wireless connection status.

Radio power on

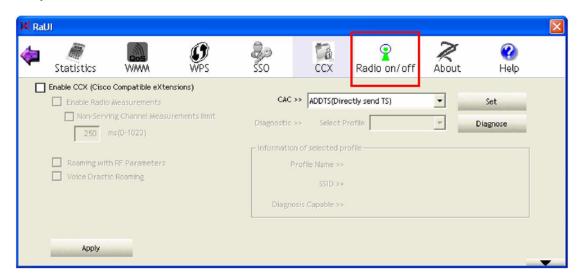


Radio power off

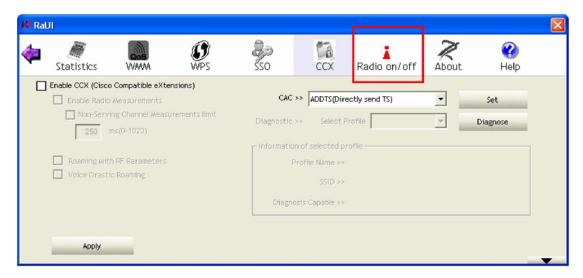


About

Display Configuration Utility, Driver, and EEPROM version information. Display Wireless NIC MAC address.

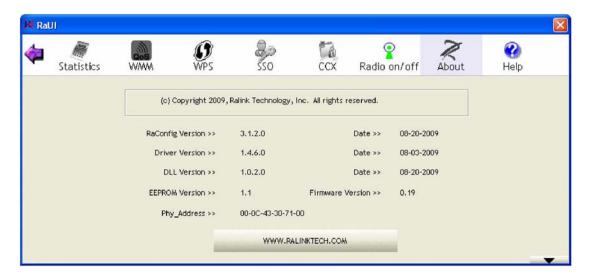


Chapter 4 AP mode management guide

Clicking will bring up the selection window and let the user make a selection. It can switch to AP mode as shown figure.

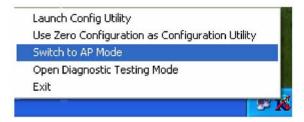

If "Switch to AP mode" is selected, the system will display default information when switching to AP mode. The dialog box is shown in figure

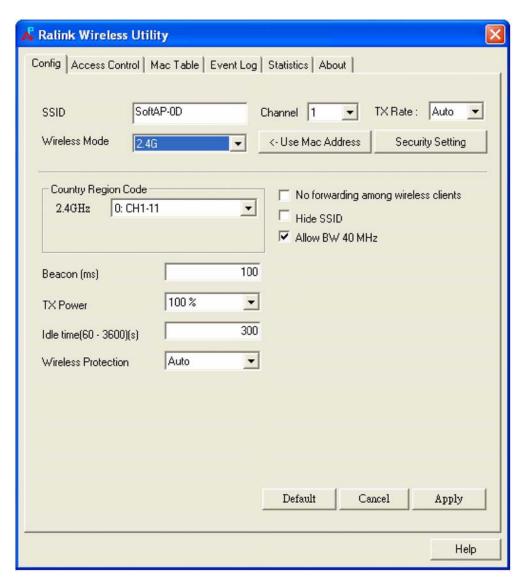

There are six tabs to configure the settings.

- Config Settings: This tab is used to configure Soft AP.
- Access Control: This tab is used to edit the access control list.
- Mac Table: This tab displays the stations which are currently connected to Soft AP.
- **Event Log**: This tab displays the Soft AP events.
- **Statistics**: This tab displays the packet counters.
- **About**: This tab displays the Ralink driver and utility information.

Control Menu

When starting Soft AP utility, a small icon appears within the system tray in winows taskbar. Double click it to bring up the main menu if the Soft AP utility menu was closed earlier. The user can also right-click the icon to bring up the control menu. There are three actions available.

- Launch Config Utilities: Restore Ralink Soft AP utility window
- Switch to Station Mode: Switch to Station mode
- Exit: End Soft AP utility

The icon changes color to reflect the current wireless network connection status. The status is indicated as follows:



Indicate connected and signal strength is good.



Indicate connected and signal strength is normal.



Indicate connected and signal strength is weak.




Indicate wireless NIC not detected.



Indicate not connected yet.

Config Setting

User can set and display detailed Soft AP information in this dialog box.

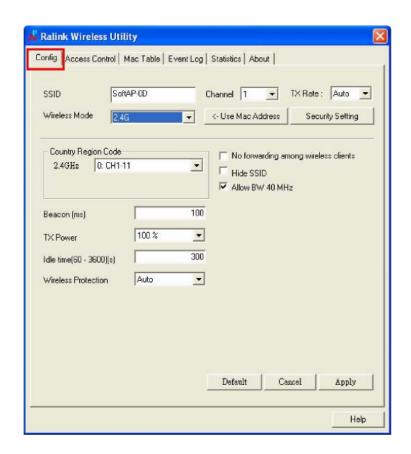


Items	Information	
SSID	AP name of user type. The user also can select [Use Mac Address] to display	
	it. System default is SoftAP-XX (XX is last two numbers of MAC address).	
Wireless Mode	Select wireless mode. 2.4G and 5G are supported. System default is 2.4G.	
	(802.11 B/G/N mix selection item only exists for B/G/N adapter)	
Country Region Code	The Country Region Code allows the user to specify the available channel list	
	based on their country's regulations.	
Beacon (ms)	The time span between two successive4 beacons. System default is 100 ms.	
TX Power	The transmitting power of Soft AP. System default is 100%.	
Idle Time	The allowed idle time before proceeding with the authentication. The default	
	is 300.	
Wireless Protection	The user can chose from Auto, on, and off. System default is auto. (802.11n	
	wireless cards don't support wireless protection.)	
	 a. Auto: STA will dynamically change according to the AP. 	
	b. On: Always send frames with protection.	
	c. Off: Always send frames without protection.	
Channel	Select the AP's operating channel manually. System default is channel 1.	
TX Rate	The transmitting rate. The default is auto. (802.11n wireless cards don't support TxRate.)	

Use Mac Address	Use the MAC address of wireless card as the AP's name. System default is
	APX. (X is last number of Mac Address.)
Security Setting	Authentication mode and encryption algorithm used by the AP. The system
	default is no authentication and encryption.
No forwarding among	If there is no beacon among the wireless clients, they can't share information
wireless clients	with each other. The system default is no forwarding.
Hide SSID	Don't display the AP name. The system default is to not hide the SSID.
Allow BW40 MHz	Allow BW40 MHz capability.
Default	Use system default values.
Cancel	Cancel the any changes without saving.
Apply:	Apply the any changes made. If using default values, it will be shown as in
	below figure

Access Control


AP connected or can't connect with Mac address that user setting.

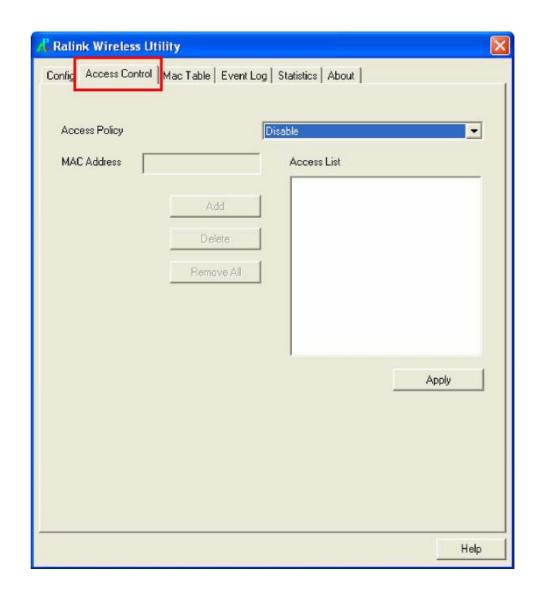

Items	Information
Access Policy	There are three policies available in the drop-down list. They are Disable,
	Allow All, and Reject All. System default is disabled.
Mac Address	In order to add an entry into the access control list, the user should input the
	MAC address without "-" in the text box and then click the "Add" button.
Access List	Display all Mac Addresses that the user has set.
Delete	Delete the Mac address set by user.
Remove All	Remove all Mac addresses in [Access List].
Apply	Apply the above changes.

MAC Table


Shows link status. It displays detailed station information of current connection.

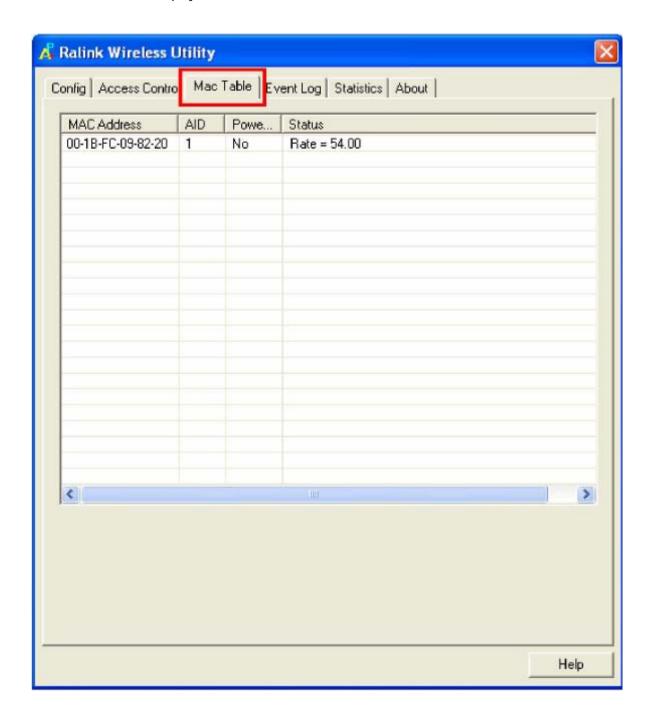

Items	Information
MAC Address	The station's Mac address of the current connection.
AID	The association identifier of the client.
Power Saving Mode	Support Power Saving Mode on the currently connected station.
Status	The link status of the current connection. (Only 802.11n wireless cards
	support)

Event Log


A record of all events, times and messages.

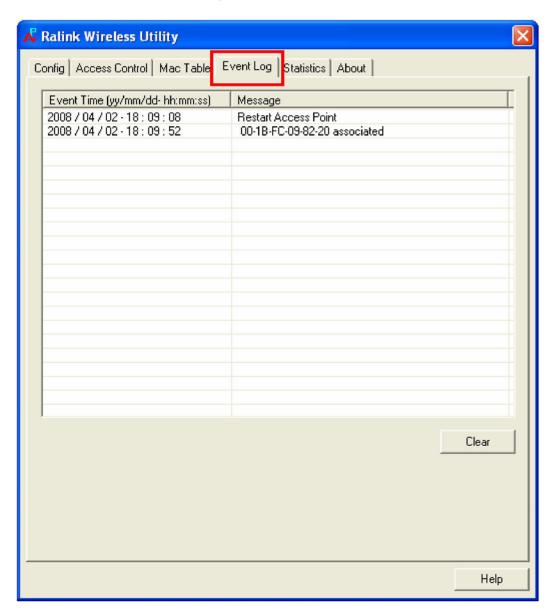

Items	Information
Event Time (yy/mm/dd- hh:mm:ss)	Specifies when the event occurred.
Message	All event messages.

Statistics

The statistics page displays detailed counter information based on the 802.11 MIB counters. The information is translated into a format easier for the user to understand.

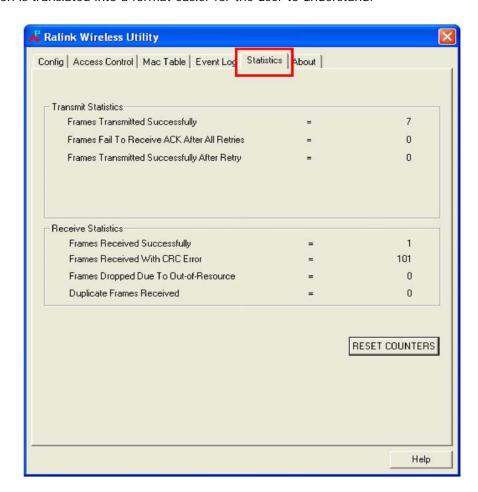

Transmit Statistics


Items	Information
Frames Transmitted Successfully	The number of frames sent successfully.
Frames Fail To Receive ACK After All Retries	The number of frames failed to transmit after hitting the retry limit
Frames Retransmitted Successfully	The number of successfully retransmitted frames.

Receive Statistics

Items	Information
Frames Received Successfully	The number of frames received successfully.
Frames Received With CRC Error	The number of frames received with a CRC error.
Frames Dropped Due To Out-of- Resource	The number of frames stopped due to insufficient resources
Duplicate Frames Received	The number of duplicate frames received.
Reset counters	Reset counters to zero.

About

The About page displays the wireless card and driver version information, displays Configuration Utility, driver and EEPROM version information, displays Wireless NIC MAC address.

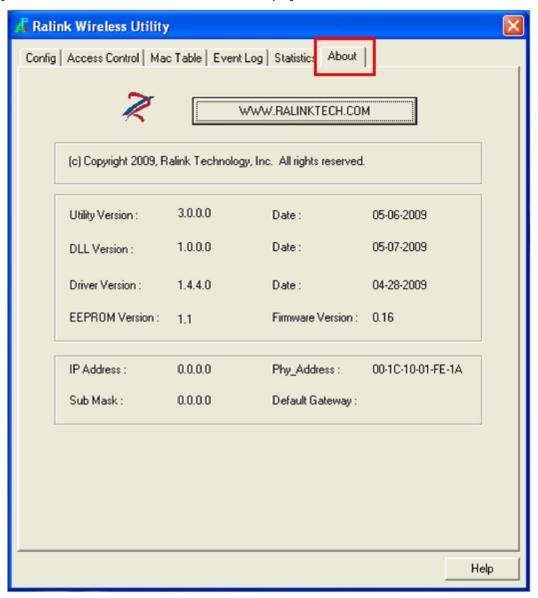

Chapter 5 Product Specifications

Standard	IEEE 802.11b, IEEE 802.11g, IEEE802.11n
Chipset	RTL2571
Frequency Band	2.412GHz~2.484GHz ISM band
Data Rate	802.11b:1, 2, 5.5, 11 Mbps 802.11g:6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n:20Mhz Up to 144Mbps, 40Mhz Up to 300Mbps
LED indicators	Active/Power
Interface	USB2.0
Antenna	5dBi RP-SMA dipole antenna*2
Transmitter Power	802.11b 23 ± 2 dBm 802.11g 18 ± 2 dBm 802.11n 17 ± 2 dBm
Receive Sensitivity	-75dBm@802.11n -76dBm@54Mbps -86dBm@11Mbps -92dBm@1Mbps
Operating Range	Up to 500M, depending on surrounding environment
Power Consumption	Transmit:<500mA, Receive:<300mA
Security	64/128-bit WEP (Hex & ASCII), WEP, WPA2, WPA-PSK, WPA2-PSK, WPA2-PSK(AES/TKIP), 802.1X.
Operating System	Windows XP/98/ME/2000, Vista, Windows 7, Linux and Apple Mac
Operating Temperature	0~55 degree Celsius
Storage Temperature	-10 ~ 70 degree Celsius
Humidity	5~90%(non-condensing)
Size	9.1(L) x 6.8(W) x 2(H) cm