



**LEVELING SUSPENSION**

## ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

### 2005-UP Ford F-250 Super Duty 4WD w/Camper Package

**SAFETY WARNING:** ReadyLift Suspension Inc. recommends this system be installed by a professional technician. In addition to these instructions, professional knowledge of disassembly/ reassembly procedures and post installation checks must be known.

**PRODUCT SAFETY WARNING:** Modifying your vehicle ride height may result in the vehicle handling differently than a factory equipped vehicle. Extreme care must be used to prevent loss of control or vehicle rollover. Failure to drive your modified vehicle safely may result in serious injury or death. ReadyLift Suspension Inc. does not recommend the combined use of suspension lifts, body lifts, or other lifting devices. You should never operate your modified vehicle under the influence of alcohol or drugs. Always drive your modified vehicle at reduced speeds to ensure your ability to control your vehicle under all driving conditions. Always wear your seat belt.

#### Pre-Installation Notes

1. Special literature required: OE Service Manual for model/year of vehicle. Refer to manual for proper disassembly/reassembly procedures of OE and related components.
2. Adhere to recommendations when replacement fasteners, retainers and keepers are called out in the OE manual.
3. Larger rim and tire combinations may increase leverage on suspension, steering, and related components. When selecting combinations larger than OE, consider the additional stress you could be inducing on the OE and related components.
4. Post suspension system vehicles may experience drive line vibrations. Angles may require tuning, slider on shaft may require replacement, shafts may need to be lengthened or trued, and U-joints may need to be replaced.
5. Secure and properly block vehicle prior to installation of ReadyLift Suspension Inc. components. **Always wear safety glasses** when using power tools.
6. If installation is to be performed without a hoist, ReadyLift aSuspension Inc. recommends rear alterations first.
7. Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle attitude. Always measure the attitude prior to beginning installation.

#### POST-INSTALLATION WARNINGS

1. Check all fasteners for proper torque. Check to ensure for adequate clearance between all rotating, mobile, fixed, and heated members. Verify clearance between exhaust and brake lines, fuel lines, fuel tank, floor boards and wiring harness. Check steering gear for clearance. Test and inspect brake system.
2. Perform steering sweep to ensure front brake hoses have adequate slack and do not contact any rotating, mobile or heated members. Inspect rear brake hoses at full extension for adequate slack. Failure to perform hose check/ replacement may result in component failure. Longer replacement hoses, if needed can be purchased from a local parts supplier.
3. Headlight adjustment is highly recommended.
4. Re-torque all fasteners after 500 miles. Always inspect fasteners and components during routine servicing.

**ReadyLift®**

2060 Placentia Ave Suite B-1, Costa Mesa, CA 92627

Toll Free (800)549-4620 Local (949)515-0795 Fax (949)515-0655

# READYLIFT®

## LEVELING SUSPENSION

ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

2005-UP Ford F-250 Super Duty 4WD w/Camper Package

Please read instructions thoroughly and completely before beginning installation.  
Installation by a trained mechanic is highly recommended.

Bolt Size Millimeters	Torque Specs in FT/LB	
	Metric Grade 8.8	Metric Grade 10.9
6mm	6	8
8mm	16	22
10mm	40	45
12mm	54	70
14mm	89	117
16mm	132	175
18mm	182	236



### Bill of Materials

Description	Qty
Metal coil spacer	2
Polyurethane sound insulator	2
Shock extension bracket	2
M14 x 90mm bolt	2
M14 Washer	4
M14 Nylon lock nut	2
16mm carrier bearing spacer	1
7/16 x 2 1/4 bolt (not pictured)	2
Bump stop extension bracket	2
M8 x1.25 Nylon lock nut	1
05-07 F350 Pan hard bracket (69-2517 only)	1
08-09 F350 Pan hard bracket (69-2518 only)	1
Inner Fender Liner brackets w/ hardware	2
ReadyLift® Aluminum 6" Decal	2
ReadyLift® OEM Style 4" block Driver side	1
ReadyLift® OEM Style 4" block Passenger side	1
U-bolts with hardware	4

### ReadyLift®

2060 Placentia Ave Suite B-1, Costa Mesa, CA 92627  
Toll Free (800)549-4620 Local (949)515-0795 Fax (949)515-0655

# READYLIFT®

## LEVELING SUSPENSION

### ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

#### 2005-UP Ford F-250 Super Duty 4WD w/Camper Package

**Please read instructions thoroughly and completely before beginning installation.**

**Installation by a trained mechanic is highly recommended.**

Position truck on a flat surface and lift vehicle by the frame until the front wheels are off the ground. Use a floor jack and support the frame with jack stands, or a (2) two post lift if available. Two jacks may be needed to lift and lower the front differential during installation.


1. Remove front wheels. Remove the lower shock bolt. Use a floor jack to raise the differential to release any pressure on the lower shock bolt making the removal easier.




2. With the jack still supporting the axle, unbolt the 13mm brake line support bracket from the frame on both sides.  
2005-2007 **Fig A**  
2008 **Fig B**




3. Remove upper track bar 30mm nut and bolt.  
Remove sway bar end link bolt on both sides. 19mm, 21mm

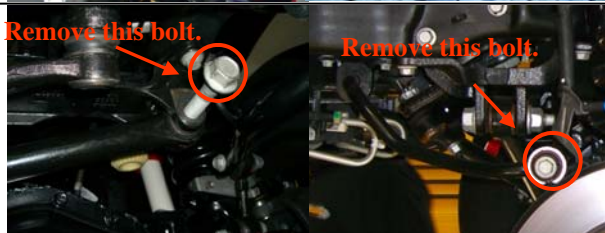

4. Lower differential and remove spring.  
Install ReadyLift® coil spacer.  
(Order of assembly: Coil (A), factory isolator (B), coil spacer (C), polyurethane sound insulator (D).) Reinstall coil and raise differential.

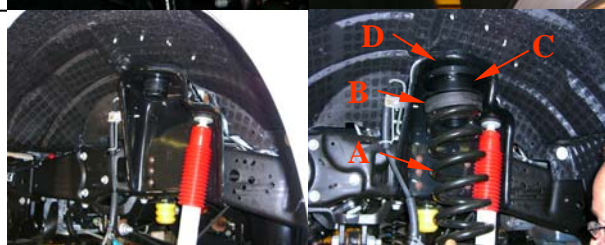

5. Install shock extension onto shock using the hardware provided. **Please note that there is a driver and passenger side shock extension. Look for the D and P stamped on the inside leg of the brackets.** Install shock extension bracket into factory shock mounting location on the axle using the factory hardware. Torque to factory specs. Reference torque specs on front page.

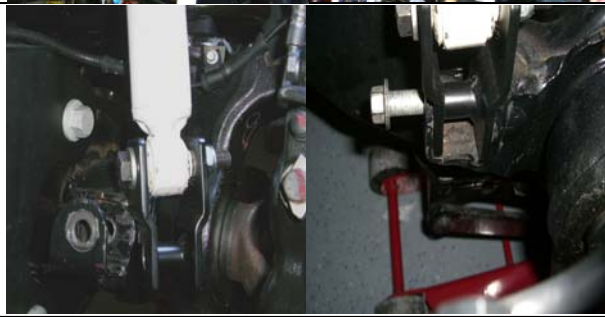

# READYLIFT®


## LEVELING SUSPENSION

### ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

#### 2005-UP Ford F-250 Super Duty 4WD w/Camper Package

Please read instructions thoroughly and completely before beginning installation.  
Installation by a trained mechanic is highly recommended.

6. Remove the two 19mm bolts on the factory track bar bracket (one on each side of the track bar mount). Remove the three 21mm nuts located on the cross member. Remove track bar bracket. Install ReadyLift® track bar bracket using the factory hardware. Torque to factory specs. Reference torque specs on front page.

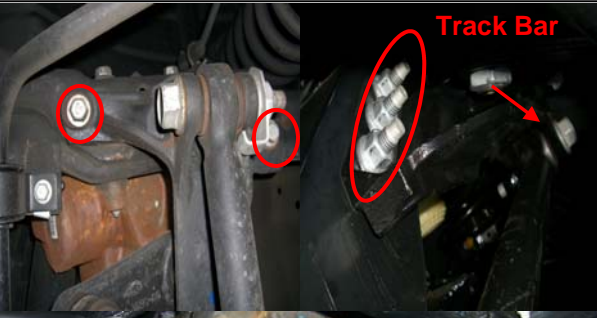


7. Using factory hardware re-install track bar onto the new ReadyLift® track bar bracket.  
  
Re-install sway bar end links.  
  
Torque to factory specs. Reference torque specs on front page.



8. Remove OEM front bump stops.  
  
Remove the 10mm bolts that attach the bump stop brackets to the frame.  
  
Install ReadyLift® bump stop extension bracket. Using a Phillips screw driver, insert it into the holes in the extension and use the handle as a leverage point to tighten.  
Install OEM bump stop bracket using nut provided. Install OEM bump stop.



9. **2005-2007 Models** - Reinstall brake line support brackets.  
**2008 models** drill 3/8" hole approximately 2" below the factory hole, use the factory self-tapping screw to re-attach the brake line support bracket.

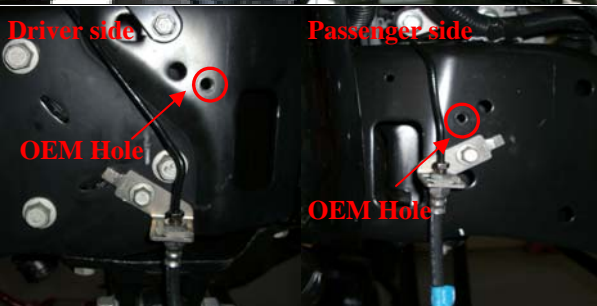

# READYLIFT®

## LEVELING SUSPENSION

ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

2005-UP Ford F-250 Super Duty 4WD w/Camper Package


Please read instructions thoroughly and completely before beginning installation.

Installation by a trained mechanic is highly recommended.

10.

### Carrier Bearing Spacer Installation

Remove the two 15mm bolts, use a jack stand to support the drive shaft. Install the ReadyLift® carrier bearing spacer using the hardware provided. Torque to factory spec. Reference torque specs on front page.

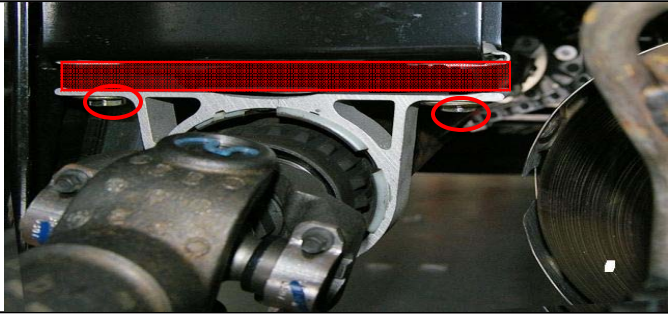

### Rear Block Installation

Remove the four 24mm nuts on one side. Remove the U-bolts. Using a jack, carefully raise the truck by the leaf spring until OEM block is loose and there is enough room for the new block. Install ReadyLift® 4" rear block. Please note that the arrow on the bottom of the block points to the front of the truck. Install ReadyLift® U-bolts using the hardware provided. Torque to factory specs. Repeat on opposite side.



Be sure to double check that all hardware has been tightened and torqued to factory specs.

Remount wheels and tires and torque to factory specs. Re-torque wheels after 25 miles.

\*See next page for Tire/wheel fitment specifications.

Wheel Alignment; a Certified Alignment Technician that is experienced with lifted vehicles is recommended to perform the alignment.

\*It is recommended that you have your vehicle's alignment checked whenever installing new tires.

\*It is also recommended that you adjust your headlights whenever your vehicle's ride height is altered.

**Warning!** This ReadyLift® Leveling Kit is designed and engineered to level out a stock vehicle with no prior modifications. The use of this kit along with items such as suspension lifts, body lifts or any other type of lifting accessory shall be done at the vehicles owners risk and will void any and all warranties in effect or implied by ReadyLift®. This kit is not for off road abuse.

ReadyLift®

2060 Placentia Ave Suite B-1, Costa Mesa, CA 92627

Toll Free (800)549-4620 Local (949)515-0795 Fax (949)515-0655

# READYLIFT®

## LEVELING SUSPENSION

### ReadyLift® (Part# 69-2517CP & 69-2518CP) Installation Instructions

#### 2005-UP Ford F-250 Super Duty 4WD w/Camper Package

**Vehicle Handling Warning**  
Vehicles with larger wheels and tires will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle.  
**DRIVE SAFELY and WEAR YOUR SEAT-BELT.**

**Installation Warning**  
Always wear proper safety equipment and use the correct tools when installing any suspension upgrade. Make sure vehicle is on a flat surface and you are using jack stands or a lift rated for the weight of the vehicle.

### Tire and Wheel Fitment

For 35" tires: 35x12.50 Mounted on a wheel no wider than 9.5" with 0 offset or 5.25" backspacing.  
For 37" tires: 37x12.5 Mounted on the factory wheel or on a wheel no wider than 8" with a +35 offset or 6" backspacing. **Please note that with this fitment the tire will rub a little at full turn on the radius arm. You will also need to pull the inner fender liner back with both of these fitments.**  
The best way to accomplish this is to install the ReadyLift® inner fender liner support kit. Drill an 1/8" hole on the inner lip of the fender liner and an 1/8" hole on the underside of the body. Using the self tapping screw and speed clip provided attach the bracket to the fender liner then attach the other end to the body. See photos below.



### Alignment Specs

Toe Left: 1/32	Toe Right: 1/32
----------------	-----------------