

OUTDOOR UNITS

1. SPECIFICATIONS.....	SR4-2
1-1. PUMY-P36,48NHMUR4 Specifications	SR4-2
1-2. PUMY-P60NKMU Specifications	SR4-3
2. EXTERNAL DIMENSIONS.....	SR4-5
3. CENTER OF GRAVITY	SR4-7
4. ELECTRICAL WIRING DIAGRAMS.....	SR4-8
5. REFRIGERANT CIRCUIT DIAGRAMS AND THERMAL SENSORS.....	SR4-12
6. SOUND PRESSURE LEVELS	SR4-14
7. CAPACITY TABLES	SR4-15
7-1. Correction by Temperature	SR4-15
7-2. Correction by Total Indoor	SR4-18
7-3. Correction by Refrigerant Piping Length	SR4-21
7-4. Correction at Frost and Defrost.....	SR4-22
7-5. Operation Temperature Range	SR4-22
8. OPTIONAL PARTS.....	SR4-24
8-1. Branch Joint.....	SR4-24
8-2. Header.....	SR4-25

1. SPECIFICATIONS

1-1. PUMY-P36,48NHMUR4 Specifications

Model			PUMY-P36NHMUR4(-BS)		PUMY-P48NHMUR4(-BS)	
Power source			1-phase 208 / 230 V 60Hz			
Cooling capacity (Nominal) *1 (208 / 230V)		Btu/h	36,000		48,000	
		kW	10.6		14.1	
	Power input	kW	3.22 *3		4.97 *3	
	Current input	A	14.23 / 15.74 *3		24.0 / 21.7 *3	
	COP (kW / kW)		3.29		2.83	
Temp. range of cooling	Indoor	59 to 75° F W.B. (15 to 24° C W.B.)				
	Outdoor	23 to 115° F D.B. (-5 to 46° C D.B.) 50 to 115° F D.B.(10 to 46° C D.B.): in case of connecting PKFY-P06/P08 type indoor unit.				
Heating capacity (Nominal) *2 (208 / 230V)		Btu/h	40,000		54,000	
		kW	11.7		15.8	
	Power input	kW	2.93 *3		4.88 *3	
	Current input	A	12.88 / 14.24 *3		23.6 / 21.3 *3	
	COP (kW / kW)		3.99		3.23	
Temp. range of heating *3	Indoor	59 to 81° F D.B. (15 to 27° C D.B.)				
	Outdoor	0 to 60° F W.B. (-18 to 15.5° C W.B.)				
Indoor unit	Total capacity		50-130% of outdoor unit capacity		50-130% of outdoor unit capacity	
connectable	Model / Quantity		P06-P36 / 1-6		P06-P54 / 1-8	
Sound pressure level (measured in anechoic room)		dB <A>	49 / 51		50 / 52	
Diameter of refrigerant pipe (O.D.)	Liquid (High pressure)	in. (mm)	3/8 (9.52) Flare (total length>=393ft. [120m])		3/8 (9.52) Flare (total length>=393ft. [120m])	
	Gas (Low pressure)	in. (mm)	5/8 (15.88) Flare		5/8 (15.88) Flare	
External finish			Galvanized sheets (+powder coating for -BS type) *4 <MUNSELL 3Y 7.8/1.1>			
External dimension H x W x D		in.	53-5/32 x 37-13/32 x 13		53-5/32 x 37-13/32 x 13	
		mm	1,350 x 950 x 330		1,350 x 950 x 330	
Net weight		lbs(kg)	287 (130)		287 (130)	
Heat exchanger			Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube	
Compressor	Type		Inverter scroll hermetic comp.		Inverter scroll hermetic comp.	
	Manufacturer		SHIZUOKA Works,MITSUBISHI ELECTRIC CORPORATION			
	Operating Range		41-100%		33-100%	
	Starting method		Inverter		Inverter	
	Lubricant		FV50S		FV50S	
FAN	Airflow rate	CFM	3,530		3,530	
		m3 / min	100		100	
		L / s	1,667		1,667	
	External static press.	in.WG(Pa)	0 (0)		0 (0)	
	Type x Quantity		Propeller fan x 2		Propeller fan x 2	
Control, Driving mechanism			DC-control, Direct-driven		DC-control, Direct-driven	
HIC circuit (HIC: Heat Inter-Changer)			-			
Protection	High pressure protection		High pressure sensor, High pressure switch 601 psi (4.15 MPa)			
	Inverter circuit (COMP., FAN)		Over-current protection,Over-heat protection			
	Compressor		Discharge thermo protection,Over-current protection			
	Fan motor		Over-heat protection,Voltage protection			
Minimum Circuit Ampacity	A		26		26	
Recommended Fuse/Breaker Size	A		30		30	
Maximum Fuse Size	A		40		40	
Defrost method			Auto-defrost mode (Reversed refrigerant circle)			
Refrigerant	Type x Original charge	lbs + oz (kg)	R410A x (18 lbs + 12 oz) (8.5kg)		R410A x (18 lbs + 12 oz) (8.5kg)	
	Control		Indoor LEV			
Drawing	External		BK01B409			
	Wiring		RG79V166			
Standard attachment	Document		Installation Manual			
	Accessory		Grounded lead wire x 2 , Conduit plate			
Optional parts			Joint: CMY-Y62-G-E			
			Header: CMY-Y64/68-G-E			
			Air Outlet Guide (One piece, requires two pieces): PAC-SG59SG-E			
			Wind Baffle (One piece, requires two pieces): WB-PA2			
		Drain Pan: PAC-SG64DP-E				
		Drain Socket: PAC-SG61DS-E / PAC-SH71DS-E				
Remark	Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.					
	*3 For details on the electrical data needed for installing these units, see the S-Series System Design section.					
	*4 For information on standard anti-corrosion protection and -BS treatment, see the S-Series System Design section.					
Note:	*1 Nominal cooling conditions		*2 Nominal heating conditions		Unit converter	
Indoor:	80degF D.B. / 67degF W.B. (26.7degC D.B. / 19.4degC W.B.)		70degF D.B. (21.1degC D.B.)		kcal =kW x 860	
					BTU/h =kW x 3,412	
Outdoor:	95degF D.B. (35degC D.B.)		47degF D.B. / 43degF W.B. (8.3degC D.B. / 6.1degC W.B.)		cfm =m³/min x 35.31	
					lb =kg / 0.4536	
Pipe length:	25ft.(7.6m)		25ft.(7.6m)			
Level difference:	0ft.(0m)		0ft.(0m)			
* Above specification data is subject to rounding variation.						
* Due to continuing improvement, above specifications may be subject to change without notice.						

1. SPECIFICATIONS

1-2. PUMY-P60NKMU Specifications

Model		PUMY-P60NKMU(-BS)	
Power source		1-phase 208 / 230 V 60Hz	
Cooling capacity (Nominal) *1 (208 / 230V)	Btu/h		60,000
	kW		17.5
	Power input	kW	4.80 *3
	Current input	A	21.5 *3
	COP (kW / kW)		12.5
Temp. range of cooling	Indoor		59 to 75° F W.B. (15 to 24° C W.B.)
	Outdoor		23 to 115° F D.B. (-5 to 46° C D.B.)
Heating capacity (Nominal) *2 (208 / 230V)	Btu/h		66,000
	kW		19.3 *3
	Power input	kW	6.15 *3
	Current input	A	27.6
	COP (kW / kW)		3.14
Temp. range of heating *3	Indoor		59 to 81° F D.B. (15 to 27° C D.B.)
	Outdoor		-4 to 60° F W.B. (-20 to 15.5° C W.B.)
Indoor unit	Total capacity		50-130% of outdoor unit capacity
connectable	Model / Quantity		P06-P72 / 1-12
Sound pressure level (measured in anechoic room)	dB <A>		58 / 59
Diameter of refrigerant pipe (O.D.)	Liquid (High pressure)	in. (mm)	3/8 (9.52) Flare
	Gas (Low pressure)	in. (mm)	3/4 (19.05) Flare
External finish		Galvanized sheets (+powder coating for -BS type) *4 <MUNSELL 3Y 7.8/1.1>	
External dimension H x W x D	in.		52-11/16 x 41-11/32 x 13
	mm		1,388 x 1,050 x 330
Net weight	lbs(kg)		313 (142)
Heat exchanger		Salt-resistant cross fin & copper tube	
Compressor	Type	Inverter scroll hermetic comp.	
	Manufacturer	SHIZUOKA Works, MITSUBISHI ELECTRIC CORPORATION	
	Operating Range	Cooling	38-100%
		Heating	29-100%
	Starting method	Inverter	
FAN	Lubricant		FV50S
	Airflow rate	CFM	4,940
		m ³ / min	140
		L / s	2,340
	External static press.	in.WG(Pa)	0 (0)
	Type x Quantity	Inverter scroll hermetic compressor x 1	
	Control, Driving mechanism	DC-control, Direct-driven	
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure	
Protection	High pressure protection		High pressure sensor, High pressure switch 601 psi (4.15 MPa)
	Inverter circuit (COMP., FAN)		Over-current protection, Over-heat protection
	Compressor		Over-heat protection
	Fan motor		Over-heat protection, Voltage protection
Minimum Circuit Ampacity	A		35
Recommended Fuse/Breaker Size	A		40
Maximum Fuse Size	A		42
Refrigerant	Type x Original charge	lbs (kg)	R410A x 11.2 (5.1)
	Control	LEV and HIC circuit	
Drawing	External		NKM-BK01-J606
	Wiring		NKM-BH79-B597
Standard attachment	Document	Installation Manual	
Optional parts	Accessory		Grounded lead wire x 2, Conduit plate
			Joint: CMY-Y62-G-E
			Header: CMY-Y64/68-G-E
			Air Outlet Guide (One piece, requires two pieces): PAC-SH96SG-E
			Wind Baffle (One piece, requires two pieces): WB-PA3
Remark			Drain Pan: PAC-SH97DP-E
			Drain Socket: PAC-SH71DS-E
		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.	
		*3 For details on the electrical data needed for installing these units, see the S-Series System Design section.	
		*4 For information on standard anti-corrosion protection and -BS treatment, see the S-Series System Design section.	

Note:	*1 Nominal cooling conditions	*2 Nominal heating conditions	Unit converter
Indoor:	80degF D.B. / 67degF W.B.	70degF D.B.	kcal = kW x 860
	(26.7degC D.B. / 19.4degC W.B.)	(21.1degC D.B.)	BTU/h = kW x 3,412
Outdoor:	95degF D.B. (35degC D.B.)	47degF D.B. / 43degF W.B. (8.3degC D.B. / 6.1degC W.B.)	cfm = m ³ /min x 35.31 lb = kg / 0.4536
Pipe length:	25ft.(7.6m)	25ft.(7.6m)	* Above specification data is subject to rounding variation.
Level difference:	0ft.(0m)	0ft.(0m)	

* Due to continuing improvement, above specifications may be subject to change without notice.


1. SPECIFICATIONS

Efficiency Ratings

Model	IDU Type	EER (95° F) *1	SEER	HSPF	COP*1
PUMY-P36NHMUR4 (-BS)	Non-ducted	11.20	14.3	8.20	3.14
	Mixed Ducted and Non-ducted	10.95	14.3	8.75	3.34
	Ducted	10.75	14.3	9.3	3.56
PUMY-P48NHMUR4 (-BS)	Non-ducted	9.00	15.5	8.7	2.84
	Mixed Ducted and Non-ducted	8.70	15.0	8.7	3.04
	Ducted	8.40	14.5	8.7	3.26
PUMY-P60NKMU (-BS)	Non-ducted (24+24+06+06)	12.2	16.7	10.6	3.14
	Mixed Ducted and Non-ducted	11.75	16.6	10.7	3.42
	Ducted (06+06+06+18+24)	11.30	16.5	10.8	3.70
Note:	*1. Efficiency values based on AHRI 1230 test method.				

PUMY-P36,48NHMUR4(-BS)


Ref. : PUMY_NHMU_EXD_USDB_P36-48
Unit : mm(in)

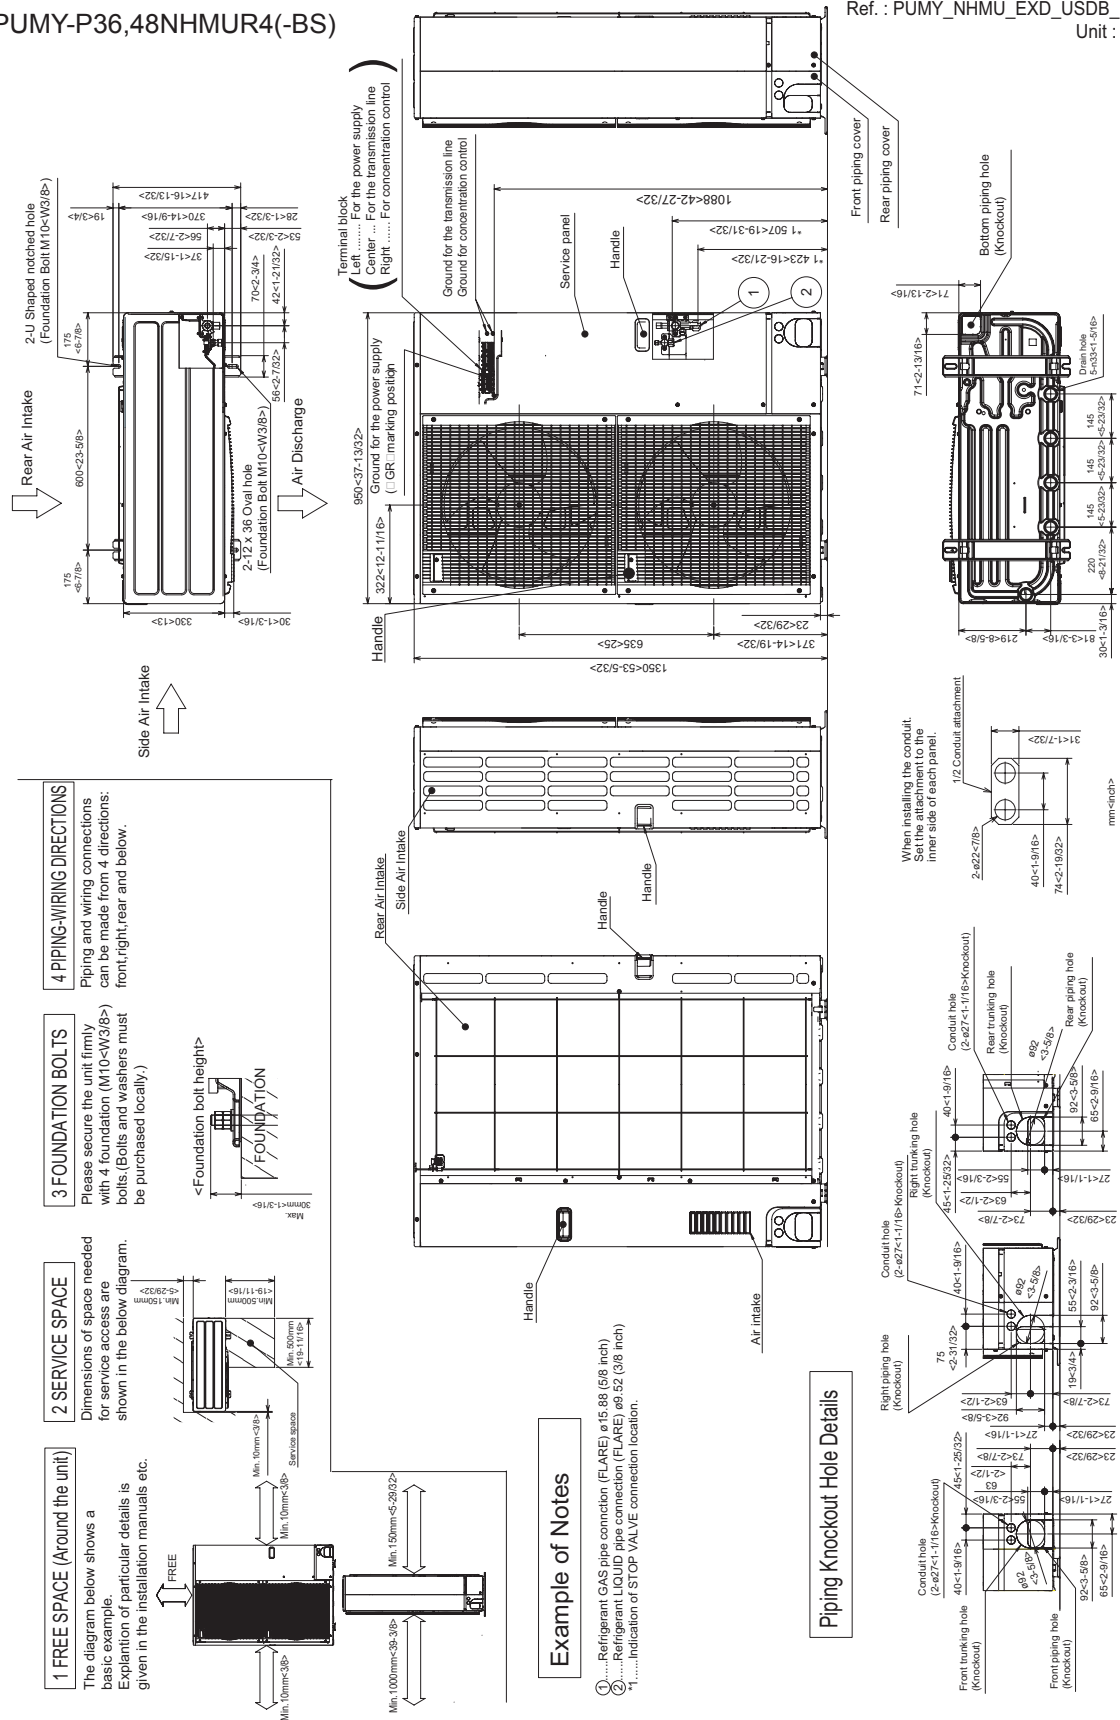

2. EXTERNAL DIMENSIONS

PUMY-P60NKMU(-BS)


Unit : mm(in)

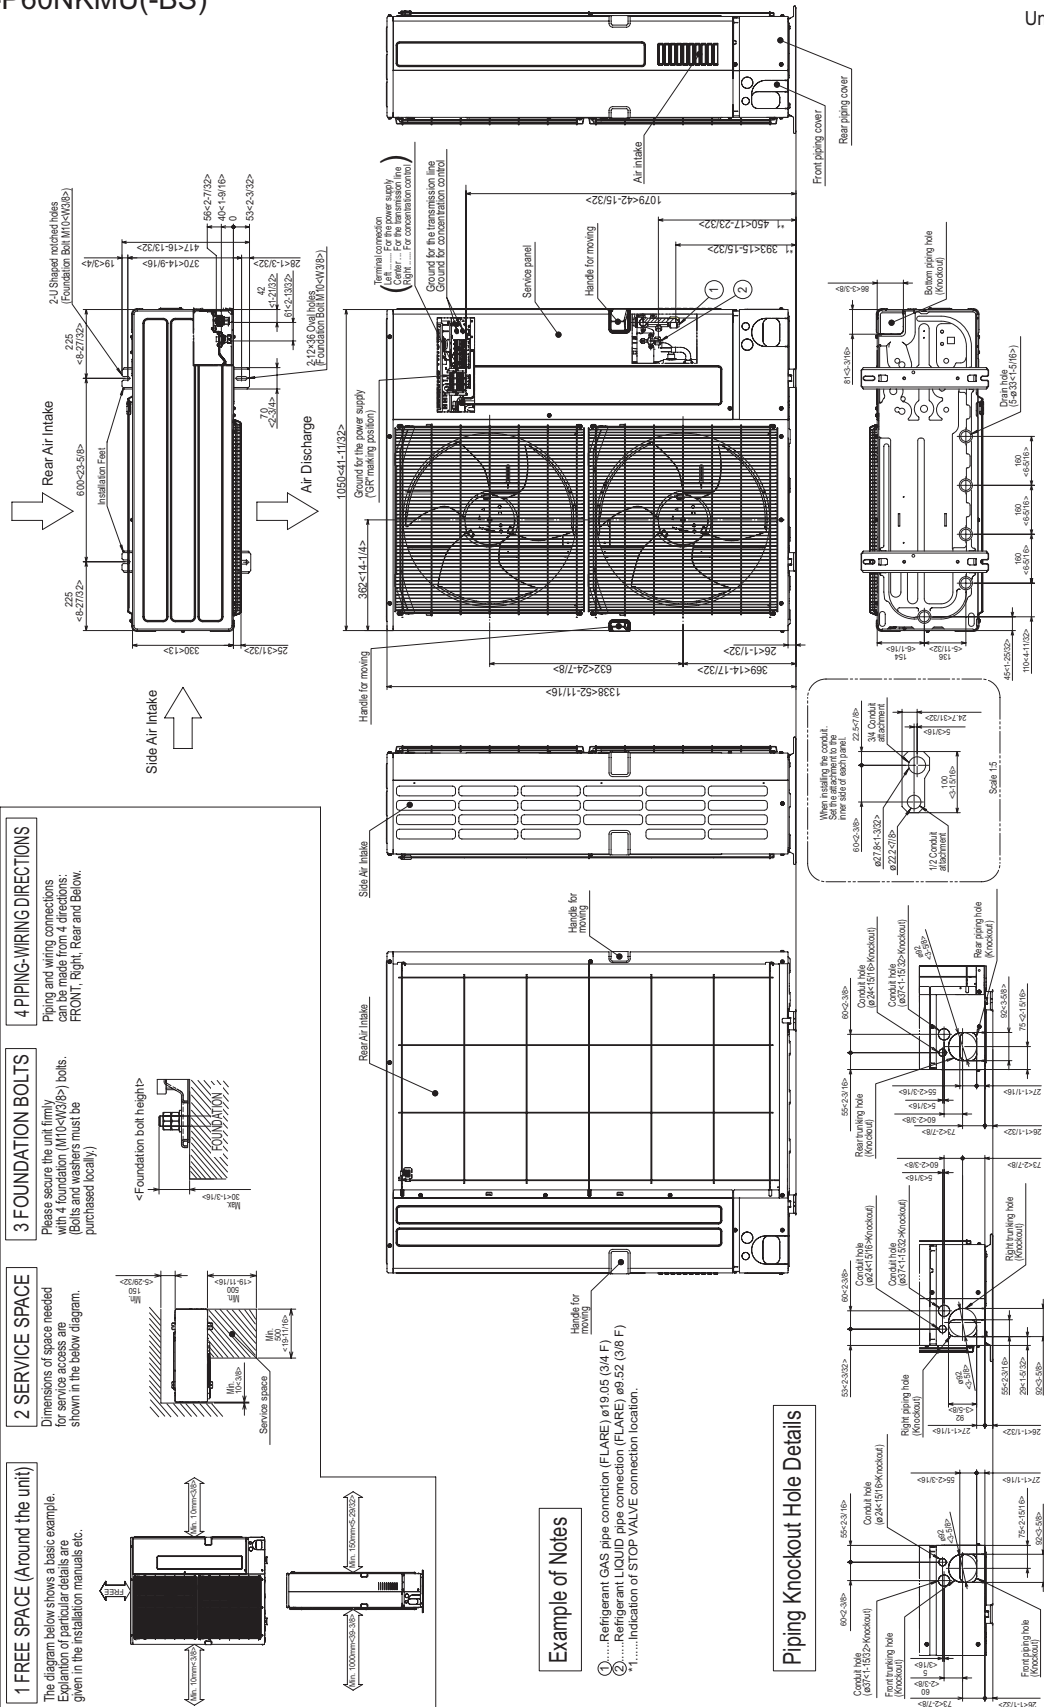

3. CENTER OF GRAVITY

PUMY-P36,48NHMUR4(-BS)


Unit : mm[in.]

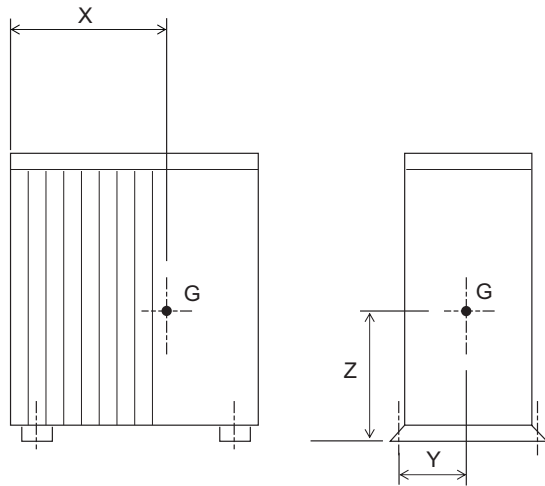

Model	X	Y	Z
PUMY-P36NHMUR4	590(23-1/4)	185(7-5/16)	500(19-11/16)
PUMY-P48NHMUR4	590(23-1/4)	185(7-5/16)	500(19-11/16)

PUMY-P60NKMU(-BS)

Unit : mm[in.]

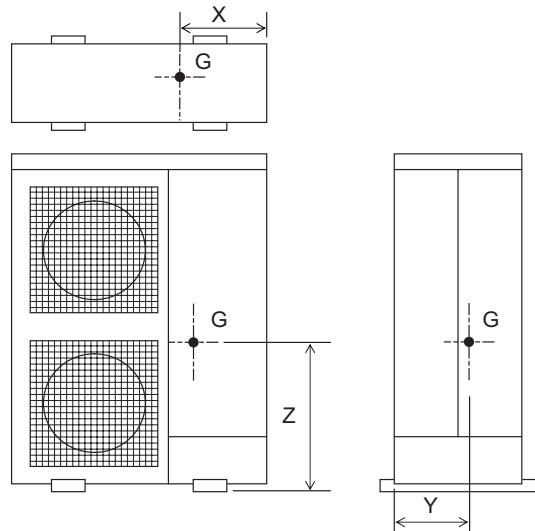

Model	X	Y	Z
PUMY-P60NKMU	385(15-3/16)	175(6-15/16)	507(20)

4. ELECTRICAL WIRING DIAGRAMS

PUMY-P36,48NHMUR4(-BS)

Ref. : PUMY-NHMU_EWD_USDB_P36-48_2

SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
TB1	Terminal Block <Power Supply>	P.B.	Power Circuit Board	SW6	Switch<Function Selection>
TB3	Terminal Block <Communication Line>	TABU/V/W	Connection Terminal<U/V/W-Phase>	SW7	Switch<Function Selection>
TB7	Terminal Block <Centralized Control Line>	TABS/T	Connection Terminal<L/N-Phase>	SW8	Switch<Function Selection>
MC	Motor For Compressor	TABP1/P2/P	Connection Terminal<DC Voltage>	SWU1	Switch<Unit Address Selection, 1st digit>
MF1,MF2	Fan Motor	TABN1/N2/N	Connection Terminal<DC Voltage>	SWU2	Switch<Unit Address Selection, 2nd digit>
21S4	Solenoid Valve<Four-Way Valve>	DS2,DS3	Diode Bridge	CNLVB	Connector<To N.F. Board CN52C> (Symbol of Board is CNLVB)
63H	High Pressure Switch	IPM	Power Module	SS	Connector<Connection For Option>
63L	Low Pressure Switch	N.F.	Noise Filter Circuit Board	CN3D	Connector<Connection For Option>
63HS	High Pressure Sensor	LI/LO	Connection Terminal<L-Phase>	CN3S	Connector<Connection For Option>
SV1	Solenoid Valve<Bypass valve>	NI/NO	Connection Terminal<N-Phase>	CN3N	Connector<Connection For Option>
TH3	Thermistor<Outdoor Pipe>	EI,E2	Connection Terminal<Ground>	CN51	Connector<Connection For Option>
TH4	Thermistor<Discharge>	52C	52C Relay	LED1,LED2	LED<Operation Inspection Display>
TH6	Thermistor<Low Pressure Saturated>	C.B.	Controller Circuit Board	LED3	LED<Power Supply to Main Microcomputer>
TH7	Thermistor<Outdoor>	SW1	Switch<Display Selection>	F1,F2	Fuse<T6,3AL250V>
TH8	Thermistor<Heatsink>	SW2	Switch<Function Selection>	X501~505	Relay
DCLE	Reactor	SW3	Switch<Test Run>	M-NET P.B.	M-NET Power Circuit Board
ACTM	Active Filter Module	SW4	Switch<Model Selection>	TP1	ConnectionTerminal<Ground>
CE	Main Smoothing Capacitor	SW5	Switch<Function Selection>		

Caution for electrical work

Use copper supply wires.

Cautions when Servicing

- ⚠ **WARNING:** When the main supply is turned off, the voltage [340 V] in the main capacitor will drop to 20 V in approx. 2 minutes (input voltage: 240 V). When servicing, make sure that LED1, LED2 on the outdoor circuit board goes out, and then wait for at least 1 minute.
- Components other than the outdoor board may be faulty: Check and take corrective action, referring to the service manual. Do not replace the outdoor board without checking.

NOTES:


- Refer to the wiring diagrams of the indoor units for details on wiring of each indoor unit.
Self-diagnosis function
The indoor and outdoor units can be diagnosed automatically using the self-diagnosis switch (SW1) and LED1, LED2 (LED indication) found on the multi-controller of the outdoor unit.
LED indication : Set all contacts of SW1 to OFF.

- During normal operation
- The LED indicates the drive state of the controller in the outdoor unit.

Bit	1	2	3	4	5	6	7	8
Indication	Compressor operated	52C	21S4	SV1	(SV2)	-	-	Always lit


- When fault requiring inspection has occurred
The LED alternately indicates the inspection code and the location of the unit in which the fault has occurred.

[Example]
When the compressor and SV1 are turned during cooling operation.



4. ELECTRICAL WIRING DIAGRAMS

PUMY-P36,48NHMUR4(-BS)

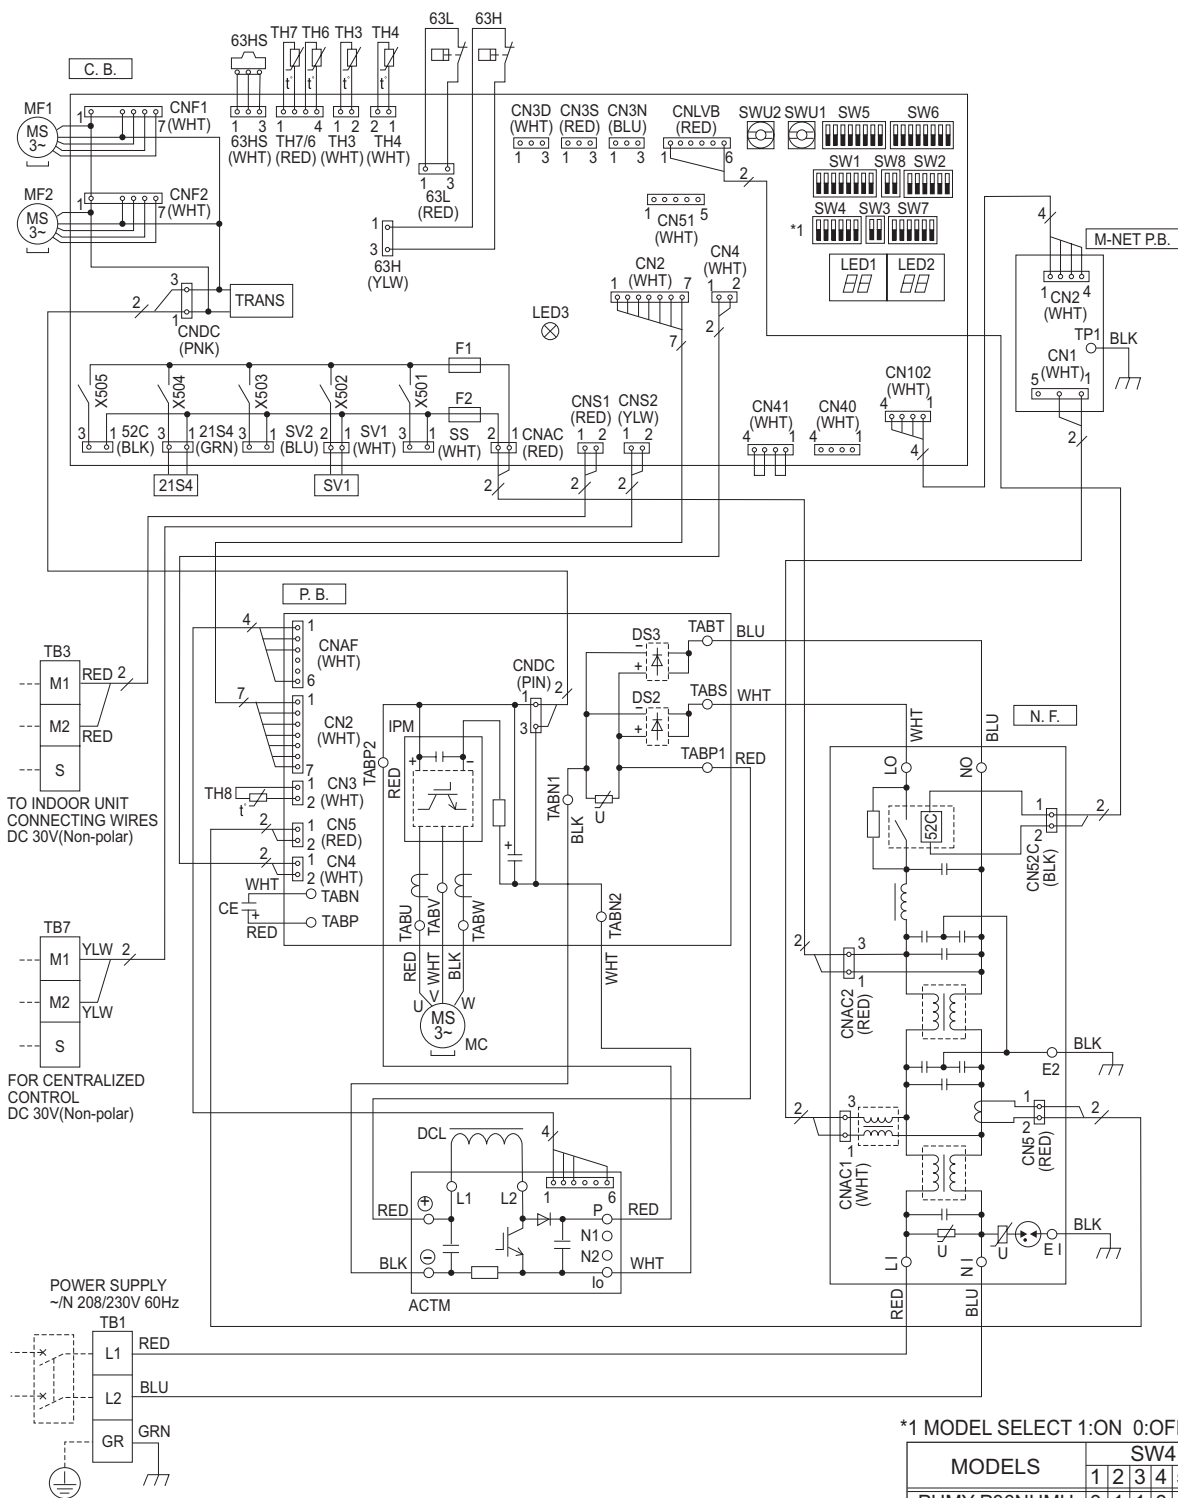

*1 MODEL SELECT 1:ON 0:OFF

MODELS	SW4					
	1	2	3	4	5	6
PUMY-P36NHMU	0	1	1	0	1	0
PUMY-P48NHMU	0	1	1	0	0	1

4. ELECTRICAL WIRING DIAGRAMS

PUMY-P60NKMU(-BS)

SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
TB1	Terminal Block (Power Supply)	DCL	Reactor	SW7	Switch (Function Selection)
TB3	Terminal Block (Communication Line)	CB	Main Smoothing Capacitor	SW8	Switch (Model Selection)
TB7	Terminal Block (Centralized Control Line)	P.B.	Power Circuit Board	SWU1	Switch (Unit Address Selection, 1st digit)
MC	Motor For Compressor	TABU/V/W	Connection Terminal (U/V/W-Phase)	SWU2	Switch (Unit Address Selection, 2nd digit)
MF1,MF2	Fan Motor	TABL/N	Connection Terminal (L/N-Phase)	SS	Connector (Connection For Option)
21S4	Solenoid Valve (Four-Way Valve)	TABP2	Connection Terminal (DC Voltage)	CN3D	Connector (Connection For Option)
63H	High Pressure Switch	TABN2	Connection Terminal (DC Voltage)	CN3S	Connector (Connection For Option)
63HS	High Pressure Sensor	DCL1,DCL2	Connection Terminal (Reactor)	CN3N	Connector (Connection For Option)
63LS	Low Pressure Sensor	IGBT	Power Module	CN51	Connector (Connection For Option)
SV1	Solenoid Valve (Bypass Valve)	E1,E2,E3,E4	Connection Terminal (Ground)	LED1,LED2	LED (Operation Inspection Display)
TH2	Thermistor (HIC Pipe)	MULTI.B.	Controller Circuit Board	LED3	LED (Power Supply to Main Microcomputer)
TH3	Thermistor (Outdoor Pipe)	SW1	Switch (Display Selection)	F1,F2	Fuse (T6, 3AL250V)
TH4	Thermistor (Compressor)	SW2	Switch (Function Selection)	X501~505	Relay
TH6	Thermistor (Low Pressure Saturated)	SW3	Switch (Test Run)	M-P.B.	M-NET Power Circuit Board
TH7	Thermistor (Outdoor)	SW4	Switch (Model Selection)	TP1	ConnectionTerminal (Ground)
TH8	Thermistor (Heat Sink)	SW5	Switch (Function Selection)		
LEV-A,LEV-B	Electronic Expansion Valve	SW6	Switch (Function Selection)		

Caution for electrical work

- Use copper supply wires.

Cautions when servicing

- ⚠ WARNING: When the main supply is turned off, the voltage [340 V] in the main capacitor will drop to 20 V in approx. 2 minutes (input voltage: 230 V). When servicing, make sure that LED1, LED2 on the outdoor circuit board goes out, and then wait for at least 1 minute.
- Components other than the outdoor board may be faulty: Check and take corrective action, referring to the service manual. Do not replace the outdoor board without checking.

NOTES:

1.Refer to the wiring diagrams of the indoor units for details on wiring of each indoor unit.

Self-diagnosis function

The indoor and outdoor units can be diagnosed automatically using the self-diagnosis switch (SW1) and LED1, LED2 (LED indication) found on the multi-controller of the outdoor unit.


LED indication : Set all contacts of SW1 to OFF.

- During normal operation
- The LED indicates the drive state of the controller in the outdoor unit.

Bit	1	2	3	4	5	6	7	8
Indication	Compressor operated	52C	21S4	SV1	(SV2)	—	—	Always lit


- When fault requiring inspection has occurred
The LED alternately indicates the inspection code and the location of the unit in which the fault has occurred.

[Example]
When the compressor and SV1 are turned during cooling operation.




4. ELECTRICAL WIRING DIAGRAMS

PUMY-P60NKMU(-BS)

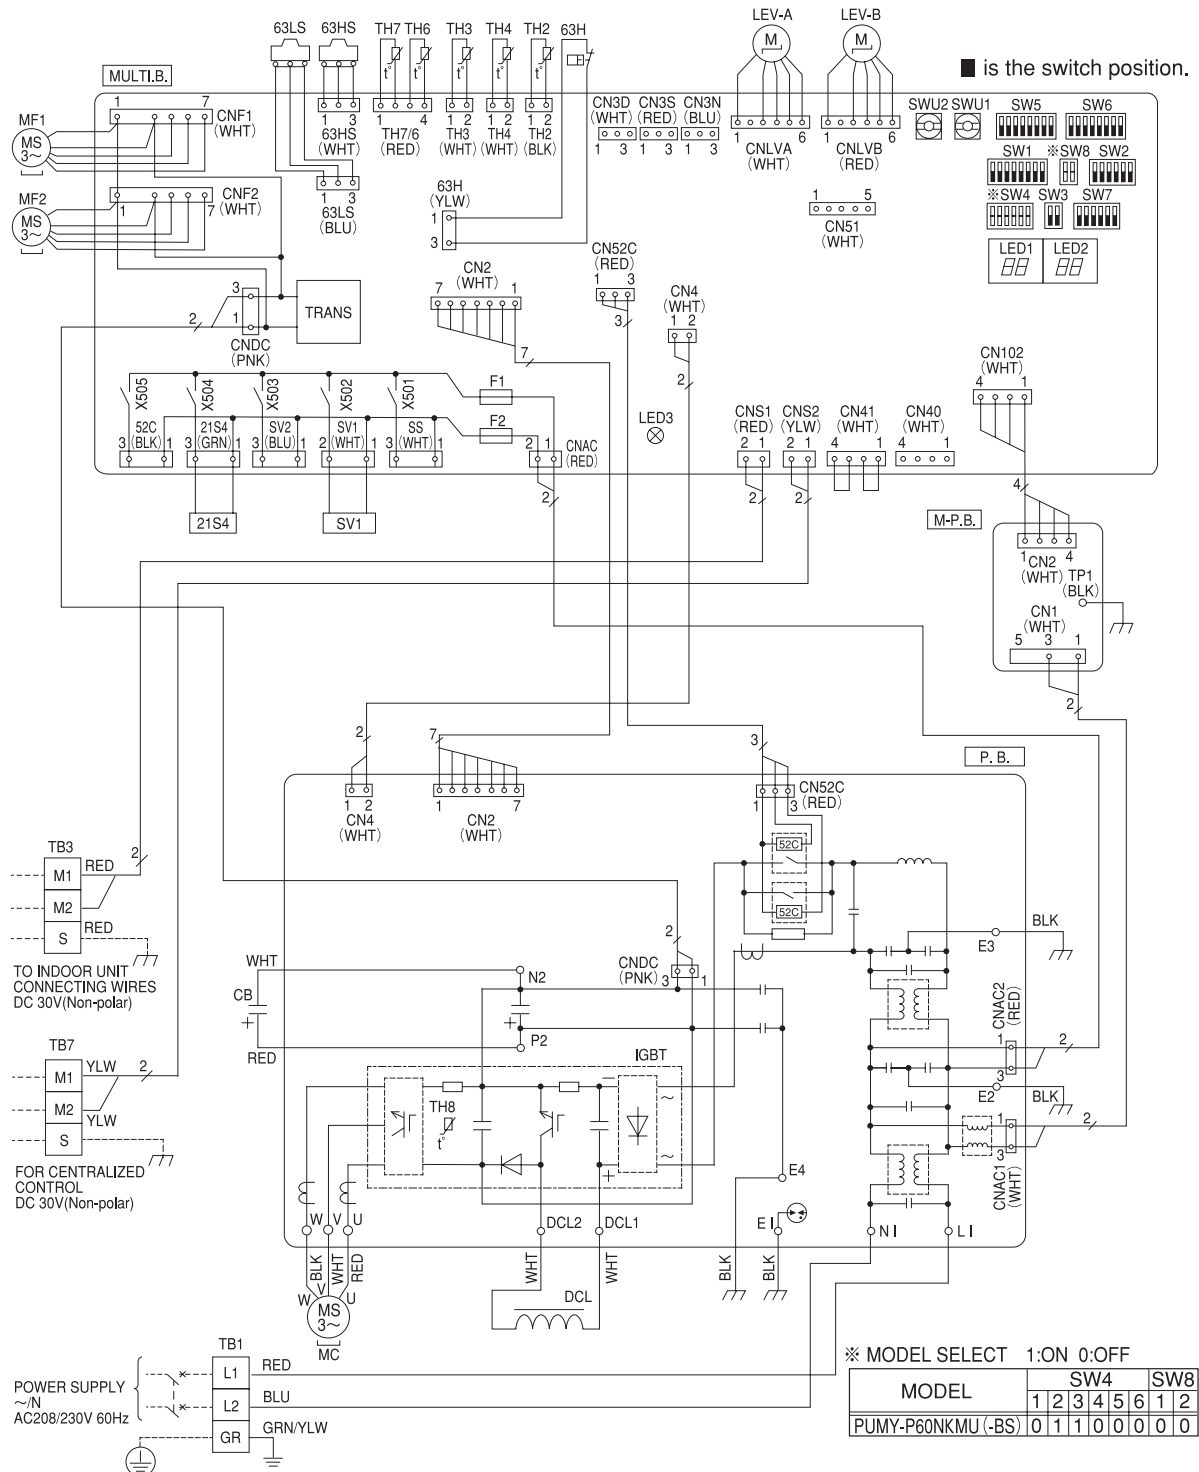

5. REFRIGERANT CIRCUIT DIAGRAMS AND THERMAL SENSORS

PUMY-P36,P48-NHMUR4(-BS)

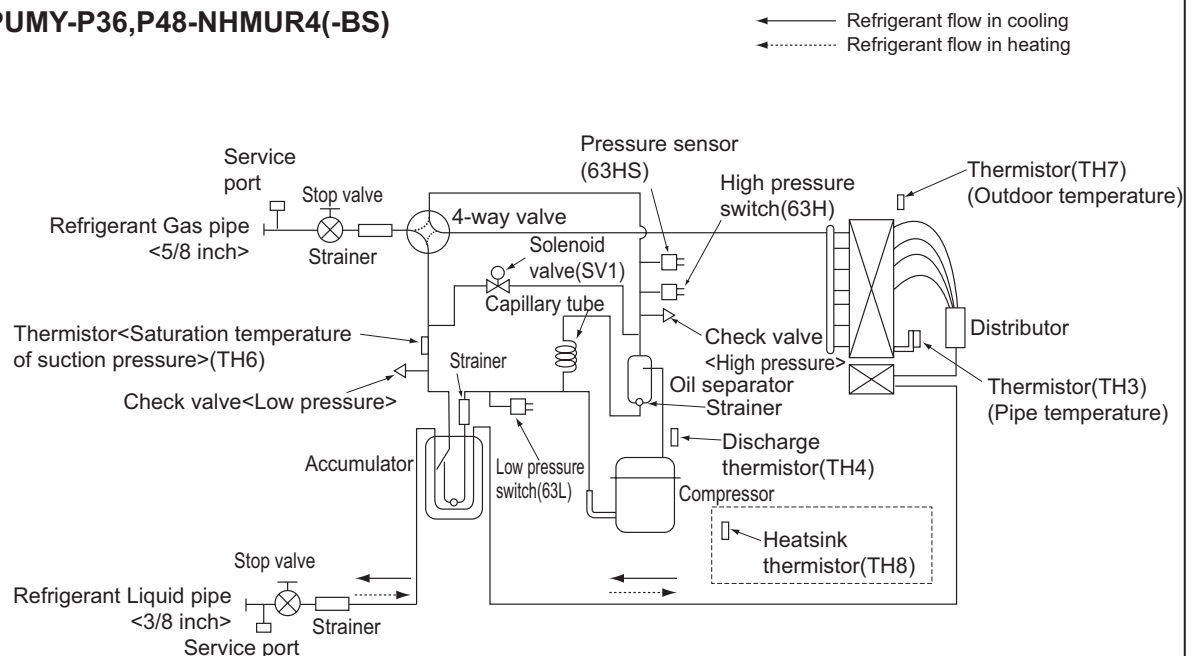

Capillary tube (for oil separator) : $\varnothing 2.5 \times \varnothing 0.8 \times L 1000(\text{mm})$ [$\varnothing (3/32) \times \varnothing (1/32) \times L (39-1/2)$] inch

Refrigerant piping specifications <dimensions of flared connector>


Unit: mm<inch>

Capacity	Item	Liquid piping	Gas piping
Indoor unit	P06, P08, P12, P15, P18	$\varnothing 6.35 < 1/4" >$ Flare	$\varnothing 12.7 < 1/2" >$ Flare
	P24, P30, P36, P48, P54	$\varnothing 9.52 < 3/8" >$ Flare	$\varnothing 15.88 < 5/8" >$ Flare
Outdoor unit	P36, P48	$\varnothing 9.52 < 3/8" >$ Flare	$\varnothing 15.88 < 5/8" >$ Flare

5. REFRIGERANT CIRCUIT DIAGRAMS AND THERMAL SENSORS

PUMY-P60NKMU PUMY-P60NKMU-BS

Unit: mm <inch>

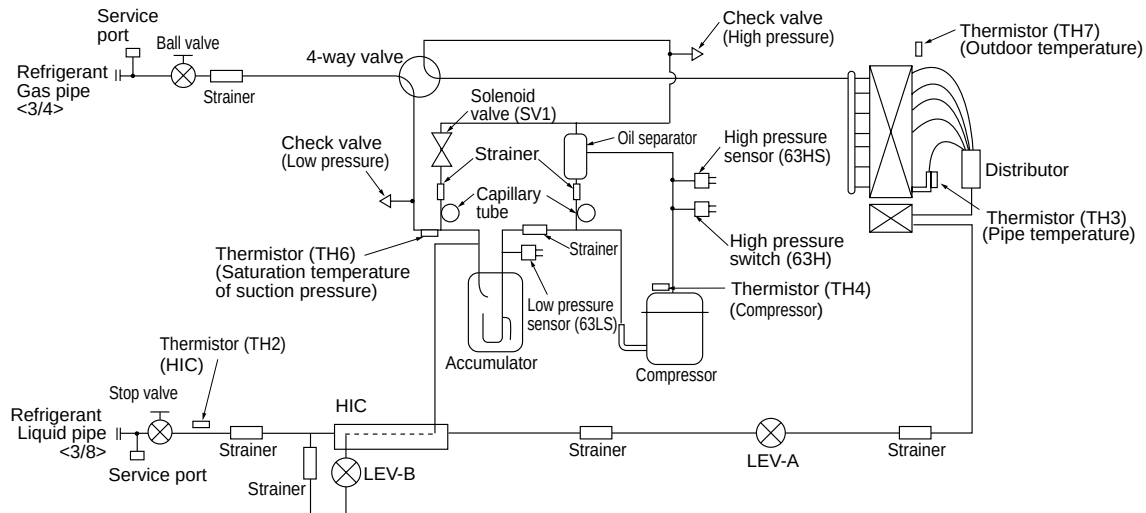


Capillary tube for oil separator : $\phi 2.5 \times \phi 0.8 \times L800$
 Capillary tube for solenoid valve : $\phi 4.0 \times \phi 3.0 \times L500$

Refrigerant piping specifications <dimensions of flared connector>


Capacity		Item	Liquid piping	Gas piping
Indoor unit		P06, P08, P12, P15, P18	$\phi 6.35$ <1/4>	$\phi 12.7$ <1/2>
		P24, P30, P36, P48, P54	$\phi 9.52$ <3/8>	$\phi 15.88$ <5/8>
		P72	$\phi 9.52$ <3/8>	$\phi 19.05$ <3/4>
Outdoor unit		P60	$\phi 9.52$ <3/8>	$\phi 19.05$ <3/4>

6. SOUND PRESSURE LEVELS

Measurement condition PUMY-P36,48NHMUR4(-BS)/P60NKMU(-BS)

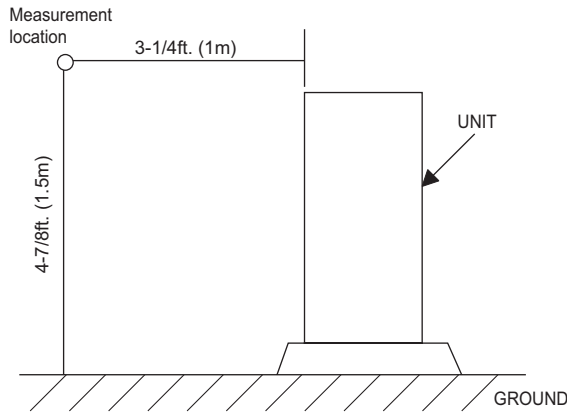


Sound level of PUMY-P60NKMU(-BS)

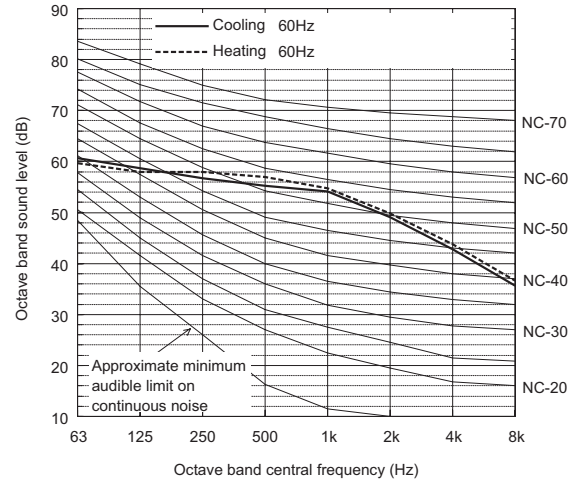

		63	125	250	500	1k	2k	4k	8k	dB(A)
Cooling	60Hz	60.7	58.7	56.7	55.2	54.1	49.1	42.8	35.6	58.0
Heating	60Hz	59.7	58.0	58.0	56.9	54.7	49.8	43.8	36.6	59.0

Sound level of PUMY-P36NHMUR4(-BS)


Ref.:PUMY_NHMu_NCC_USDB_P36

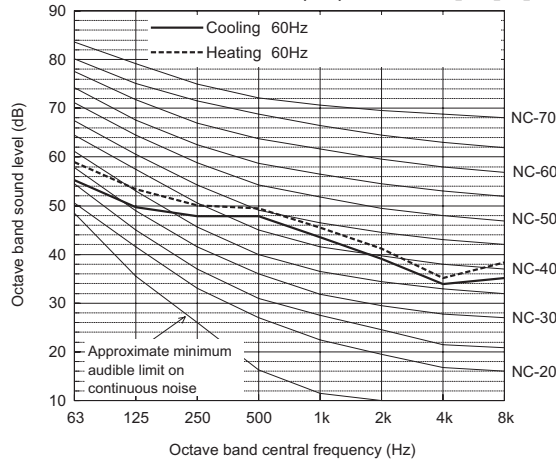

		63	125	250	500	1k	2k	4k	8k	dB(A)
Cooling	60Hz	55.2	49.7	47.9	47.8	43.5	39.1	33.9	35.1	49.0
Heating	60Hz	58.9	53.4	50.1	49.4	45.5	41.2	35.1	38.3	51.0

Sound level of PUMY-P48NHMUR4(-BS)

Ref.:NC_PUMY-P48

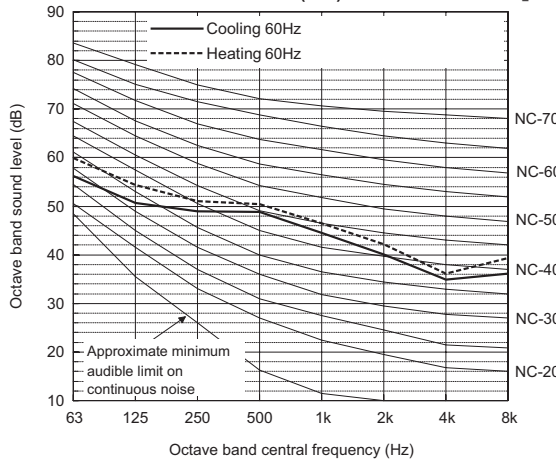


		63	125	250	500	1k	2k	4k	8k	dB(A)
Cooling	60Hz	56.2	50.7	48.9	48.8	44.5	40.1	34.9	36.1	50.0
Heating	60Hz	59.9	54.4	51.1	50.4	46.5	42.2	36.1	39.3	52.0

7. CAPACITY TABLES


7-1. Correction by Temperature

CITY MULTI systems could have various capacities at different design temperatures. Using the nominal cooling/heating capacity values and the ratios below, the capacity can be found for different temperatures.

PUMY-		P36NHMUR4	P48NHMUR4
Nominal Cooling Capacity	kW	10.6	14.1
	BTU/h	36,000	48,000
Input	kW	3.22	4.97

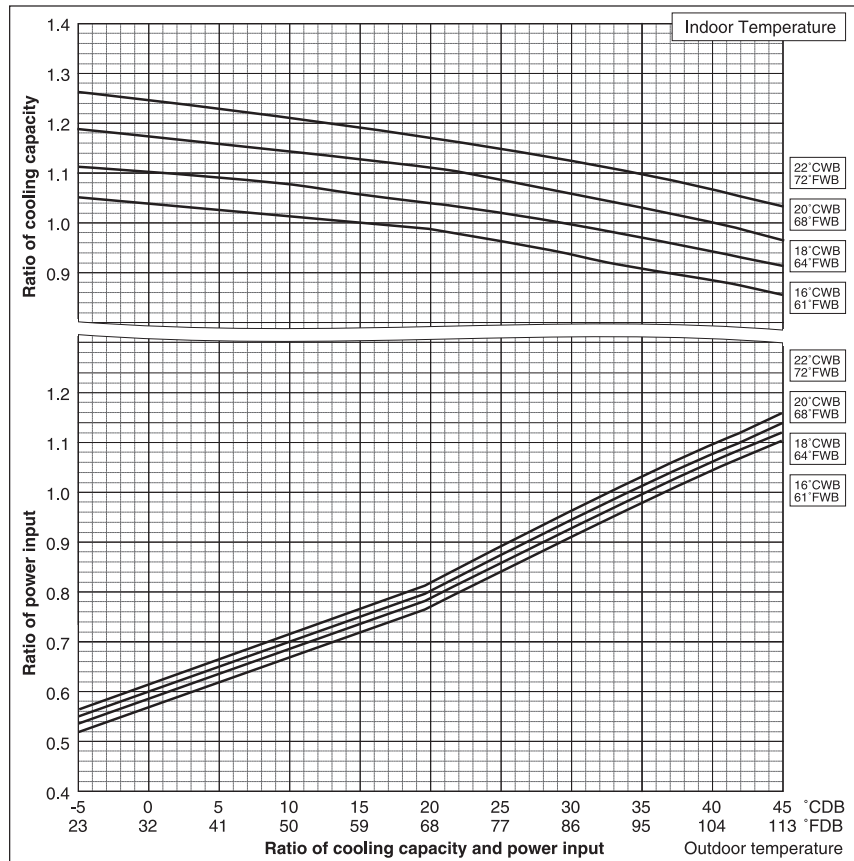


PUMY-		P36NHMUR4	P48NHMUR4
Nominal Heating Capacity	kW	11.7	15.8
	BTU/h	40,000	54,000
Input	kW	2.93	4.88

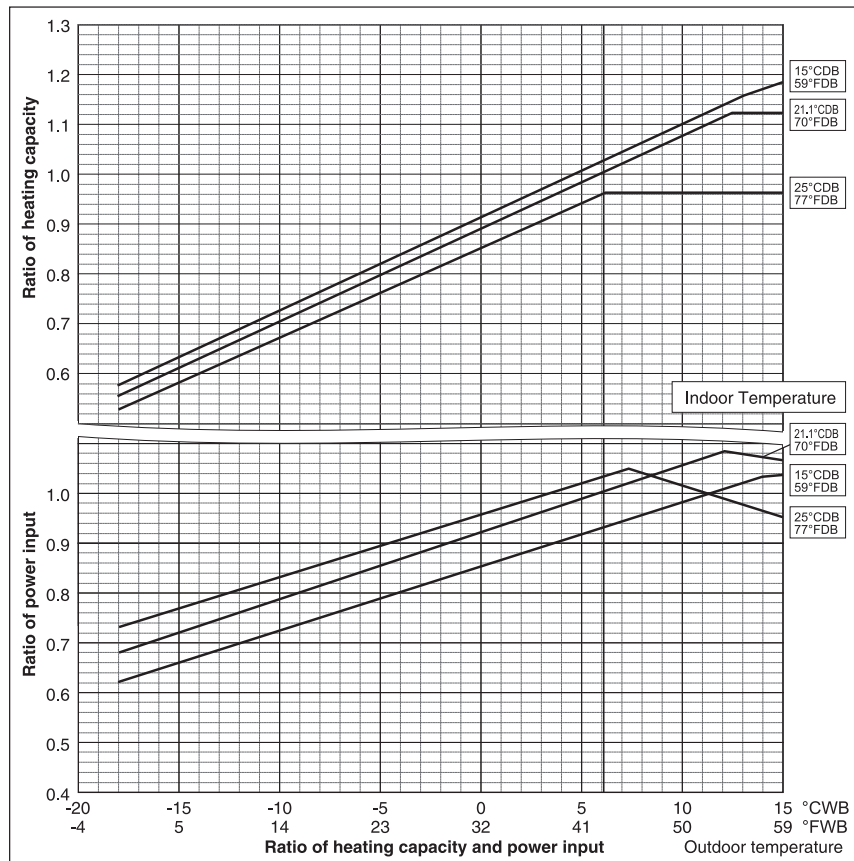


Ref.cbt_p100-140

7. CAPACITY TABLES

PUMY-		P60NKMU	
		Non-Ducted	Ducted
Nominal cooling capacity	BTU/h	60,000	
	kW	17.5	
	Input kW	4.80	5.30

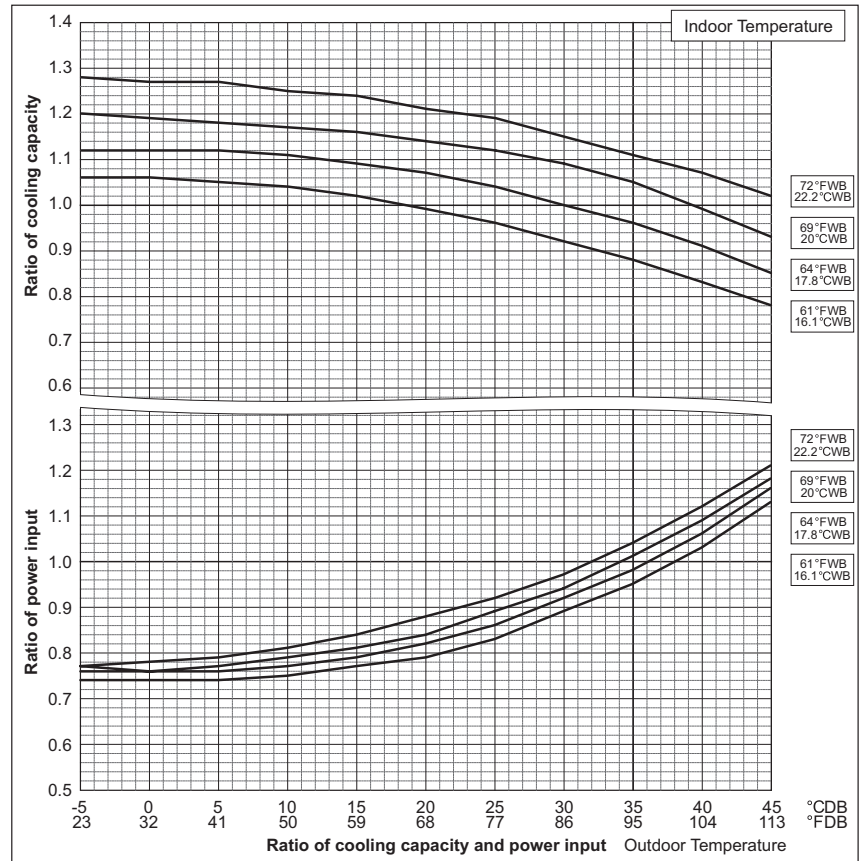

PUMY-		P60NKMU	
		Non-Ducted	Ducted
Nominal heating capacity	BTU/h	66,000	
	kW	19.3	
	Input kW	6.15	5.23

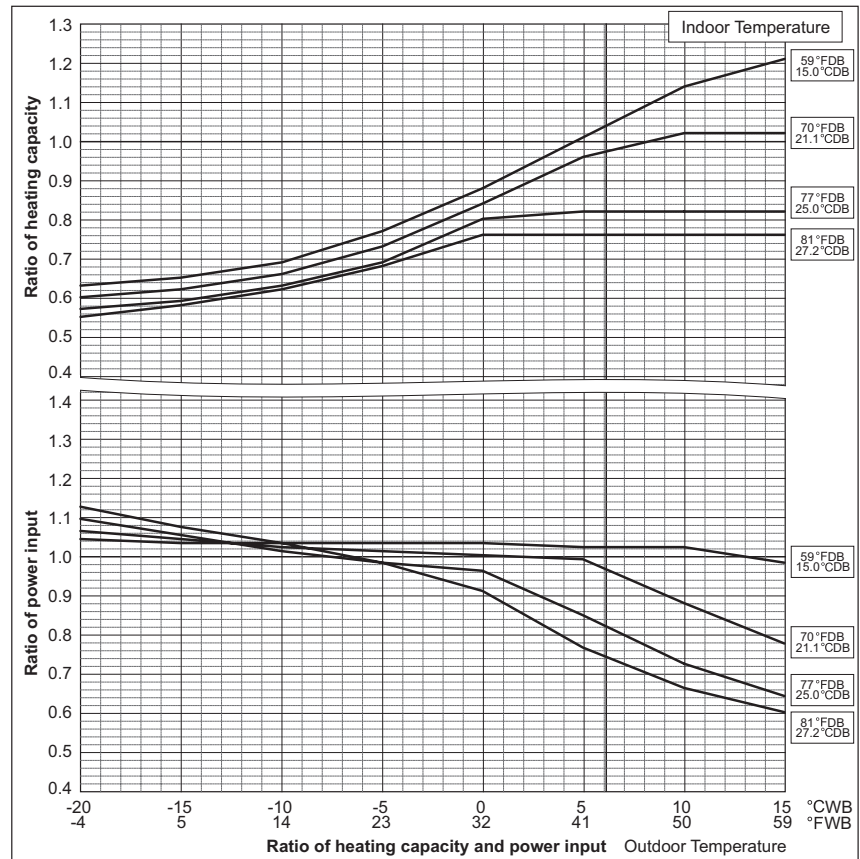


7. CAPACITY TABLES

7-1-1. Correction by Temperature (High Heating Performance Mode)


CITY MULTI systems could have various capacities at different design temperatures. Using the nominal cooling/heating capacity values and the ratios below, the capacity can be found for different temperatures.

To select high heating performance mode, DipSW 7-3 must be set to ON. (In the low ambient temperature, heating capacity and power input become higher than those under standard mode.)

PUMY-		P60NKMU	
		Non-Ducted	Ducted
Nominal cooling capacity	BTU/h	60,000	
	kW	17.5	
Input	kW	4.80	5.30

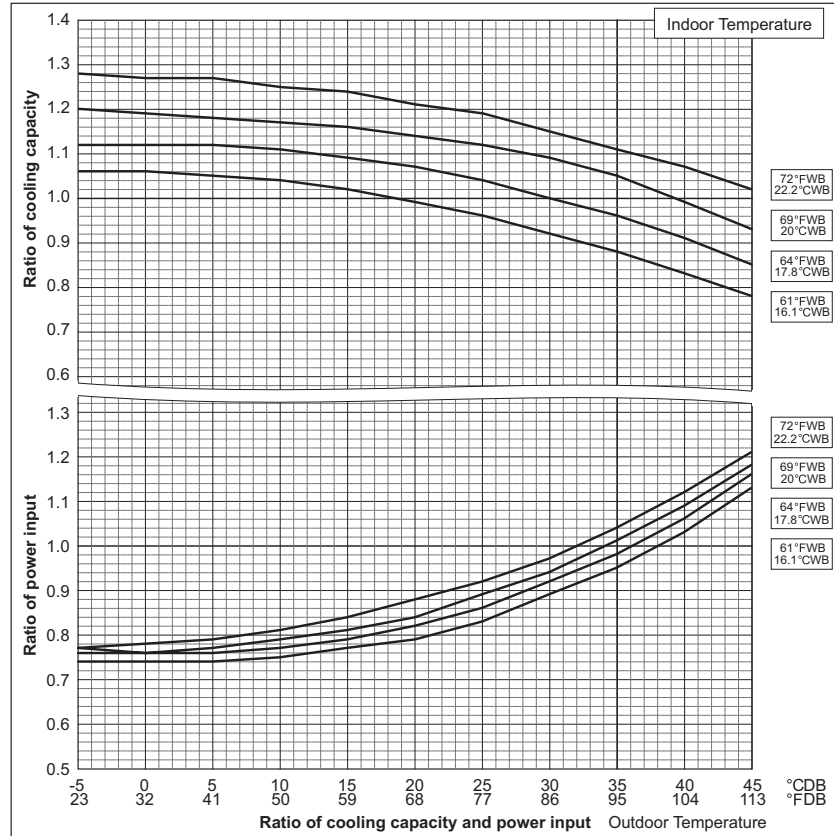

PUMY-		P60NKMU	
		Non-Ducted	Ducted
Nominal heating capacity	BTU/h	66,000	
	kW	19.3	
Input	kW	6.15	5.23

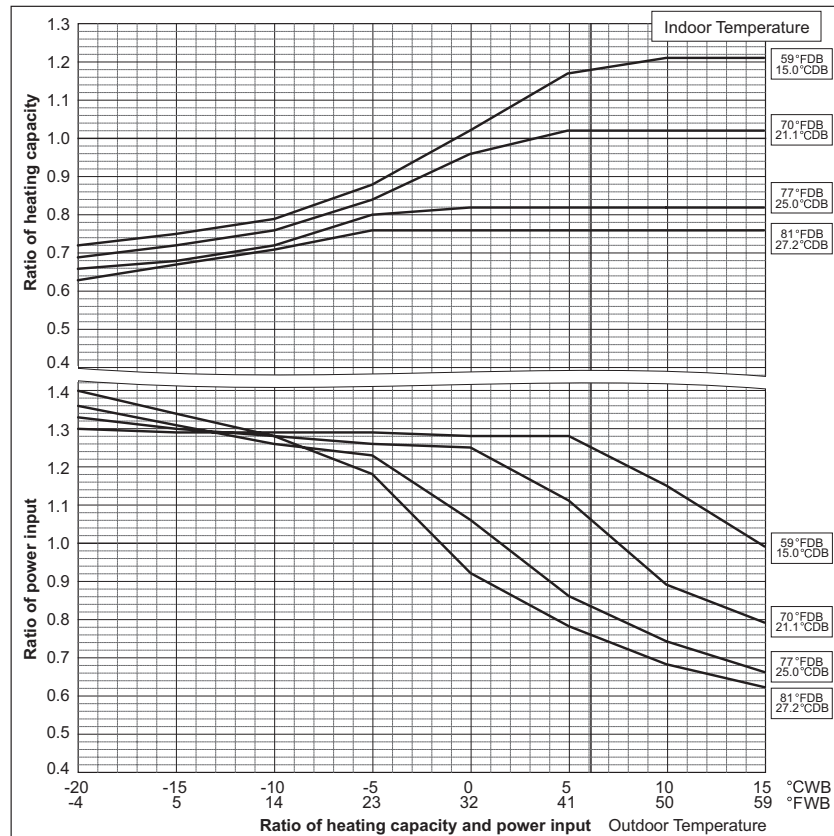

7. CAPACITY TABLES

7-2. Correction by Total Indoor

CITY MULTI systems have different capacities and inputs when different combinations of indoor units with different total capacities are connected. Using following tables, the maximum capacity can be found to ensure the system is installed with enough capacity for a particular application.

7-2-1.PUMY-P36NHMUR4(-BS)

Total capacity of Indoor units*	Capacity(Btu/h)		Power Consumption(kW)		Current(A)/230V		Current(A)/208V	
	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
18	18,000	20,200	1.38	1.45	6.1	6.4	6.8	7.1
19	19,000	21,300	1.45	1.52	6.4	6.7	7.1	7.4
20	20,000	22,400	1.52	1.60	6.7	7.0	7.4	7.8
21	21,000	23,500	1.60	1.67	7.1	7.4	7.8	8.1
22	22,000	24,700	1.68	1.75	7.4	7.7	8.2	8.5
23	23,000	25,800	1.76	1.83	7.8	8.0	8.6	8.9
24	24,000	26,900	1.85	1.91	8.2	8.4	9.0	9.3
25	25,000	28,000	1.94	1.98	8.6	8.7	9.5	9.6
26	26,000	29,200	2.04	2.06	9.0	9.1	9.9	10.0
27	27,000	30,300	2.14	2.15	9.4	9.4	10.4	10.4
28	28,000	31,400	2.24	2.23	9.9	9.8	10.9	10.8
29	29,000	32,500	2.35	2.31	10.4	10.2	11.5	11.2
30	30,000	33,700	2.46	2.40	10.9	10.5	12.0	11.7
31	31,000	34,800	2.58	2.48	11.4	10.9	12.6	12.1
32	32,000	35,900	2.70	2.57	11.9	11.3	13.2	12.5
33	33,000	37,000	2.82	2.66	12.5	11.7	13.8	12.9
34	34,000	38,200	2.95	2.75	13.0	12.1	14.4	13.4
35	35,000	39,300	3.08	2.84	13.6	12.5	15.1	13.8
36	36,000	40,000	3.22	2.93	14.2	12.9	15.7	14.2
37	36,200	40,200	3.23	2.92	14.3	12.9	15.8	14.2
38	36,400	40,400	3.25	2.89	14.3	12.7	15.9	14.1
39	36,600	40,700	3.26	2.86	14.4	12.6	15.9	13.9
40	36,900	40,900	3.27	2.84	14.5	12.5	16.0	13.8
41	37,100	41,100	3.28	2.81	14.5	12.3	16.0	13.6
42	37,300	41,300	3.30	2.78	14.6	12.2	16.1	13.5
43	37,500	41,600	3.31	2.75	14.6	12.1	16.2	13.4
44	37,700	41,800	3.32	2.72	14.7	11.9	16.2	13.2
45	37,900	42,000	3.34	2.69	14.7	11.8	16.3	13.1
46	38,100	42,200	3.35	2.66	14.8	11.7	16.4	12.9

Note)

1. In some combination patterns, numerical value of the heating data may differ slightly (CAPACITY : about several hundred Btu/h)
2. *. Indoor capacity is described by its model size. For example, PEFY-P08NMSU-ER2, its capacity is P08.

7. CAPACITY TABLES

7-2-2.PUMY-P48NHMUR4(-BS)

Total capacity of Indoor units*	Capacity(Btu/h)		Power Consumption(kW)		Current(A)/230V		Current(A)/208V	
	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
24	24,000	26,900	2.11	2.32	9.2	10.2	10.2	11.2
25	25,000	28,000	2.20	2.41	9.6	10.5	10.6	11.6
26	26,000	29,200	2.29	2.50	10.0	10.9	11.1	12.1
27	27,000	30,300	2.38	2.59	10.4	11.3	11.5	12.5
28	28,000	31,400	2.48	2.68	10.8	11.7	12.0	13.0
29	29,000	32,500	2.58	2.78	11.3	12.1	12.4	13.4
30	30,000	33,700	2.68	2.87	11.7	12.6	12.9	13.9
31	31,000	34,800	2.78	2.97	12.2	13.0	13.4	14.4
32	32,000	35,900	2.89	3.07	12.6	13.4	14.0	14.8
33	33,000	37,000	3.00	3.17	13.1	13.9	14.5	15.3
34	34,000	38,200	3.11	3.28	13.6	14.3	15.0	15.8
35	35,000	39,300	3.23	3.38	14.1	14.8	15.6	16.3
36	36,000	40,400	3.35	3.49	14.6	15.2	16.2	16.9
37	37,000	41,500	3.47	3.60	15.2	15.7	16.8	17.4
38	38,000	42,700	3.60	3.71	15.7	16.2	17.4	17.9
39	39,000	43,800	3.72	3.82	16.3	16.7	18.0	18.5
40	40,000	44,900	3.85	3.93	16.8	17.2	18.6	19.0
41	41,000	46,000	3.99	4.05	17.4	17.7	19.3	19.6
42	42,000	47,200	4.12	4.17	18.0	18.2	19.9	20.1
43	43,000	48,300	4.26	4.28	18.6	18.7	20.6	20.7
44	44,000	49,400	4.41	4.41	19.3	19.3	21.3	21.3
45	45,000	50,500	4.55	4.53	19.9	19.8	22.0	21.9
46	46,000	51,700	4.70	4.65	20.5	20.3	22.7	22.5
47	47,000	52,800	4.85	4.78	21.2	20.9	23.4	23.1
48	48,000	54,000	4.97	4.88	21.7	21.3	24.0	23.6
49	48,300	54,200	4.98	4.83	21.8	21.1	24.1	23.3
50	48,500	54,300	4.99	4.79	21.8	20.9	24.1	23.2
51	48,700	54,400	5.00	4.75	21.8	20.8	24.1	23.0
52	48,900	54,500	5.01	4.71	21.9	20.6	24.2	22.8
53	49,100	54,600	5.01	4.67	21.9	20.4	24.2	22.6
54	49,300	54,800	5.02	4.63	21.9	20.2	24.3	22.4
55	49,600	54,900	5.03	4.59	22.0	20.1	24.3	22.2
56	49,800	55,000	5.04	4.55	22.0	19.9	24.3	22.0
57	50,000	55,100	5.04	4.51	22.0	19.7	24.4	21.8
58	50,200	55,200	5.05	4.47	22.1	19.5	24.4	21.6
59	50,400	55,300	5.06	4.43	22.1	19.4	24.4	21.4
60	50,600	55,500	5.07	4.39	22.1	19.2	24.5	21.2
61	50,800	55,600	5.07	4.35	22.2	19.0	24.5	21.0
62	51,100	55,700	5.08	4.31	22.2	18.8	24.6	20.8

Note)

1. In some combination patterns, numerical value of the heating data may differ slightly (CAPACITY : about several hundred Btu/h)
2. *. Indoor capacity is described by its model size. For example, PEFY-P08NMSU-ER2, its capacity is P08.

7. CAPACITY TABLES

7-2-3. PUMY-P60NKMU (-BS)


Total capacity of indoor units	Capacity (Btu/h)		Power consumption (kW)		EER / COP		Current (A) / 230V		Current (A) / 208V	
	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
6	6000	7000	0.71	1.06	8.45	1.94	3.1	4.6	3.4	5.1
7	7000	8100	0.82	1.15	8.56	2.06	3.6	5.1	4.0	5.6
8	8000	9200	0.92	1.24	8.67	2.18	4.0	5.4	4.5	6.0
9	9000	10300	1.03	1.32	8.77	2.28	4.5	5.8	5.0	6.4
10	10000	11400	1.13	1.40	8.86	2.38	5.0	6.2	5.5	6.8
11	11000	12500	1.23	1.48	8.95	2.47	5.4	6.5	6.0	7.2
12	12000	13600	1.33	1.56	9.04	2.56	5.8	6.8	6.5	7.6
13	13000	14700	1.43	1.63	9.12	2.64	6.3	7.2	6.9	7.9
14	14000	15800	1.52	1.71	9.20	2.71	6.7	7.5	7.4	8.3
15	15000	16900	1.62	1.78	9.27	2.77	7.1	7.8	7.9	8.7
16	16000	18000	1.71	1.86	9.34	2.83	7.5	8.2	8.3	9.0
17	17000	19100	1.81	1.94	9.40	2.89	7.9	8.5	8.8	9.4
18	18000	20200	1.90	2.02	9.46	2.94	8.3	8.9	9.2	9.8
19	19000	21300	2.00	2.09	9.52	2.98	8.8	9.2	9.7	10.2
20	20000	22400	2.09	2.18	9.58	3.02	9.2	9.6	10.1	10.6
21	21000	23500	2.18	2.26	9.63	3.05	9.6	9.9	10.6	11.0
22	22000	24600	2.27	2.34	9.68	3.08	10.0	10.3	11.0	11.4
23	23000	25700	2.36	2.43	9.73	3.10	10.4	10.7	11.5	11.8
24	24000	26800	2.45	2.51	9.78	3.12	10.8	11.0	11.9	12.2
25	25000	27900	2.54	2.60	9.82	3.14	11.2	11.4	12.3	12.6
26	26000	29000	2.63	2.70	9.87	3.15	11.6	11.8	12.8	13.1
27	27000	30100	2.72	2.79	9.92	3.16	11.9	12.3	13.2	13.5
28	28000	31200	2.81	2.88	9.96	3.17	12.3	12.7	13.6	14.0
29	29000	32300	2.90	2.98	10.01	3.17	12.7	13.1	14.1	14.5
30	30000	33400	2.98	3.08	10.05	3.18	13.1	13.5	14.5	15.0
31	31000	34500	3.07	3.18	10.10	3.18	13.5	14.0	14.9	15.5
32	32000	35600	3.15	3.29	10.14	3.17	13.8	14.4	15.3	16.0
33	33000	36700	3.24	3.39	10.19	3.17	14.2	14.9	15.7	16.5
34	34000	37800	3.32	3.50	10.24	3.16	14.6	15.4	16.1	17.0
35	35000	38900	3.40	3.61	10.29	3.16	14.9	15.9	16.5	17.5
36	36000	40000	3.48	3.72	10.35	3.15	15.3	16.4	16.9	18.1
37	37000	41100	3.56	3.84	10.40	3.14	15.6	16.9	17.3	18.6
38	38000	42200	3.63	3.95	10.46	3.13	15.9	17.4	17.6	19.2
39	39000	43200	3.71	4.06	10.52	3.12	16.3	17.8	18.0	19.7
40	40000	44300	3.78	4.17	10.59	3.11	16.6	18.3	18.4	20.3
41	41000	45400	3.85	4.29	10.65	3.10	16.9	18.8	18.7	20.8
42	42000	46500	3.92	4.41	10.73	3.09	17.2	19.4	19.0	21.4
43	43000	47600	3.98	4.52	10.80	3.08	17.5	19.9	19.3	22.0
44	44000	48700	4.04	4.64	10.88	3.08	17.7	20.4	19.6	22.5
45	45000	49800	4.10	4.75	10.97	3.07	18.0	20.9	19.9	23.1
46	46000	50900	4.16	4.86	11.06	3.07	18.3	21.4	20.2	23.6
47	47000	52000	4.21	4.98	11.15	3.06	18.5	21.8	20.4	24.2
48	48000	53100	4.26	5.08	11.25	3.06	18.7	22.3	20.7	24.7
49	49000	54200	4.31	5.18	11.36	3.06	18.9	22.8	20.9	25.2
50	50000	55300	4.36	5.28	11.48	3.07	19.1	23.2	21.2	25.7
51	51000	56400	4.40	5.38	11.59	3.07	19.3	23.6	21.4	26.1
52	52000	57500	4.44	5.46	11.72	3.08	19.5	24.0	21.6	26.5
53	53000	58600	4.47	5.55	11.86	3.10	19.6	24.4	21.7	26.9
54	54000	59700	4.50	5.62	12.00	3.11	19.8	24.7	21.9	27.3
55	55000	60800	4.53	5.69	12.14	3.13	19.9	25.0	22.0	27.6
56	56000	61900	4.55	5.75	12.30	3.15	20.0	25.2	22.1	27.9
57	57000	63000	4.57	5.80	12.47	3.18	20.1	25.5	22.2	28.2
58	58000	64100	4.59	5.84	12.64	3.21	20.2	25.7	22.3	28.4
59	59000	65200	4.60	5.87	12.82	3.25	20.2	25.8	22.3	28.5
60	60000	66000	4.60	5.95	13.04	3.25	20.2	26.1	22.3	28.9
61	60200	66200	4.61	5.90	13.05	3.29	20.2	25.9	22.4	28.6
62	60400	66400	4.61	5.90	13.09	3.30	20.2	25.9	22.4	28.6
63	60600	66600	4.61	5.90	13.13	3.31	20.2	25.9	22.4	28.7
64	60800	66800	4.62	5.90	13.17	3.31	20.3	25.9	22.4	28.7
65	61000	67000	4.62	5.91	13.21	3.32	20.3	25.9	22.4	28.7
66	61200	67200	4.62	5.91	13.26	3.33	20.3	26.0	22.4	28.7
67	61400	67400	4.62	5.91	13.30	3.34	20.3	26.0	22.4	28.7
68	61600	67600	4.62	5.91	13.34	3.35	20.3	26.0	22.4	28.7
69	61800	67800	4.62	5.91	13.38	3.36	20.3	26.0	22.4	28.7
70	62000	68000	4.62	5.91	13.42	3.37	20.3	26.0	22.4	28.7
71	62200	68200	4.62	5.91	13.47	3.38	20.3	26.0	22.4	28.7
72	62400	68400	4.62	5.91	13.51	3.39	20.3	26.0	22.4	28.7
73	62600	68600	4.62	5.91	13.56	3.40	20.3	26.0	22.4	28.7
74	62800	68800	4.62	5.91	13.60	3.41	20.3	26.0	22.4	28.7
75	63000	69000	4.62	5.91	13.64	3.42	20.3	26.0	22.4	28.7
76	63200	69200	4.62	5.91	13.69	3.43	20.3	26.0	22.4	28.7
77	63400	69400	4.62	5.91	13.74	3.44	20.3	26.0	22.4	28.7
78	63600	69600	4.61	5.91	13.78	3.45	20.2	25.9	22.4	28.7

7. CAPACITY TABLES


7-3. Correction by Refrigerant Piping Length

CITY MULTI systems can have extended piping lengths if certain limitations are followed, but cooling/heating capacity could be reduced. Using the following correction factor by equivalent piping length shown at 7-3-1 and 7-3-2, capacity can be found. 7-3-3 shows how to obtain the equivalent piping length.

7-3-1. Cooling Capacity Correction

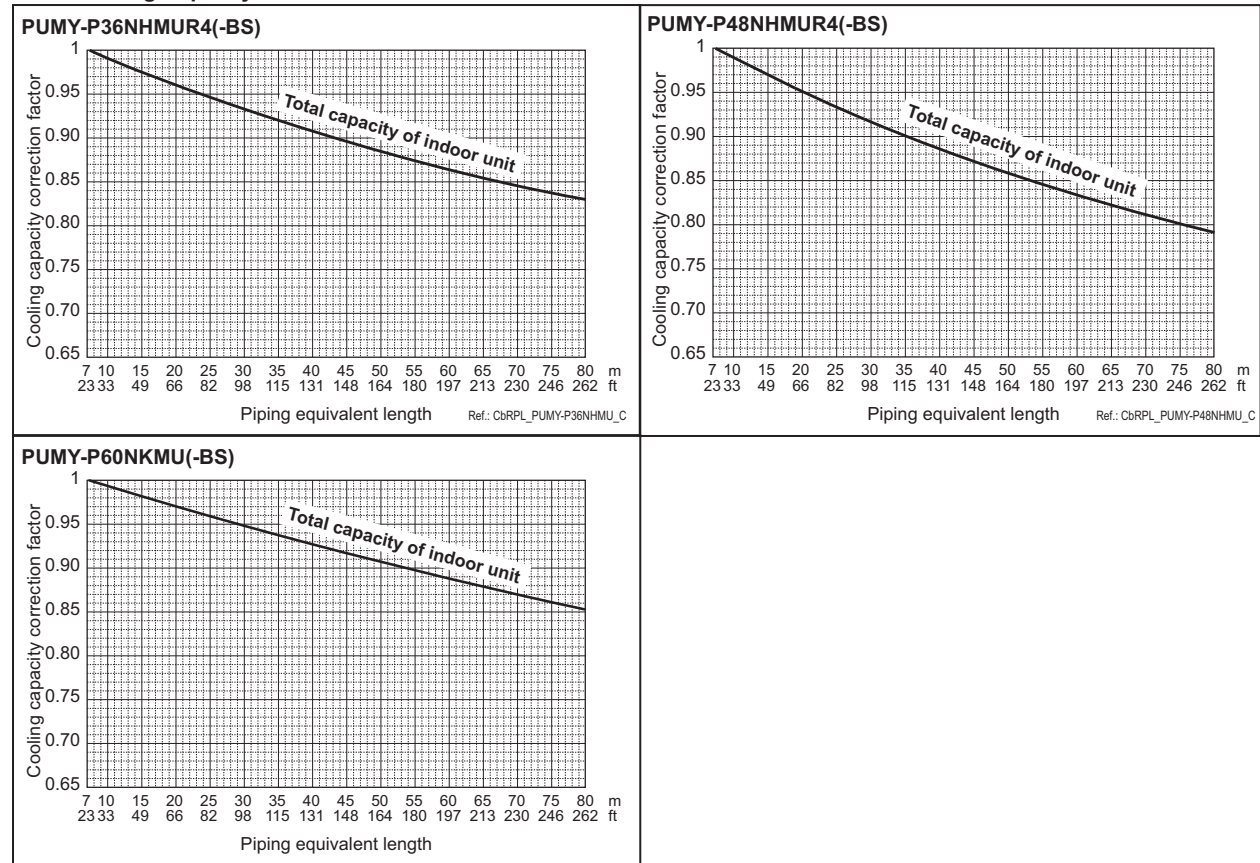

7-3-2. Heating Capacity Correction

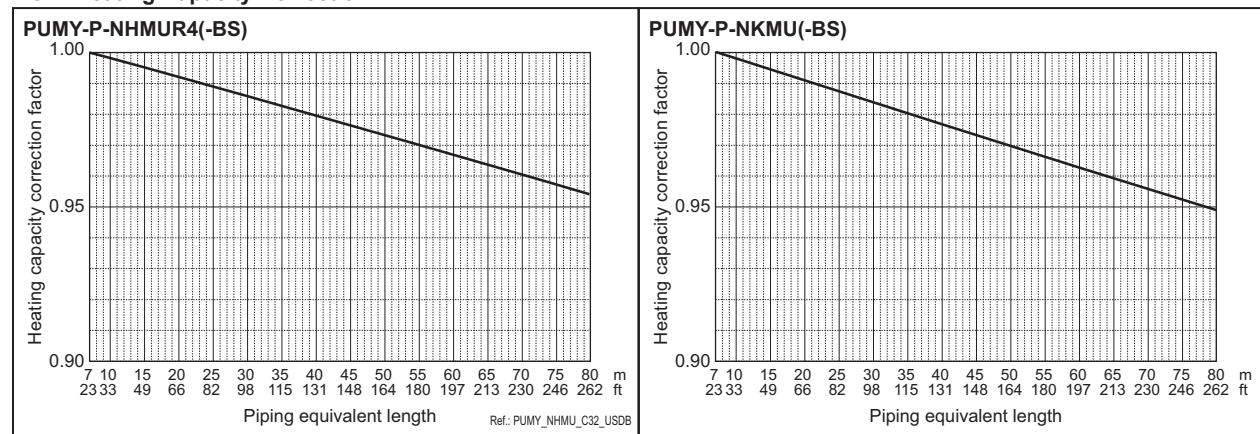

7-3-3. How to Obtain the Equivalent Piping Length

1. PUMY-P-NHMUR4/NKMU(-BS)

Equivalent length[m]= (Actual piping length to the farthest indoor unit) + (0.30 x number of bends in the piping)

Equivalent length[ft.]= (Actual piping length to the farthest indoor unit) + (0.99 x number of bends in the piping)

7. CAPACITY TABLES

7-4. Correction at Frost and Defrost

Due to frost on the outdoor heat exchanger and the automatic defrost operation, the heating capacity of the outdoor unit can be calculated by multiplying the correction factor shown in the table below.

Table of correction factor at frost and defrost

Outdoor inlet air temp. °F	43	39	36	34	32	28	25	21	18	14	-4
Outdoor inlet air temp. °C	6	4	2	1	0	-2	-4	-6	-8	-10	-20
PUMY-P36, 48NHMU(-BS)	1.0	0.98	0.89	0.88	0.88	0.89	0.9	0.95	0.95	0.95	-
PUMY-P60NKMU(-BS)	1.0	0.98	0.855	0.85	0.845	0.89	0.9	0.95	0.95	0.95	0.95

* The correction factors in the table above are used for a full-load and above.

Use the formula below to calculate the correction factor to use for a partial load.

Correction factor for partial load: K

Correction factor for a full load and above: K_0


Partial load factor: A

$$K = 1 - (1 - K_0) \times A$$

7-5. Operation Temperature Range

7-5-1. PUMY-P-NHMUR4/NKMU(-BS)


• Cooling

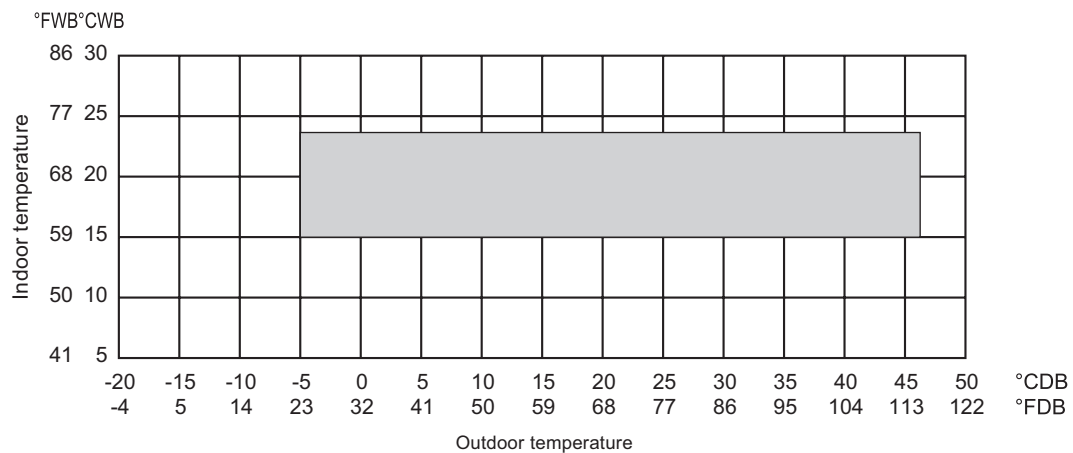

*50 to 115°F D.B. (10 to 46°C D.B.): in case of connecting PKFY-P06/P08 type indoor unit.

7-5-2. PUMY-P-NHMU(-BS)

• Heating

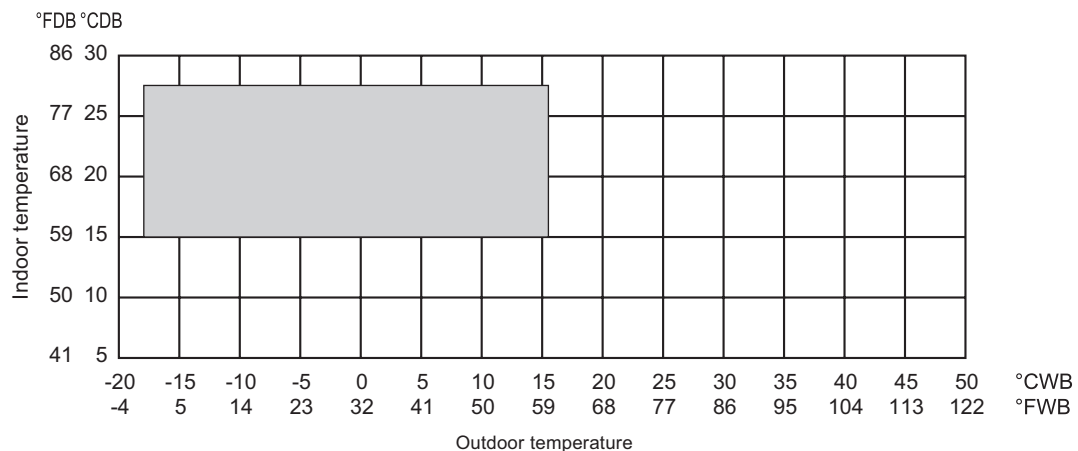

□e□□□ tr-□□□□-□


* Tables above show published performance operation range. Units will try to continue to cool and heat above and below temperature range shown, but there is no published performance data at these ranges.

7. CAPACITY TABLES

7-5-3. PUMY-P-NKMU(-BS)

• Heating

PUMY-P-NKMU(-BS)

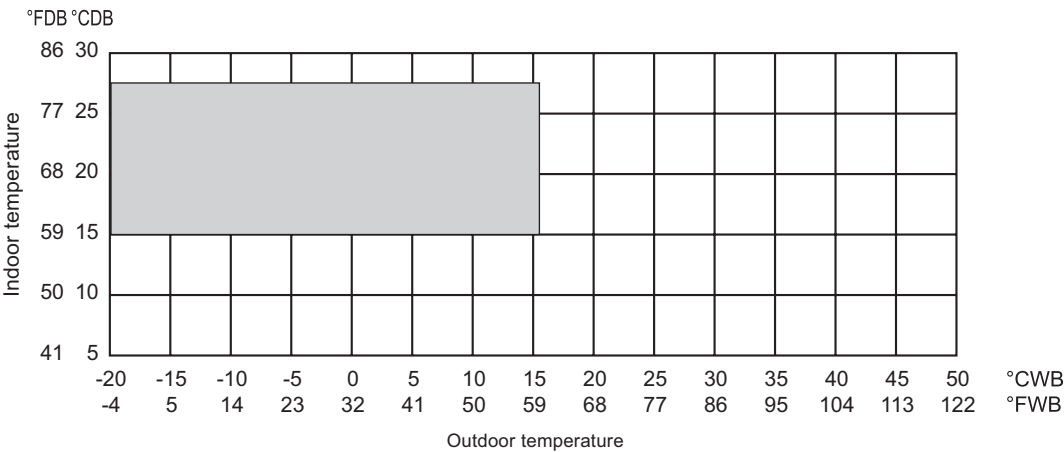

8. OPTIONAL PARTS

8-1. Branch Joint

CITY MULTI piping can be easily done with branch joints and headers provided by MITSUBISHI ELECTRIC CORP. One kind of Joint sets are available for use. Details for installing the branch joint can be found in the System Design sections, or in the Installation Manual.

CMY-Y62-G


Ref.: 7FAGFA
in.

1. Specification


Items	Details
Main	Number of ports
	2 ports
	Number of branch joints
Accessory	One for each liquid and gas pipe
	Pipe material
	Phosphorus deoxidized copper C1220T-OL (JIS H3300)
Insulation material	Foamed polyethylene (one for each liquid and gas pipe)
	Reducer
	10 reducers of 7 types (Refer to the external drawing for details.)

2. External drawing


For liquid pipe:

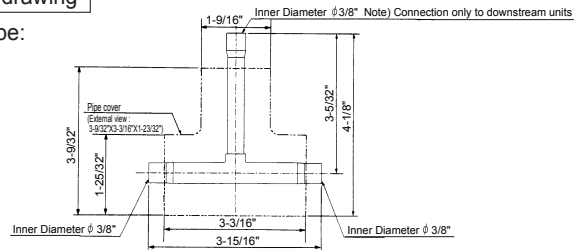


For gas pipe:

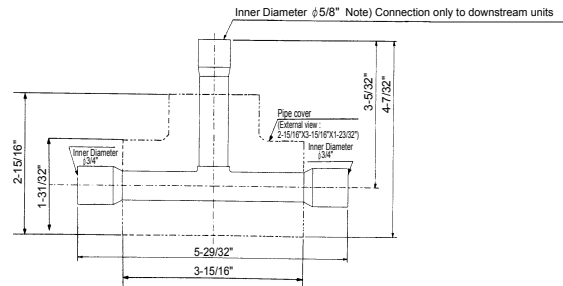

Reducer (Accessory):



A (Inner Diameter)	B (Outer Diameter)	Number of reducers
1/2"	3/8"	2
3/4"	5/8"	1
7/8"	3/4"	1



C (Inner Diameter)	D (Outer Diameter)	Number of reducers
1/4"	3/8"	2
1/2"	5/8"	1
1/2"	3/4"	1
5/8"	3/4"	2

8. OPTIONAL PARTS

8-2. Header

CITY MULTI piping can be easily done with branch joints and headers provided by MITSUBISHI ELECTRIC CORP. There are two header sets used for piping PUMY. Details for installing the headers can be found in the System Design sections, or Installation Manual.

CMY-Y64-G


Ref.: 7FAGFB
in.

1. Specification


	Items	Details
Main	Number of ports	3 ~ 4 ports
	Number of branch joints	One for each liquid and gas pipe
	Pipe material	Phosphorus deoxidized copper C1220T-OL (JIS H3300)
Accessory	Insulation material	Foamed polyethylene
	Reducer	7 reducers of 5 types
	Cap	2 caps of 2 different types for each liquid and gas pipe ; 4 caps in total

2. External drawing

For liquid pipe:


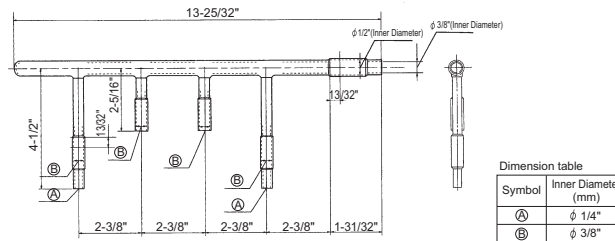


Reducer (Accessory):



A (Inner Diameter)	B (Outer Diameter)	Number of reducers
φ 3/4"	φ 5/8"	1
φ 5/8"	φ 1/2"	2
φ 3/8"	φ 1/4"	2

For gas pipe:

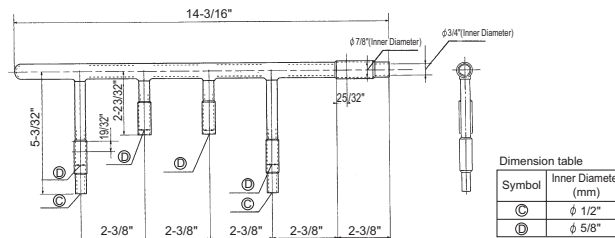

C (Inner Diameter)	D (Outer Diameter)	Number of reducers
φ 5/8"	φ 3/4"	1
φ 3/8"	φ 1/2"	1

CMY-Y68-G


Ref.: 7FAGFC
in.

1. Specification


	Items	Details
Main	Number of ports	5 ~ 8 ports
	Number of branch joints	One for each liquid and gas pipe
	Pipe material	Phosphorus deoxidized copper C1220T-OL (JIS H3300)
Accessory	Insulation material	Foamed polyethylene
	Reducer	3 reducers of 3 types
	Cap	3 caps for each liquid and gas pipe ; 6 in total

2. External drawing

For liquid pipe:


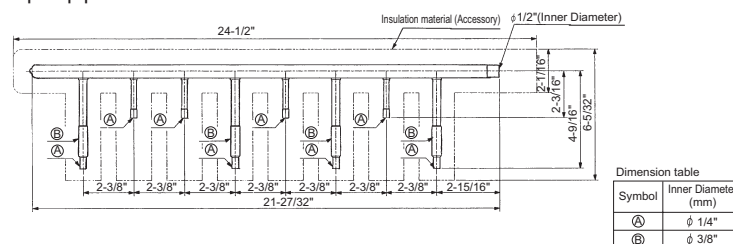


Reducer (Accessory):



A (Inner Diameter)	B (Outer Diameter)	Number of reducers
φ 3/4"	φ 5/8"	1
φ 1/2"	φ 3/8"	1

For gas pipe:

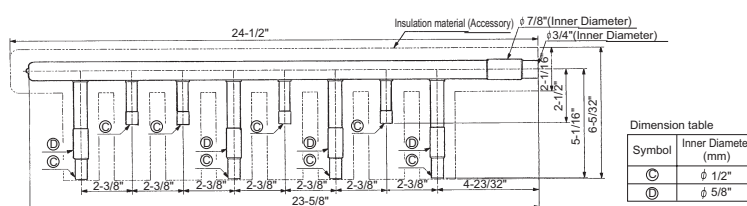

C (Inner Diameter)	D (Outer Diameter)	Number of reducers
φ 5/8"	φ 3/4"	1

