

NOKIA 1506

Service Manual Level 1&2

COMPANY CONFIDENTIAL

Copyright © 2009 Nokia. All rights reserved.



Transceiver characteristics

Band:

800MHz, CDMA2000 1xRTT

Display:

1.47" 128*128 CSTN, 65k Main display

Operation System:

Nucleus

Connections:

4-pin 2.5mm audio jack required for UHJ support.
Micro-USB 2.0

Transceiver with BL-4C 860mAh Li-Ion battery pack

Talk time	Standby time	Note
3.25 hours	China: 2 to 10days SEAP/MEA/LTA : 4 to 10 days	Depends on network parameters

Environmental characteristics:

- Lead-free soldered

Table of Contents

Amendment record sheet	4
Copyright	5
Warnings and cautions	6
<i>WARNINGS</i>	6
<i>CAUTIONS</i>	6
For your safety	7
ESD production	8
Care and maintenance	9
Battery information.....	10
Exploded view	11
Service devices	12
Software update	13
Disassembly instructions.....	14
Assembly and disassembly hints	19
Solder components	20

Amendment record sheet

Amendment No	Date	Inserted by	Comments
Version 1.0	11/2009	Lijun Gu	

The purpose of this document is to guide technicians of Nokia service levels 1 and 2 workshop to carry out services to Nokia products. This Service Manual is Company confidential and to be used by authorized Nokia service suppliers. Nokia also provides other guidance documents (e.g. Service Bulletins) for service suppliers, and please regularly follow them and comply with the given instructions.

While every endeavor has been made to ensure the accuracy of this document, some errors may exist. If any errors are found or if you have further suggestions, please notify Nokia in writing by sending letters or mails to the following:

Nokia Care Academy

<mailto:Service.Manuals@nokia.com>

Please keep in mind that this documentation is continuously being updated, and watch out for the newest version.

Copyright

Copyright© 2009 Nokia. All rights reserved.

Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission of Nokia is prohibited.

Nokia, Nokia Connecting People, X and Y are trademarks or registered trademarks of Nokia Corporation. Other product and company names mentioned herein may be trademarks or tradenames of their respective owners.

Nokia operates a policy of continuous development. Nokia reserves the right to make changes and improvements to any of the products described in this document without prior notice.

Under no circumstances shall Nokia be responsible for any loss of data or income or any special, incidental, consequential or indirect damages howsoever caused.

The contents of this document are provided "as is". Except as required by applicable law, no warranties of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, are made in relation to the accuracy, reliability or contents of this document. Nokia reserves the right to revise this document or withdraw it at any time without prior notice.

The availability of particular products may vary by region.

IMPORTANT

This document is intended for use by qualified service personnel only.

Warnings and cautions

Please refer to the phone's user guide for instructions relating to operation, care and maintenance including important safety information. Note also the following:

WARNINGS

- CARE MUST BE TAKEN ON INSTALLATION IN VEHICLES FITTED WITH ELECTRONIC ENGINE MANAGEMENT SYSTEMS AND ANTI-SKID BRAKING SYSTEMS. UNDER CERTAIN FAULT CONDITIONS, EMITTED RF ENERGY CAN AFFECT THEIR OPERATION. IF NECESSARY, CONSULT THE VEHICLE DEALER/MANUFACTURER TO DETERMINE THE IMMUNITY OF VEHICLE ELECTRONIC SYSTEMS TO RF ENERGY.
- THE HANDPORTABLE TELEPHONE MUST NOT BE OPERATED IN AREAS LIKELY TO CONTAIN POTENTIALLY EXPLOSIVE ATMOSPHERES, EG PETROL STATIONS (SERVICE STATIONS), BLASTING AREAS ETC.
- OPERATION OF ANY RADIO TRANSMITTING EQUIPMENT, INCLUDING CELLULAR TELEPHONES, MAY INTERFERE WITH THE FUNCTIONALITY OF INADEQUATELY PROTECTED MEDICAL DEVICES. CONSULT A PHYSICIAN OR THE MANUFACTURER OF THE MEDICAL DEVICE IF YOU HAVE ANY QUESTIONS. OTHER ELECTRONIC EQUIPMENT MAY ALSO BE SUBJECT TO INTERFERENCE.

CAUTIONS

- Servicing and alignment must be undertaken by qualified personnel only.
- Ensure that all work is carried out at in anti-static workstation and that an anti-static wrist strap is worn.
- Use only approved components as specified in the parts list.
- Ensure that all components, modules screws and insulators are correctly re-fitted after servicing and alignment.
- Ensure that all cables and wires are correctly repositioned.

For your safety

QUALIFIED SERVICE

Only qualified personnel may install or repair mobile terminal equipment.

ACCESSORIES AND BATTERIES

Use only approved accessories and batteries. Do not connect incompatible products.

CONNECTING TO OTHER DEVICES

When connecting to any other device, read its user's guide for detailed safety instructions. Do not connect incompatible products.

ESD production



Nokia requires that product service points have sufficient ESD protection (against static electricity) when servicing products.

Any product of which the covers are removed must be handled with ESD protection. The SIM card can be replaced without ESD protection if the product is otherwise ready for use.

To replace the covers ESD protection must be applied.

All electronic parts of the product are susceptible to ESD. Resistors, too, can be damaged by static electricity discharge.

All ESD sensitive parts must be packed in metallized protective bags during shipping and handling outside any ESD Protected Area (EPA).

Every repair action involving opening the product or handling the product components must be done under ESD protection.

ESD protected spare part packages **MUST NOT** be opened/closed out of an ESD Protected Area.

For more information and local requirements about ESD protection and ESD Protected Area, contact your local Nokia After Market Services representative.

Care and maintenance

This product is of superior design and craftsmanship and should be treated with care. The suggestions below will help you to fulfill any warranty obligations and to enjoy this product for many years.

Keep the phone and all its parts and accessories out of the reach of small children.

Keep the phone dry. Precipitation, humidity and all types of liquids or moisture can contain minerals that will corrode electronic circuits.

Do not use or store the phone in dusty, dirty areas. Its moving parts can be damaged.

Do not store the phone in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.

Do not store the phone in cold areas. When it warms up (to its normal temperature), moisture can form inside, which may damage electronic circuit boards.

Do not drop, knock or shake the phone. Rough handling can break internal circuit boards.

Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the phone.

Do not paint the phone. Paint can clog the moving parts and prevent proper operation.

Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications or attachments could damage the phone and may violate regulations governing radio devices.

All of the above suggestions apply equally to the product, battery, charger or any accessory.

Battery information

Note that a new battery's full performance is achieved only after two or three complete charge and discharge cycles!

The battery can be charged and discharged hundreds of times but it will eventually wear out. When the operating time (talk-time and standby time) is noticeably shorter than normal, it is time to buy a new battery.

Use only batteries approved by the phone manufacturer and recharge the battery only with the chargers approved by the manufacturer. Unplug the charger when not in use. Do not leave the battery connected to a charger for longer than a week, since overcharging may shorten its lifetime. If left unused a fully charged battery will discharge itself over time.

Temperature extremes can affect the ability of your battery to charge.

For good operation times with Ni-Cd/NiMh batteries, discharge the battery from time to time by leaving the product switched on until it turns itself off (or by using the battery discharge facility of any approved accessory available for the product). Do not attempt to discharge the battery by any other means.

Use the battery only for its intended purpose.

Never use any charger or battery that is damaged.

Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object (coin, clip or pen) causes direct connection of the + and – terminals of the battery (metal strips on the battery) for example when you carry a spare battery in your pocket or purse. Short-circuiting the terminals may damage the battery or the connecting object.

Leaving the battery in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C (59°F and 77°F). A phone with a hot or cold battery may temporarily not work, even when the battery is fully charged. Batteries' performance is particularly limited in temperatures well below freezing.


Do not dispose of batteries in a fire!

Dispose of batteries according to local regulations (e.g. recycling). Do not dispose as household waste.



Exploded view

Refer to the image below for the recommended ecologically sound disposal of components. Colorized components show the different categories.

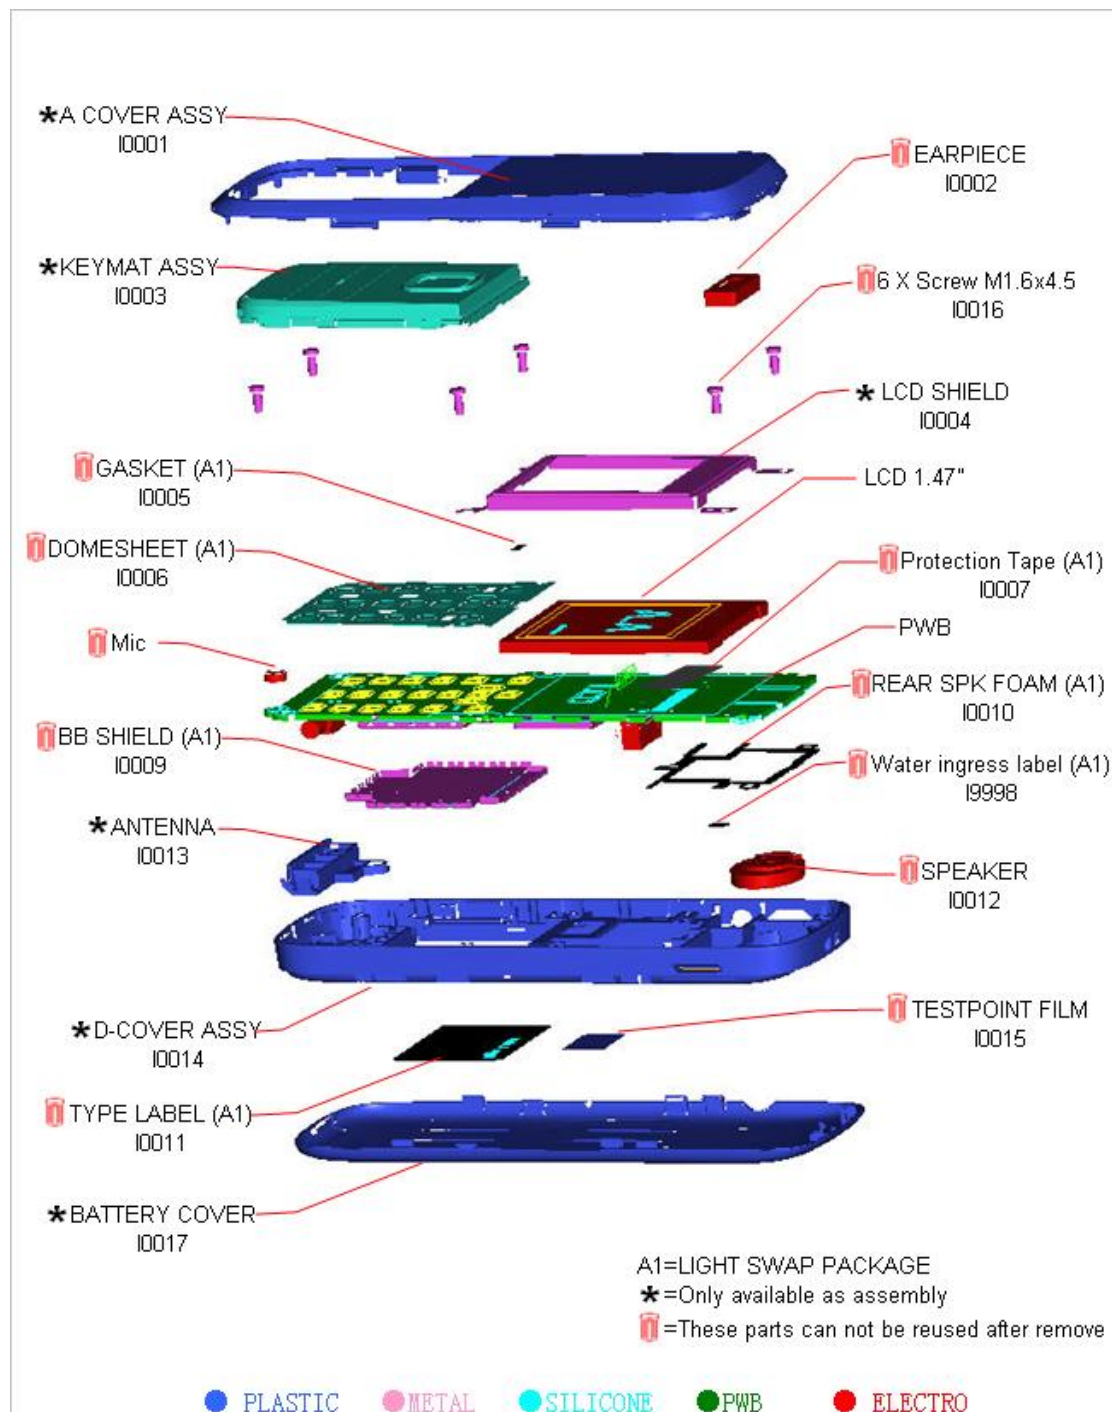Refer to the corresponding ITEM/CIRCUIT REF in the Spare Parts Service Bulletins on the Nokia Online (NOL) website.



Service devices

Picture	Description	
	RJ-230	Soldering Jig
	This jig serves as a holder for PWB component de-soldering and soldering.	
	CA-101	Data Service Cable
	This cable provides a connection from the USB port of the personal computer or notebook to the micro USB connector of the phone and allows Point of Sale (POS) locations to flash the mobile terminal.	

Software update

Point of Sales Flashing

Check always for the latest version of flash software, which is available on Nokia Online.



For instructions, refer to Care Suite User Guide.

Disassembly instructions

1



Open the Battery Cover by using.....

3



Remove the Battery Cover.

5

2



....the notch.

4



Use the SRT-6....

6



....to release the A-Cover.



Slide around....

7



...the A-Cover...

9

8




...with SRT-6.

10




Lift up the A-Cover on bottom side.

11

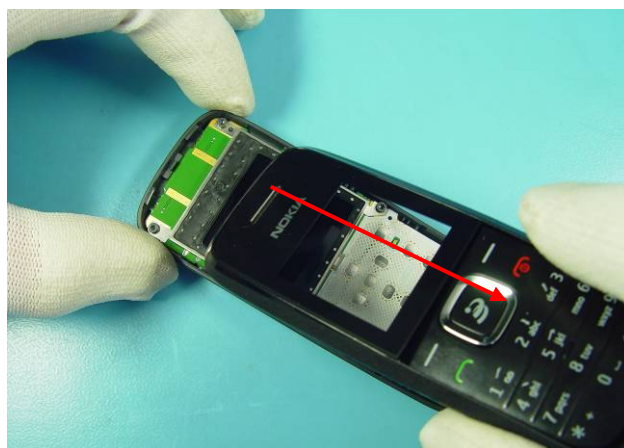

Remove the A-Cover.

12

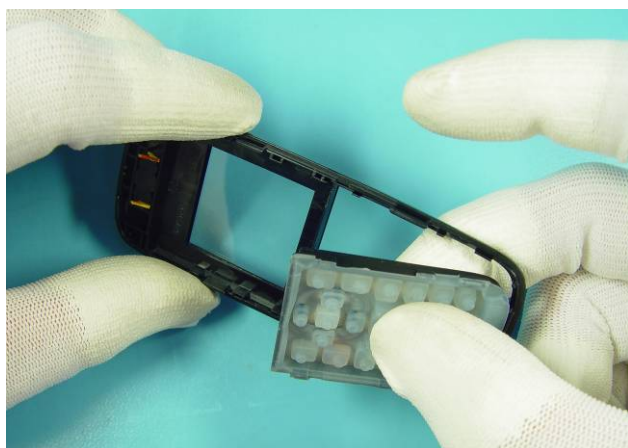

Press out the Keymat.



Remove the Keymat.


13



Use the dental tool....


15

14

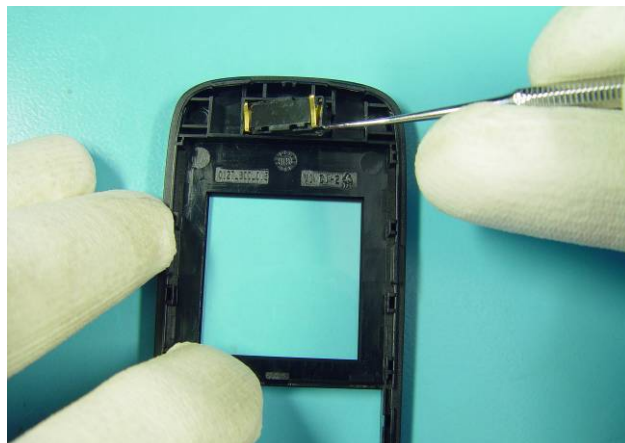

...to release the Earpiece.

16

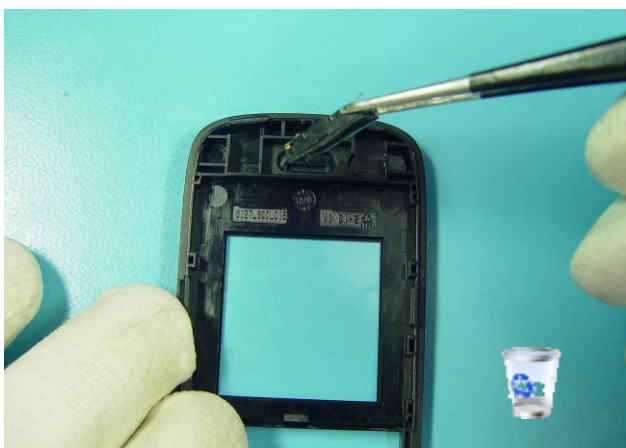


Remove the Earpiece with a tweezers.

17




If any adhesive remains on the A-Cover, please clean it.

18

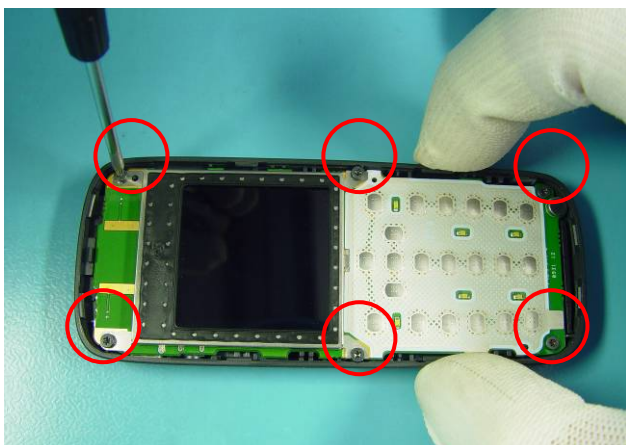

Unscrew the six T5+ screws.

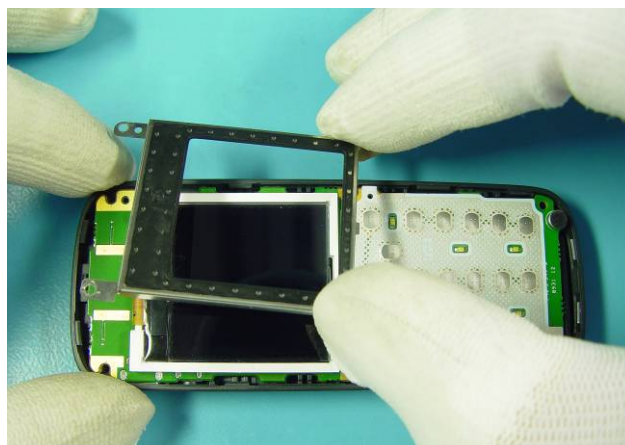

Remove the


19



Press out the PWB.....

21

20

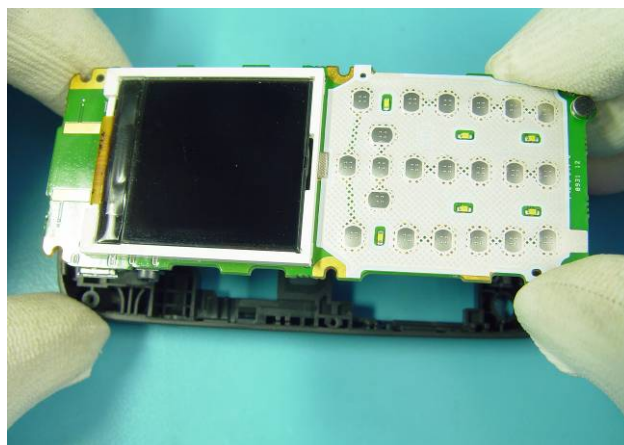


....and remove the PWB.

22




Use the SS-93 to release the Antenna.

23

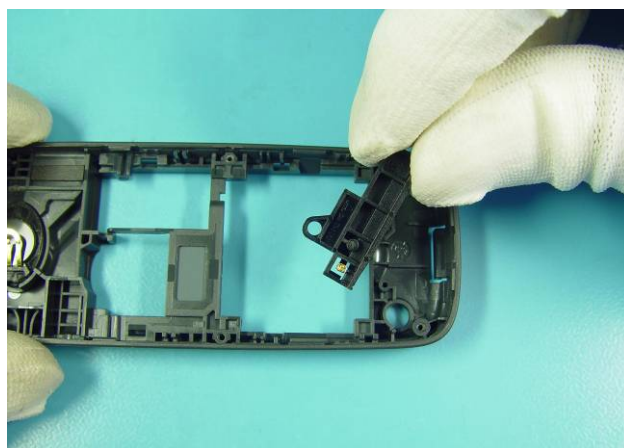


Remove the Antenna.

24

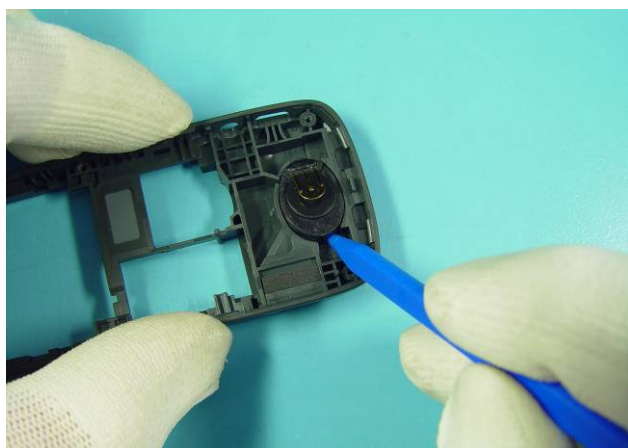


Use the SS-93.....

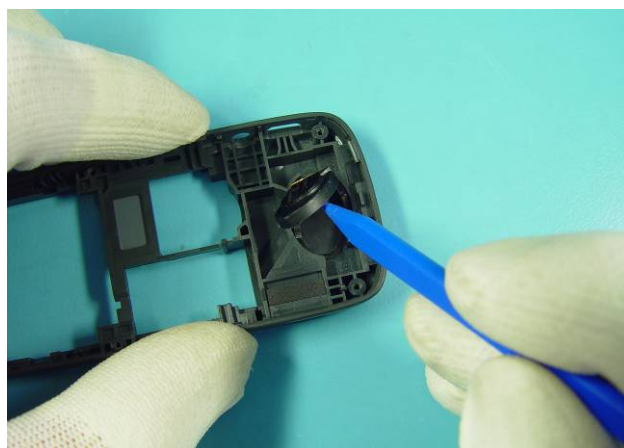

....to release the

25

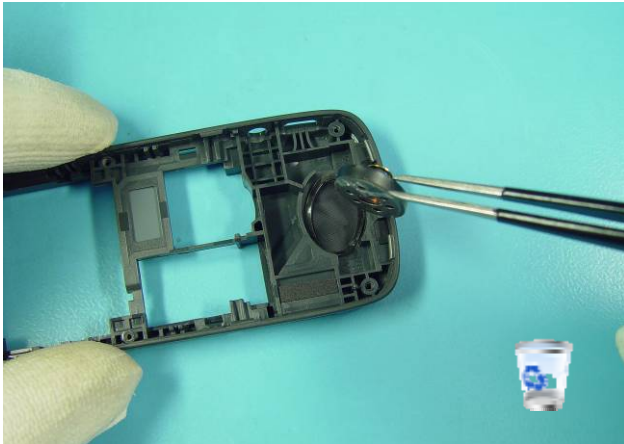


Remove the Speaker with a tweezers.

27

End of disassembling!

26

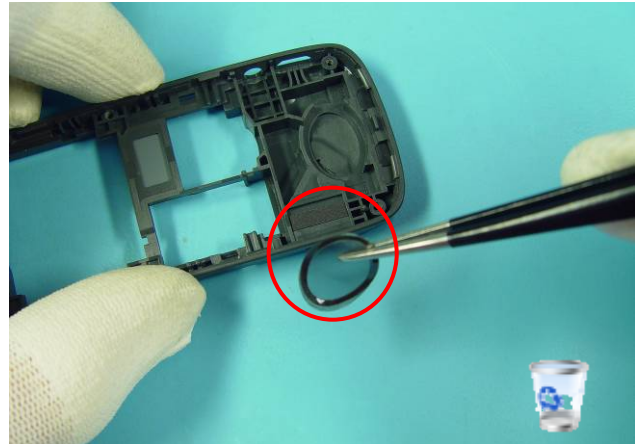


Remove the adhesive and dust net also.


Note: To assemble the mobile terminal, follow the “Disassembly Instructions” in reverse order.

Assembly and disassembly hints

Order for screw assembly

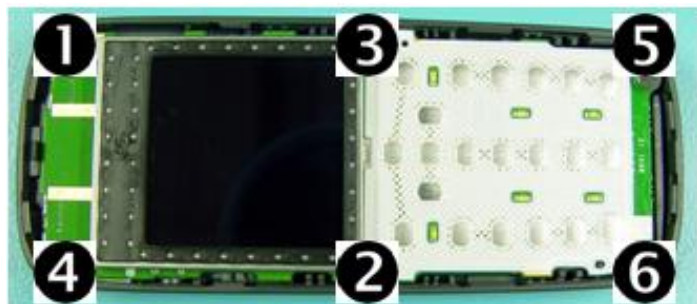

Order for screw disassembly

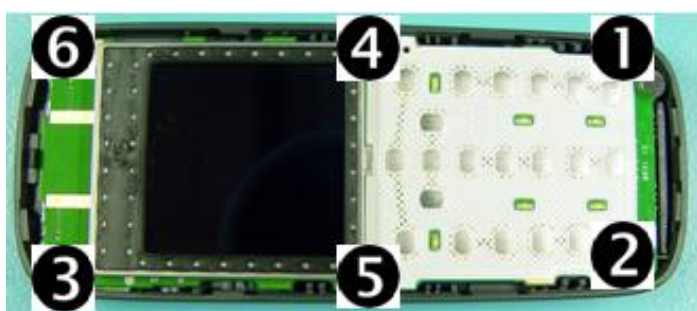

Torque Information

Related to above picture: 19.6 Ncm

Solder components

